

**Package Contents:**

Socket 4 x 1

Socket 6 x 1

Socket 8 x 1

lamp grain warm light 15CM x 1

headlight Warm light 15CM x 3

headlight Warm light 30CM x 2

LED soft light strip warm light x 8

Colored light strip warm light (3 sections) x 1

Colorful light string (10 lights) x 1

White lamp post 30CM x 1

cable 5CM x 4

cable 15CM x 1

cable 30CM x 3

cable 50CM x 2

Battery box AA (USB port) x 1

USB port 50CM x 1

Some building blocks


**Notes** (the pictures in this paragraph are for demonstration purposes only and are not the parts of this set) :

Wiring above and below the board

Wires can be run between boards or underneath boards , but they must be placed correctly between the studs.





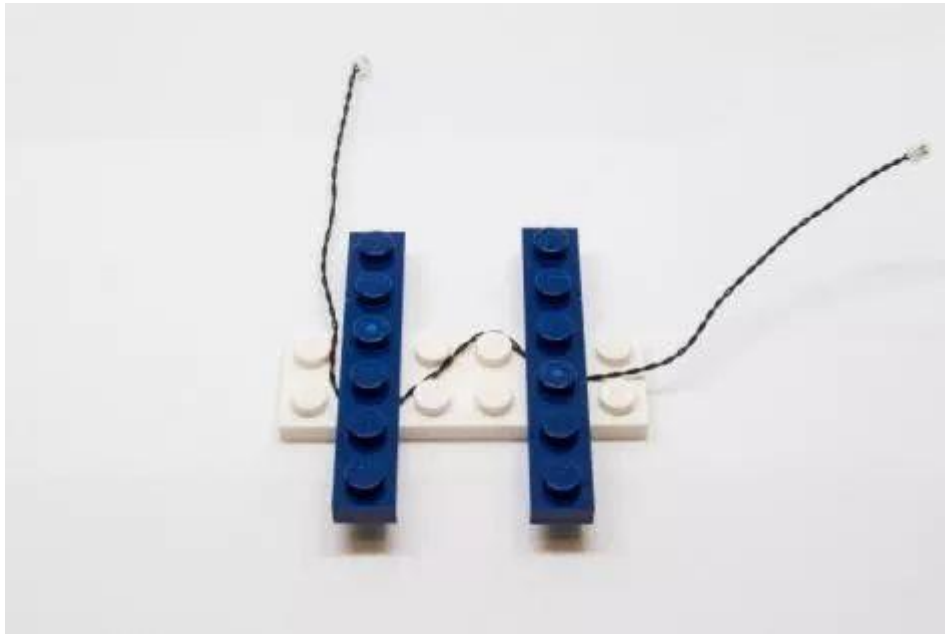



Connect the electrical outlet to the socket

Be extremely careful when inserting the wire plug into the outlet. The plug only goes in one way. With the plug facing up, look for the soldered "=" symbol on the left side of the port. The side of the plug with the exposed wire should be facing the soldered "=" symbol as you insert it into the port. If the plug does not fit easily into the port, do not force it.


Inserting the socket incorrectly may cause the pins inside the port to bend or may cause the socket to overheat when connected.




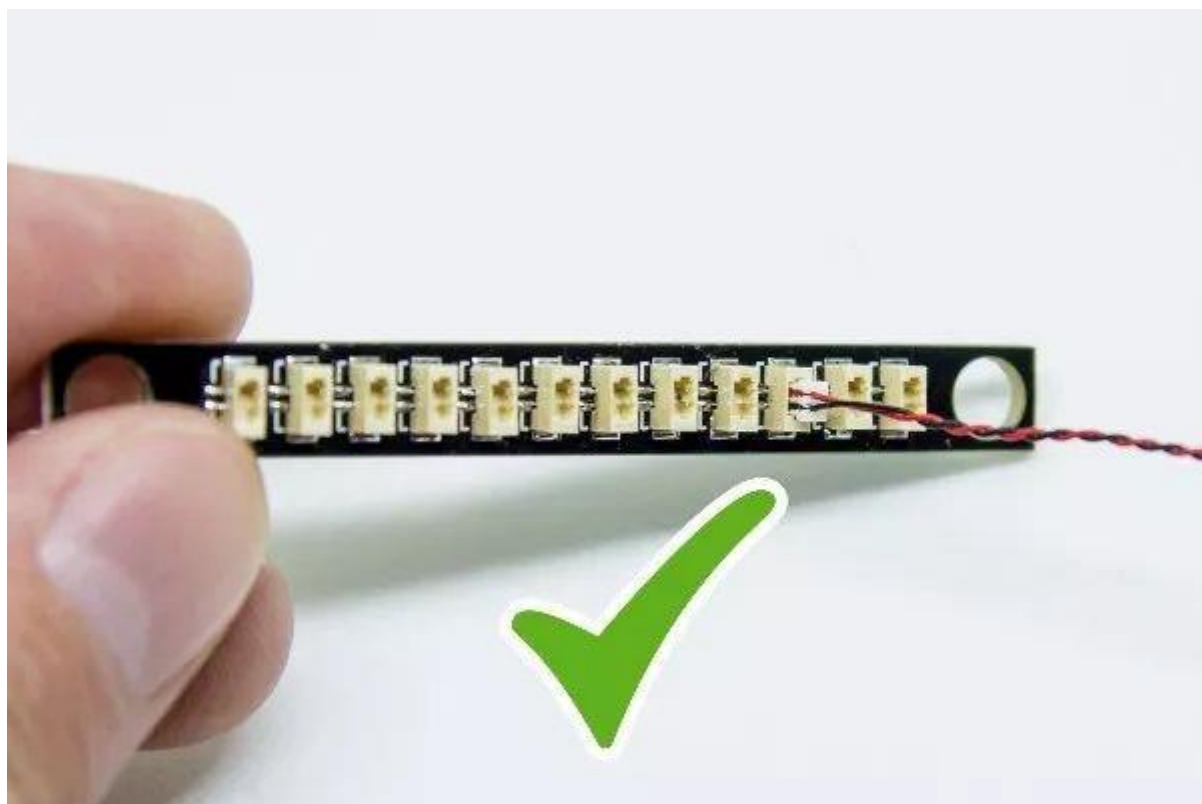

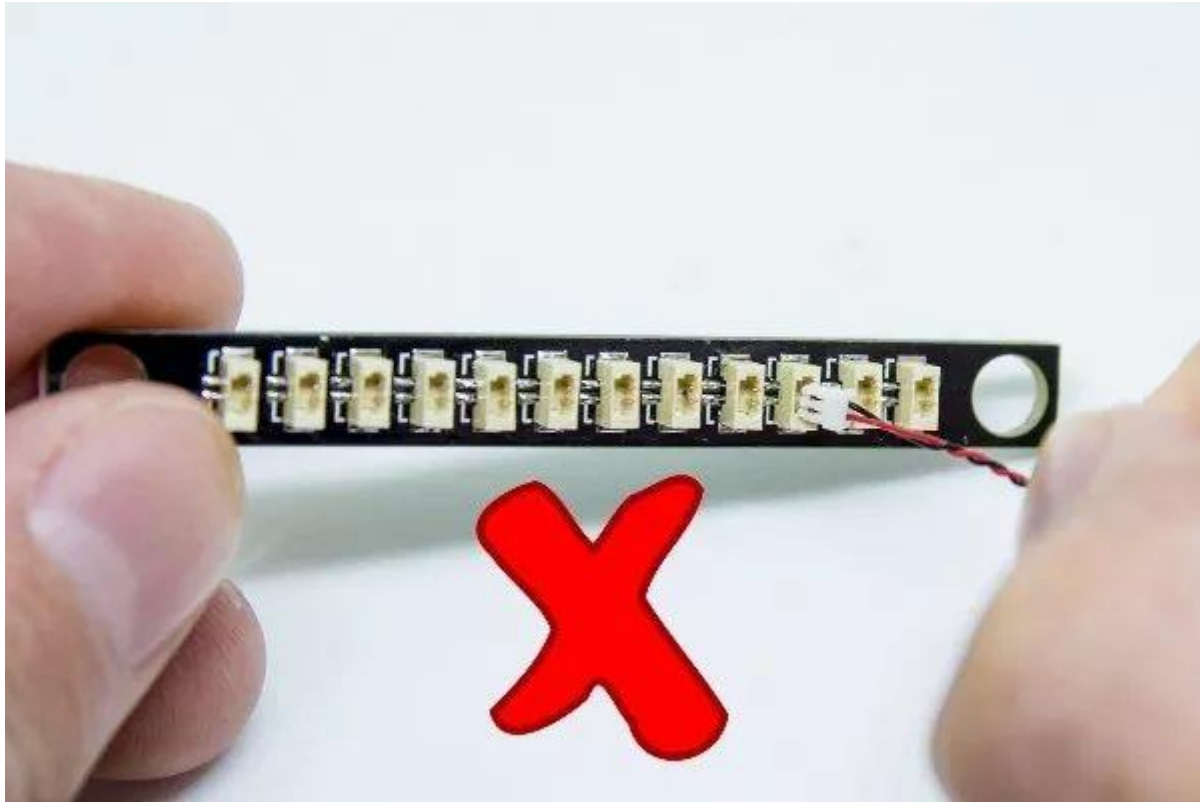


When installing the light pellets on the building blocks, make sure they are properly positioned (with the yellow LED assembly exposed). You can place them directly on top of the building block studs or in between.

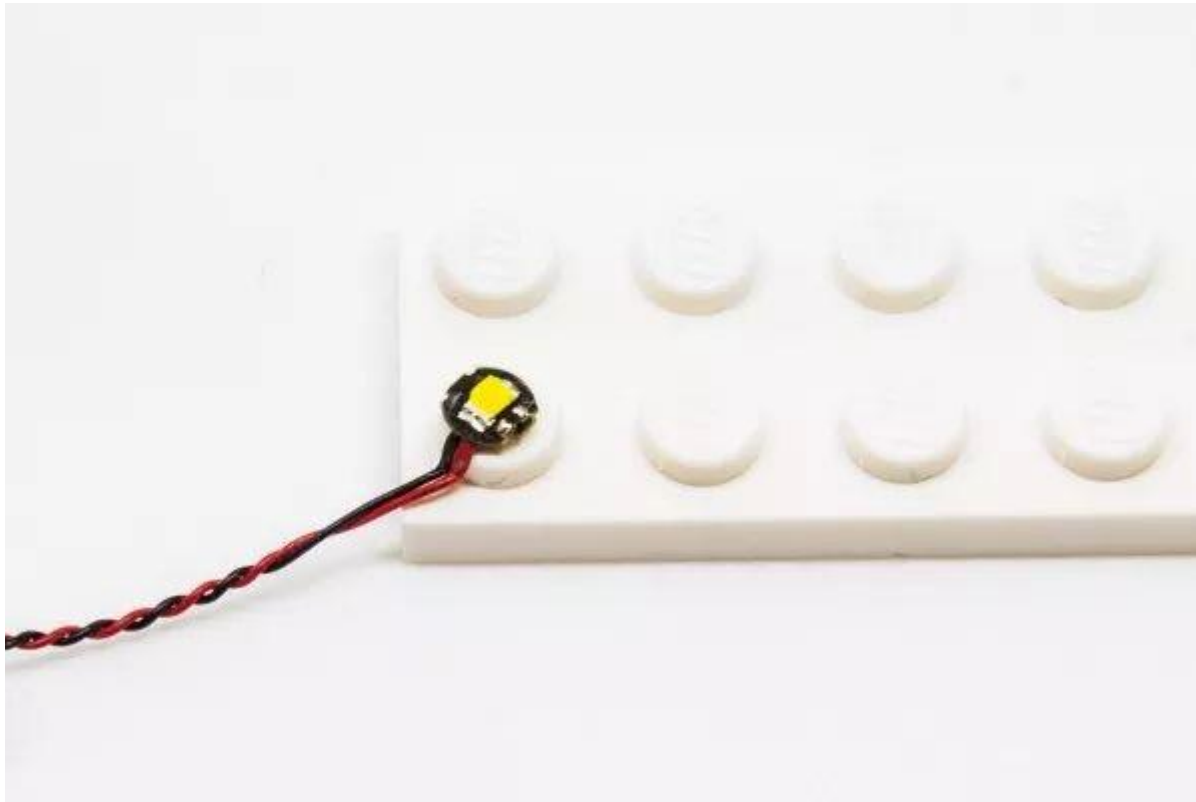

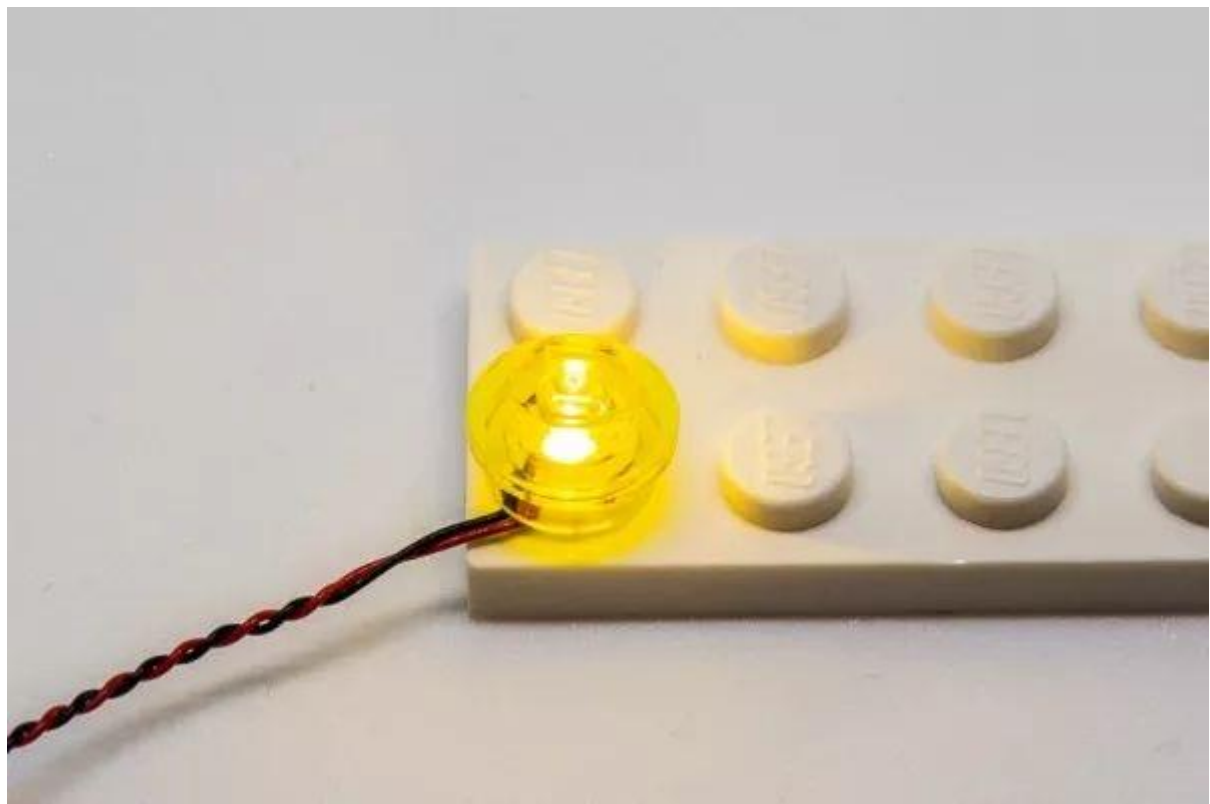




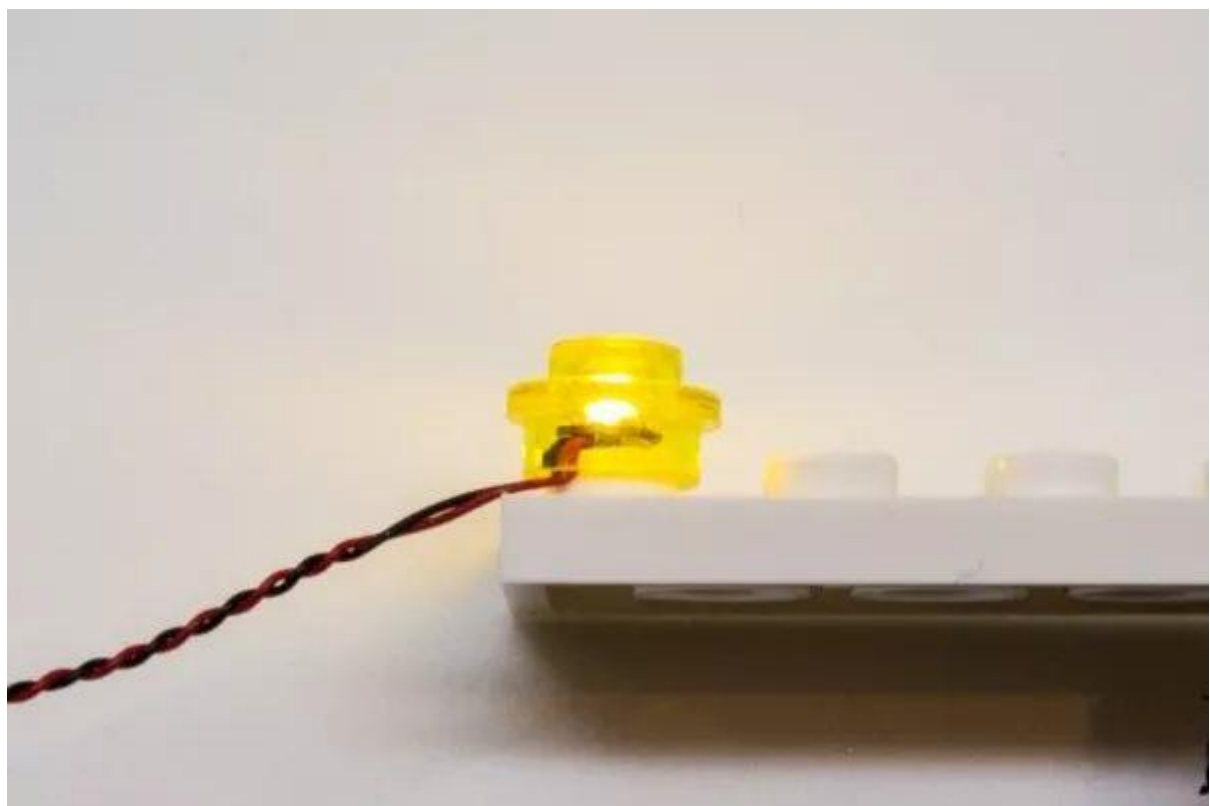


## Insert the battery into the battery compartment

The specifications of several battery boxes are different, please pay attention to the positive and negative poles of the batteries.

AA battery box Correct battery installation

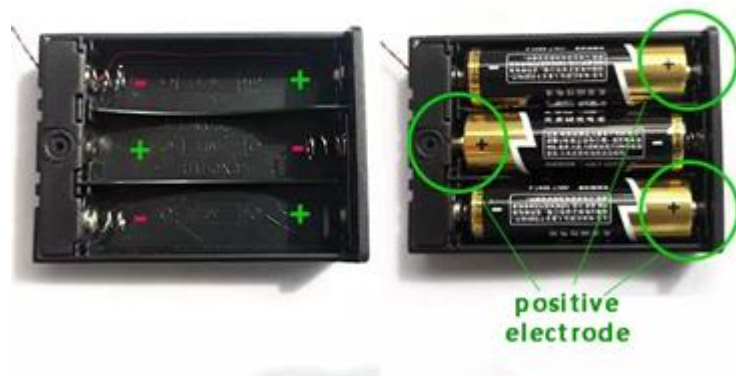

Button battery box (flat) battery correct installation method

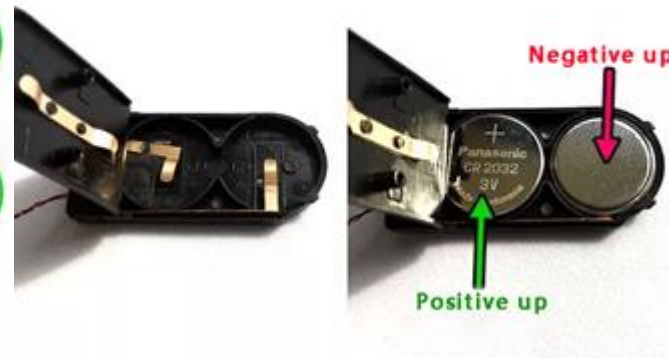


Button battery box (round) battery correct installation



## Installation Instructions

Take out the AA battery box and correctly install 3 AA batteries (new batteries are recommended)

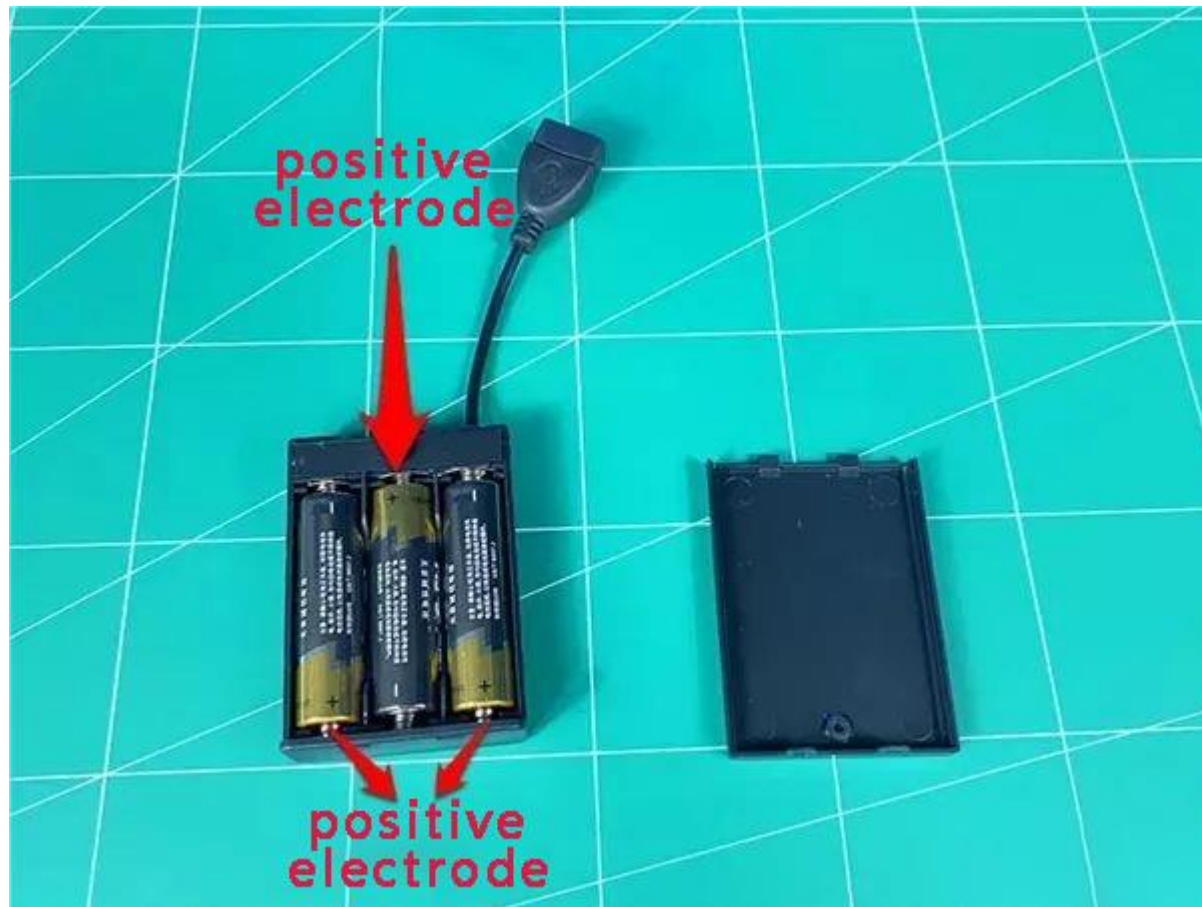




Take out the USB power cable and insert it into the battery box (different shapes of the battery box will not affect normal installation)




Take a 6-socket and plug the power cord into the 6-socket

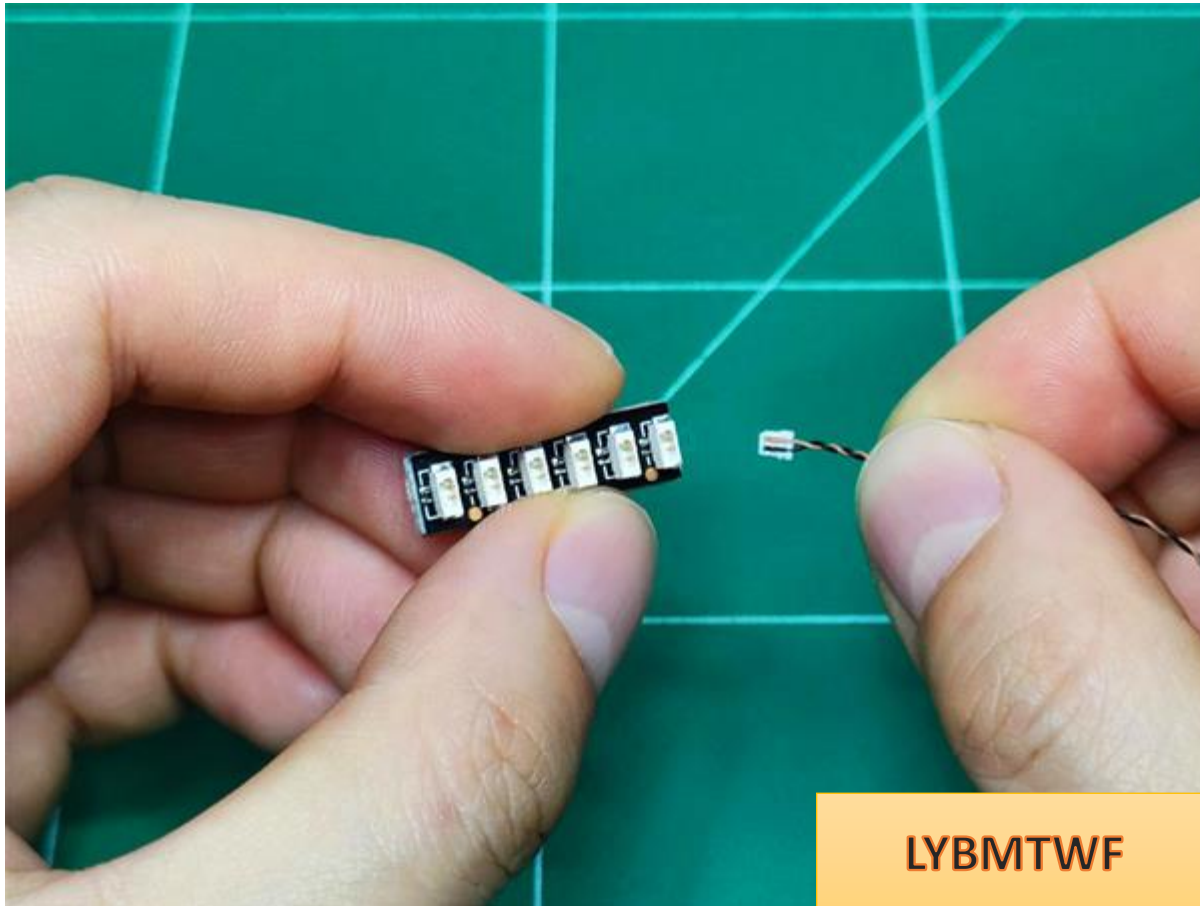


LYBMTWF

# Plug and socket connection method


Align the "=" on the plug with the "=" side on the receptacle

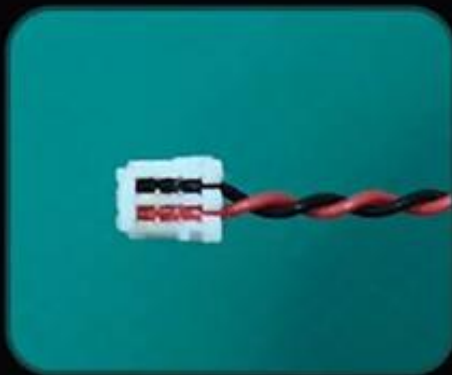

The "=" on the plug can clearly see one side of the line

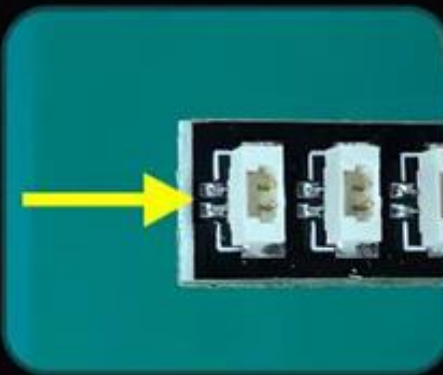

There are two silver dots next to the "=" socket on the socket

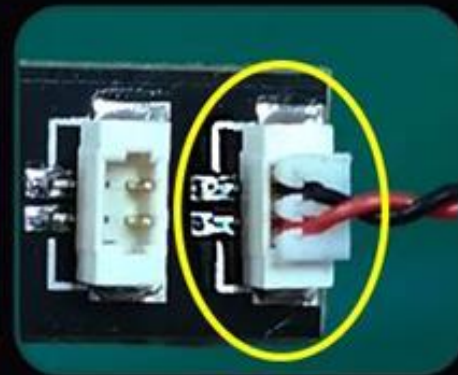

equal sign equal sign






Take a 15cm warm light headlight and insert it into 6 seats



Turn on the power and test that the light is on normally

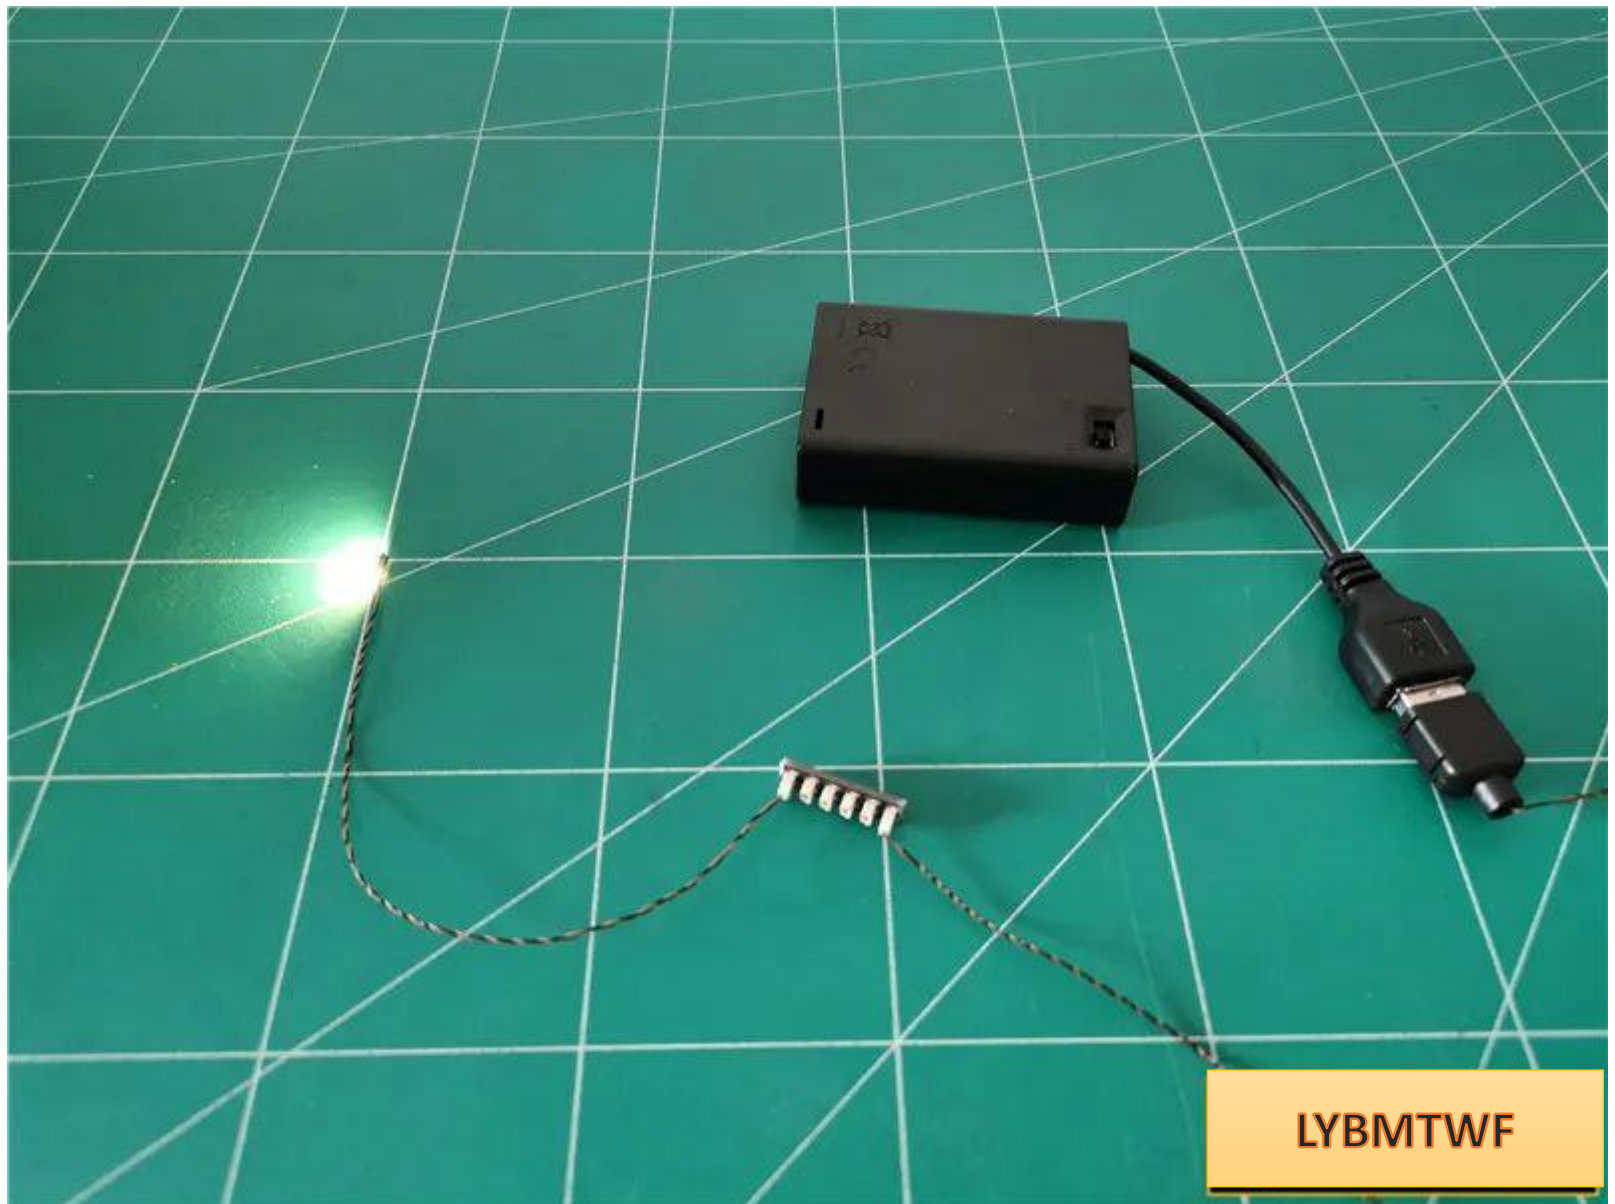

After the test, turn off the power, pull out the lamp, and **leave the 6 lamps on the power supply.**






Take out the building and layer it






Install the lower building lighting first, and remove the parts indicated by the arrows one by one



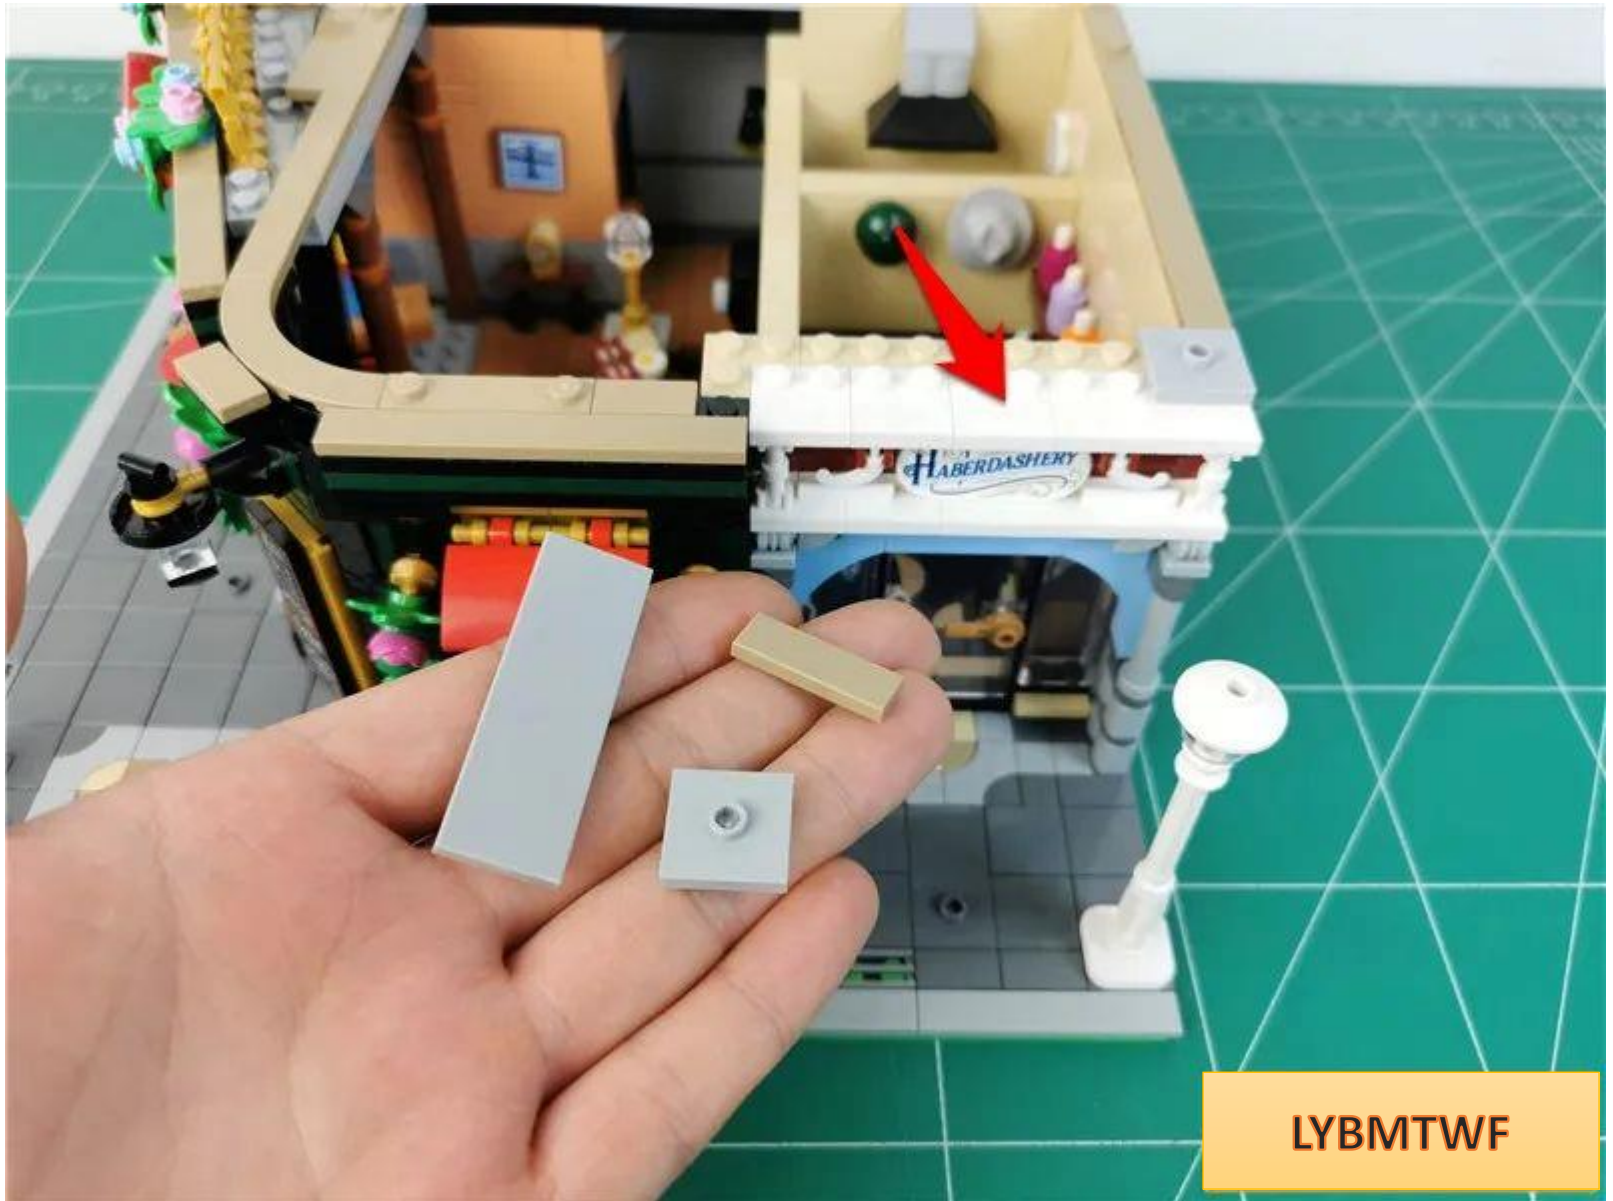


LYBMTWF



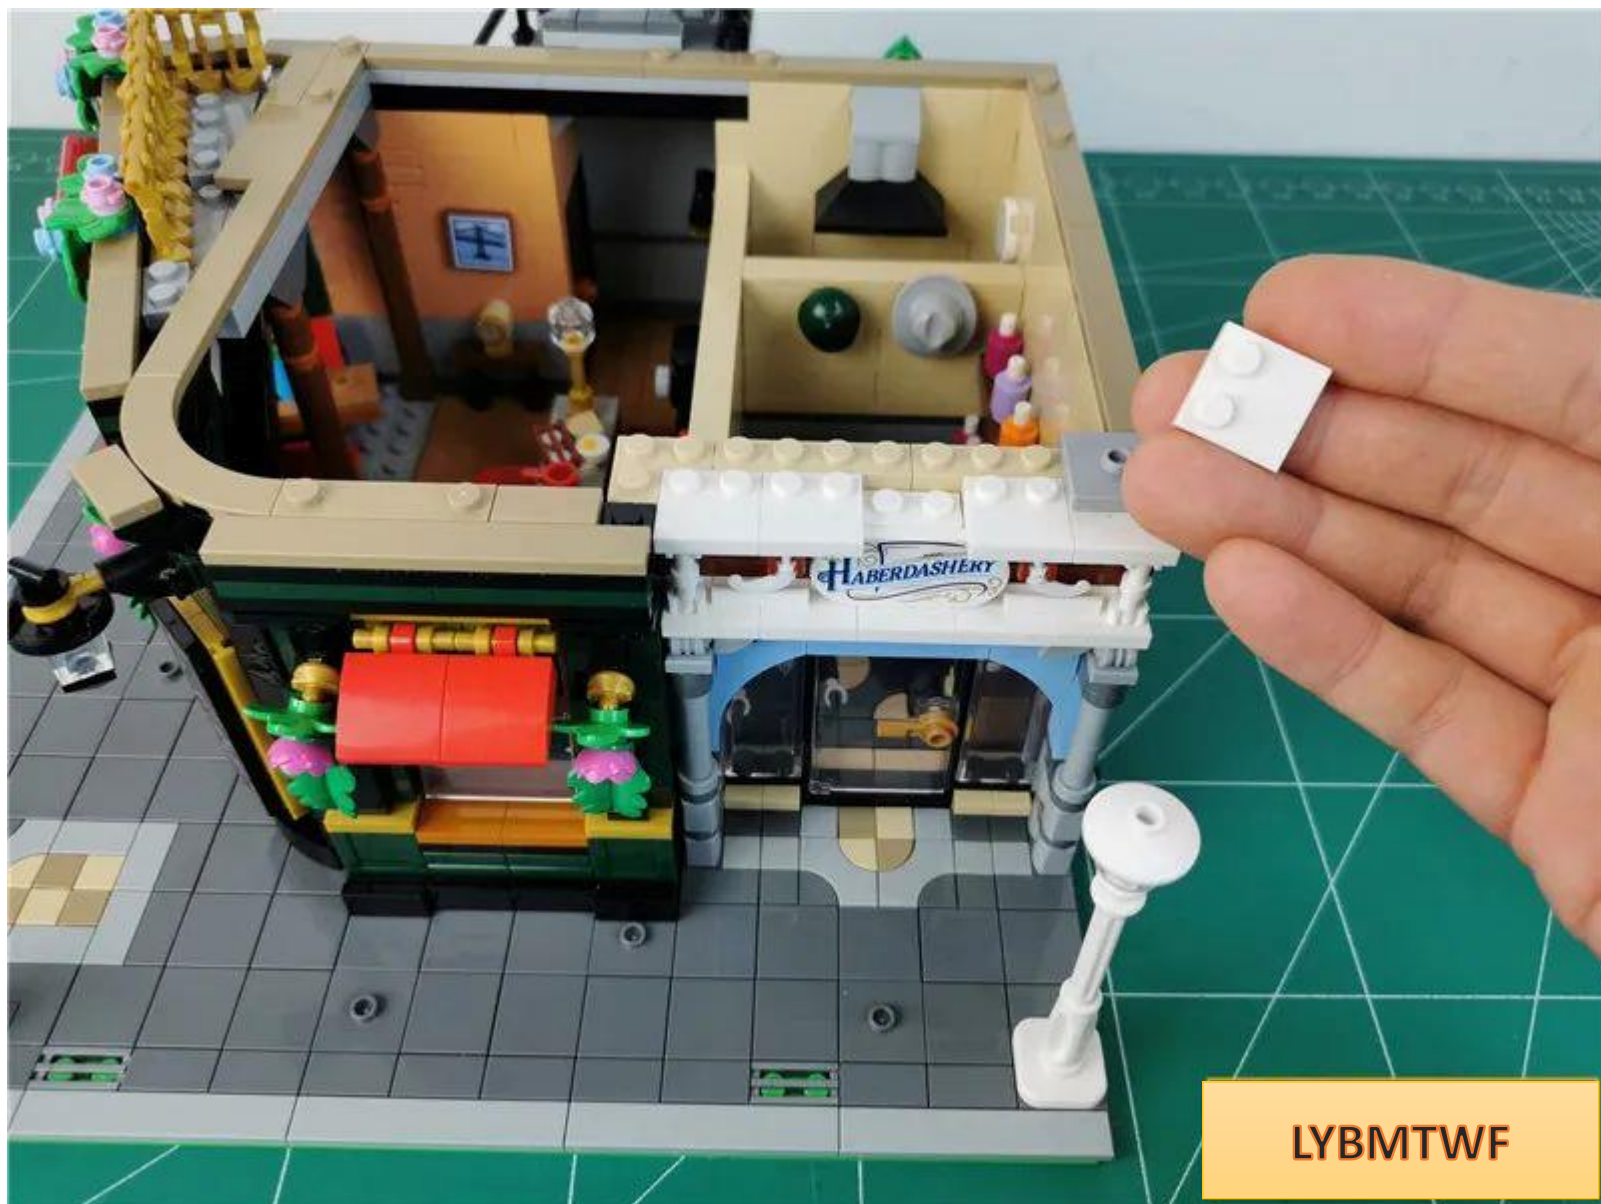


LYBMTWF

Take 1 15cm warm light headlight pellet

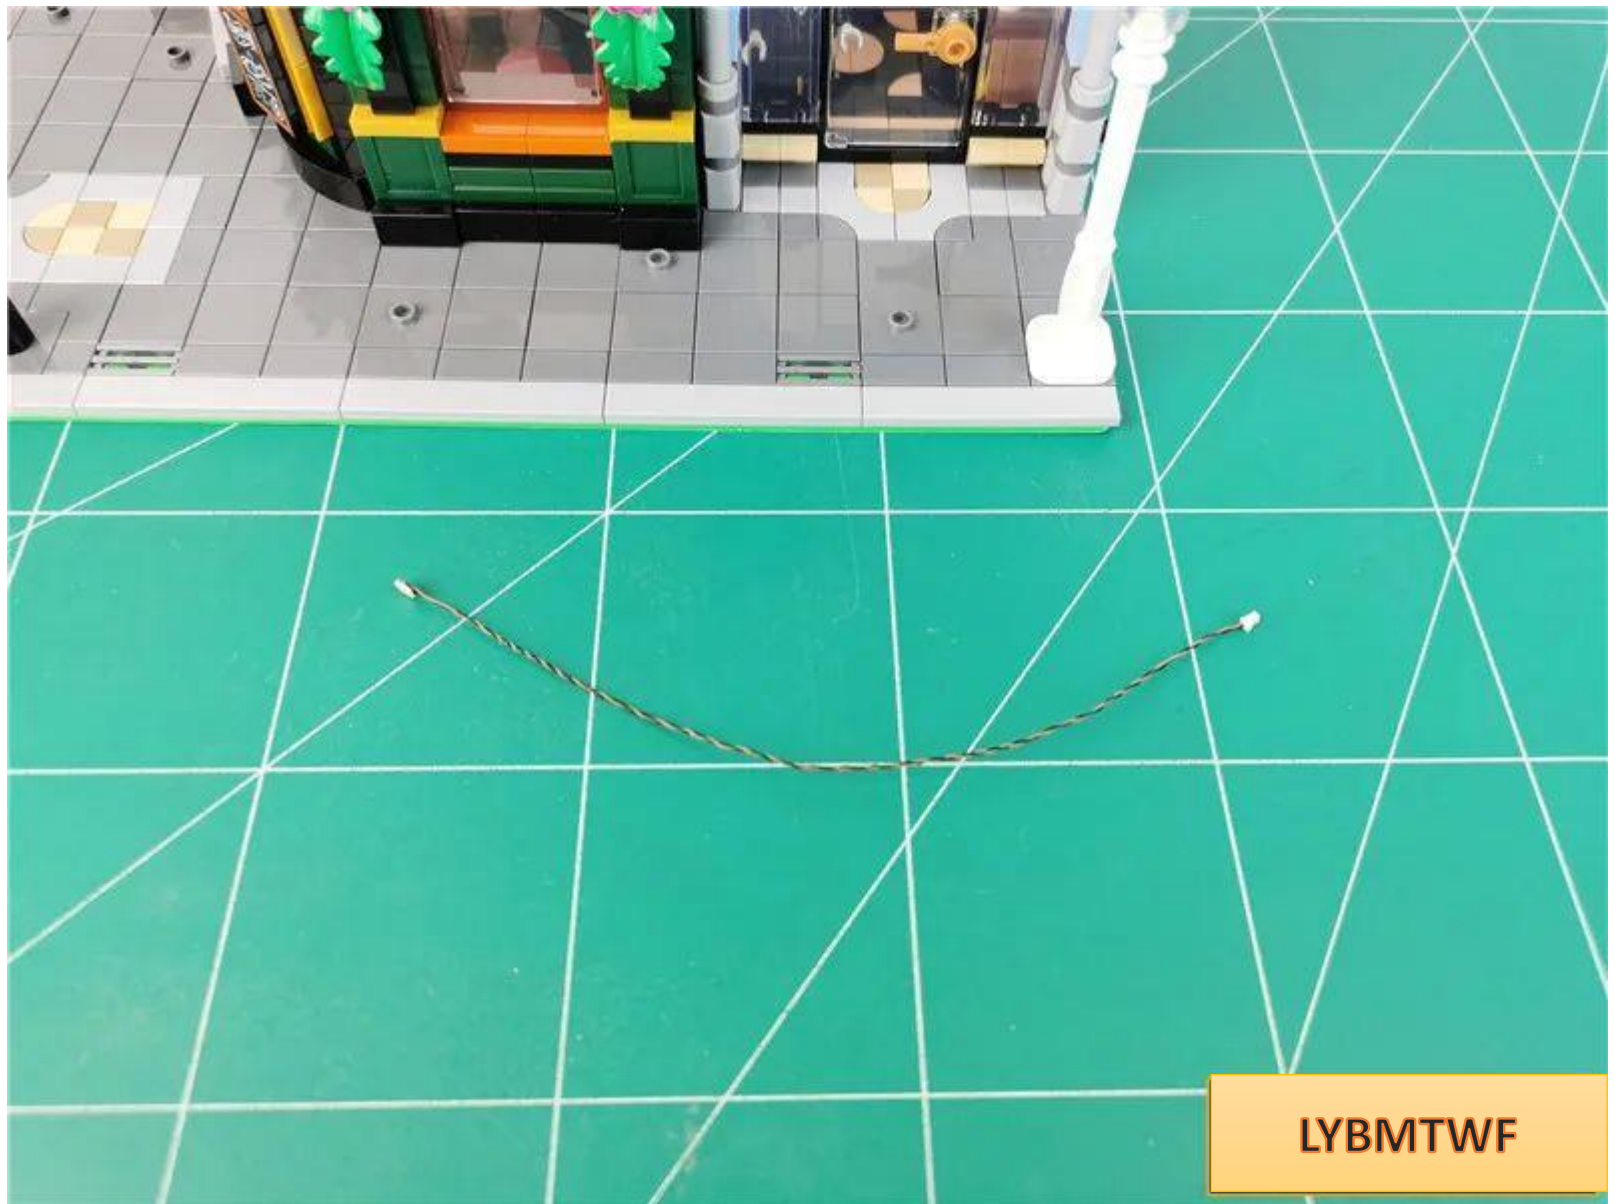


the light pellet with **the luminous side facing downwards** at the position shown in the figure.

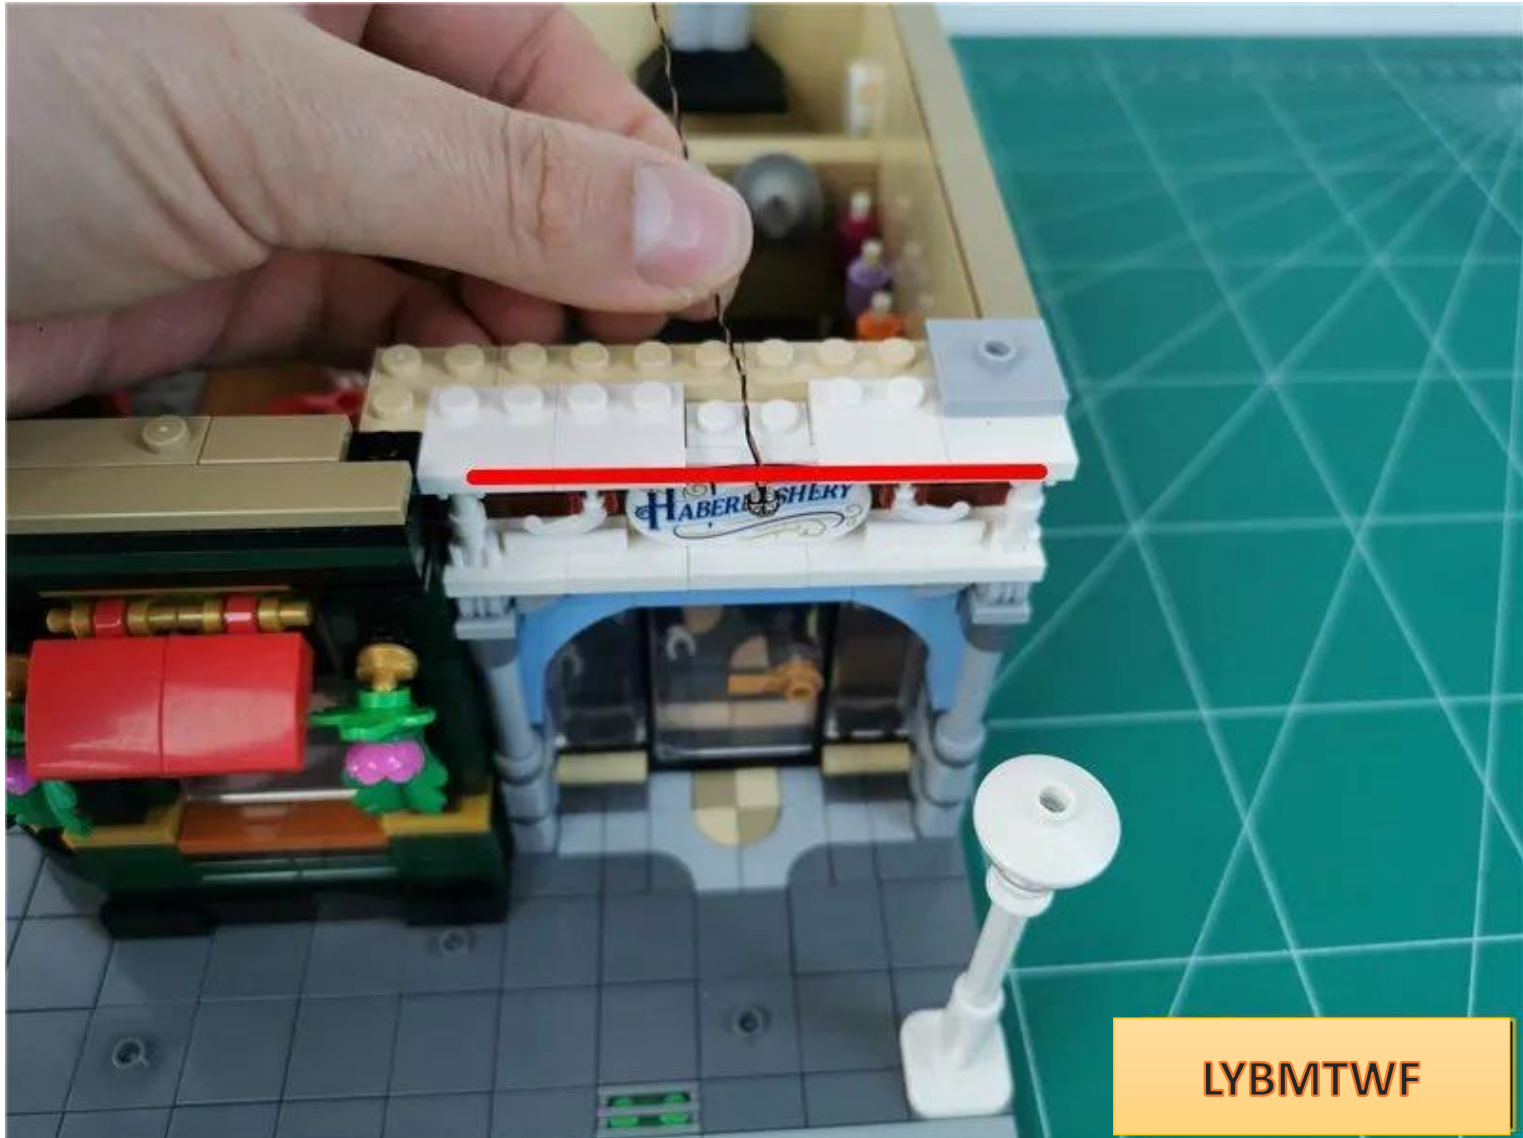




Use the tool to fit the wire to the angle.

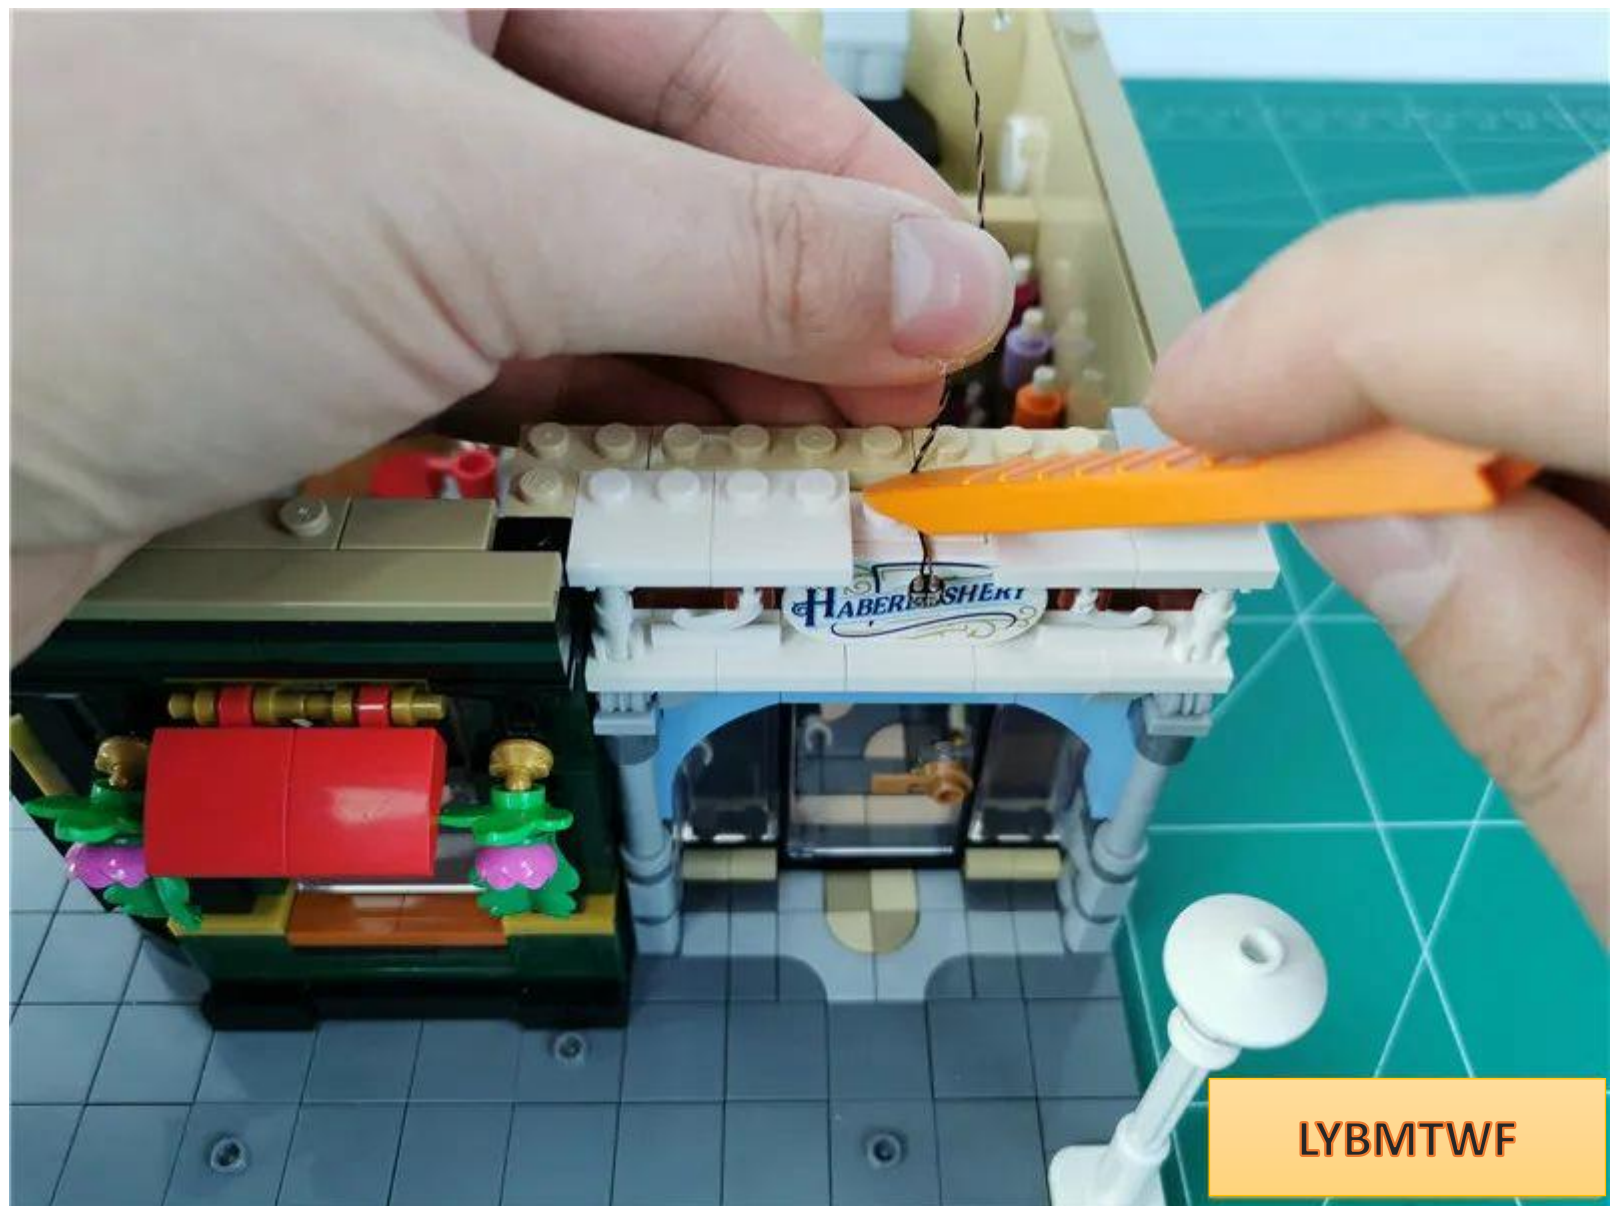

LYBMTWF

The effect after sorting is as follows

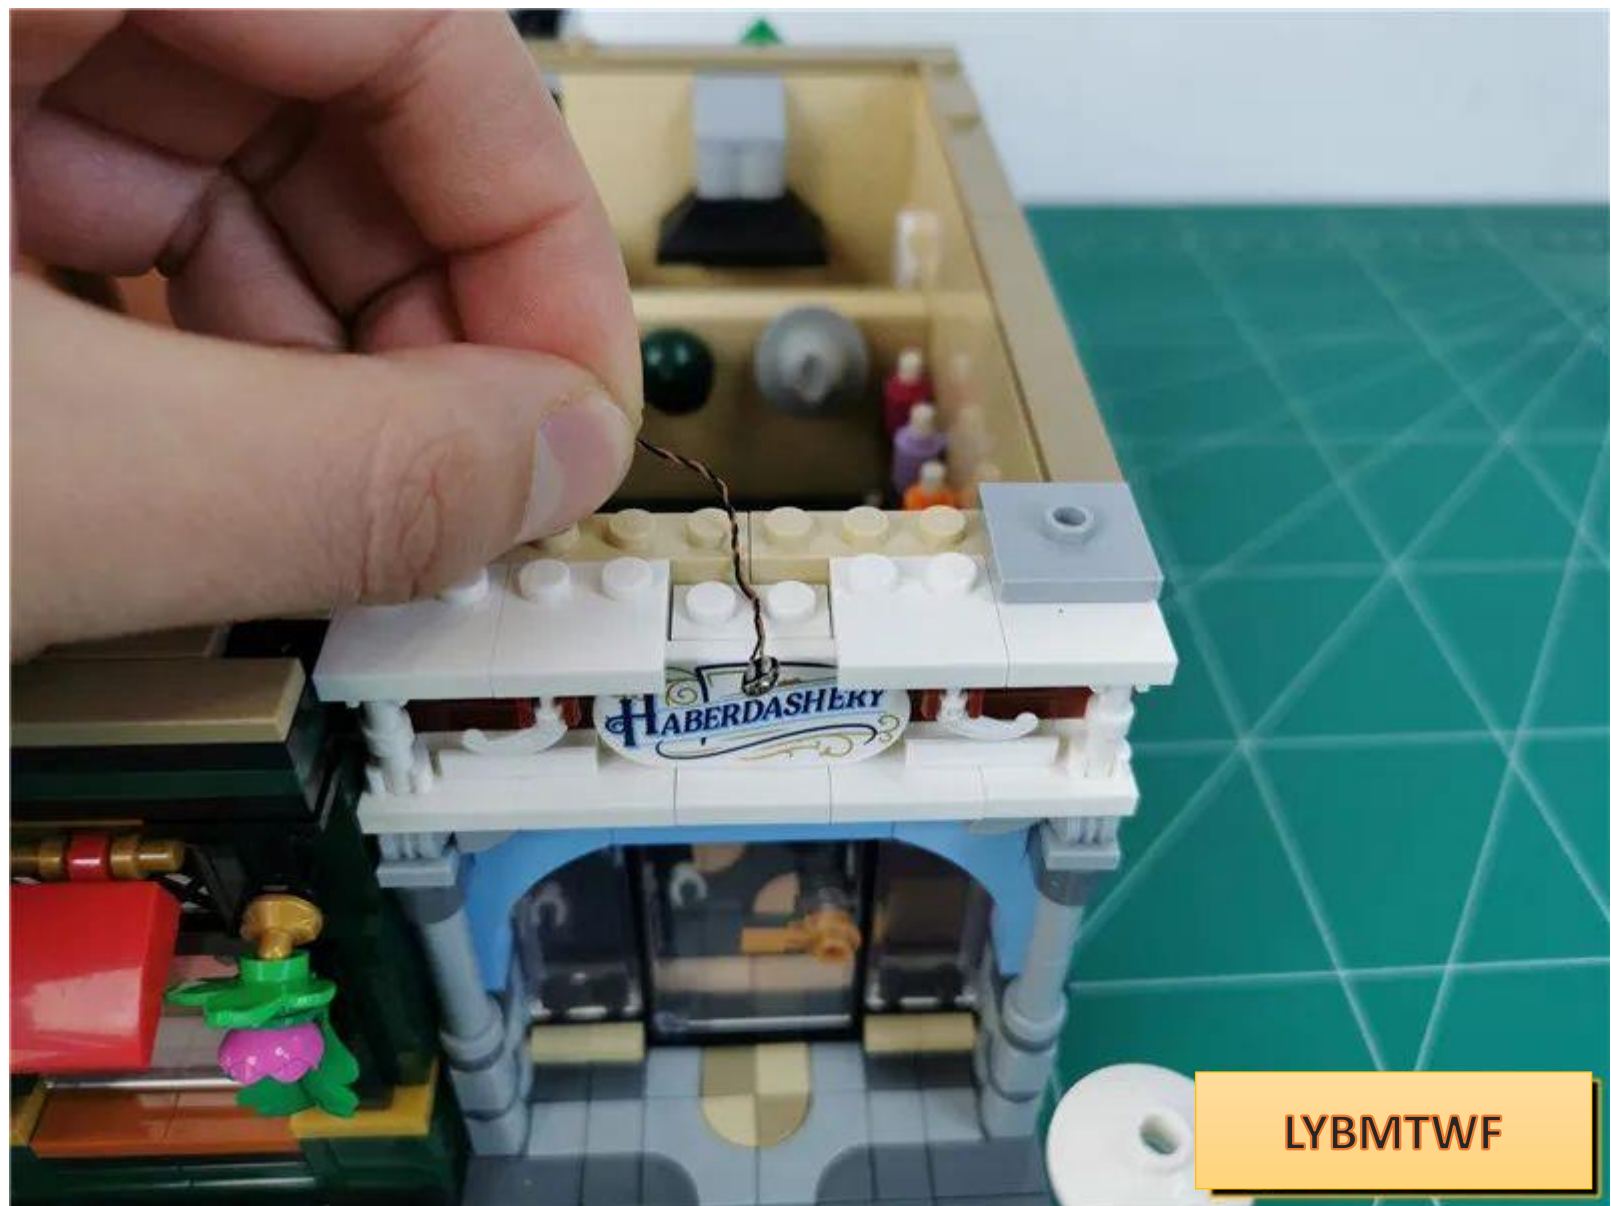

LYBMTWF

Restore parts and fix wires





From below, the effect is as follows




Pull the wire along the gap between the raised particles to the left



LYBMTWF

Restore parts and fix wires

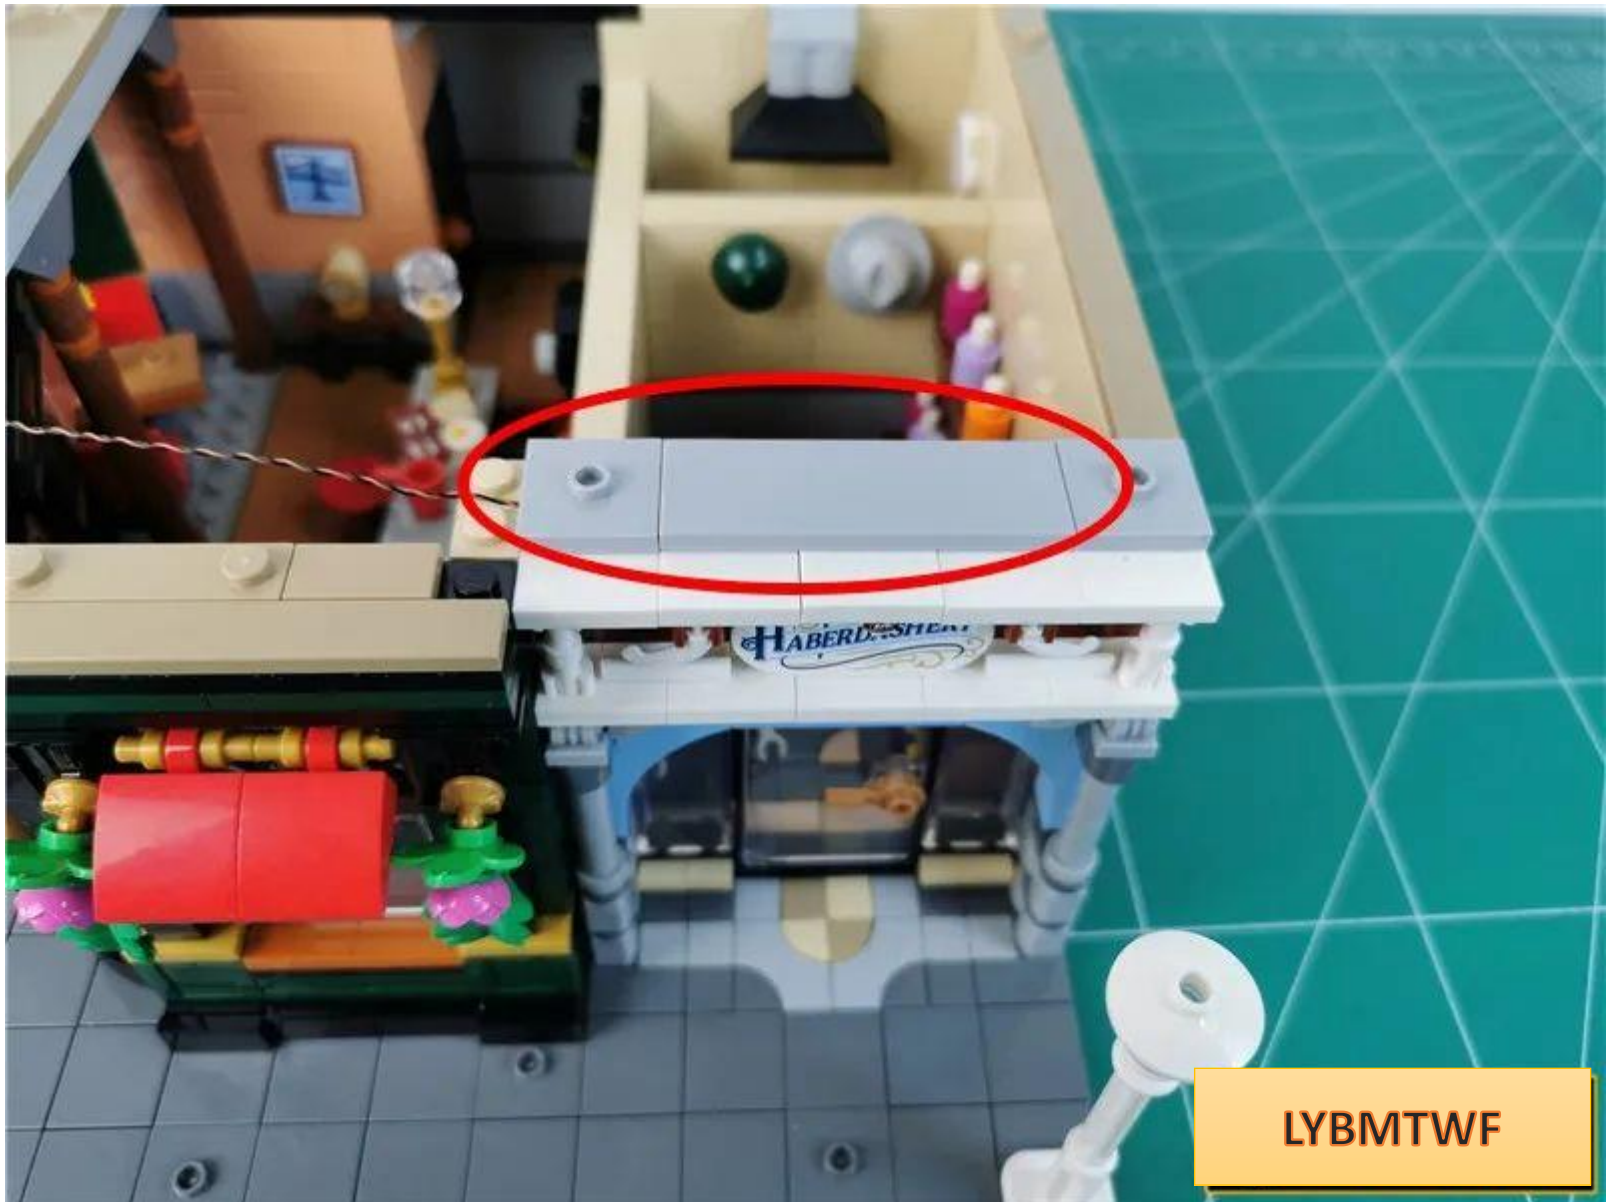




Remove the parts indicated by arrows one by one








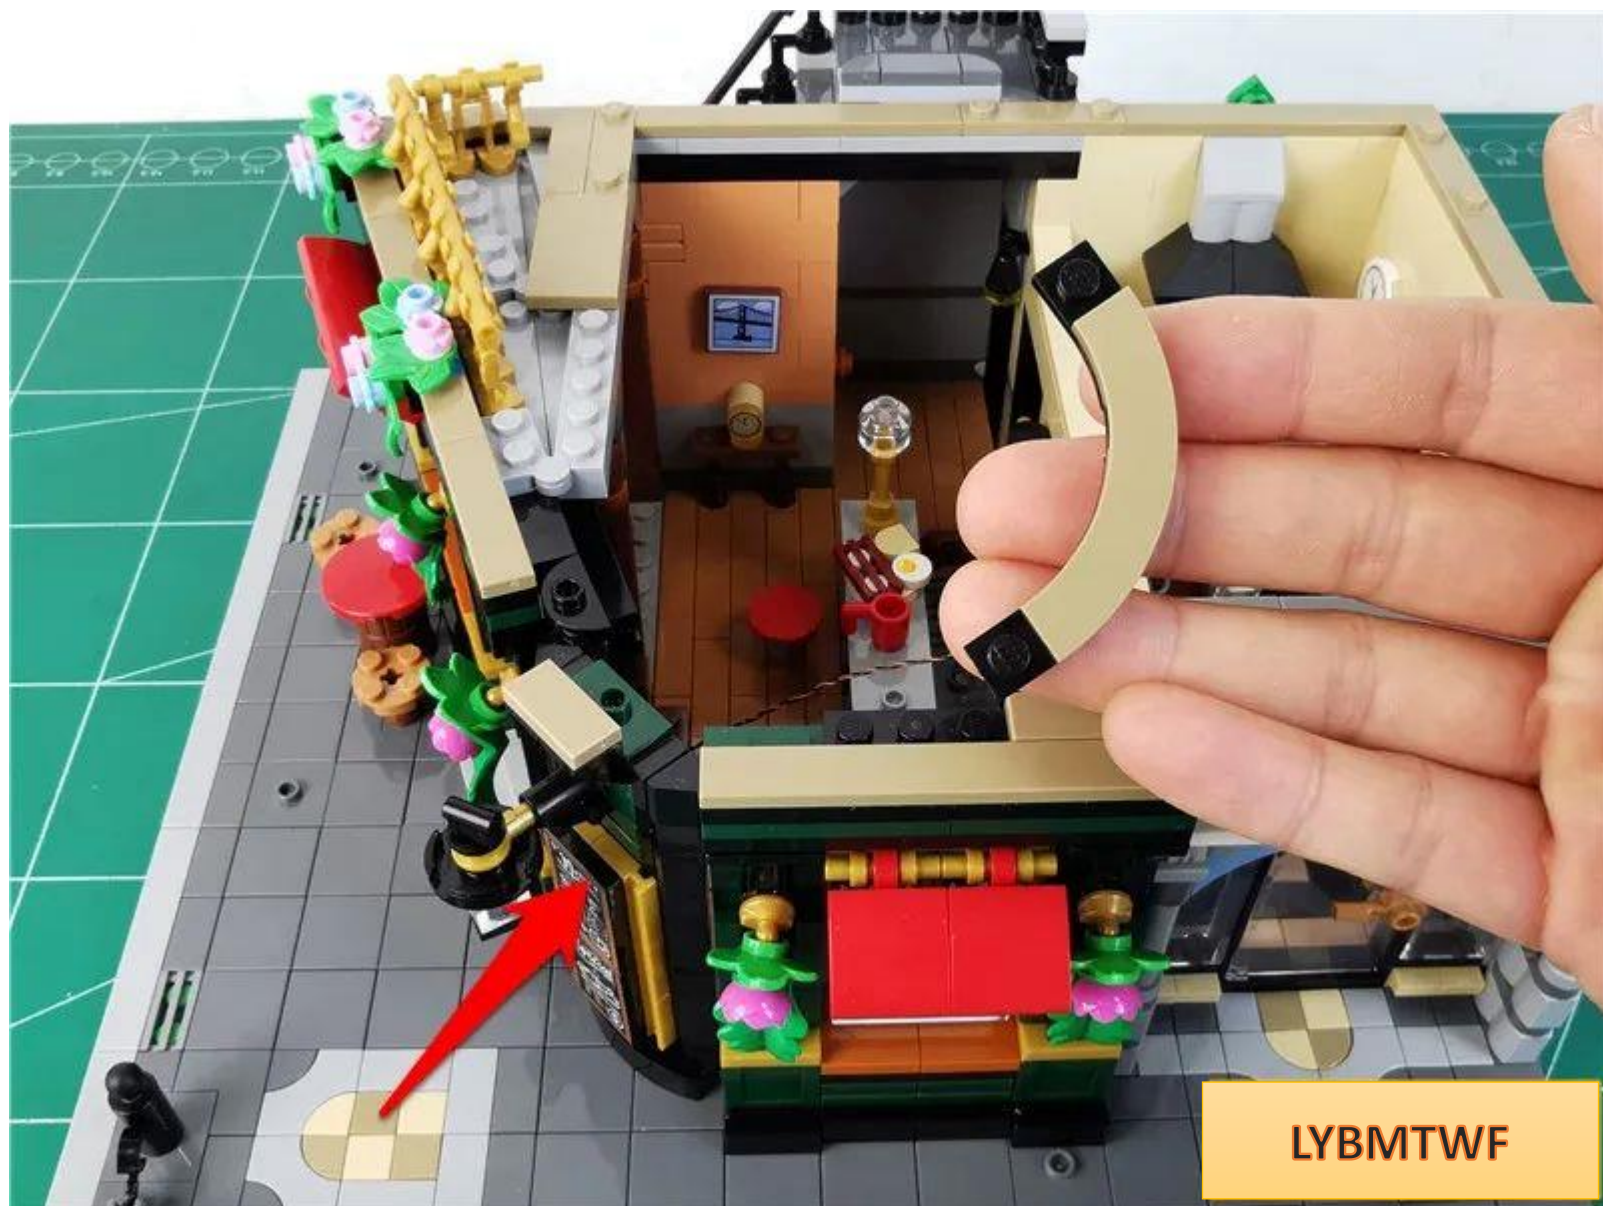

LYBMTWF

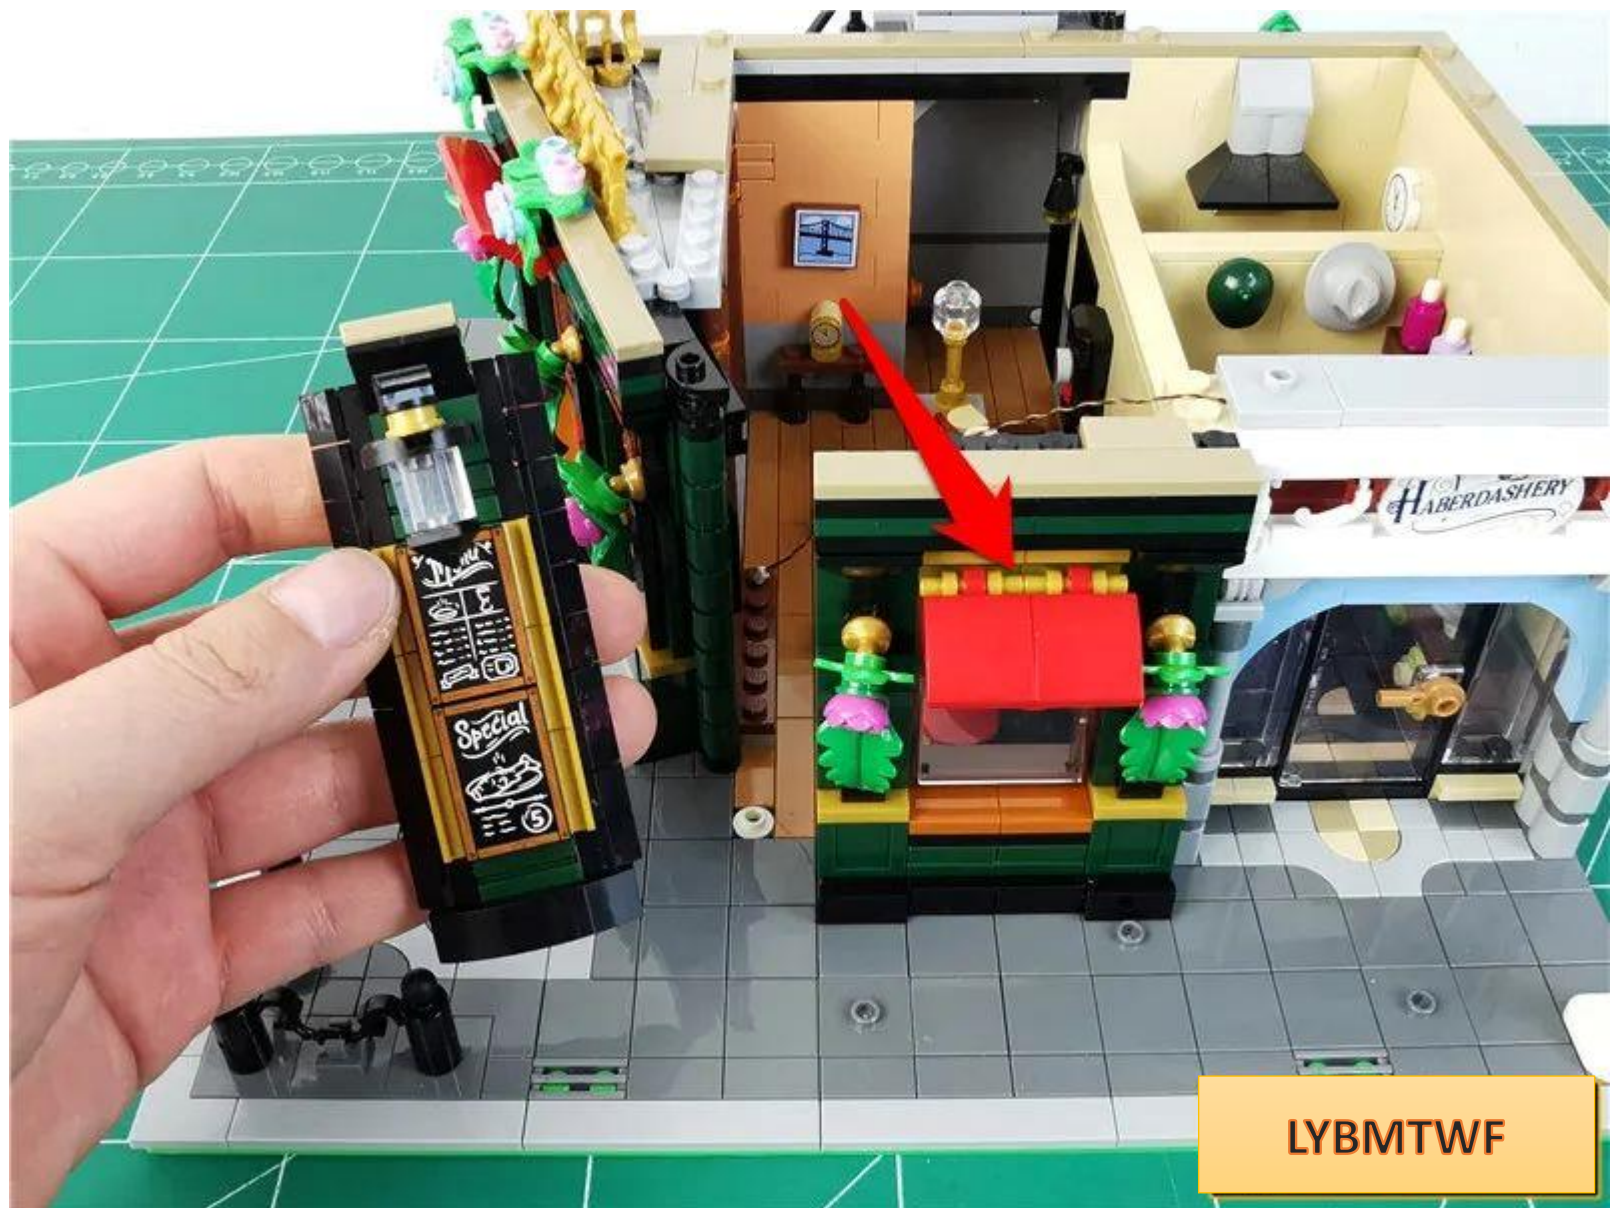

LYBMTWF



Pinch the bottom of the part and pry it upwards



LYBMTWF



Continue to remove the parts indicated by the arrows.






LYBMTWF





LYBMTWF

Remove the white lamp post

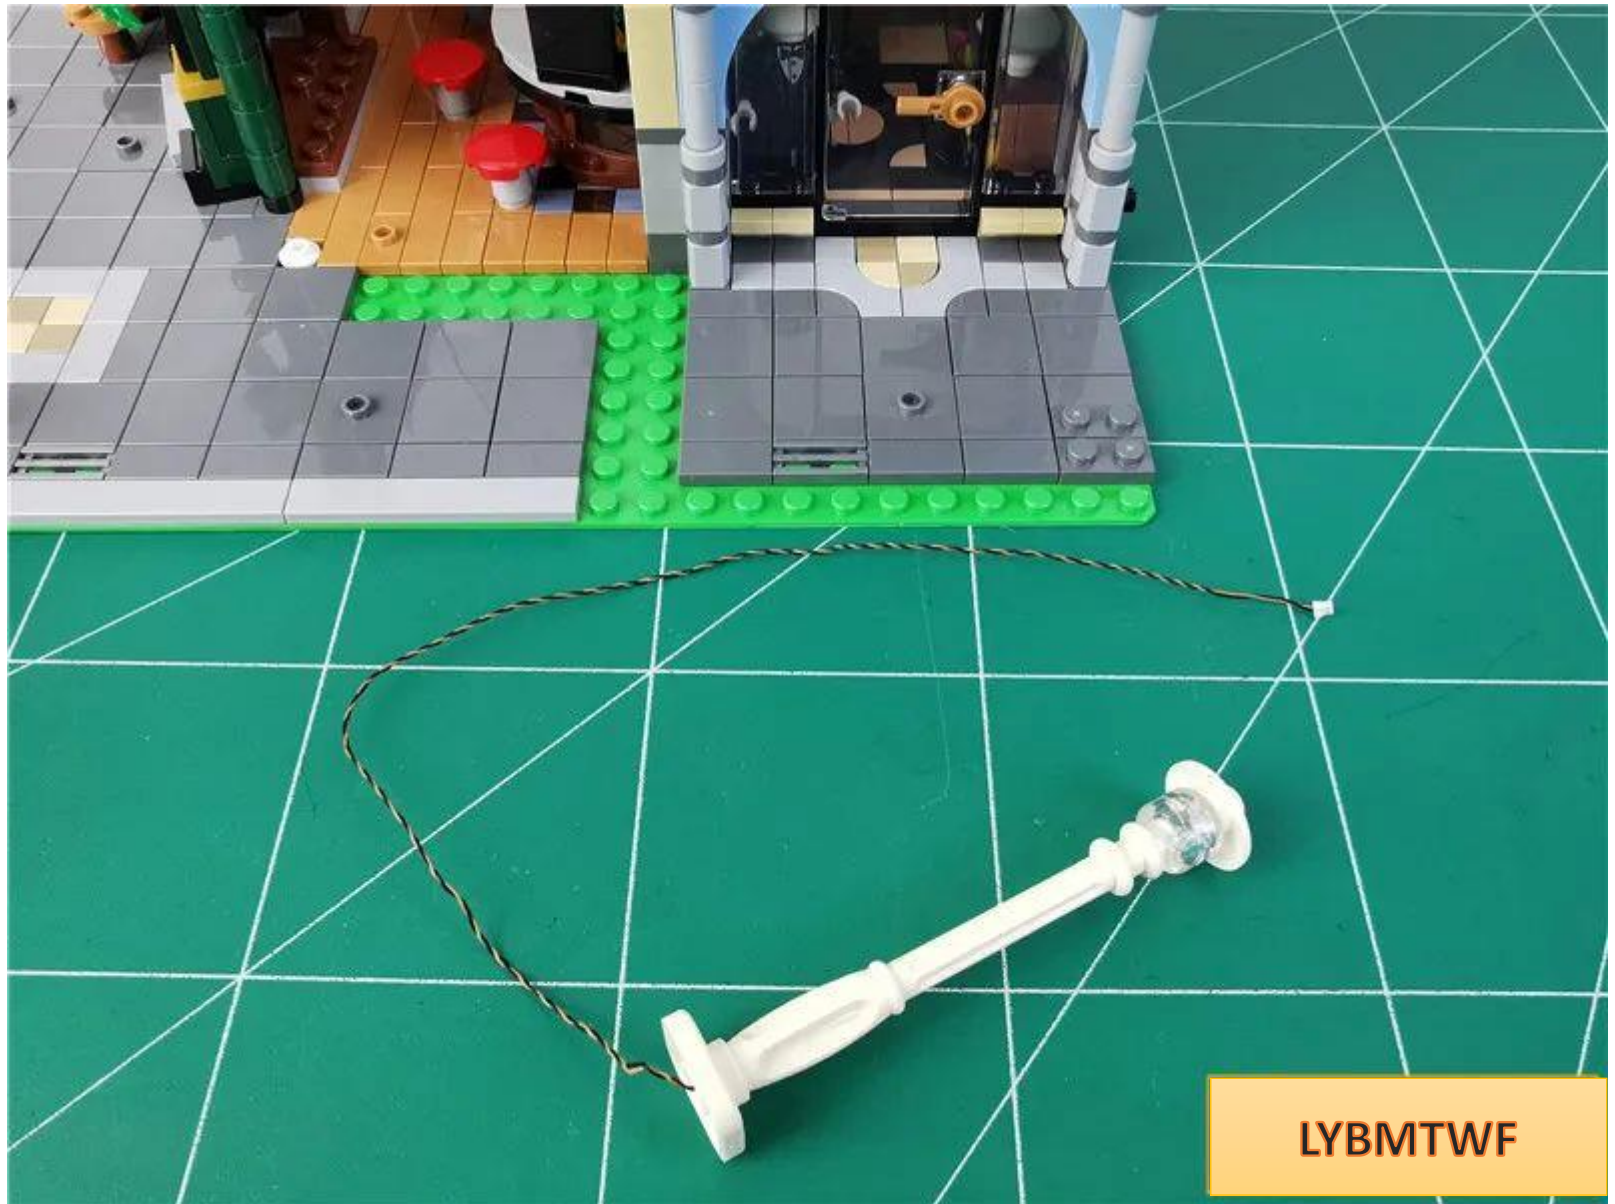


LYBMTWF



Replace the lamp post and install it **with the wires facing your side**




Fit the wire to the part and pull it to the left

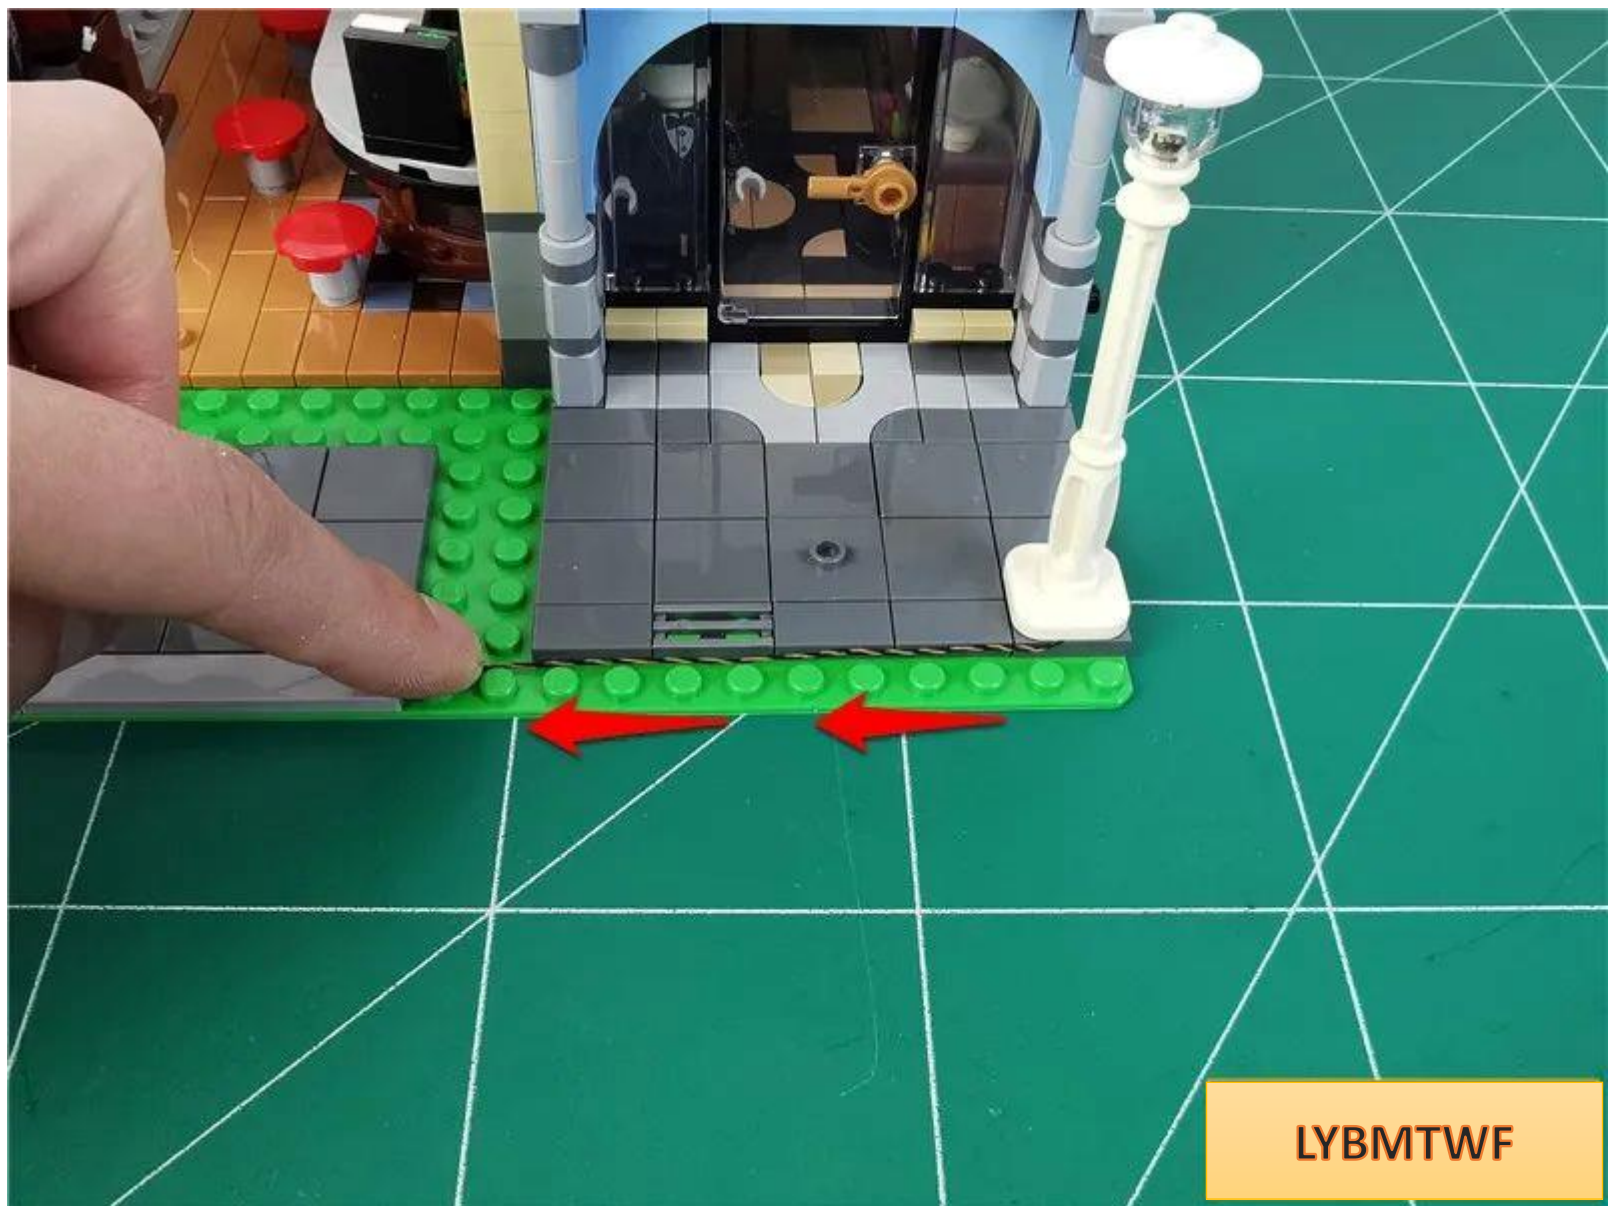



Restore the plate, continue to fit the wires into the gaps, and pull them into the room

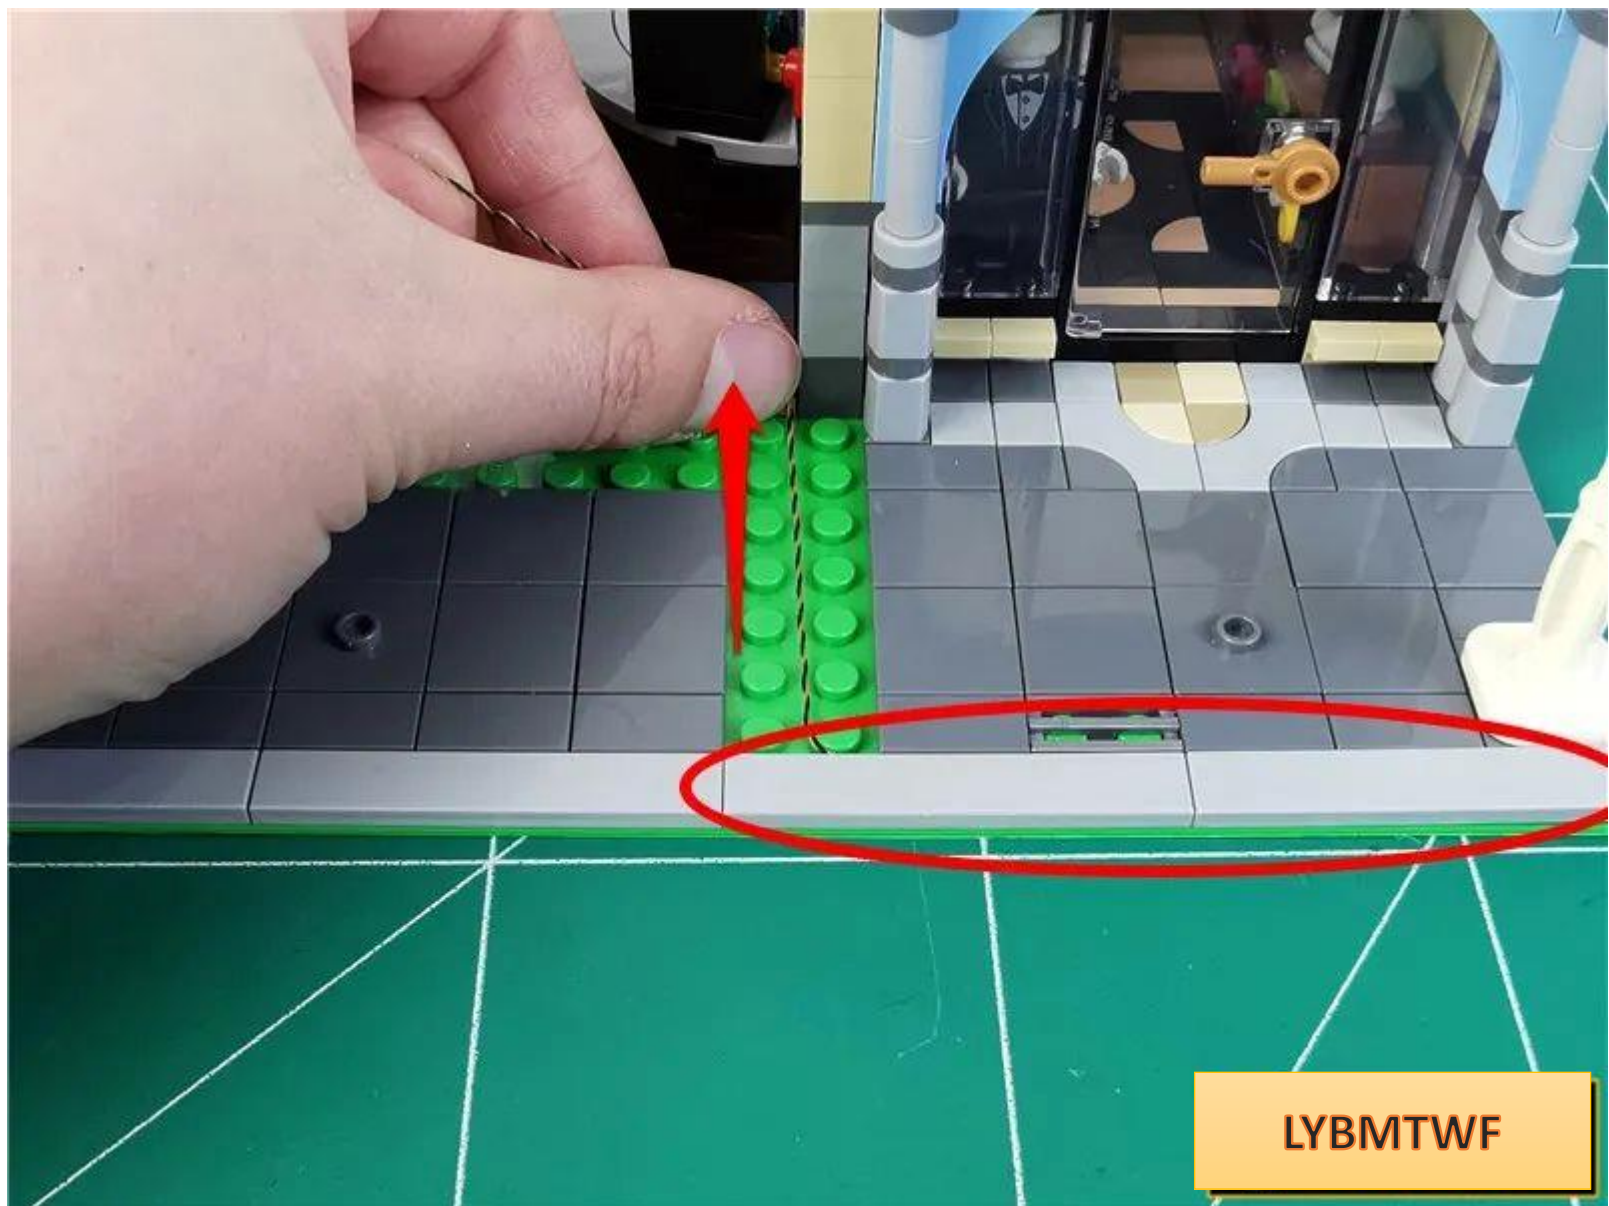

Restore parts and fix wires




LYBMTWF



Remove the window




Break it apart from the position shown in the picture

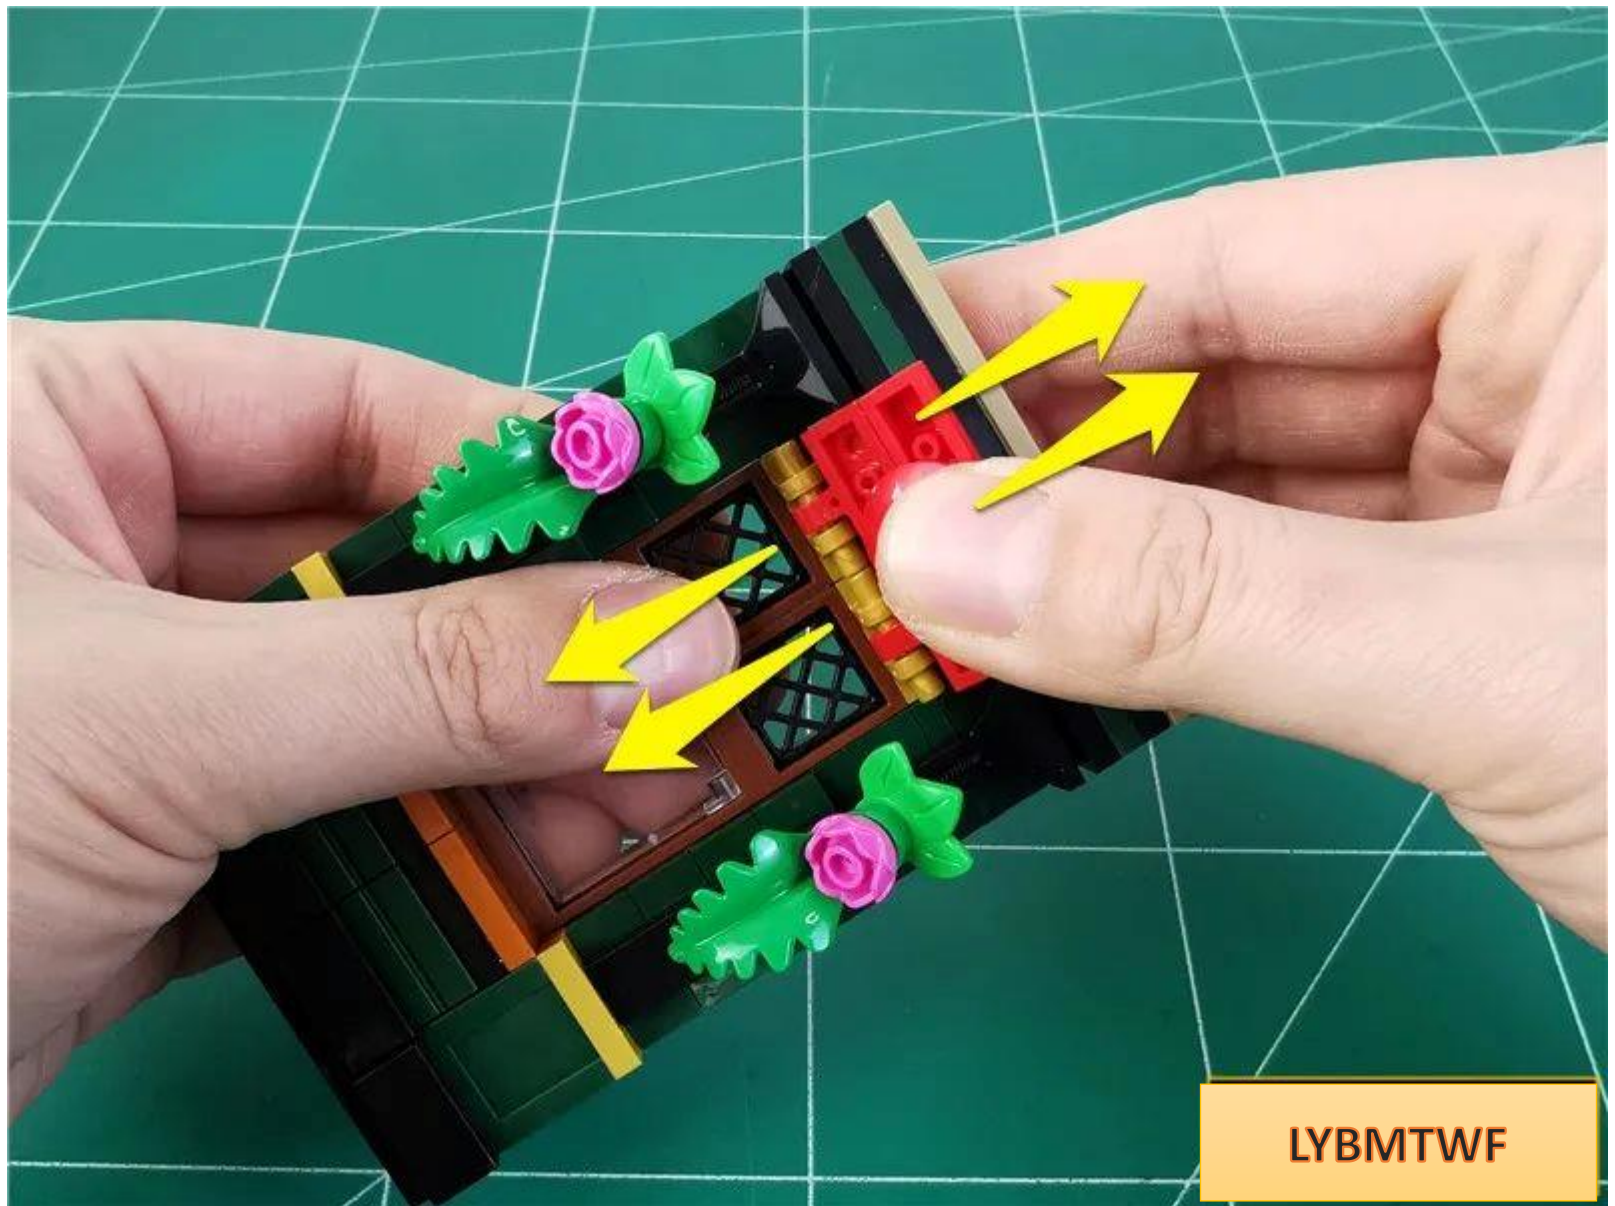


LYBMTWF



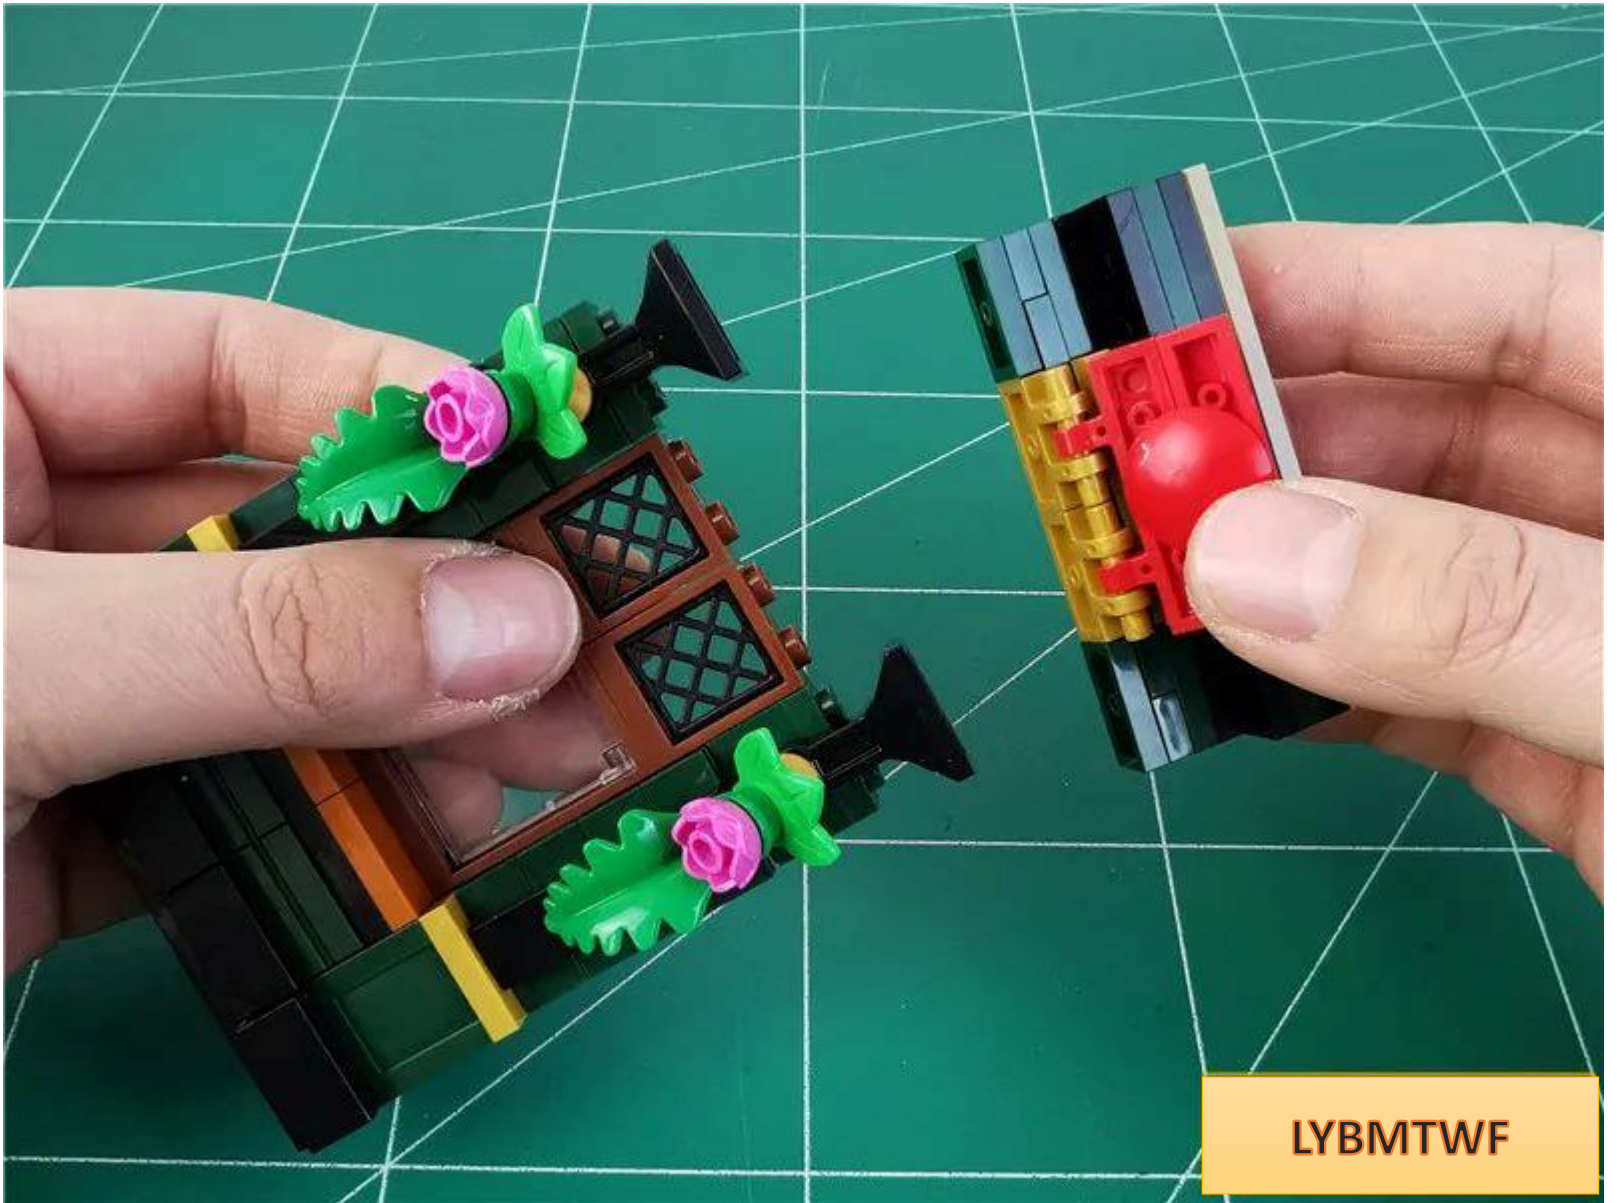

LYBMTWF


Remove the red parts

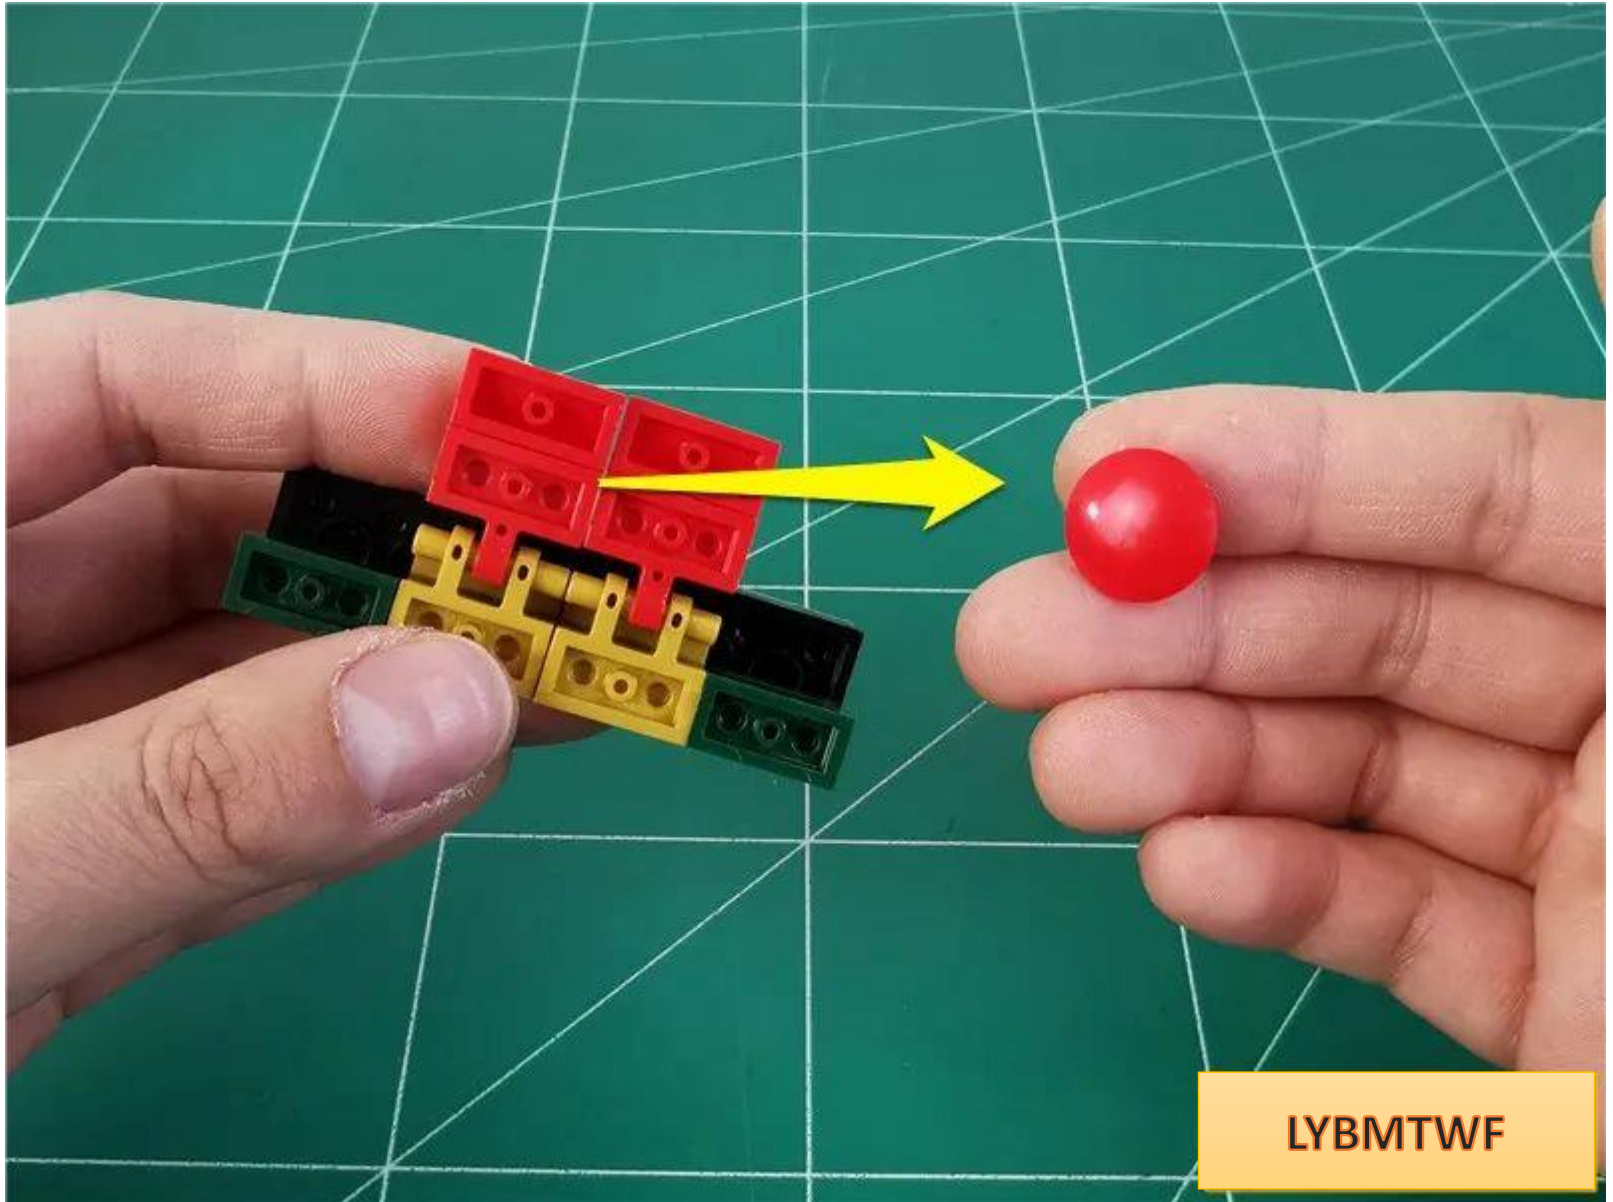

LYBMTWF




Take 1 15cm warm light headlight pellet , 1 2X2 transparent round

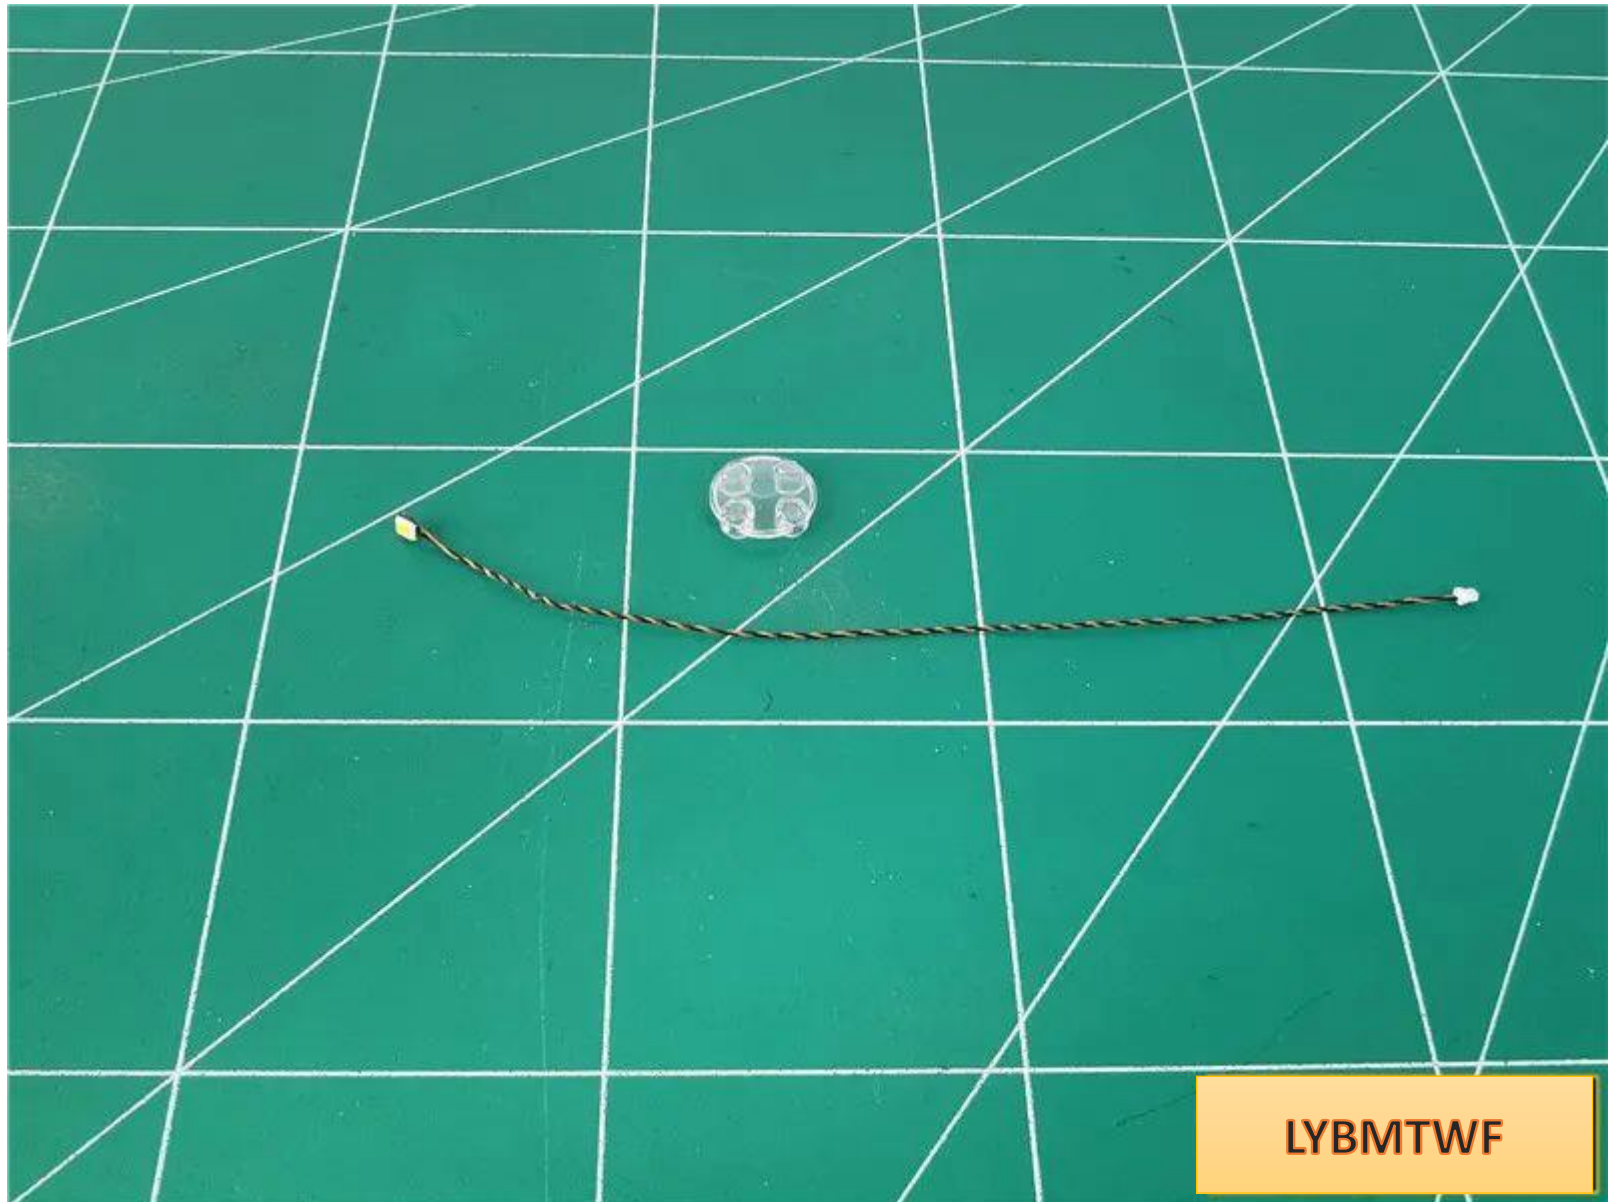


LYBMTWF

the light pellet with **the luminous side facing outwards** at the position shown in the figure.

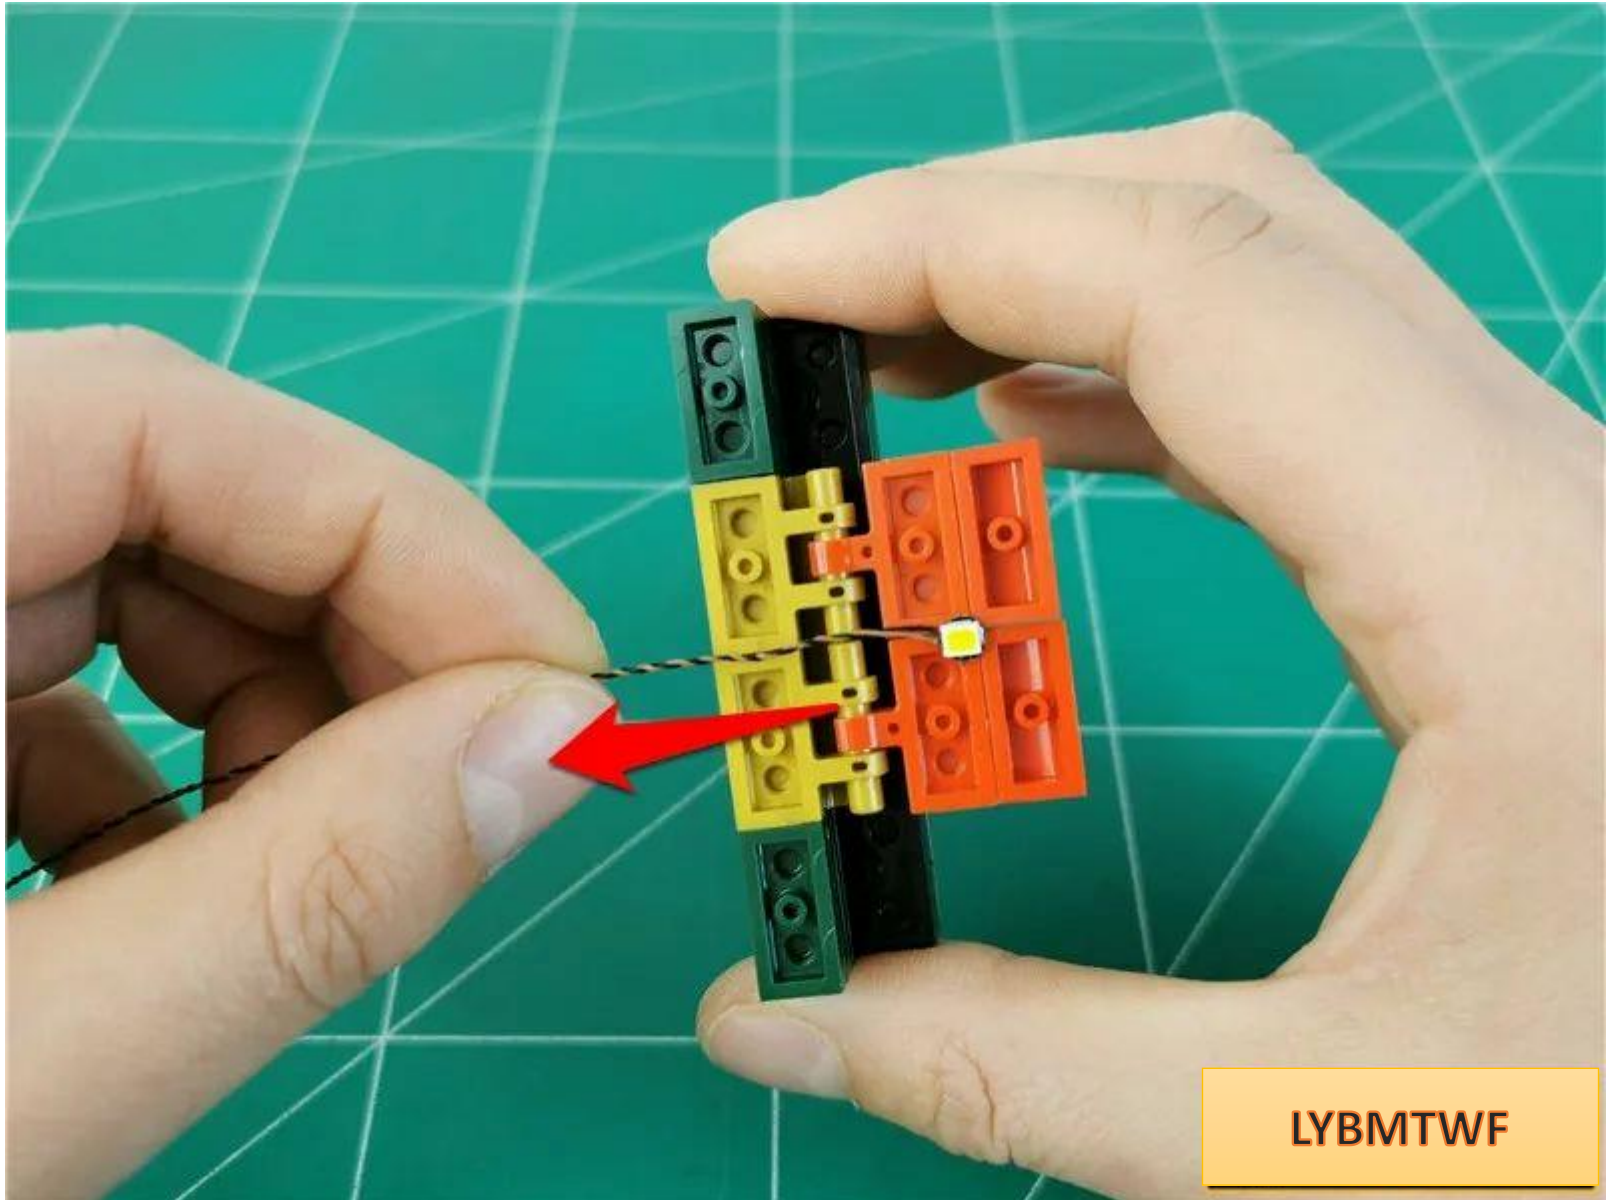


LYBMTWF

Install transparent parts and fix lamp particles

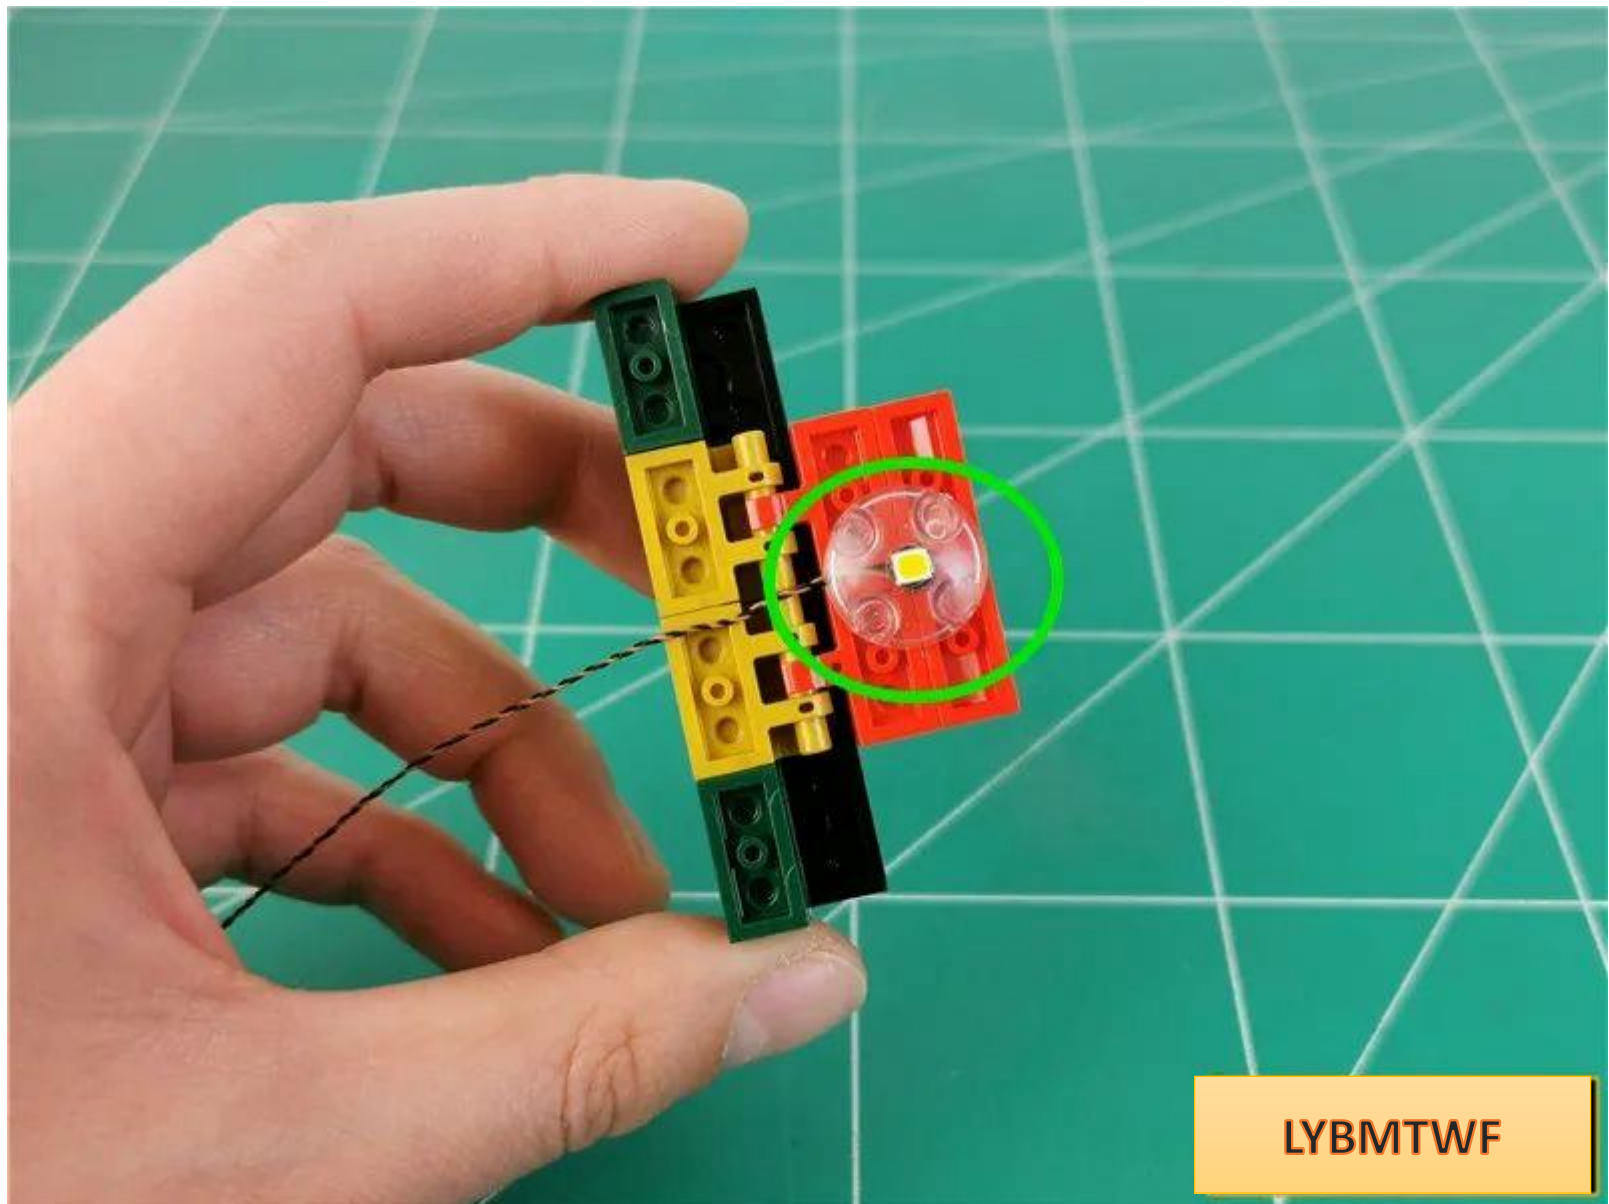




Fit the wire to the middle of the part and pull it to the left

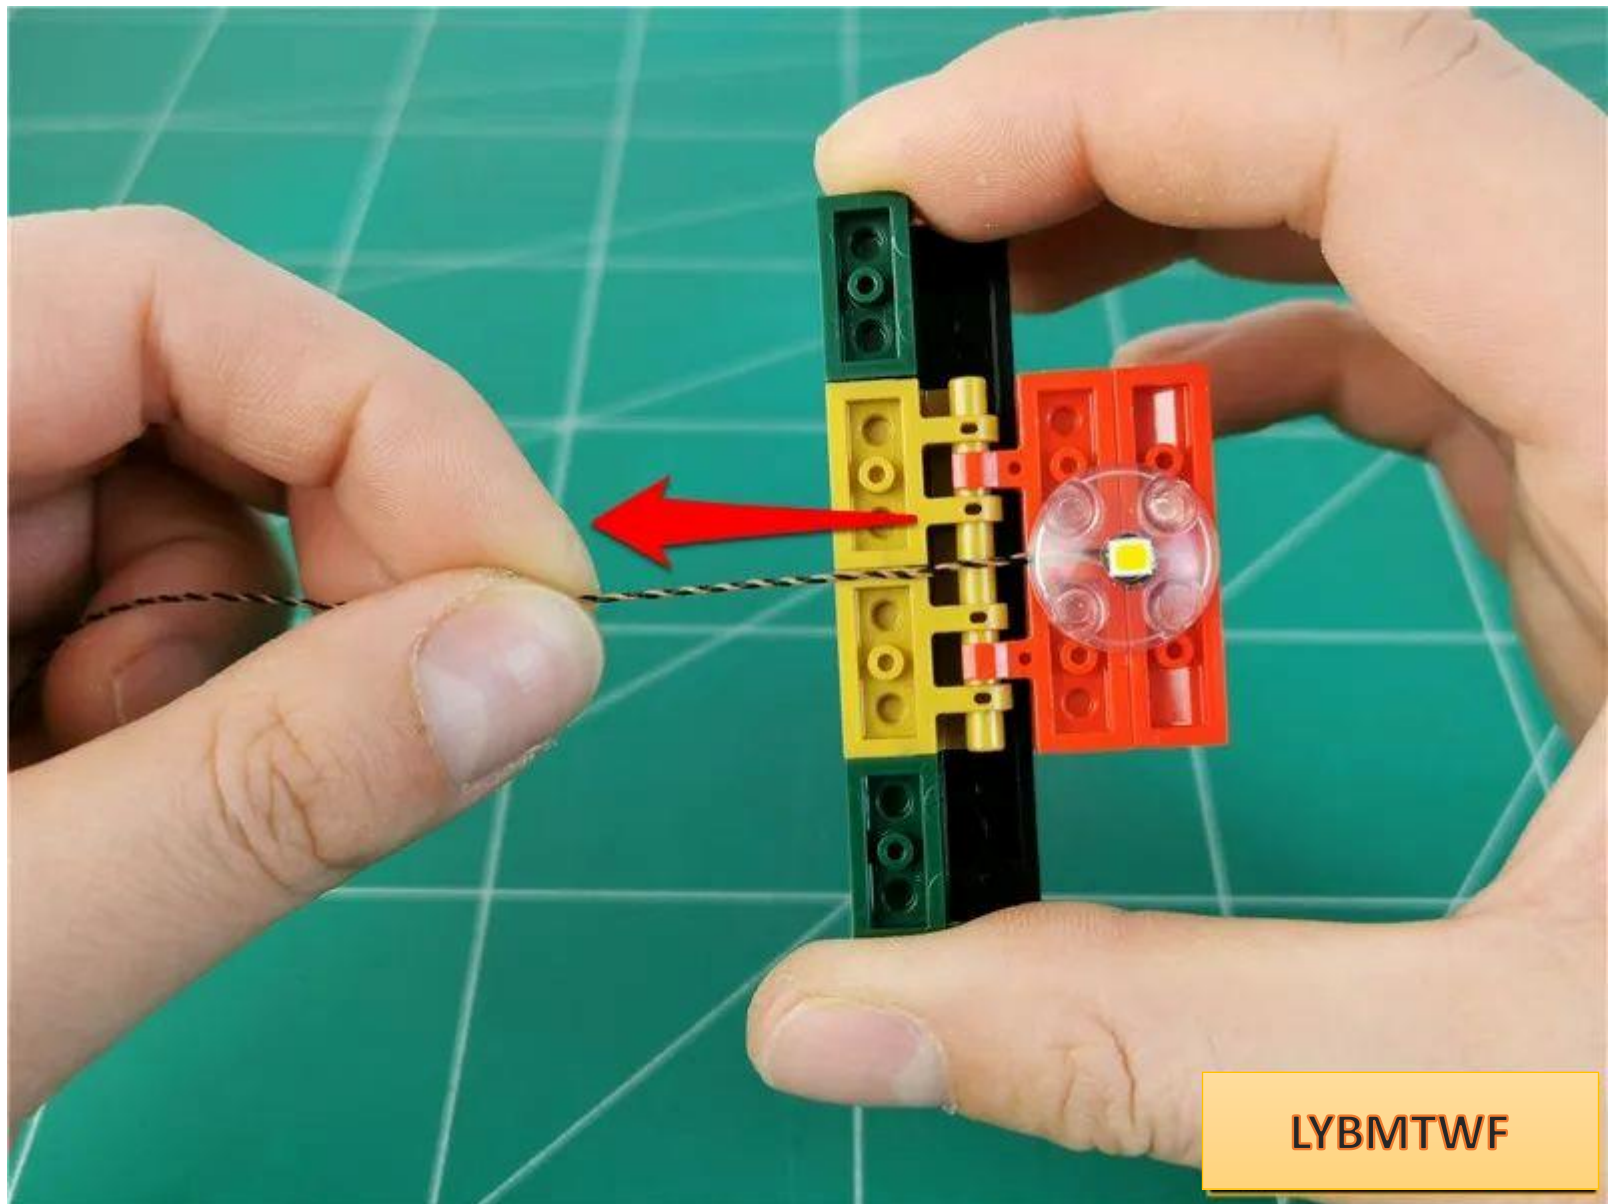


LYBMTWF



Restore parts

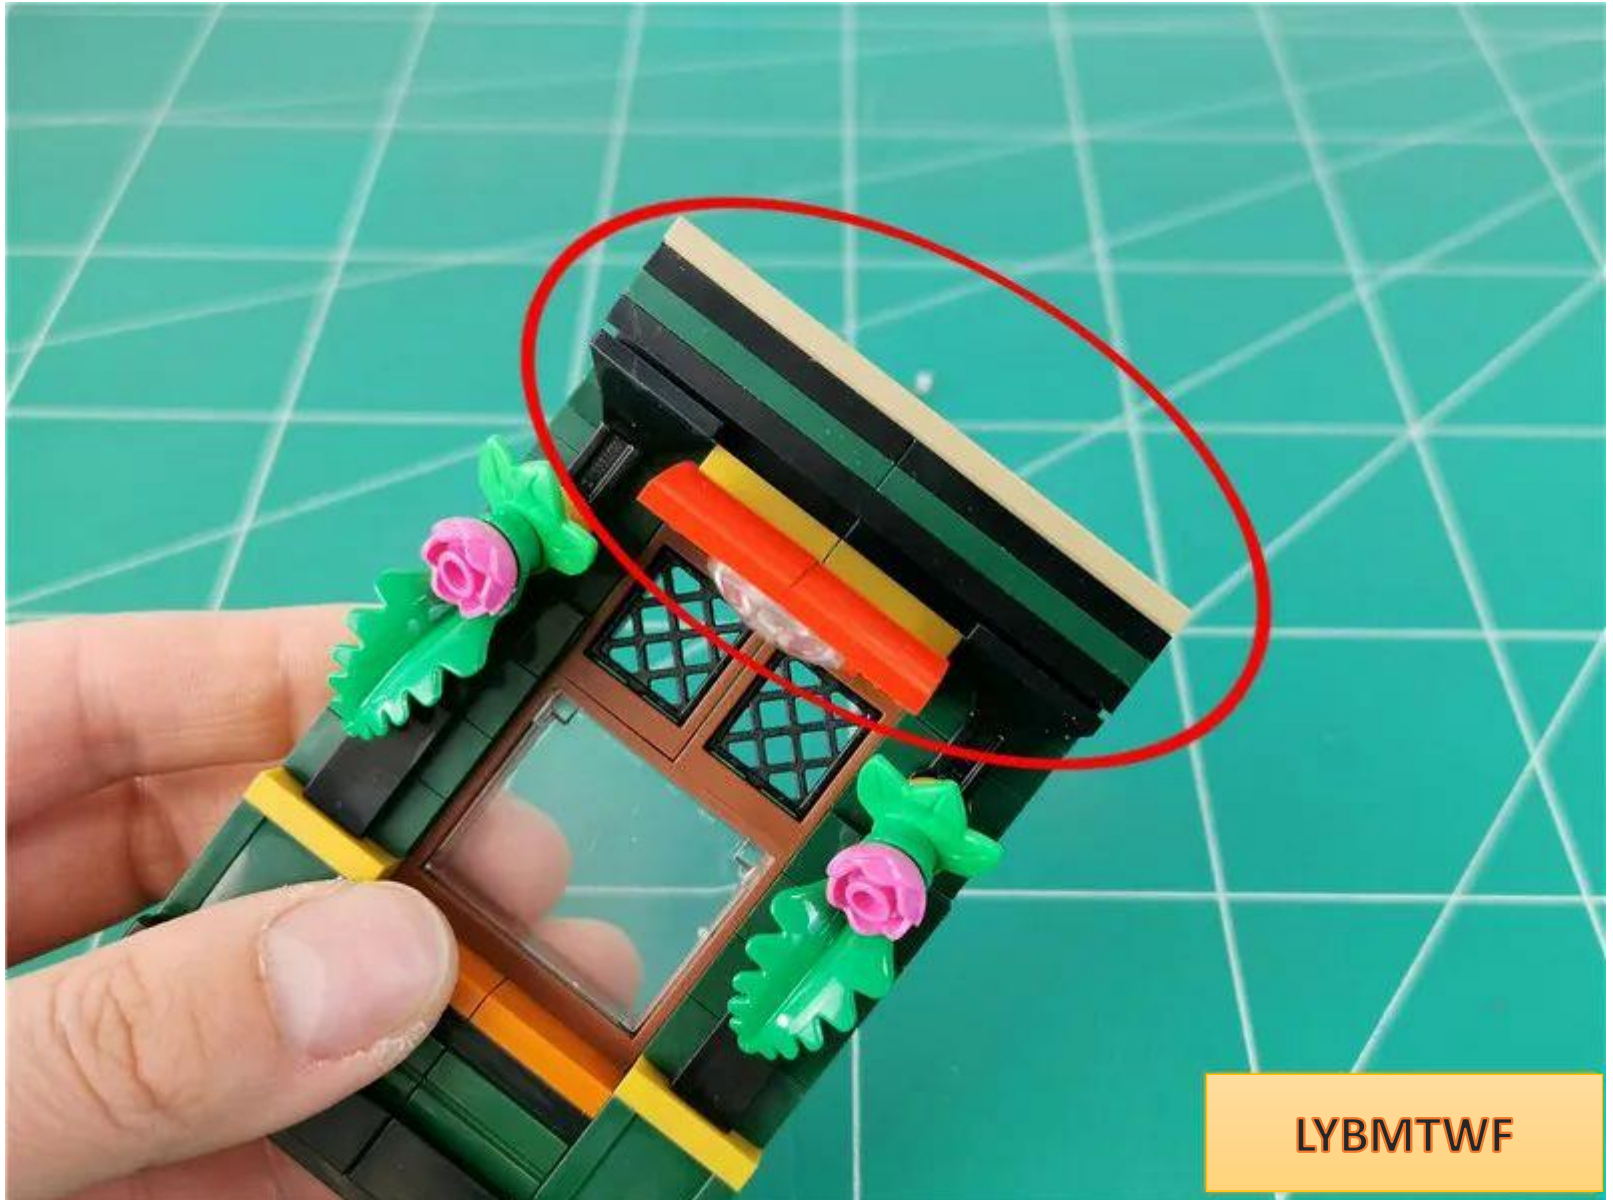

Fit the lamp post wire to the angle

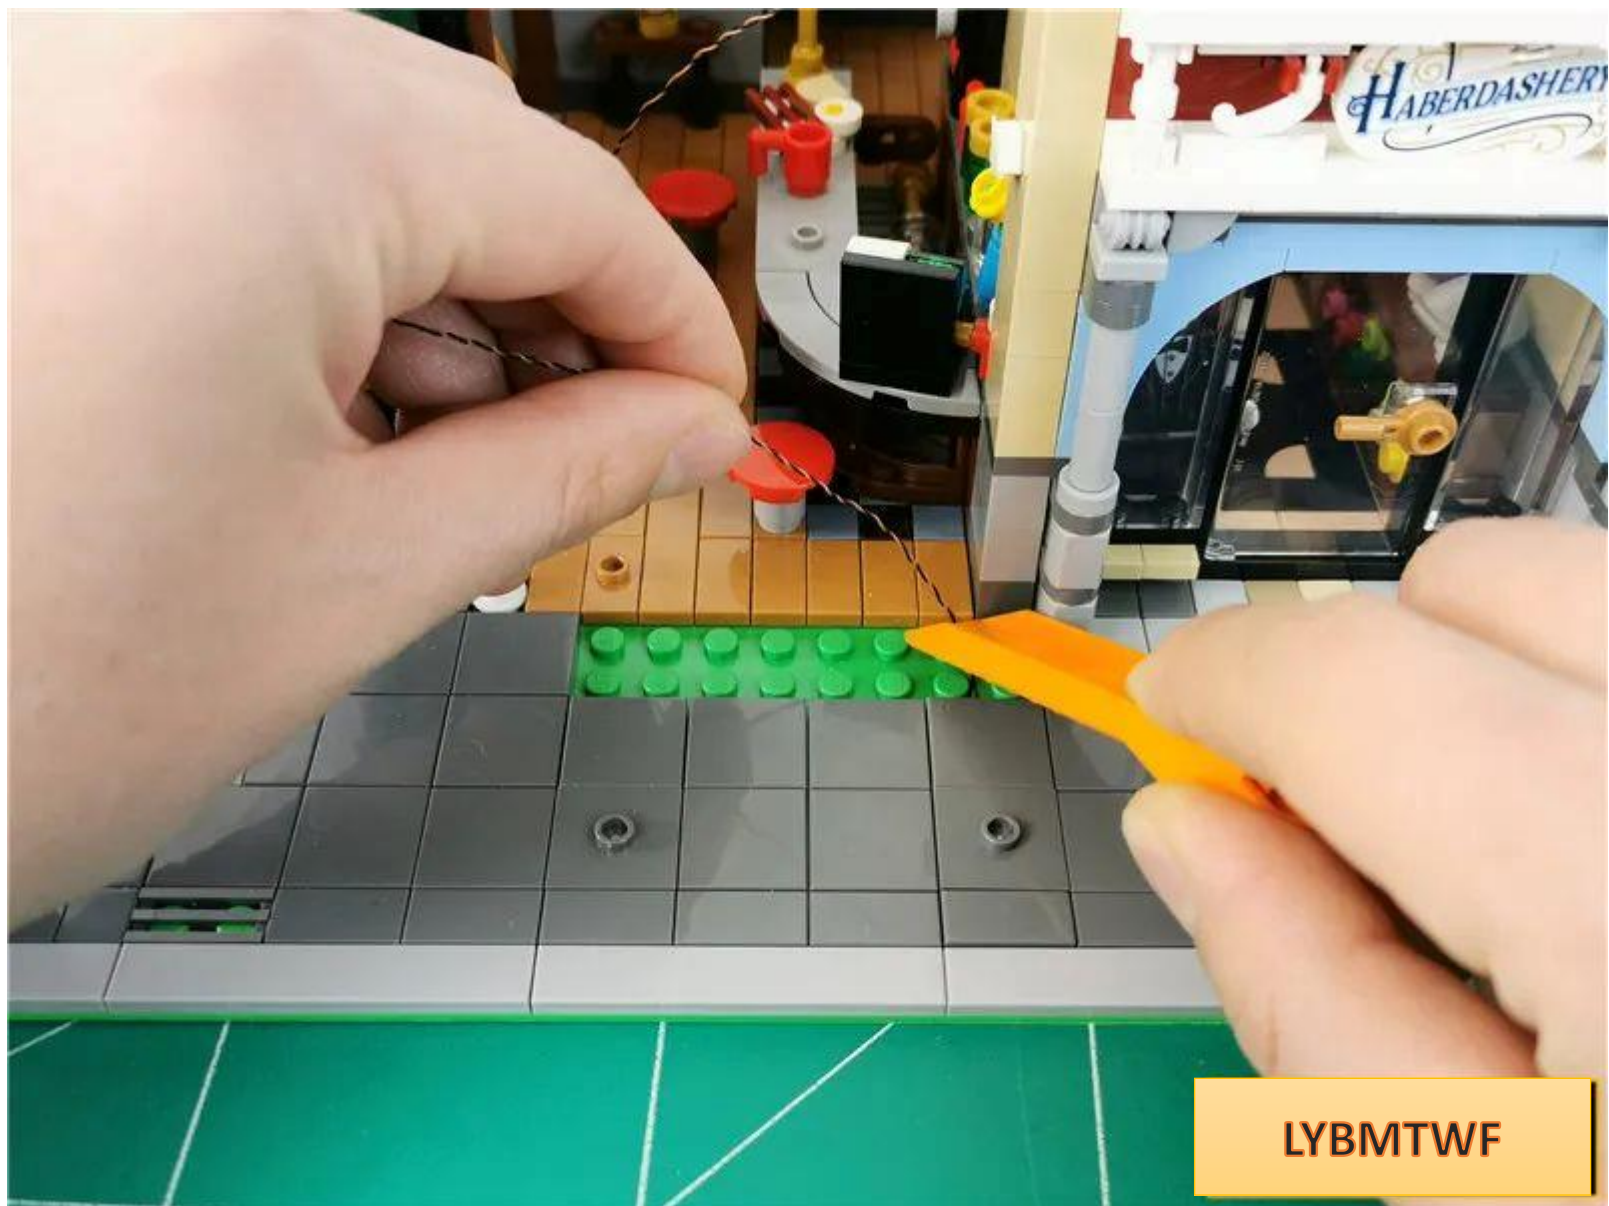


LYBMTWF



Restore parts and fix wires




Take out the parts shown in the figure

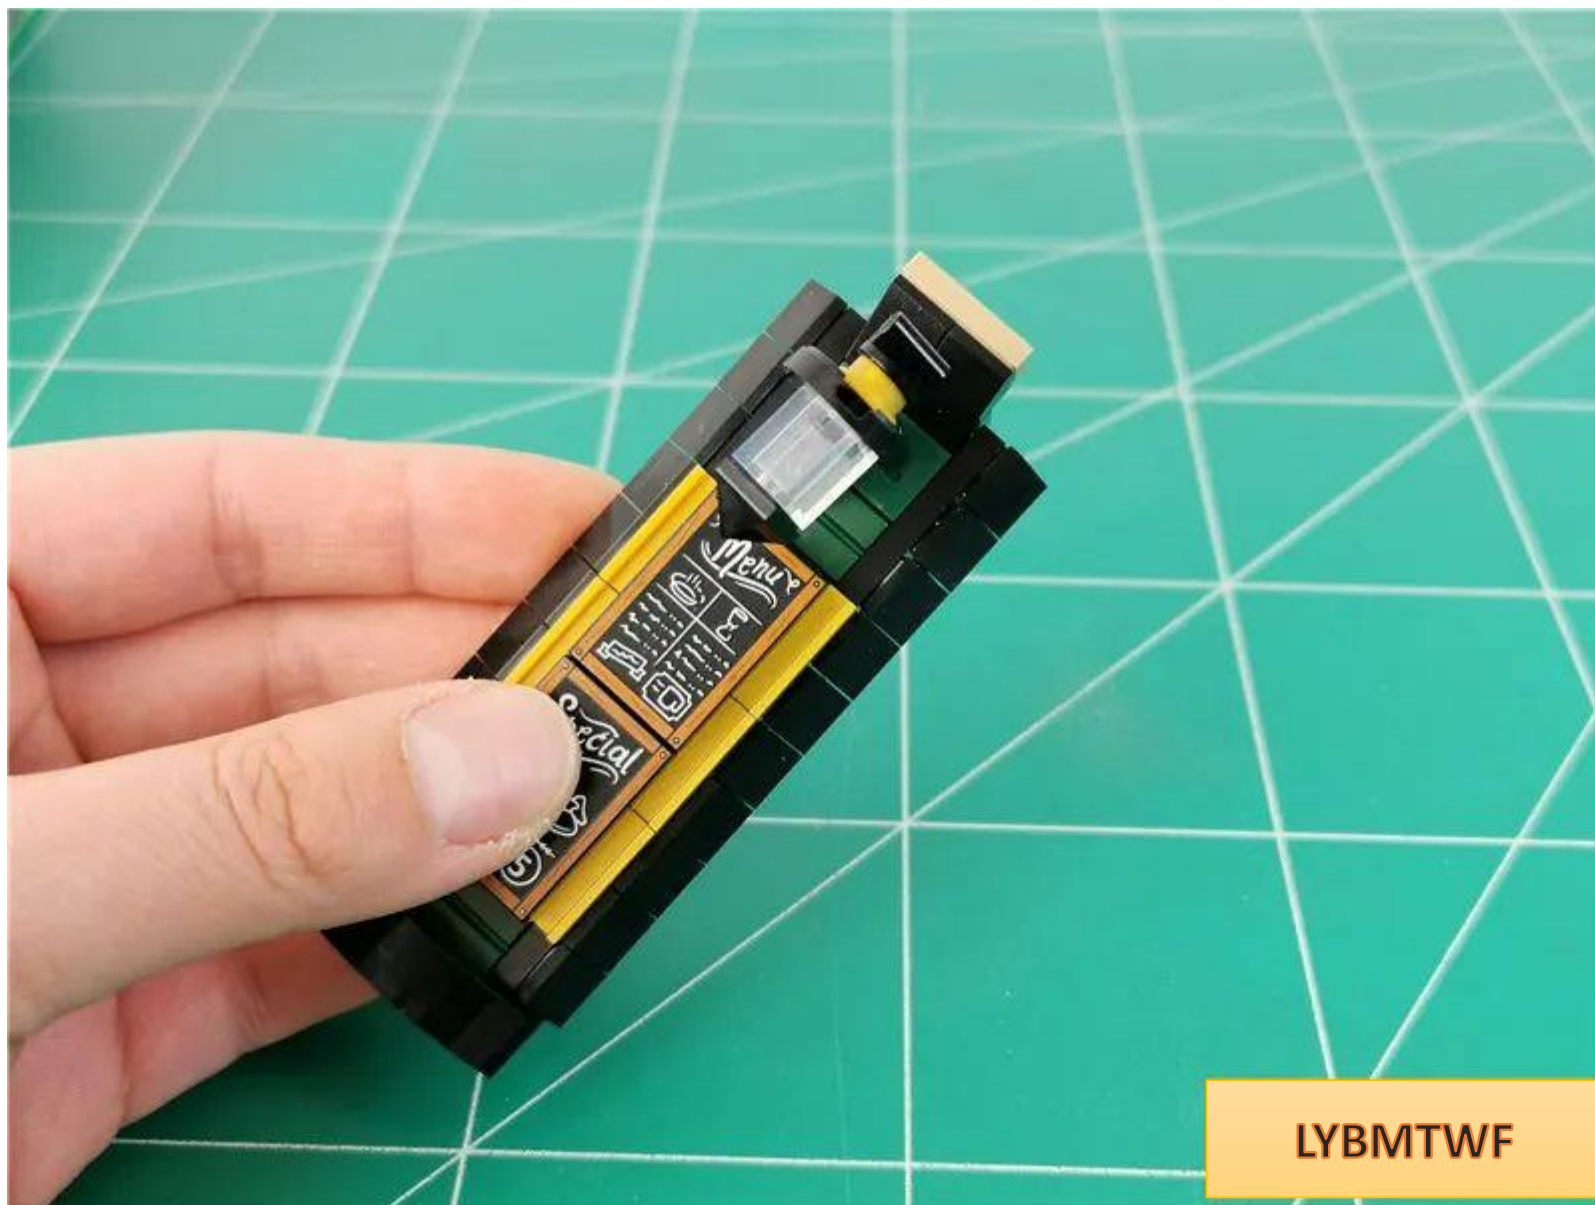

LYBMTWF




Remove the street light

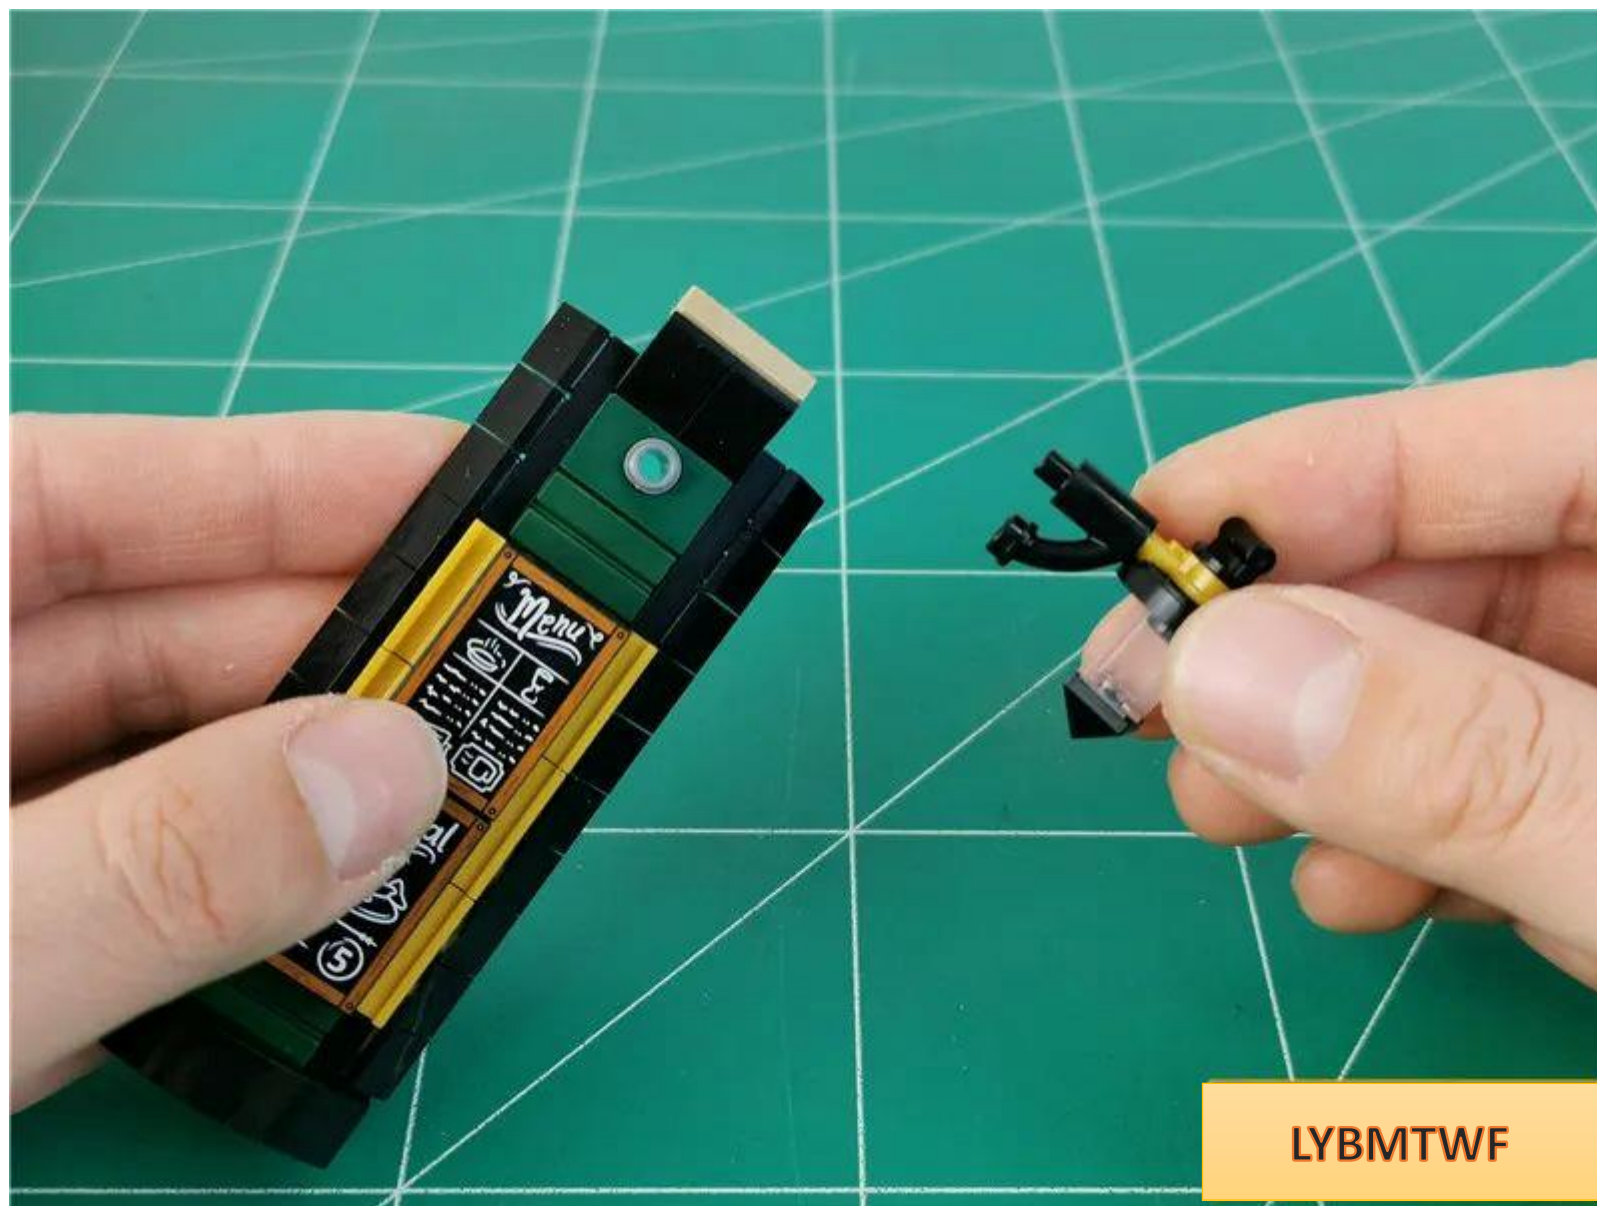


LYBMTWF

The street lamp is decomposed as follows

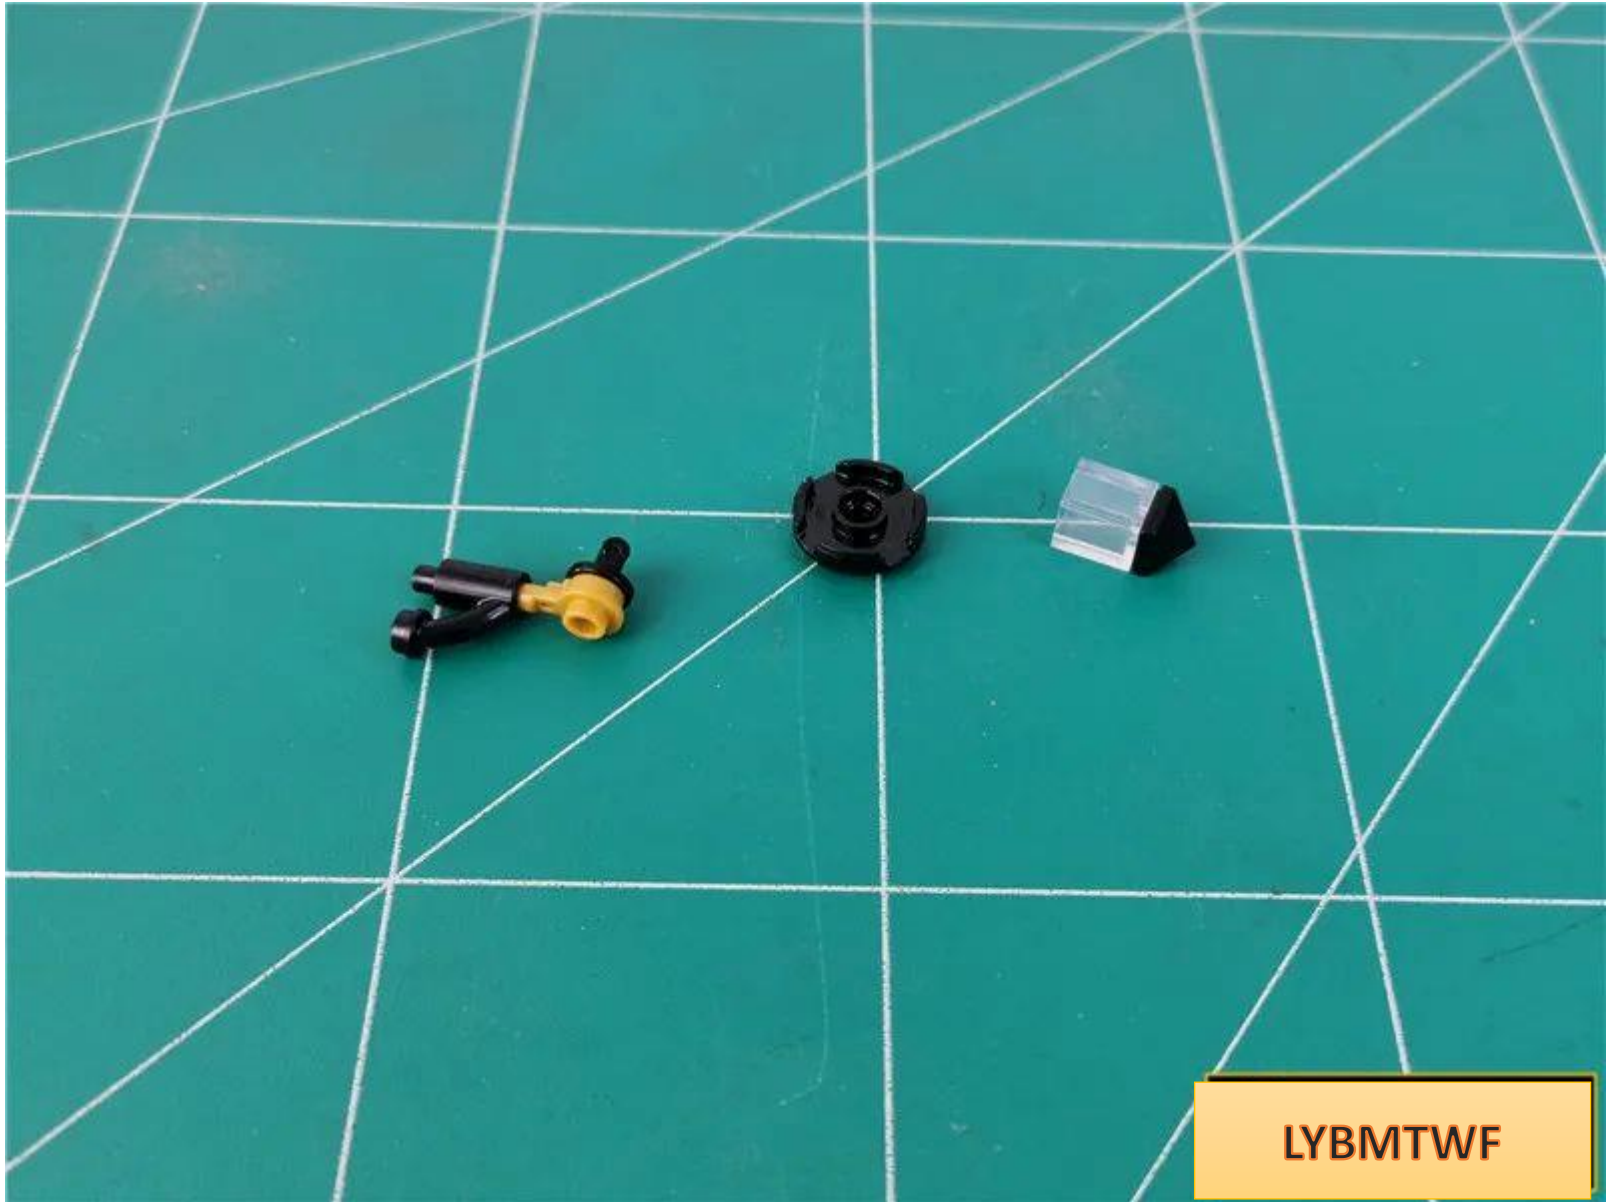


Take 1 15cm ordinary warm light pellet

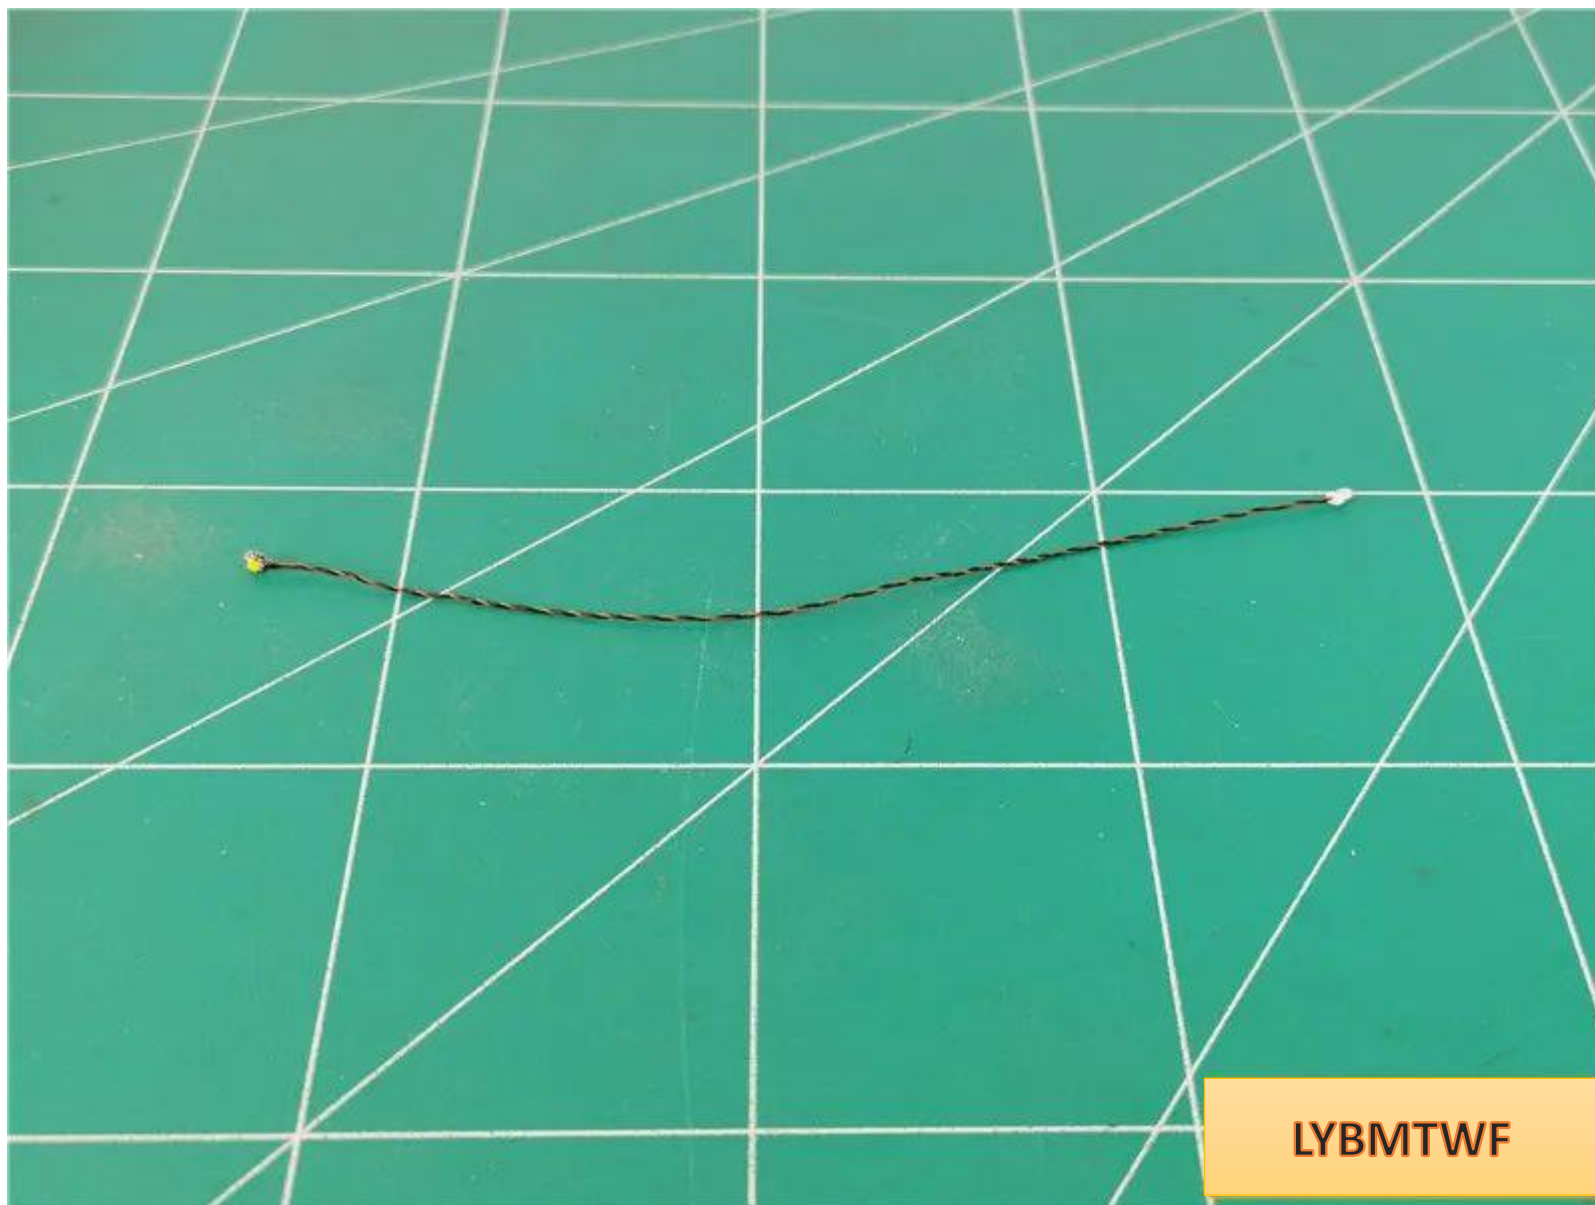




Bend the lamp 90° with the luminous side facing outwards

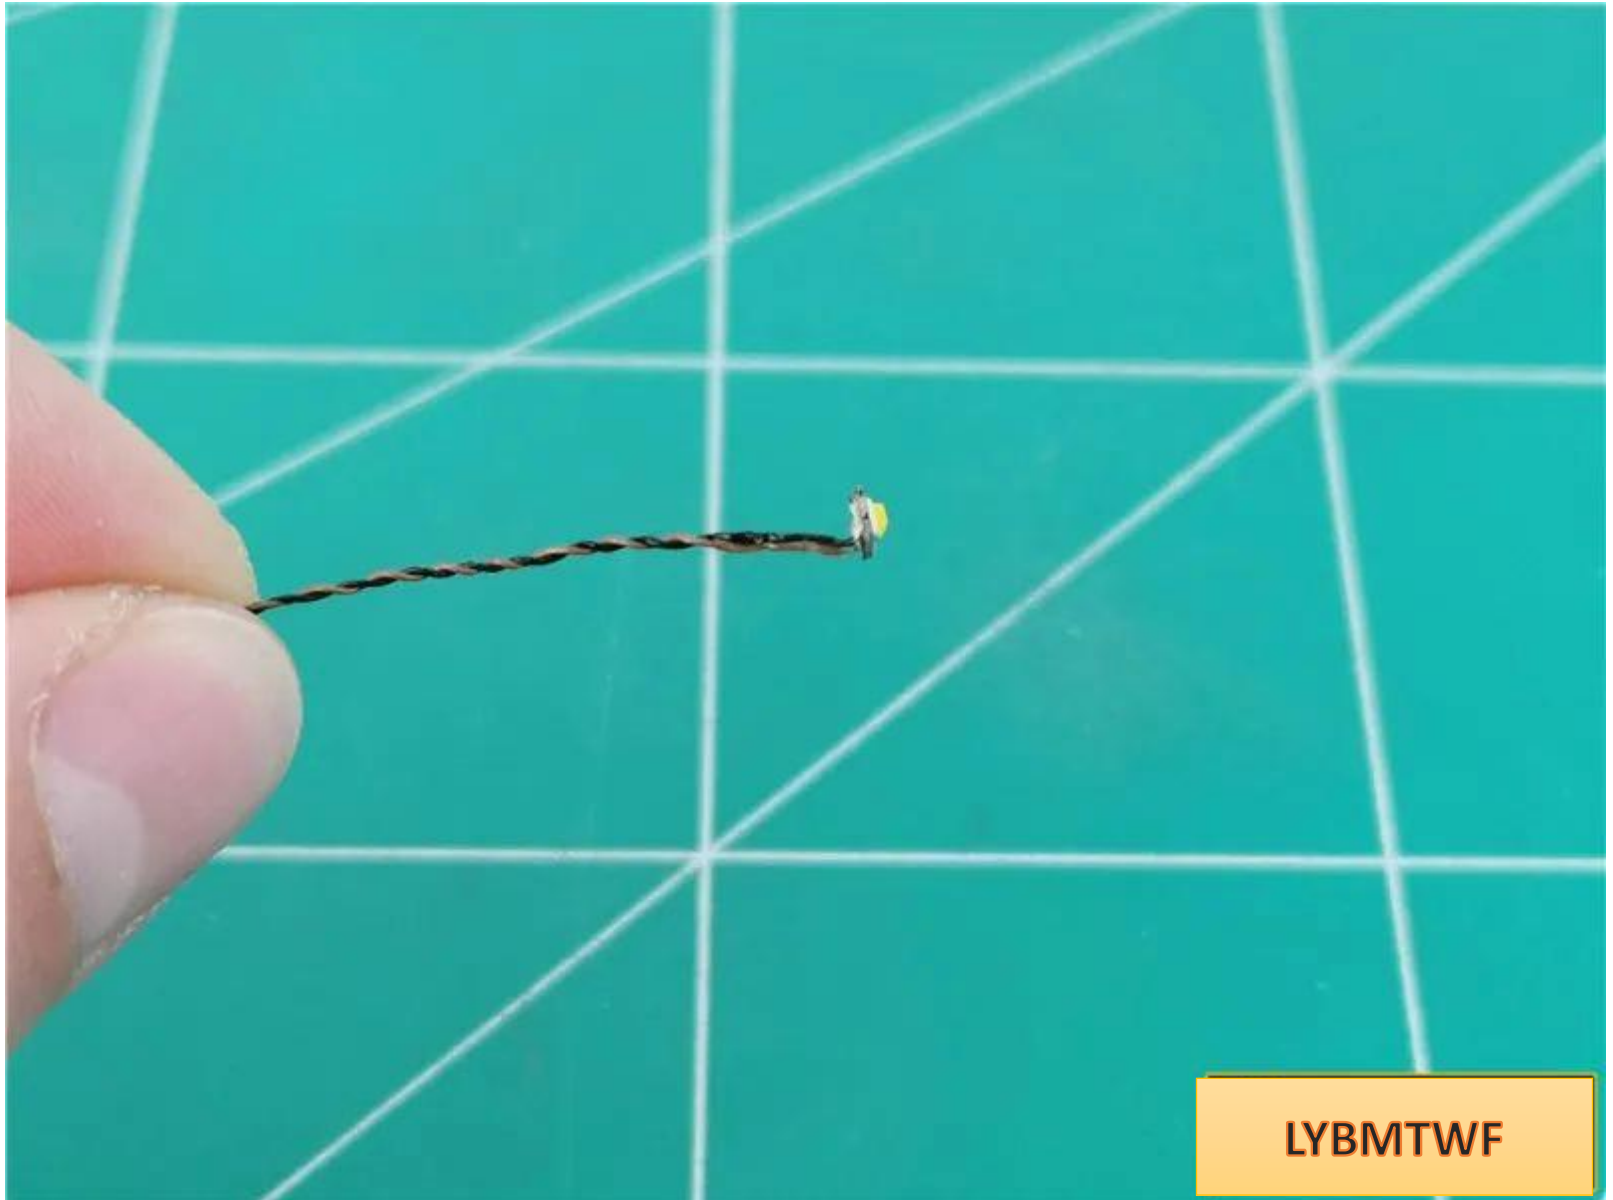

the lamp lead through the raised side of the black part.

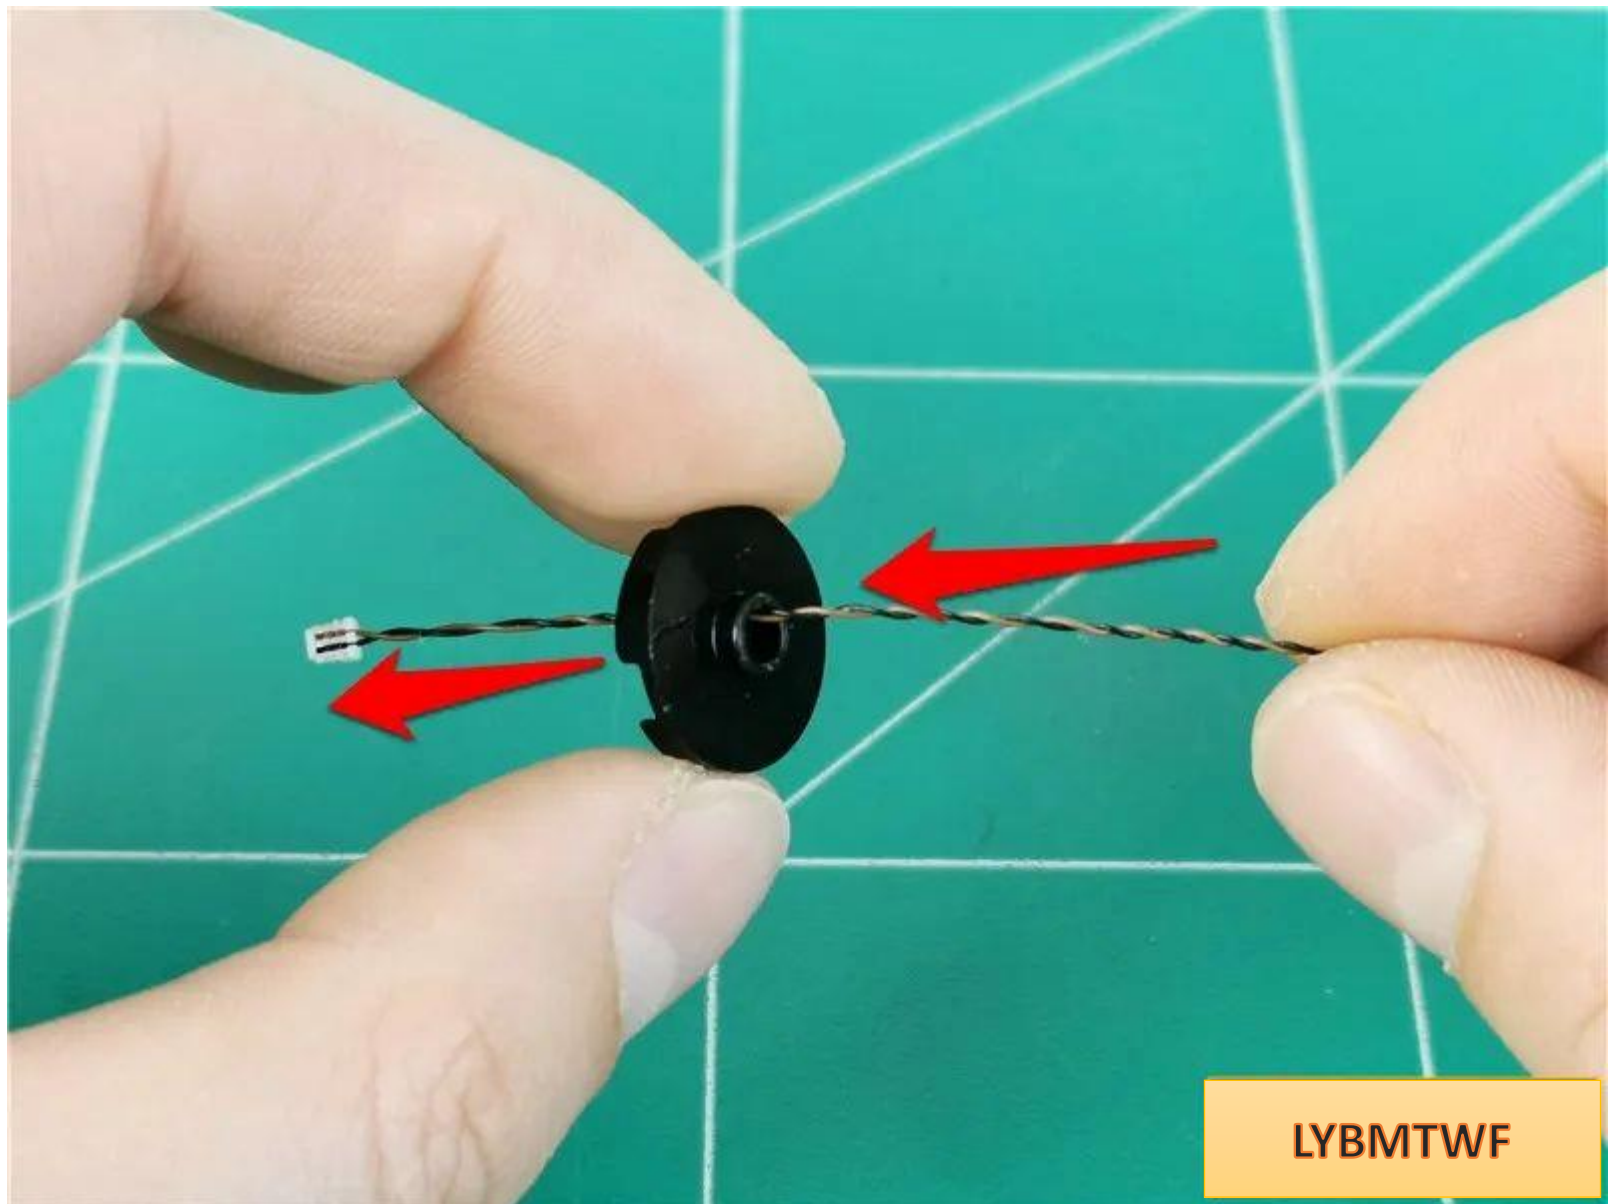

Put it through to the bottom, with the **light-emitting side of the lamp facing outwards** , and place it on the protrusion






Restore lampshade




Restore the parts, the wire is on one side of the bracket

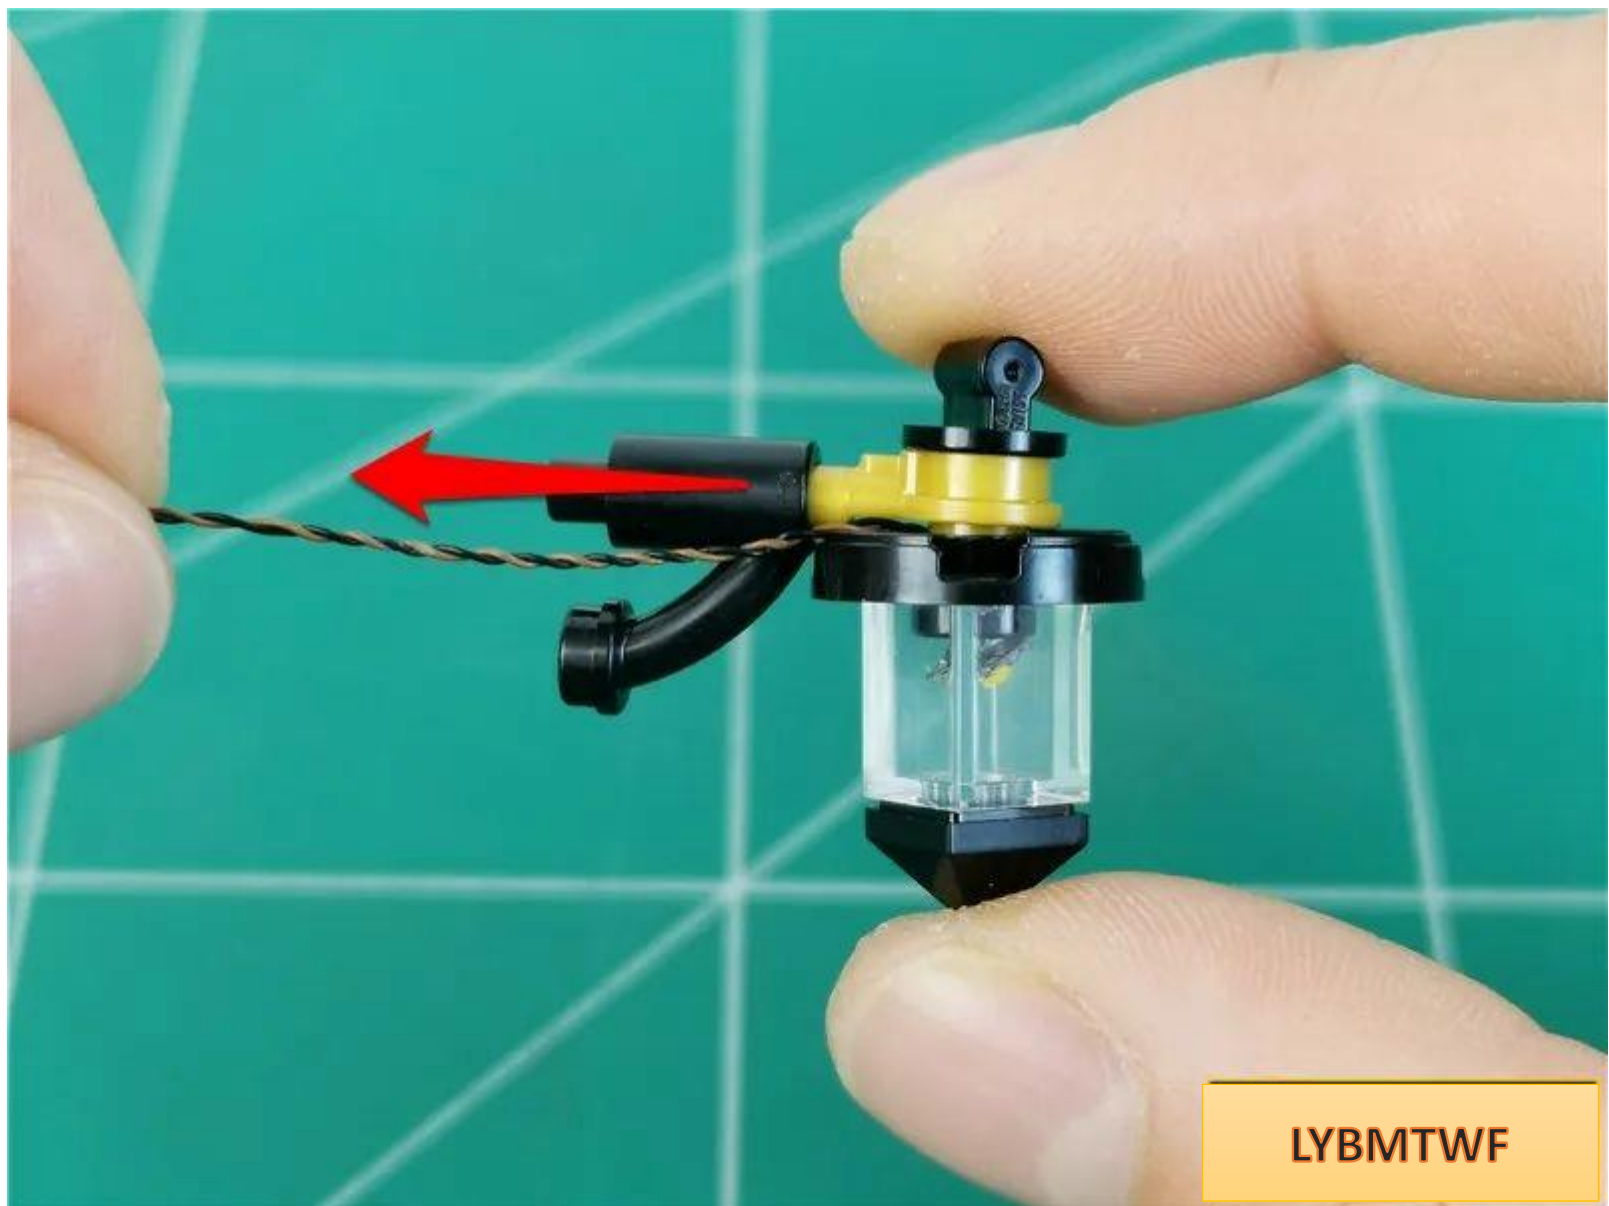

LYBMTWF

Route the wires through the bracket

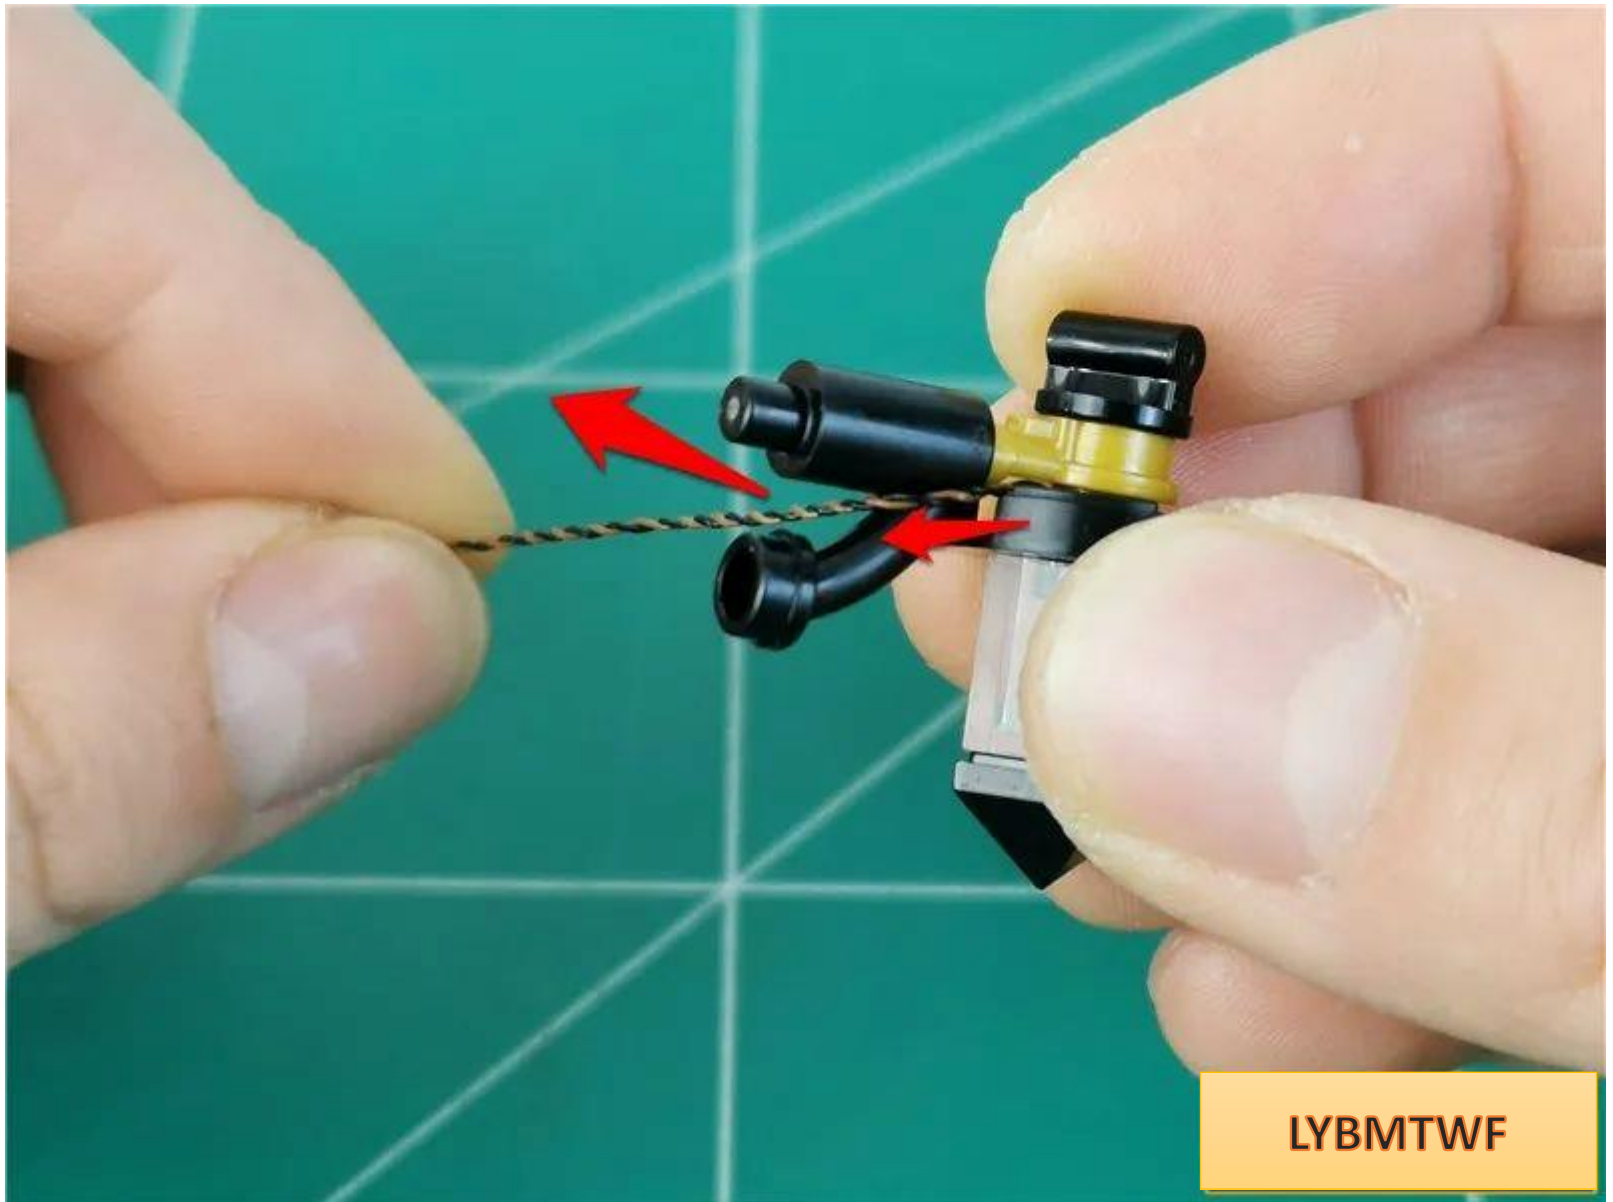

LYBMTWF



Restore the street light and pull the wire to the right



LYBMTWF

Restore the parts as a whole, and pull the wires along the gaps into the room.



LYBMTWF



Go to the other side





Remove the parts indicated by the arrows.




LYBMTWF



LYBMTWF



Pinch the parts and pry them apart.

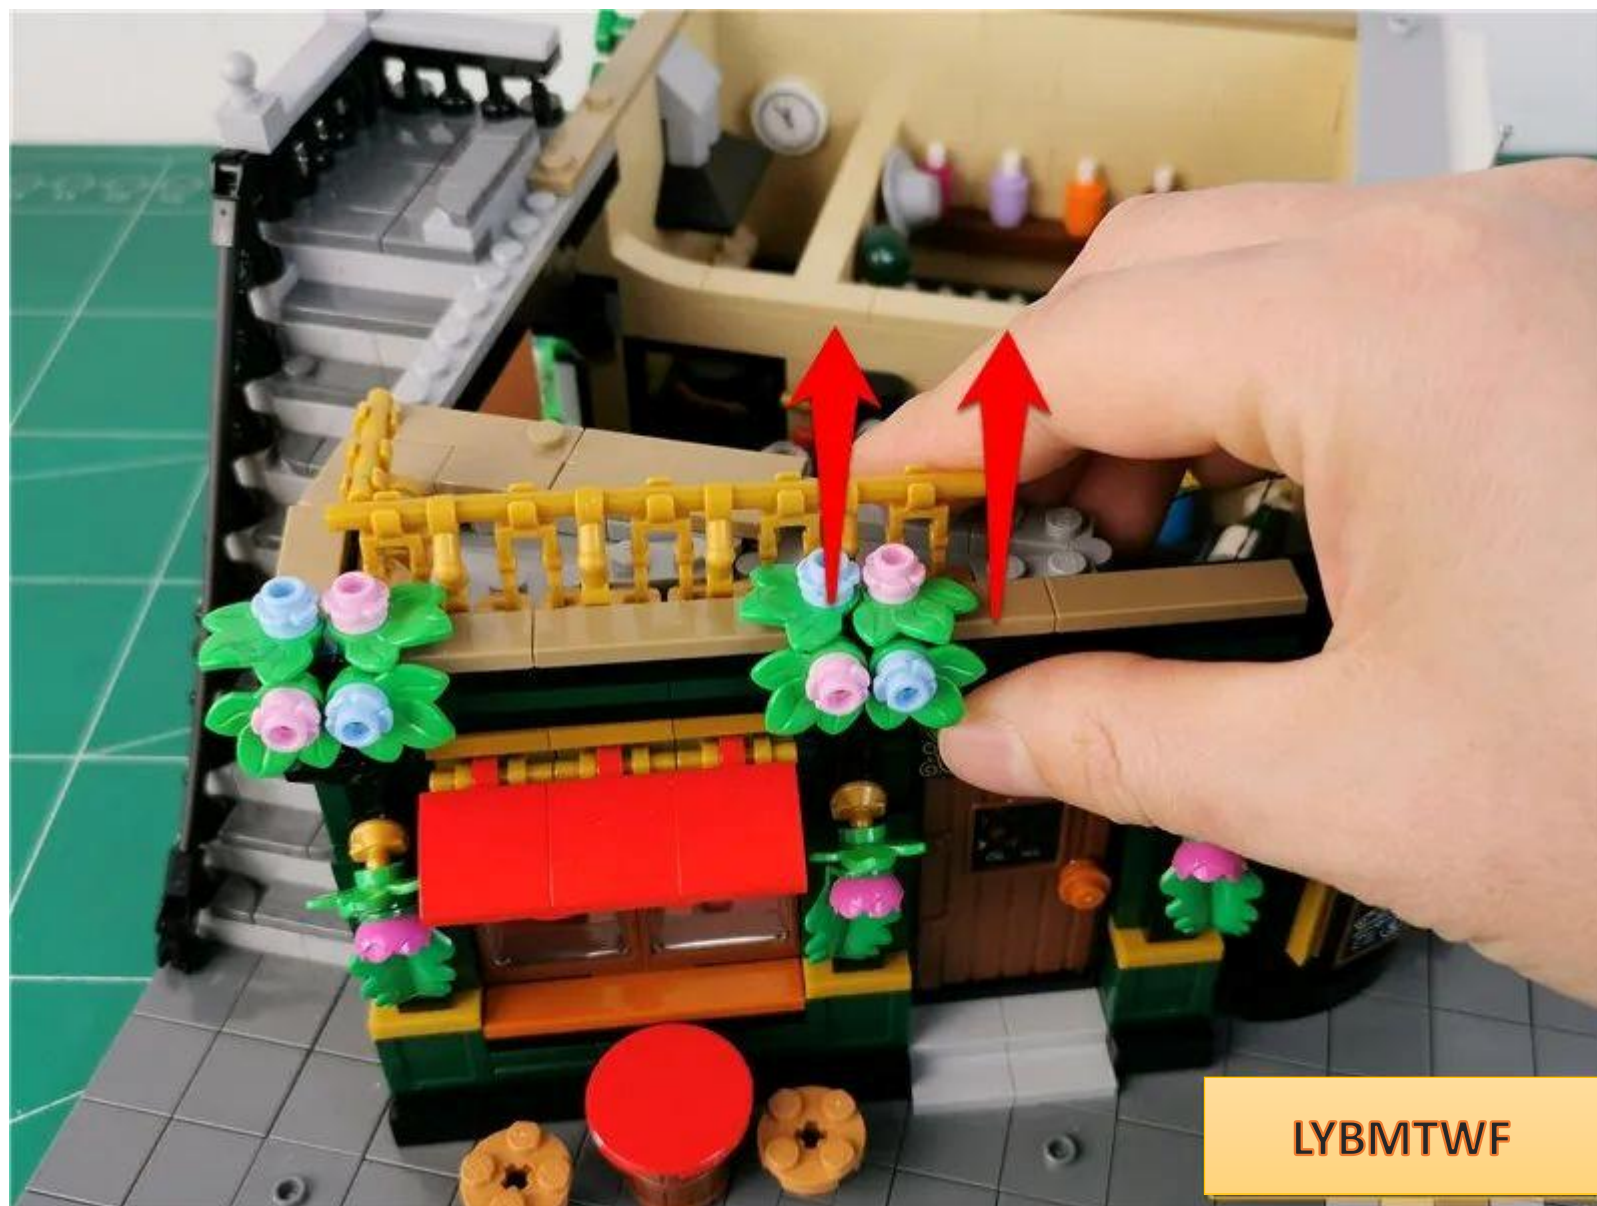

LYBMTWF




Remove the entire part



Continue to remove the parts indicated by the arrows one by one






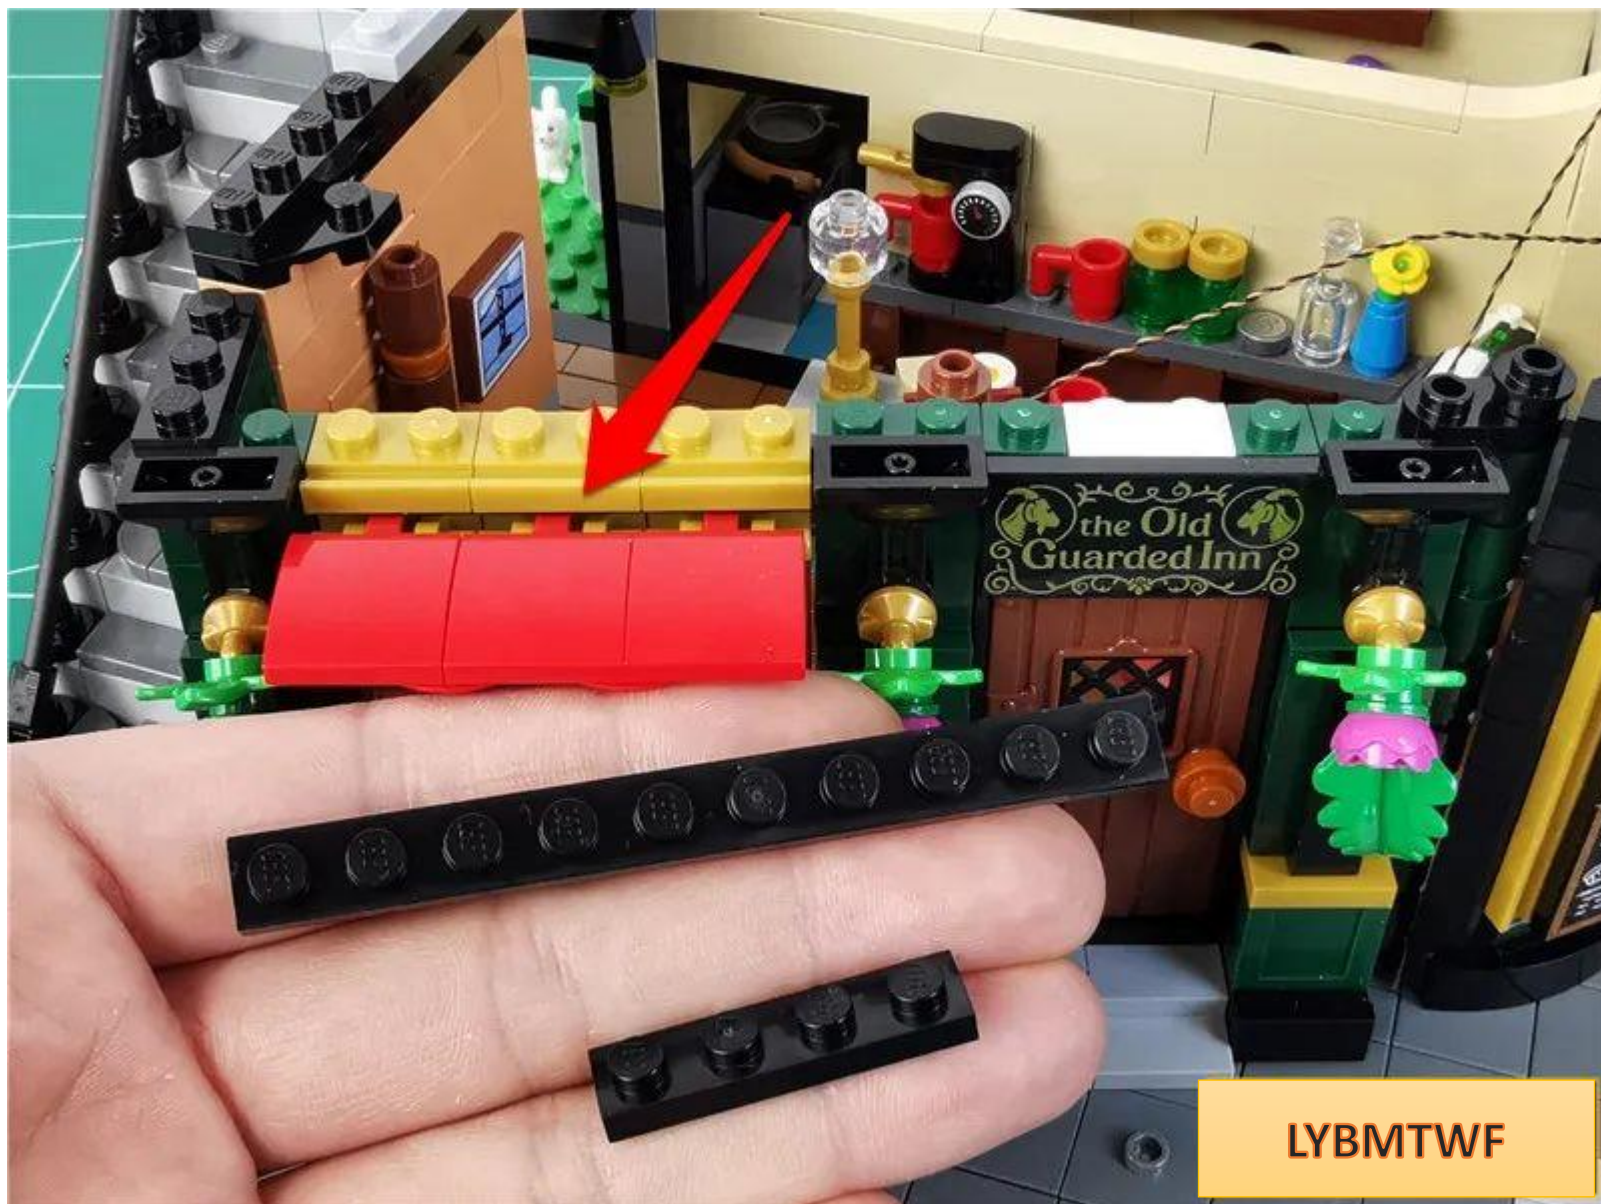


LYBMTWF



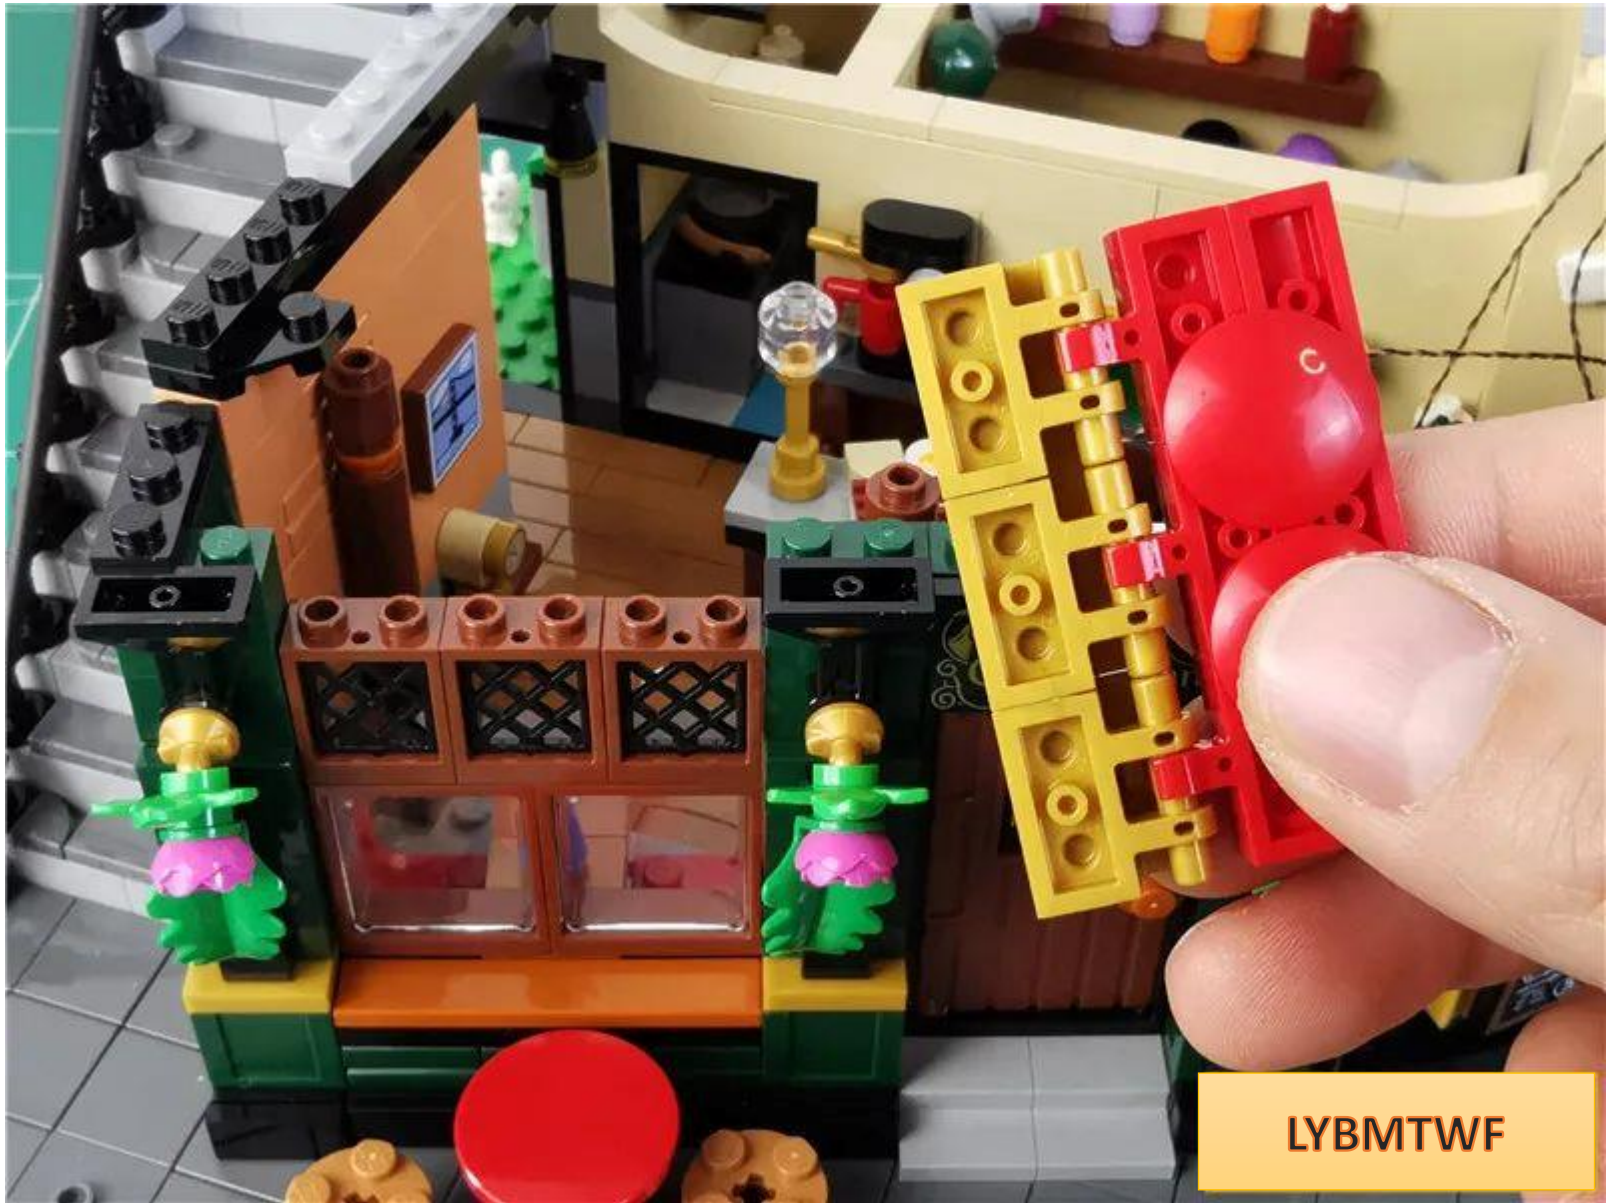


LYBMTWF

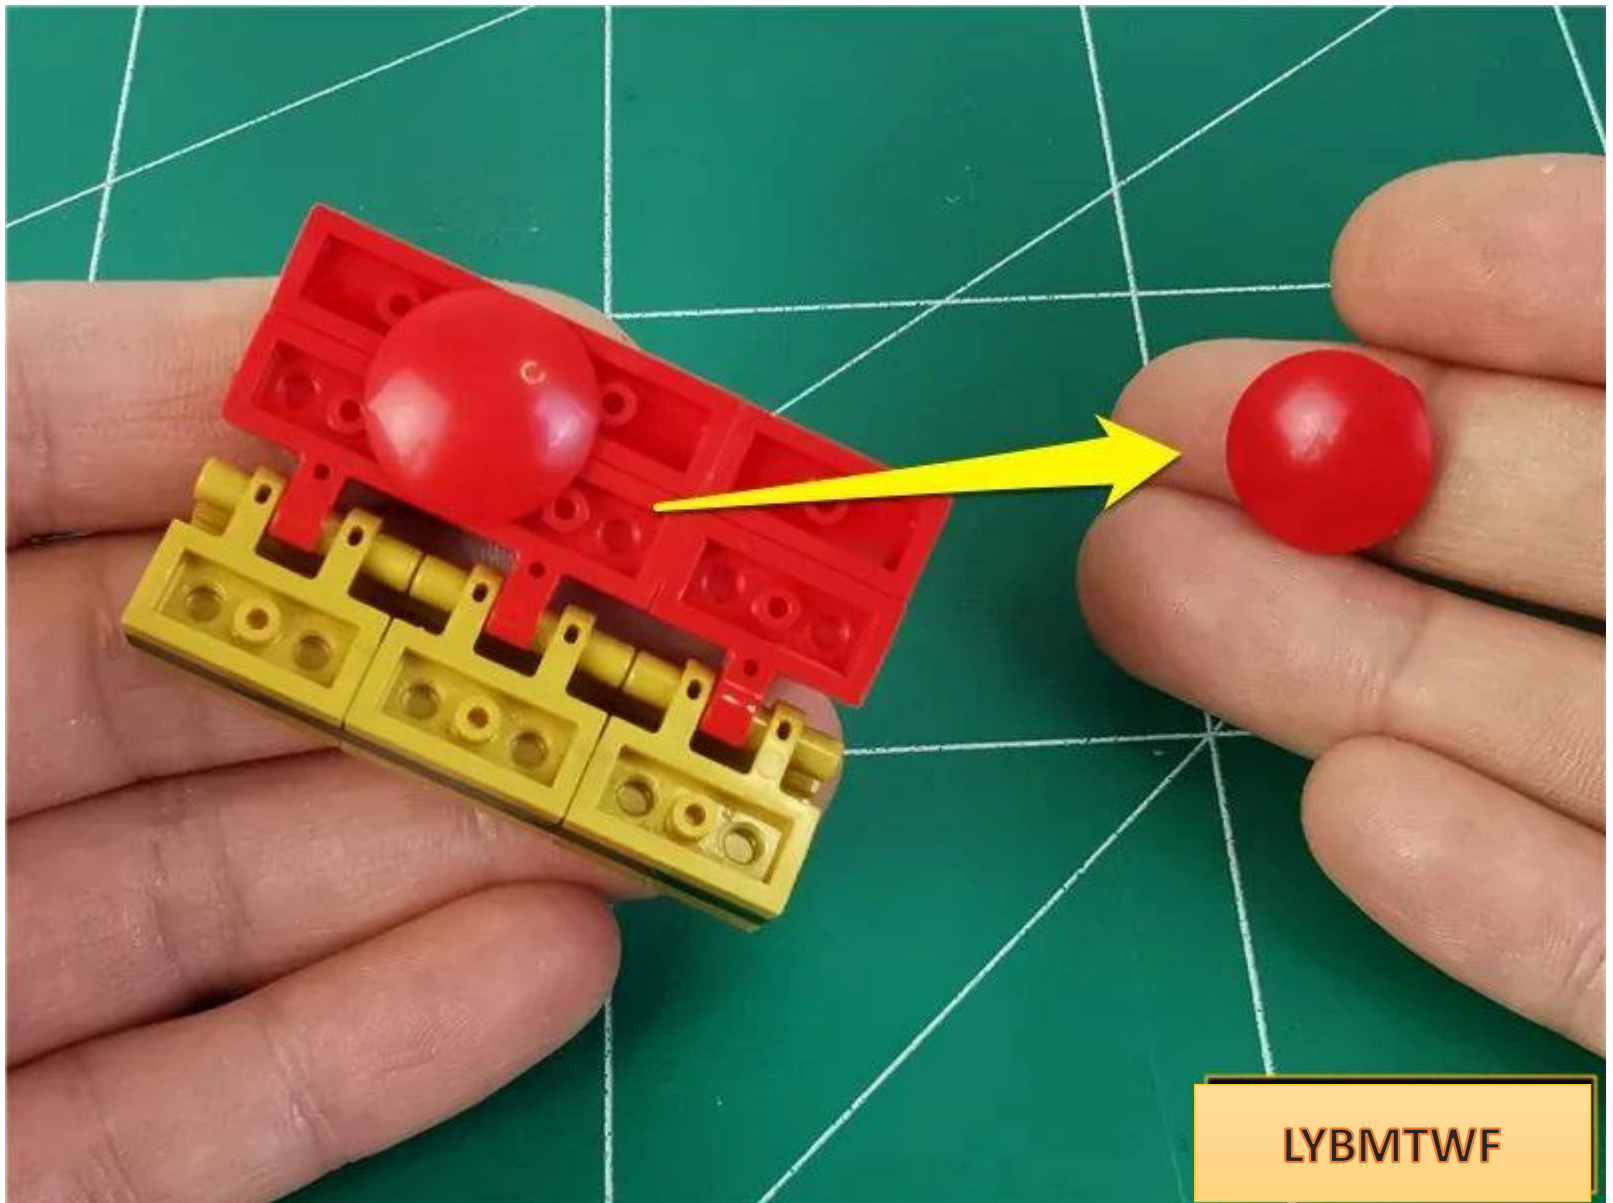


LYBMTWF

Take 1 30cm warm light headlight pellet

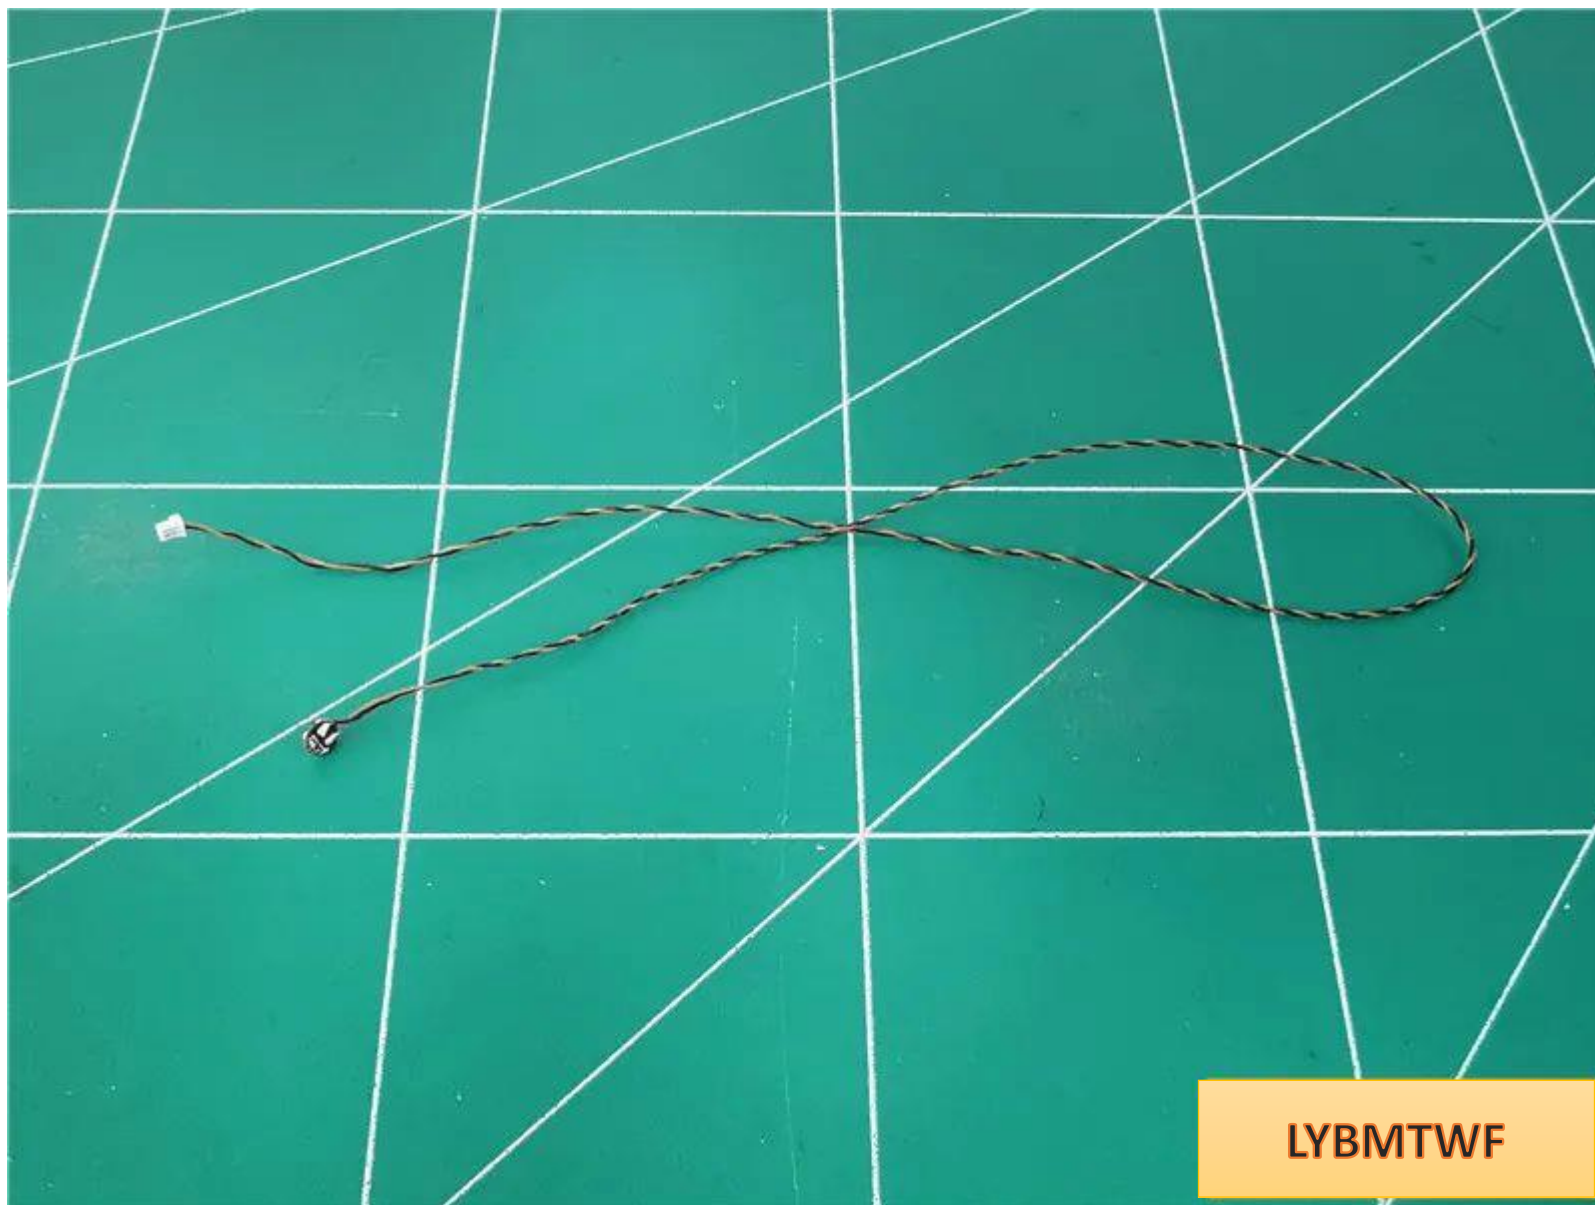




the light pellet with **the luminous side facing outwards** at the position shown in the figure.

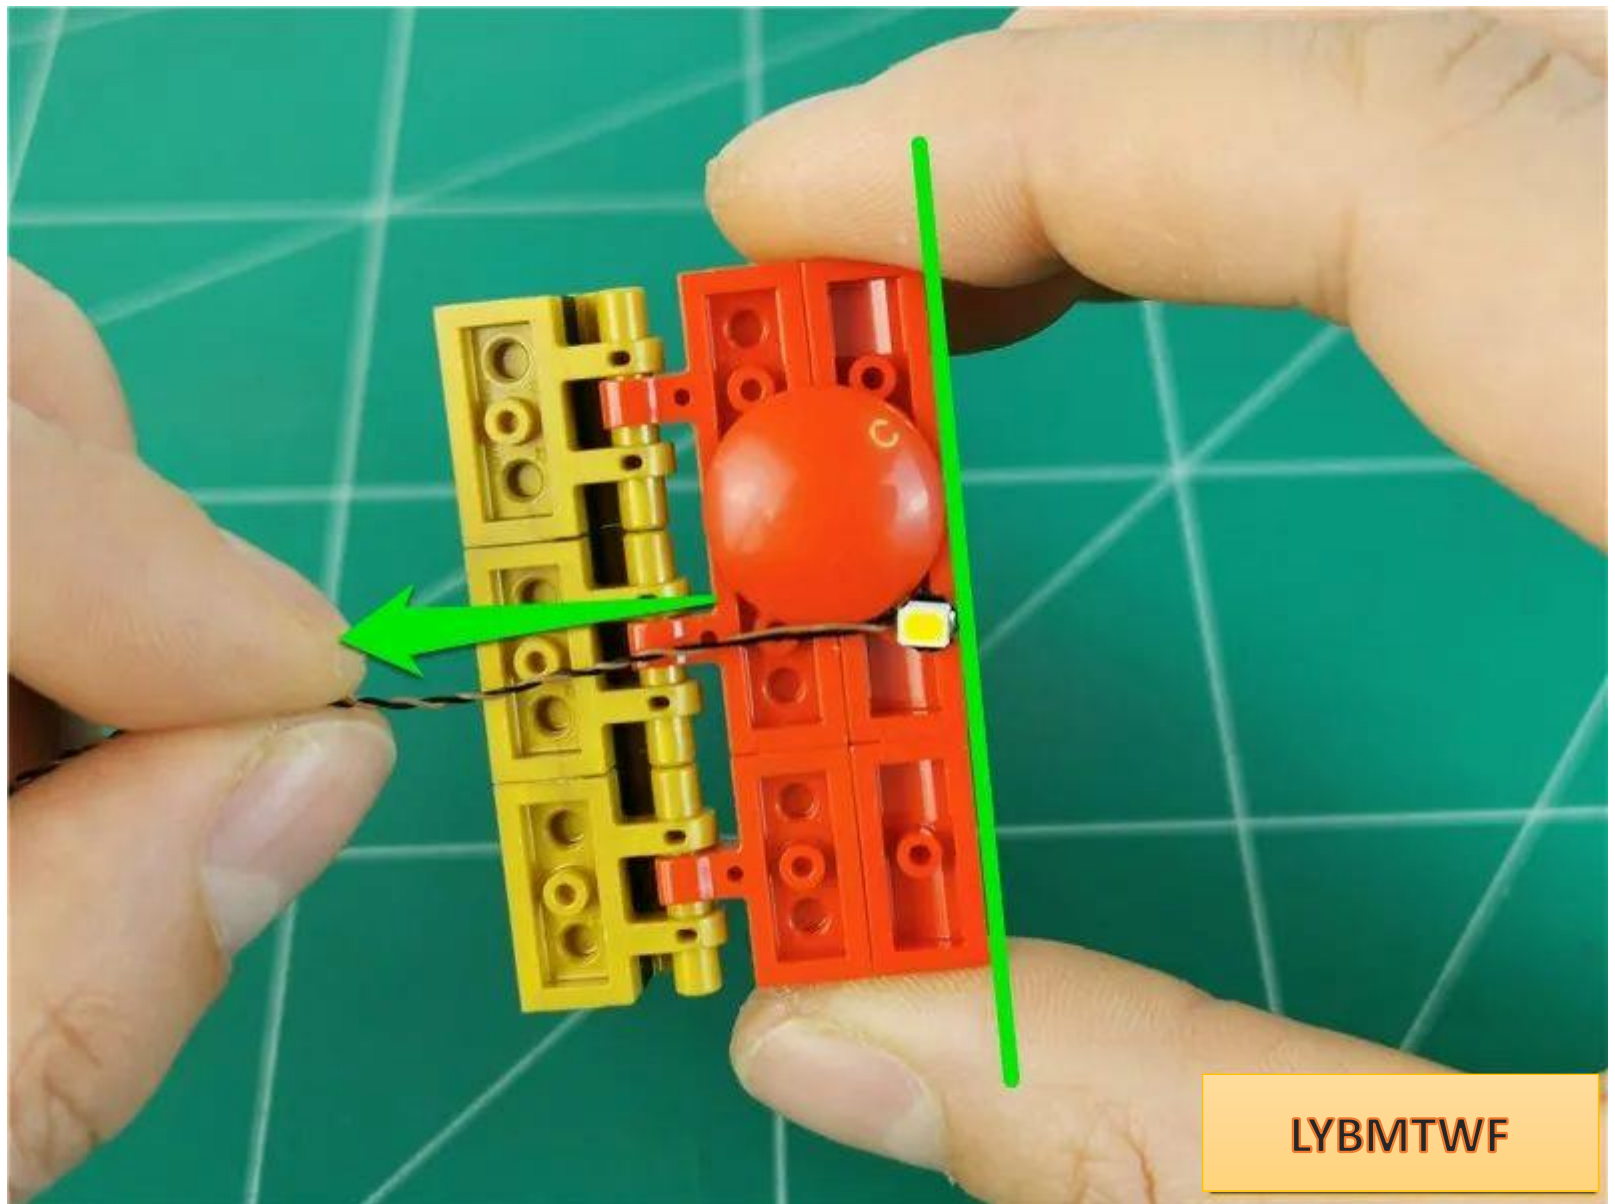


LYBMTWF

Restore the red parts and fix the light particles

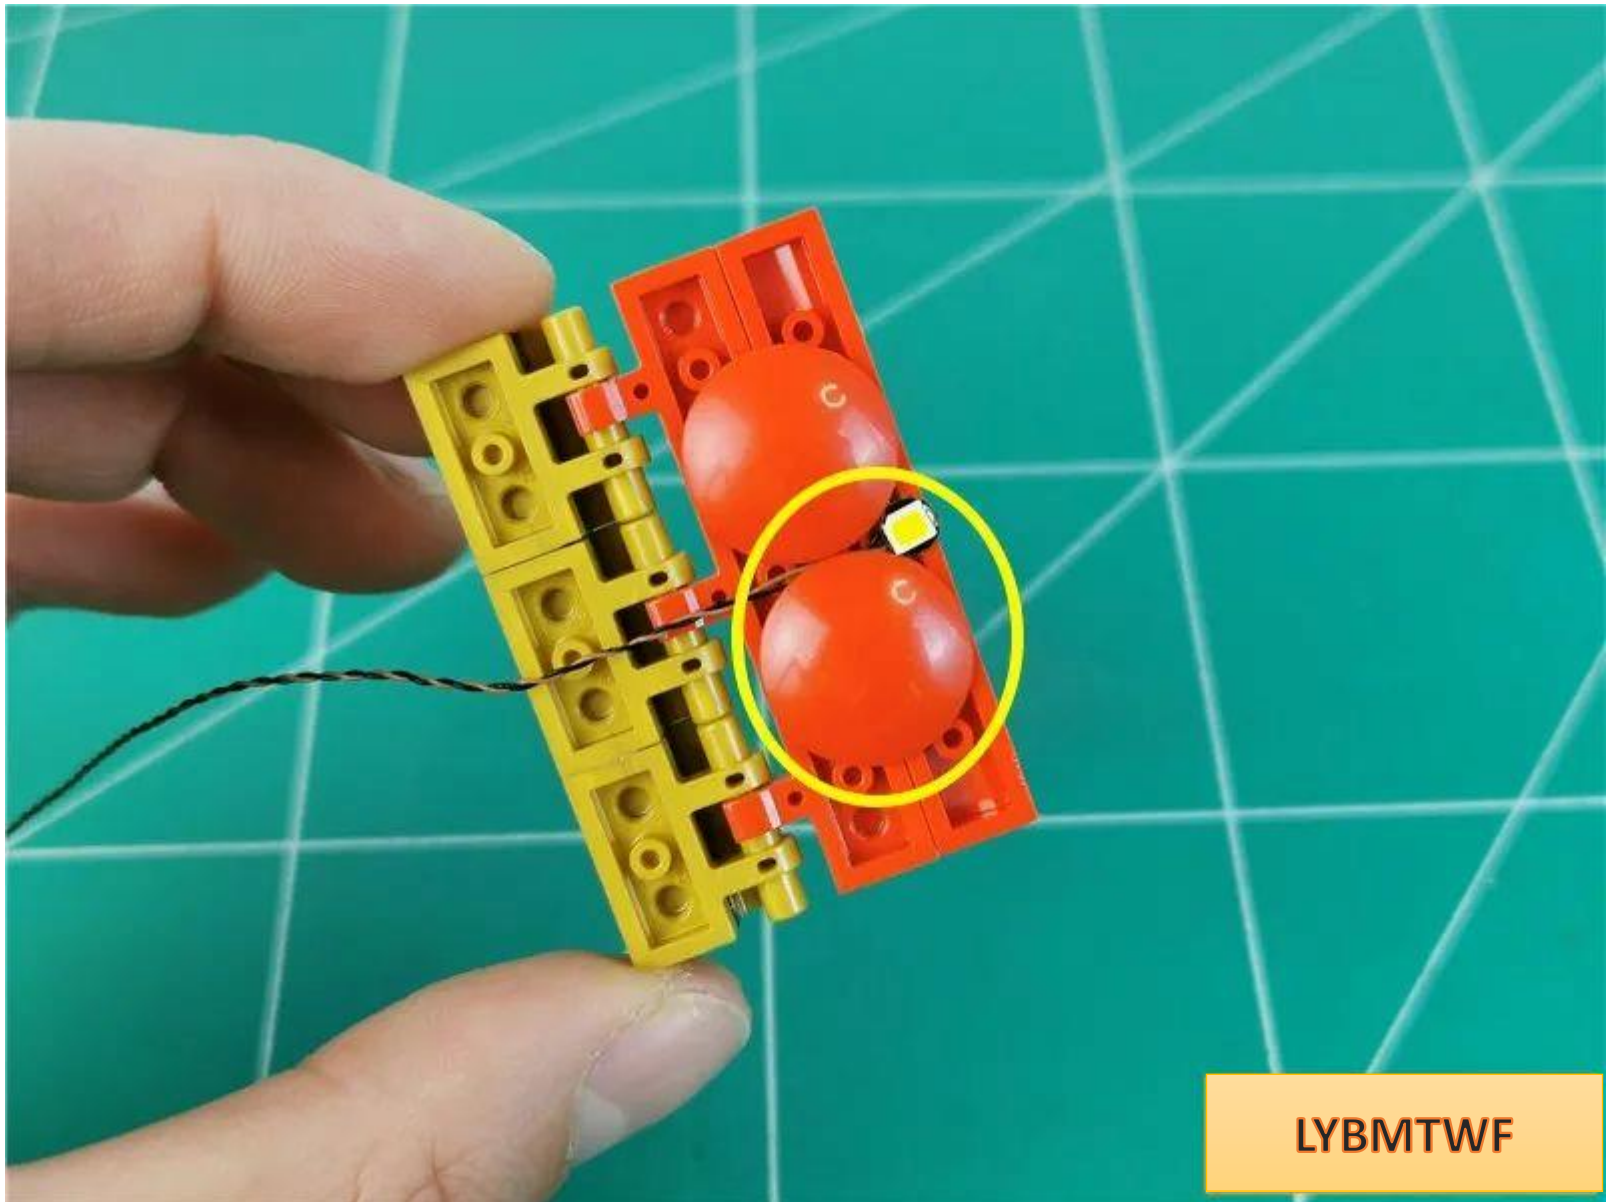

LYBMTWF

Fit the wire to the middle of the part and pull it to the left

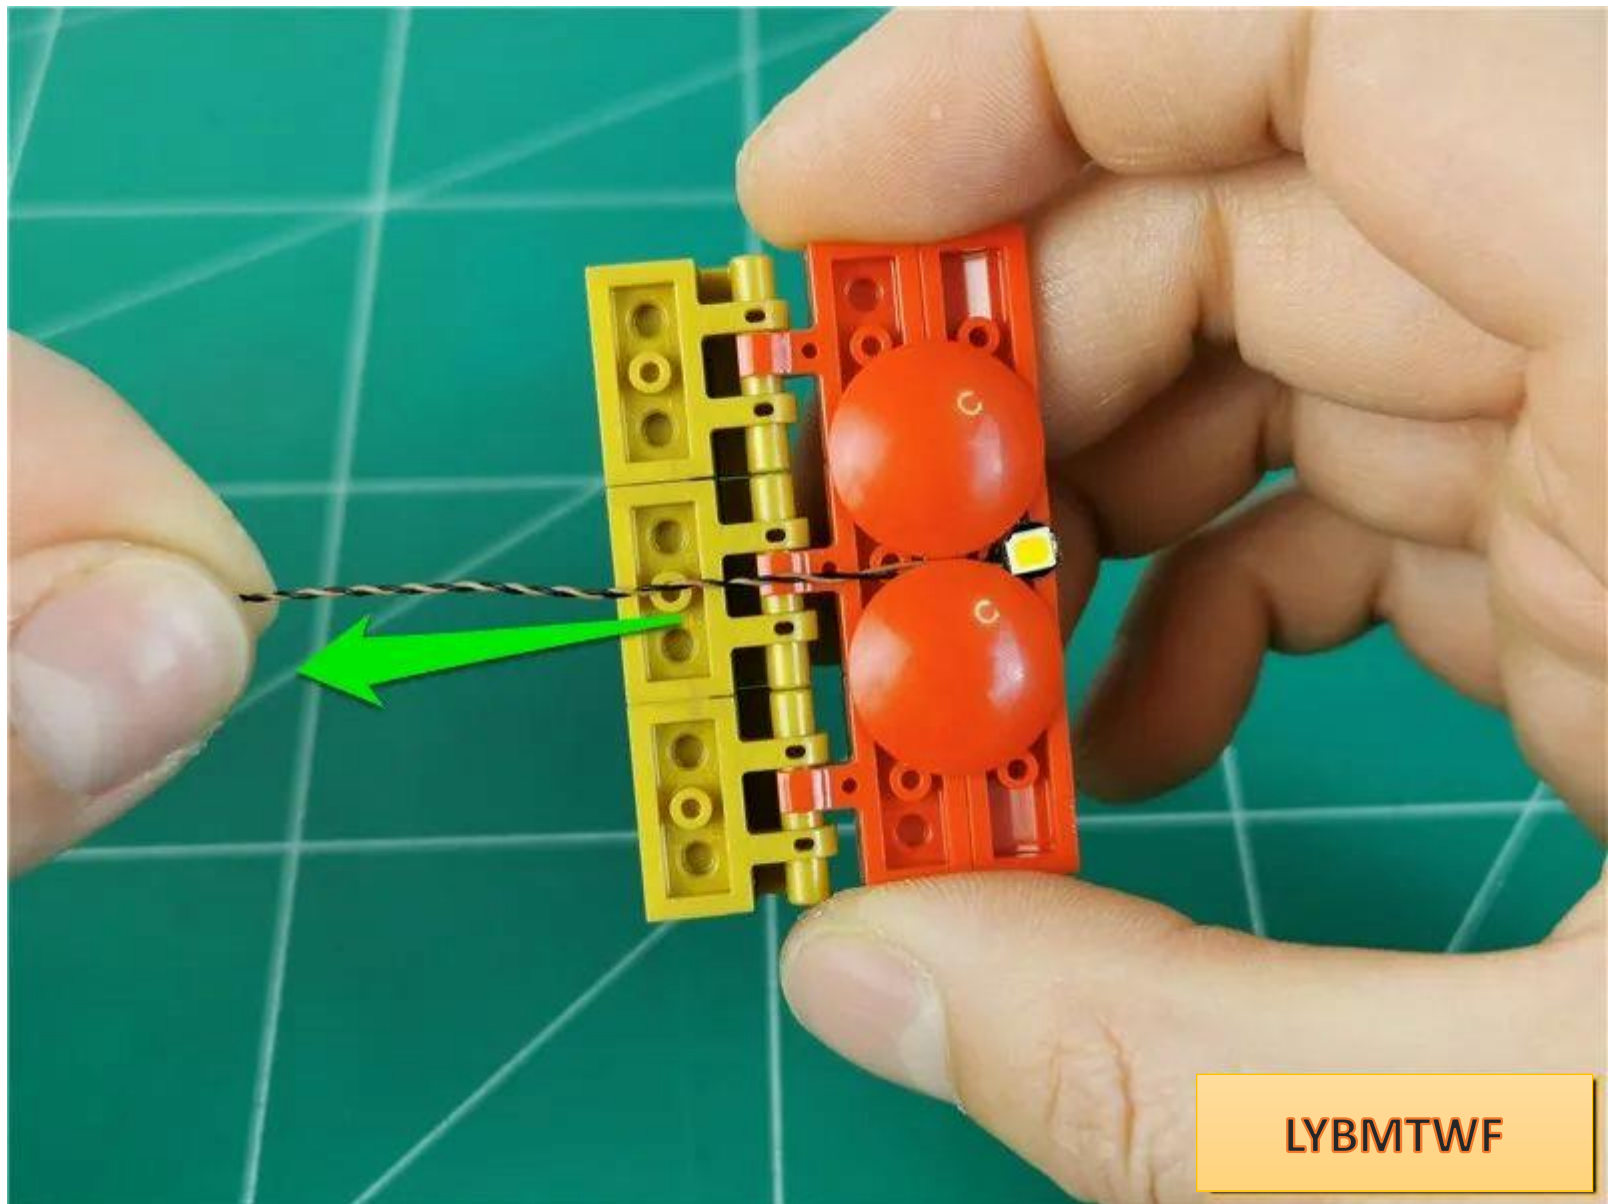

LYBMTWF



Restore parts and fix wires



Restore the upper part





Take 1 15cm warm light headlight pellet





the light pellet with **the luminous side facing downwards** at the position shown in the figure.




Restore parts and fix lamp particles





Pull **the two wires on the left side** around the raised particles and pull them to the right

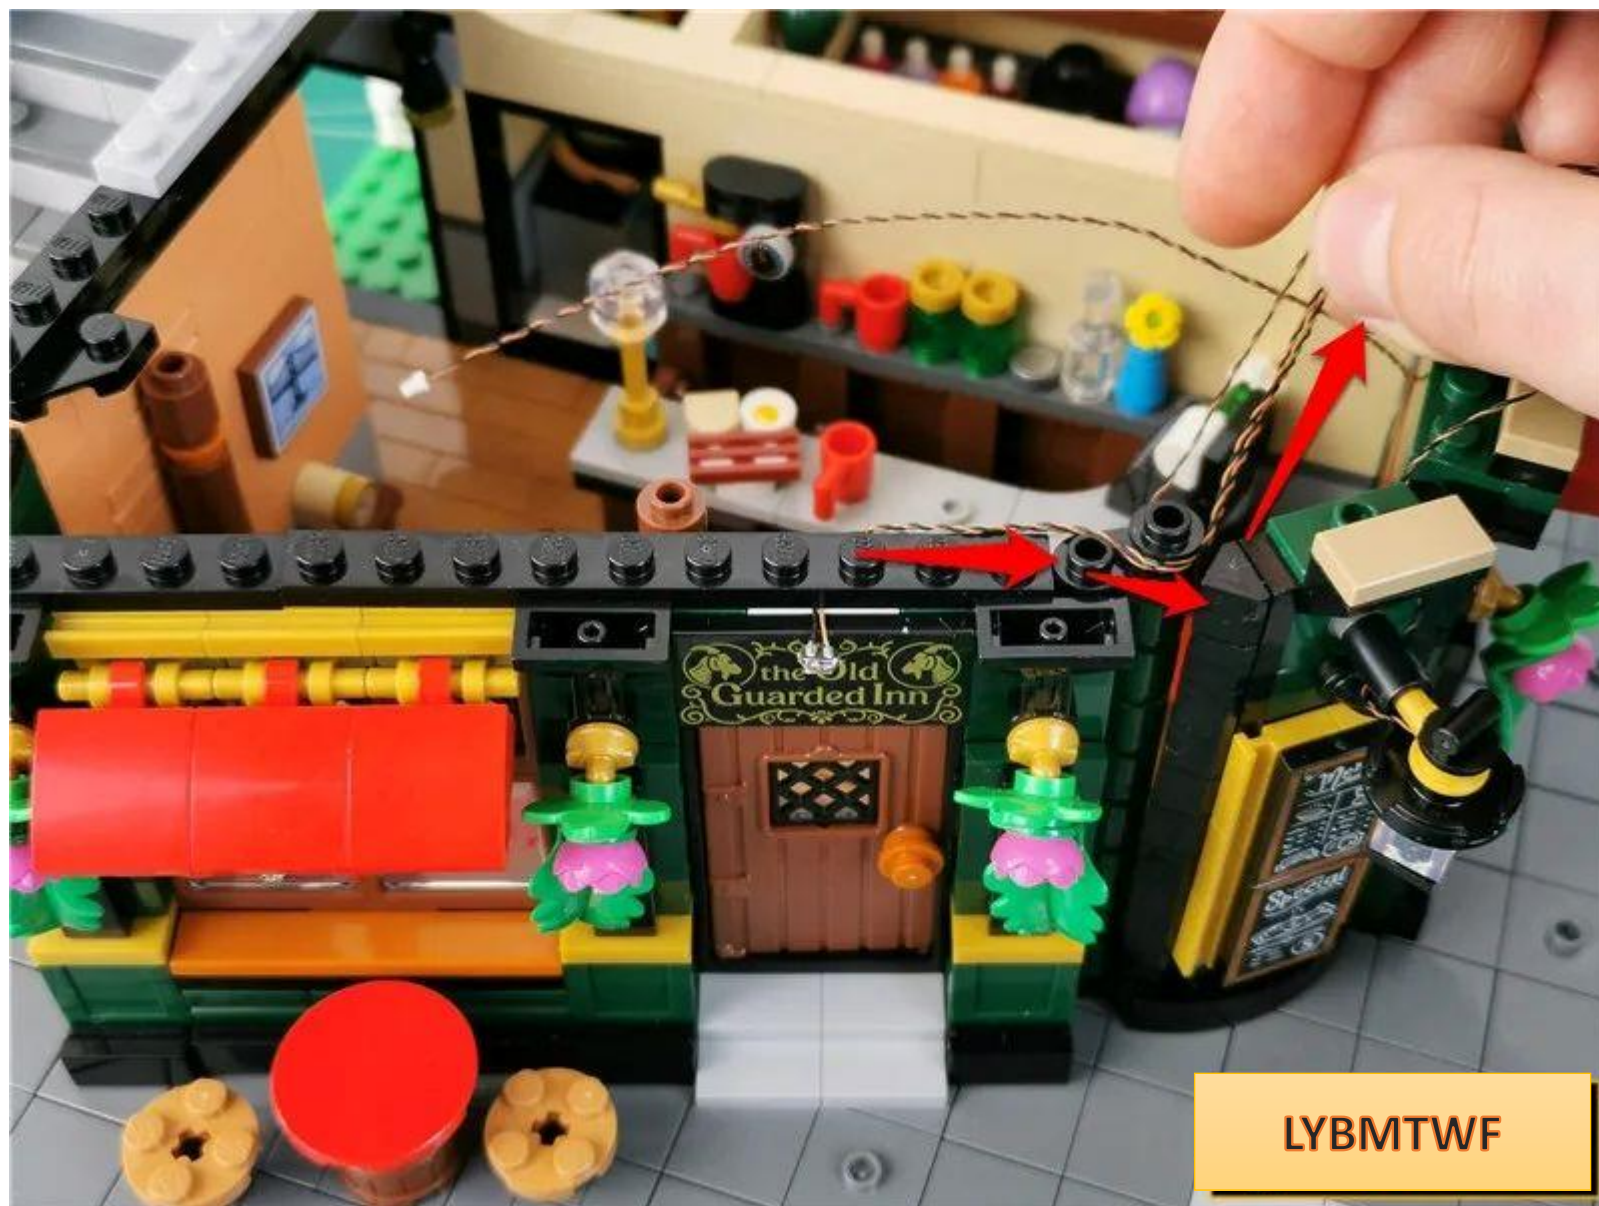


LYBMTWF




Restore the upper parts one by one



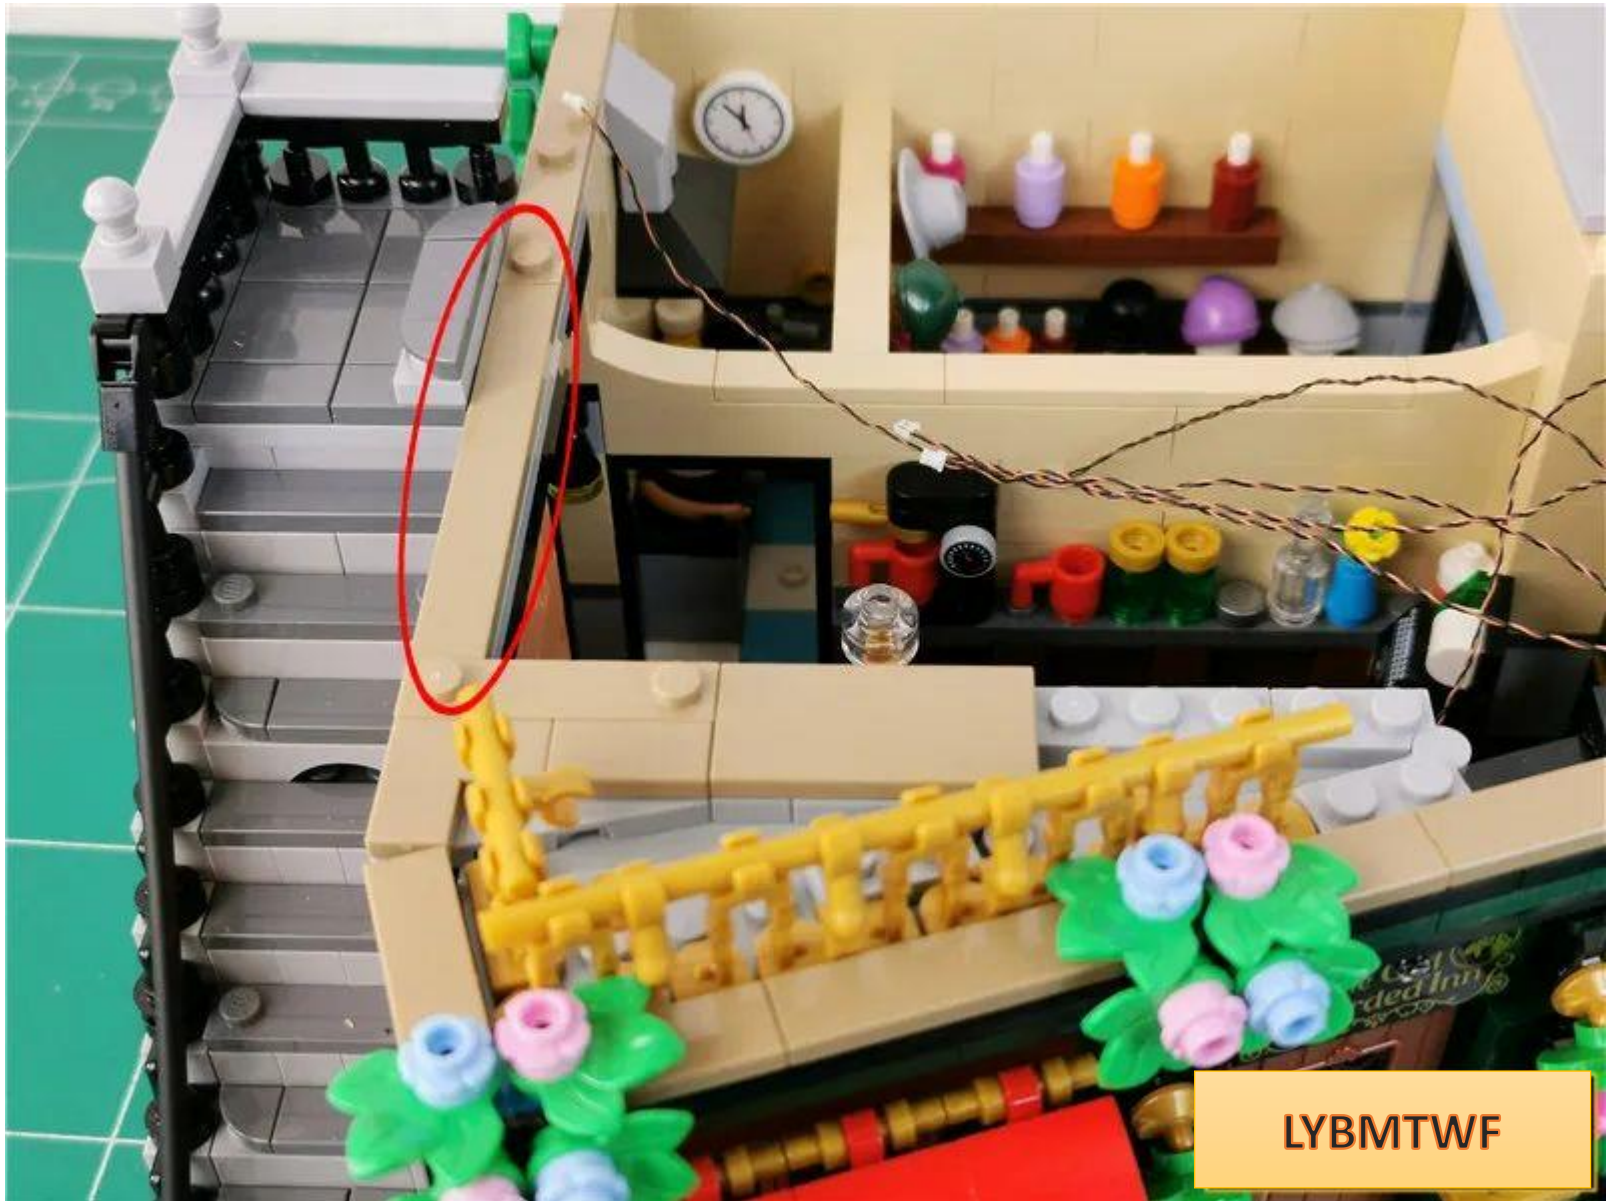


LYBMTWF



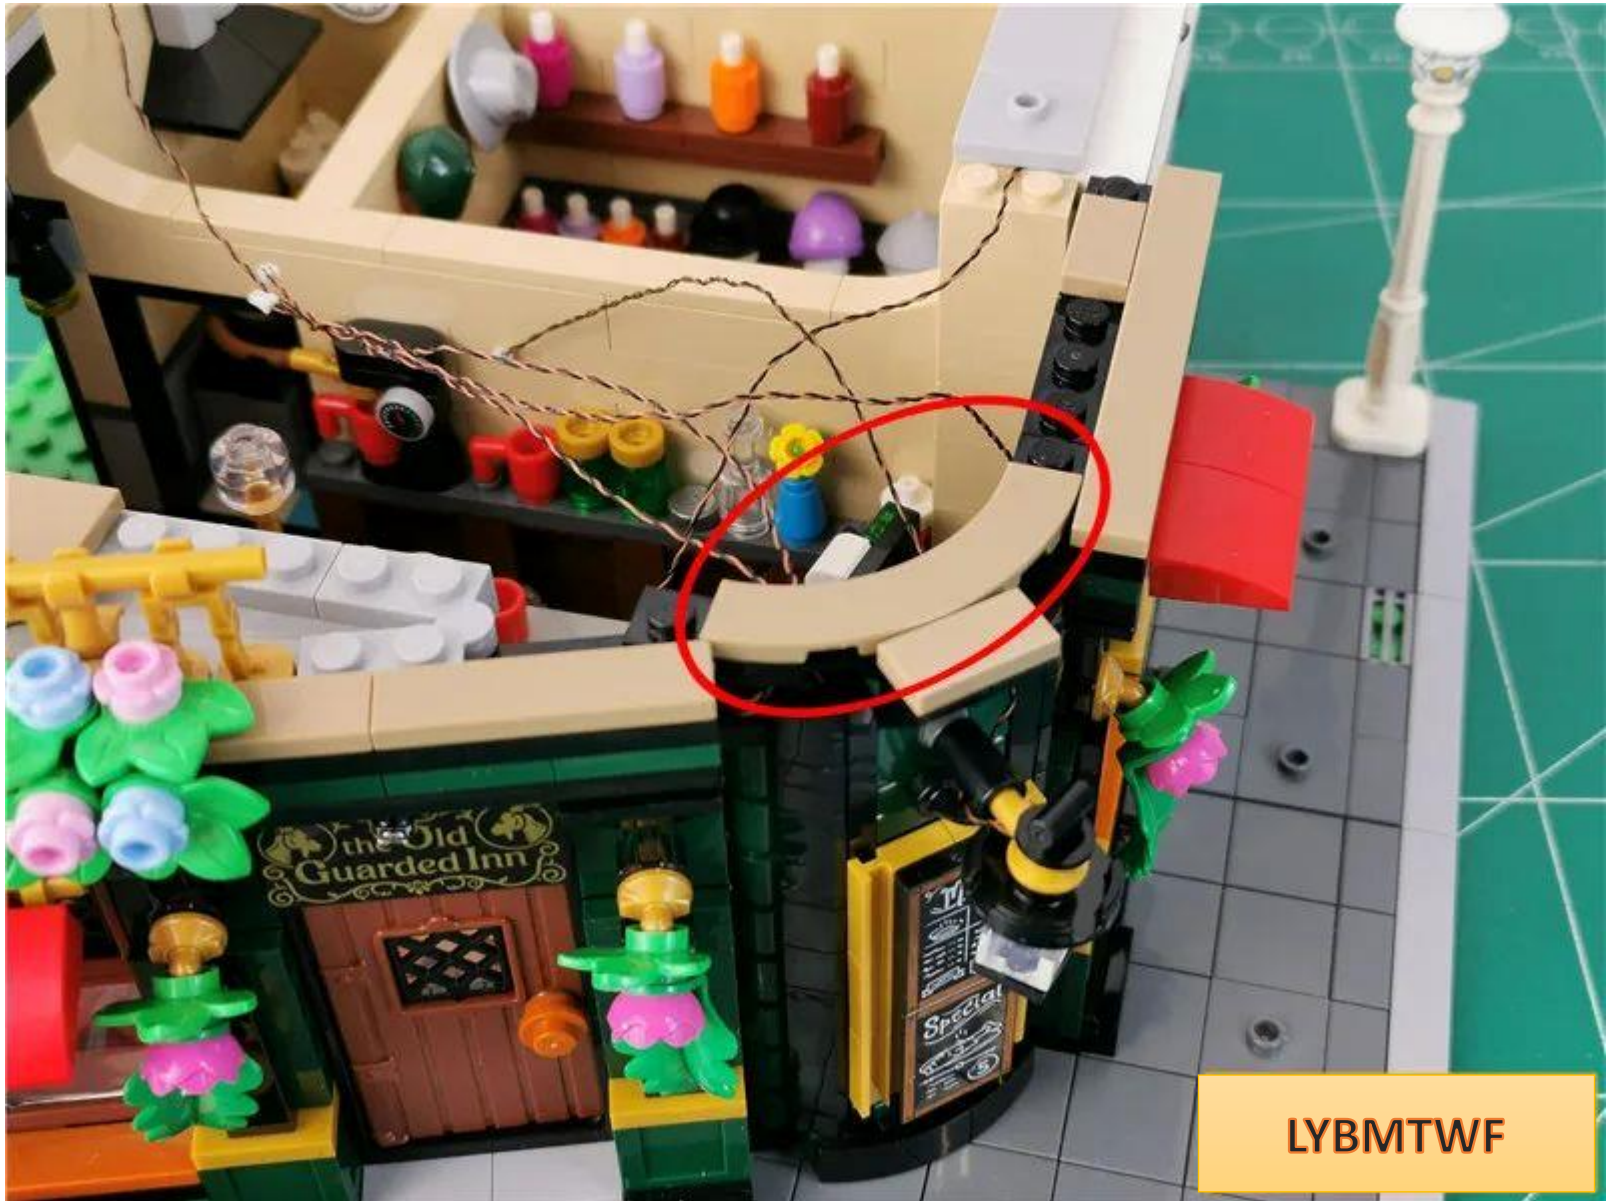


LYBMTWF




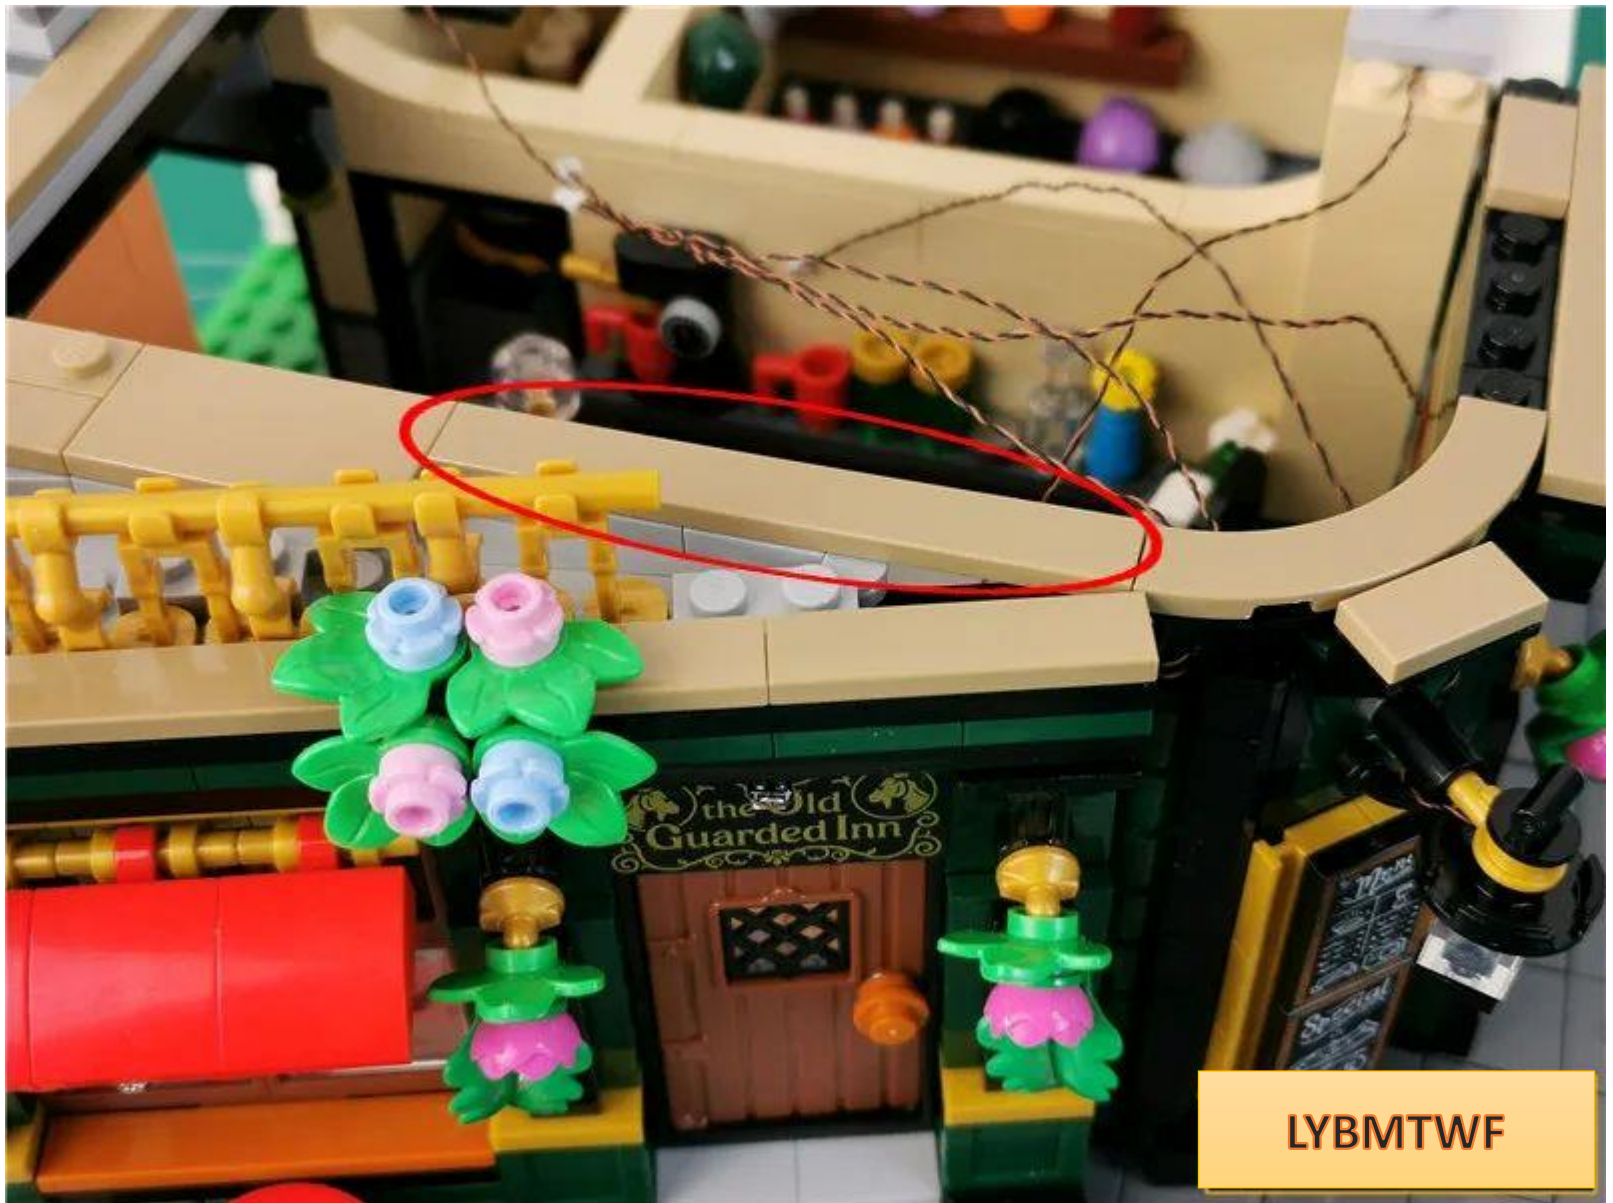

LYBMTWF

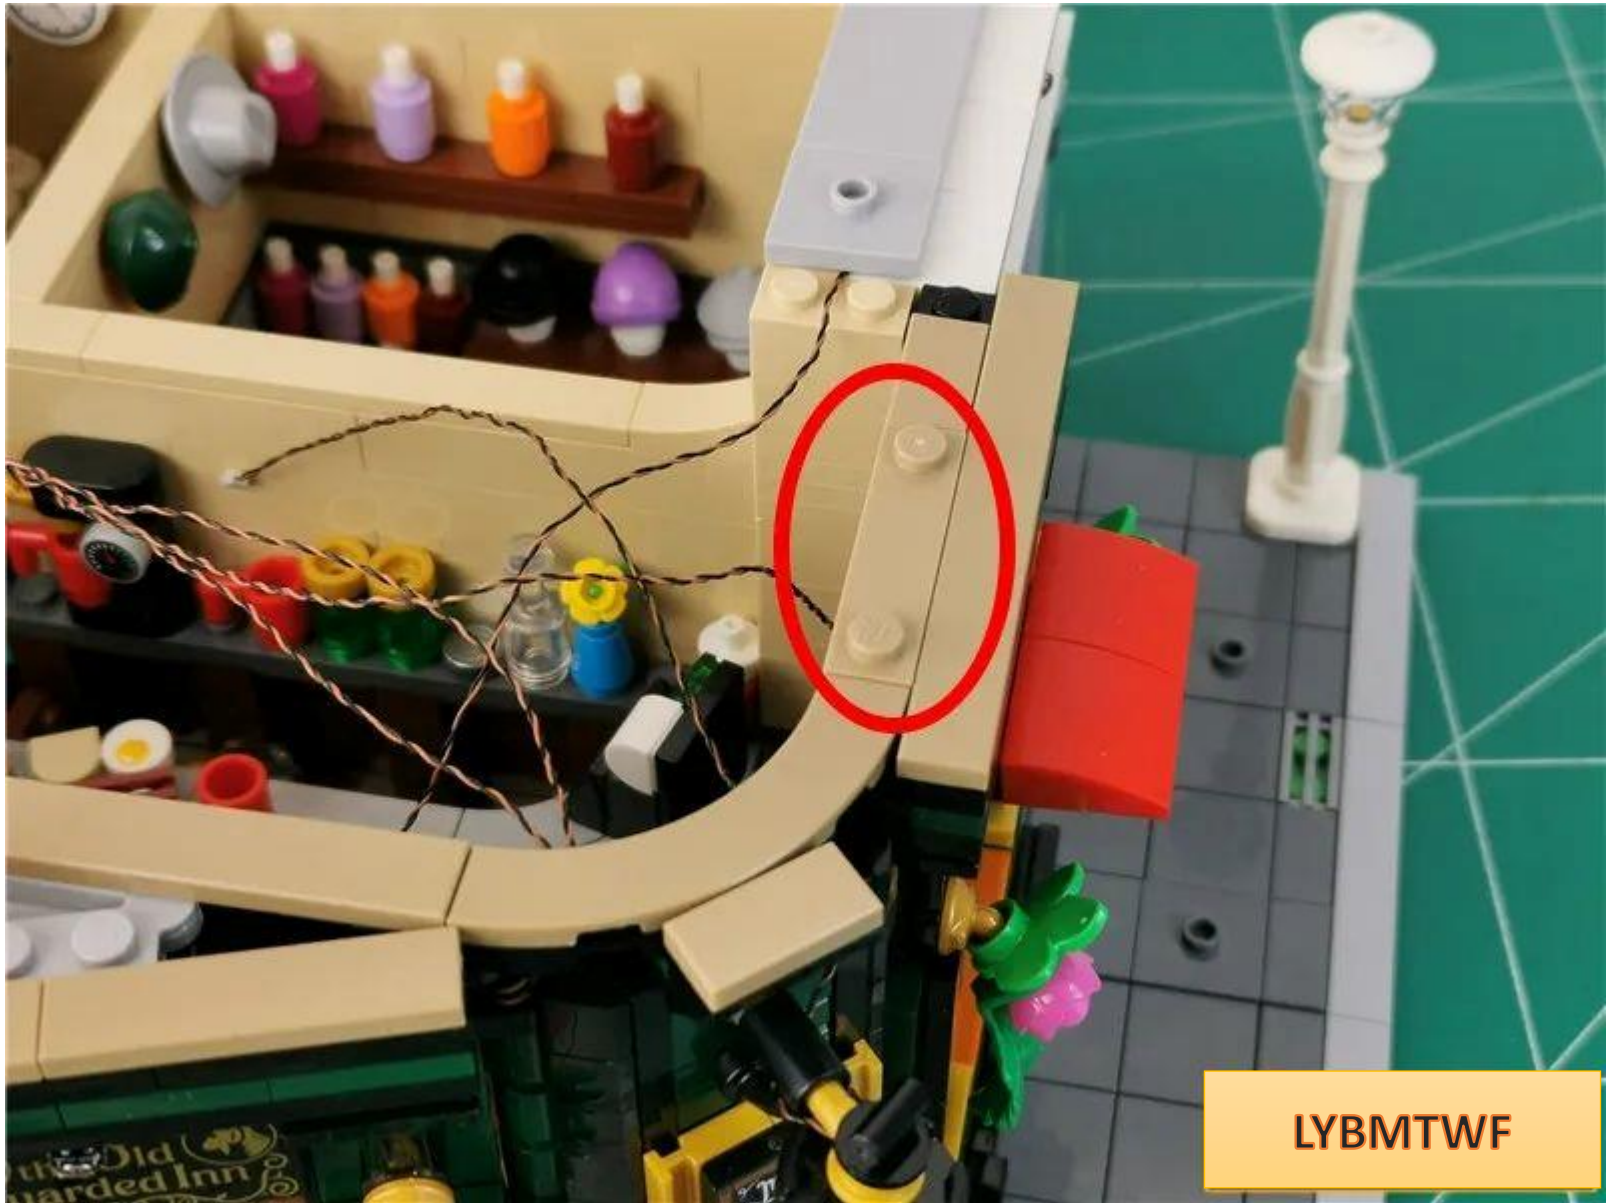




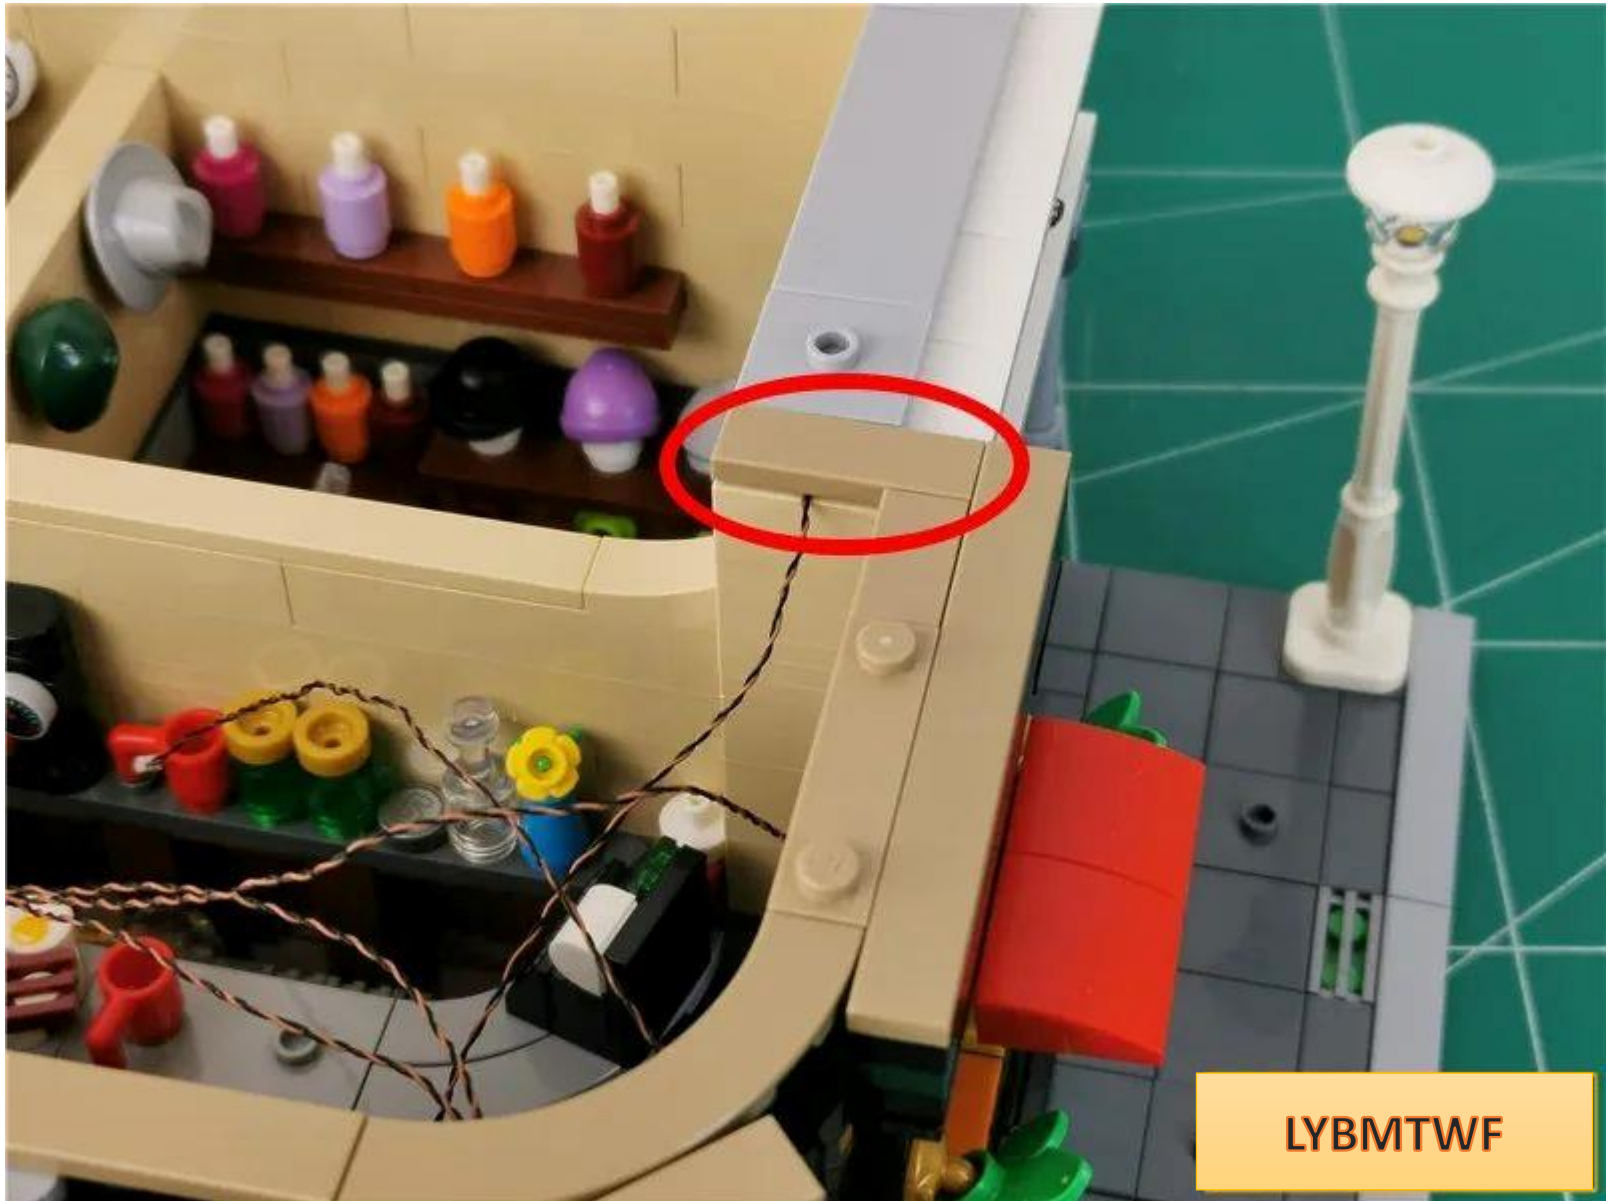





Twist the top 5 wires together appropriately

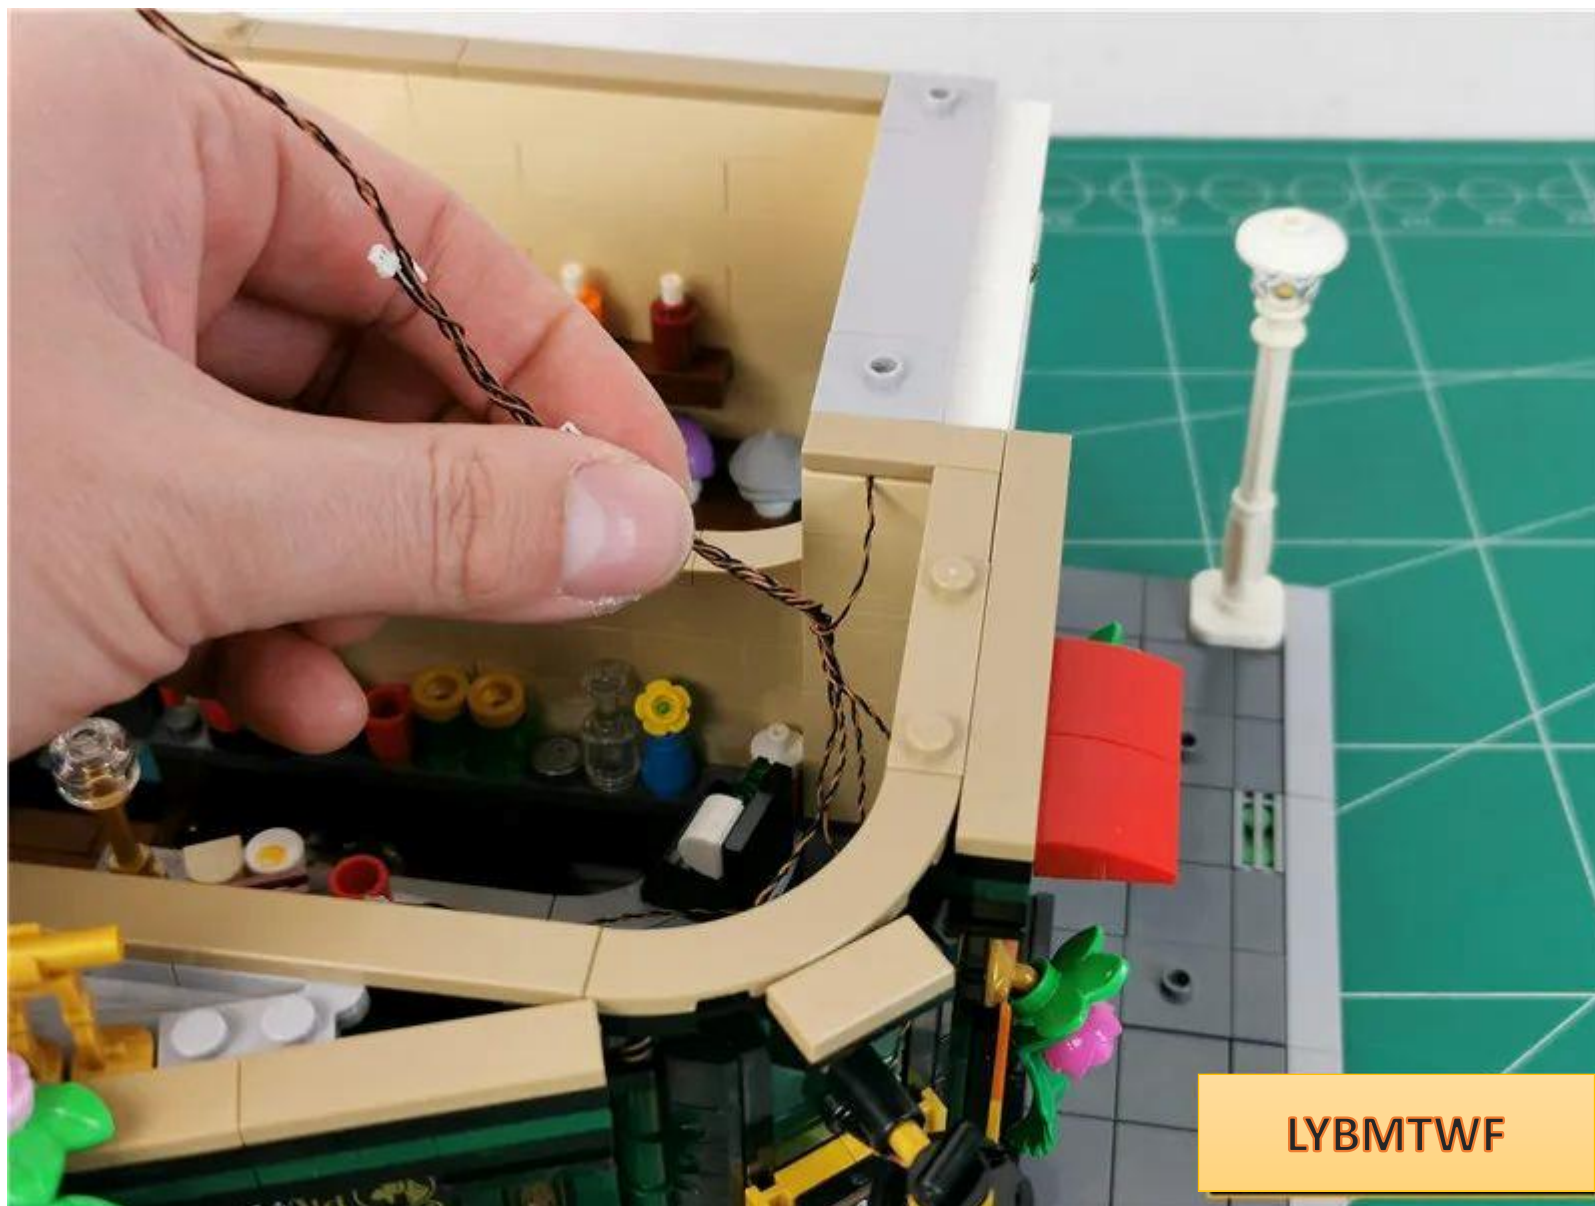

Take 1 8-socket and 1 30cm connecting wire and connect them together

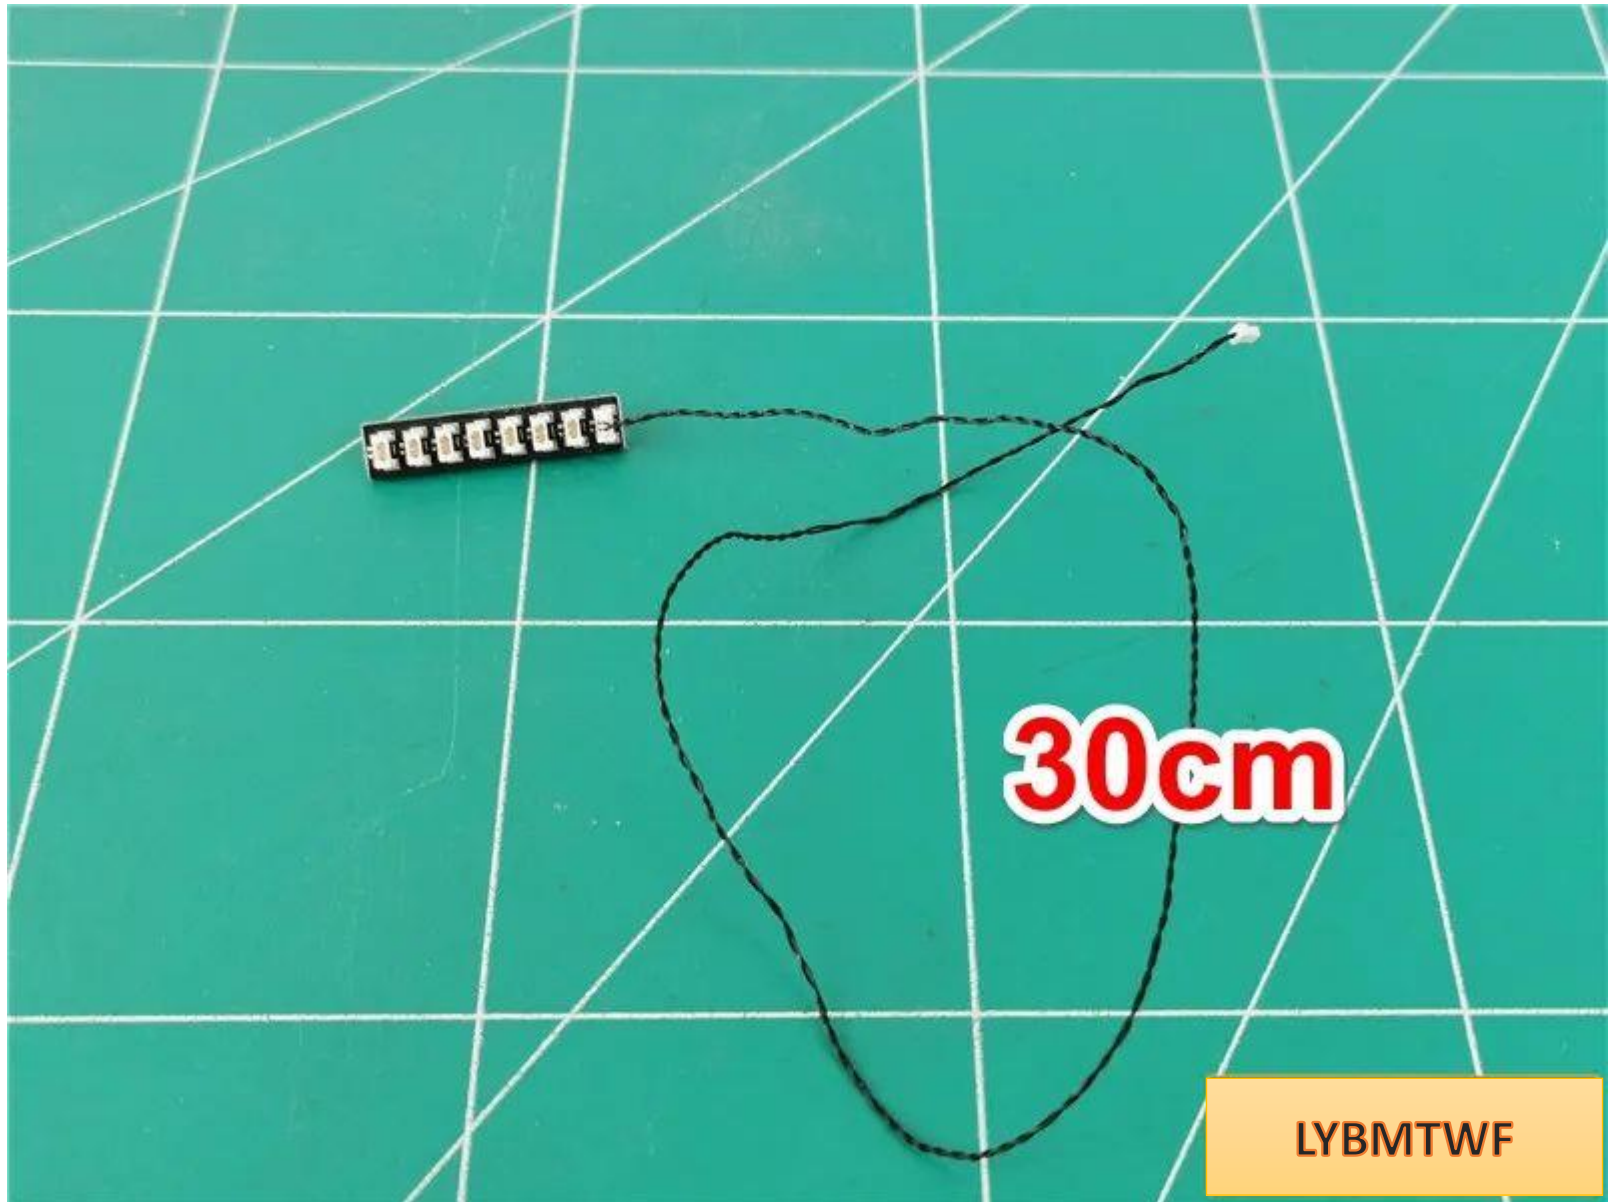


Insert all 5 wires into the 8 sockets

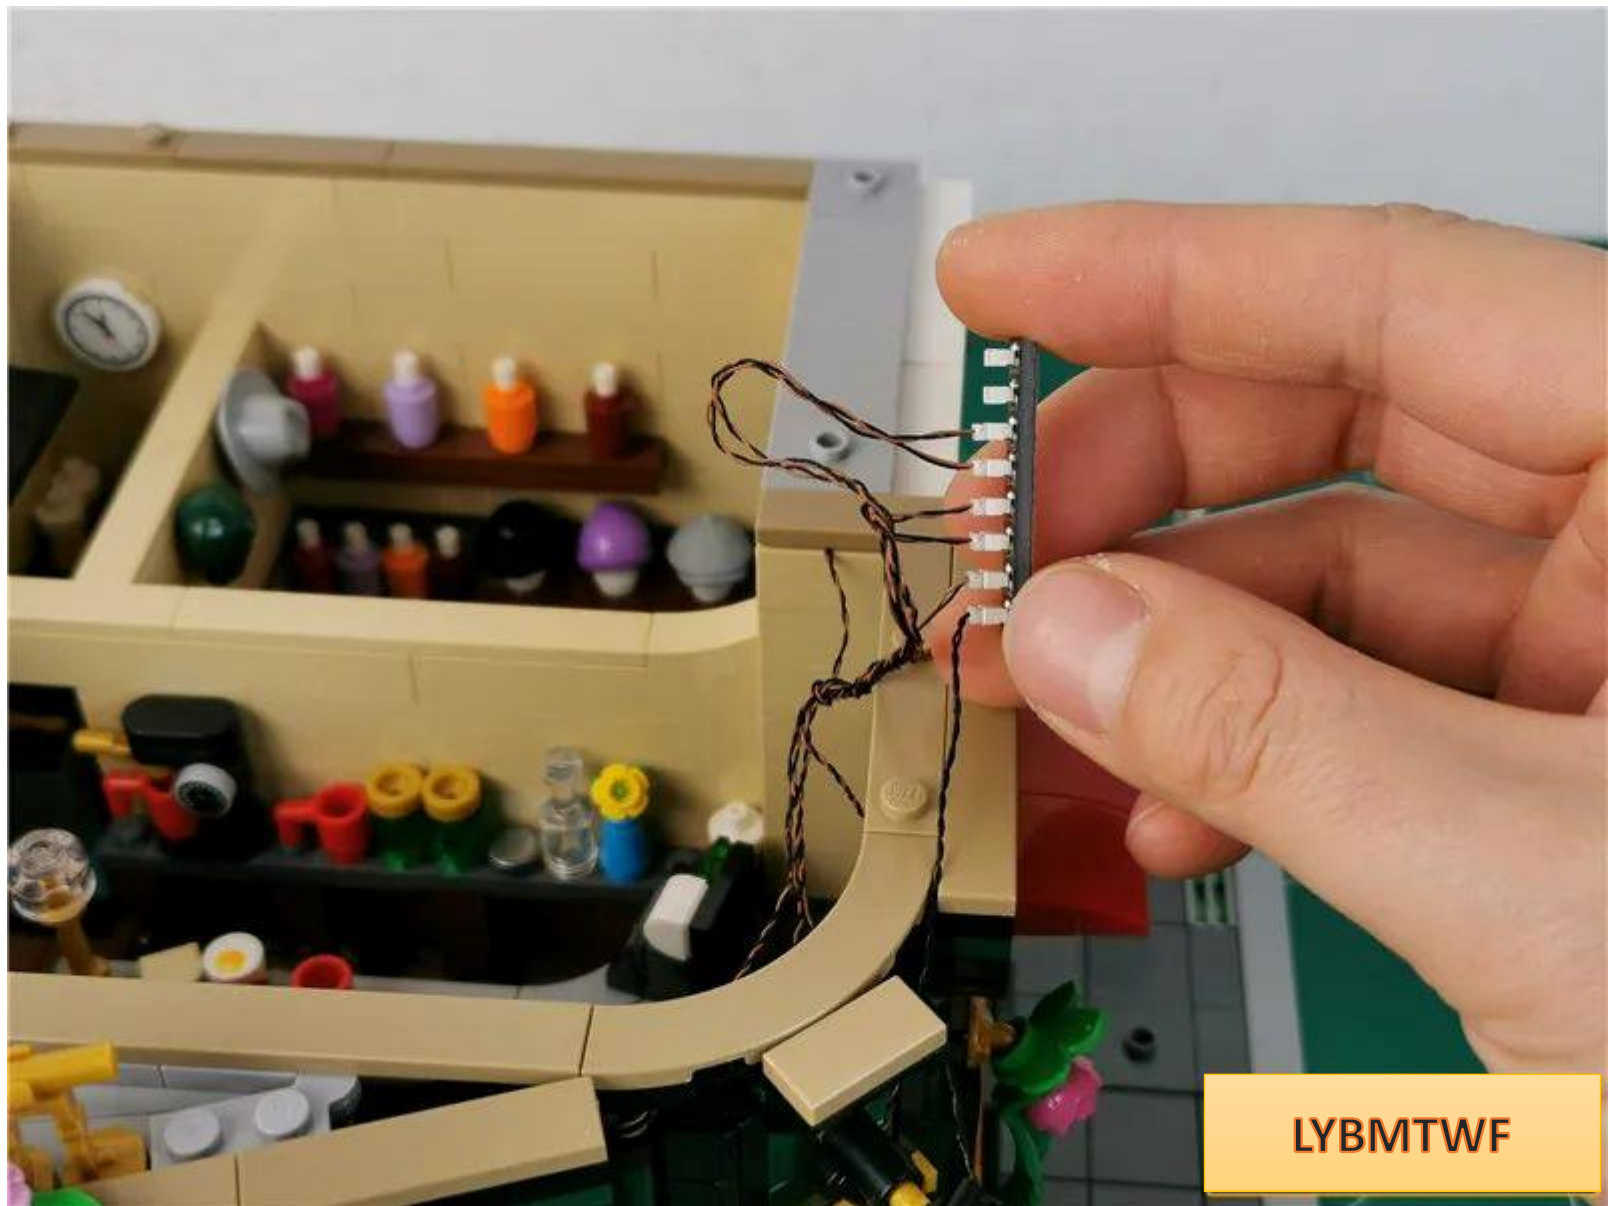

LYBMTWF




Insert the street light wires below into the 8

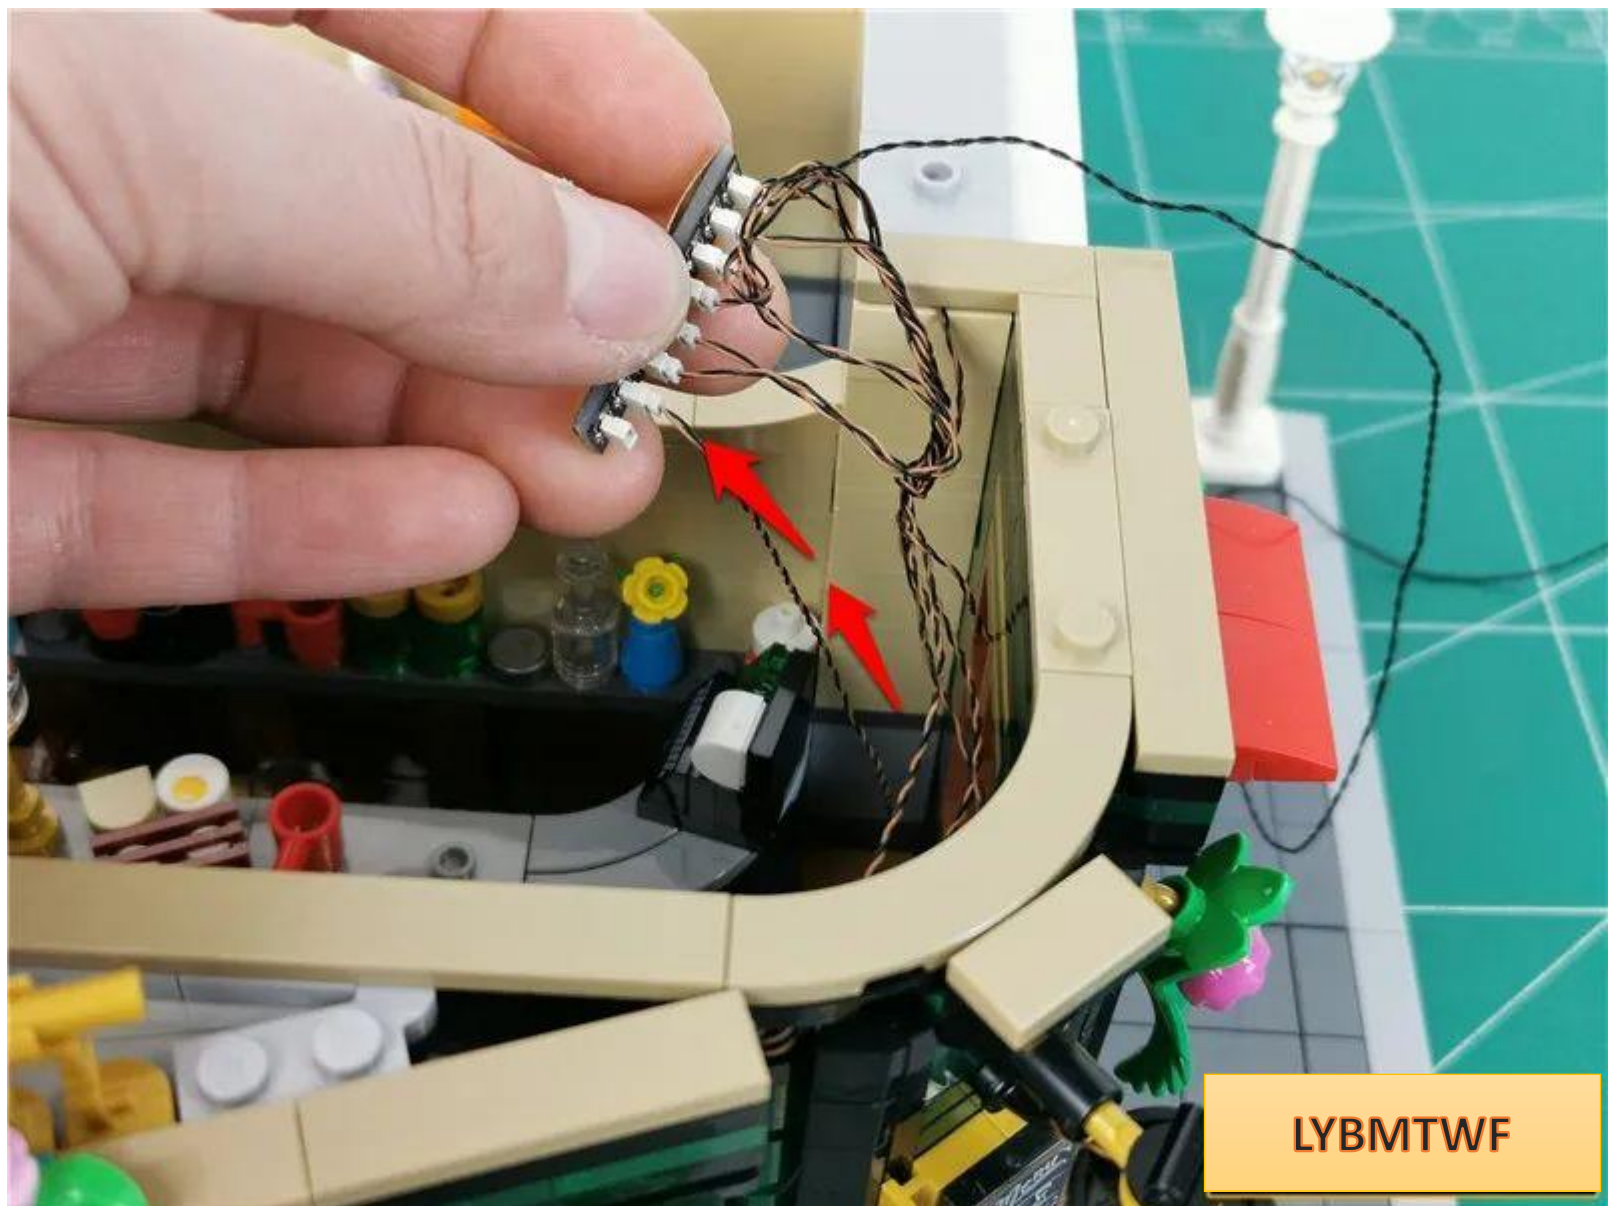

LYBMTWF

Plug the connecting wire on the 8th socket into the 6th socket connected to the power supply

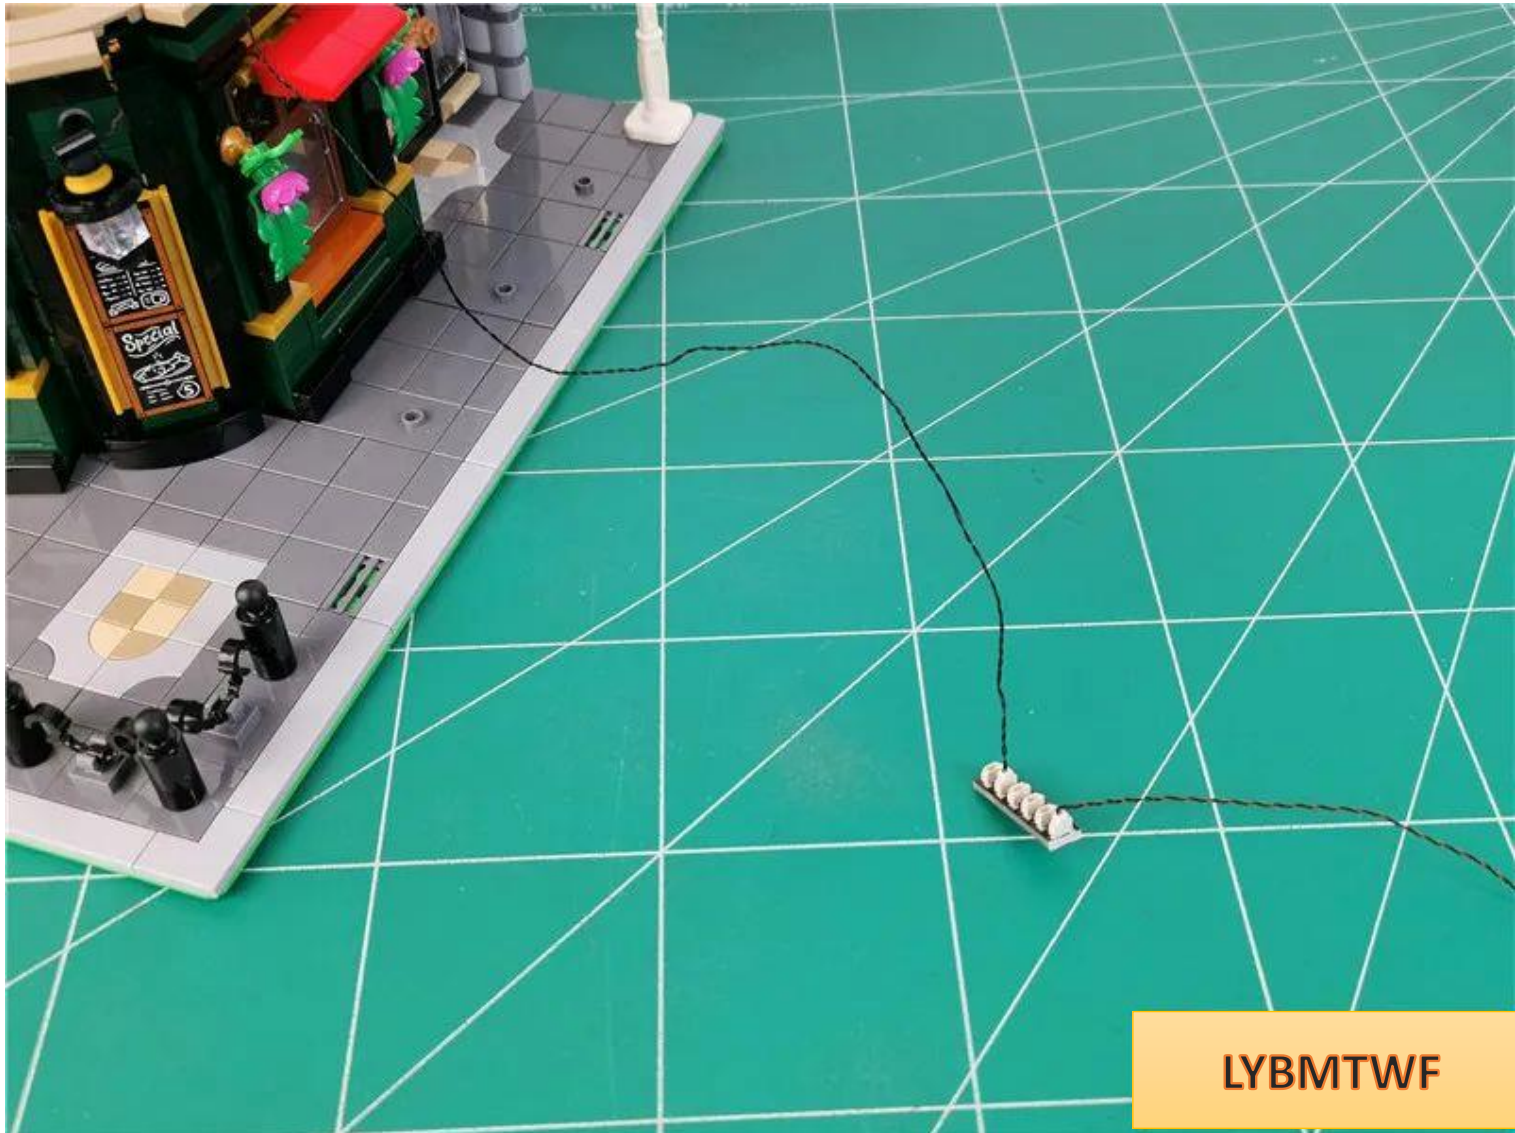




Turn on the power and test that the light is on normally







After the test, turn off the power supply, unplug the connecting wires, and leave the 6 sockets connected to the power supply.

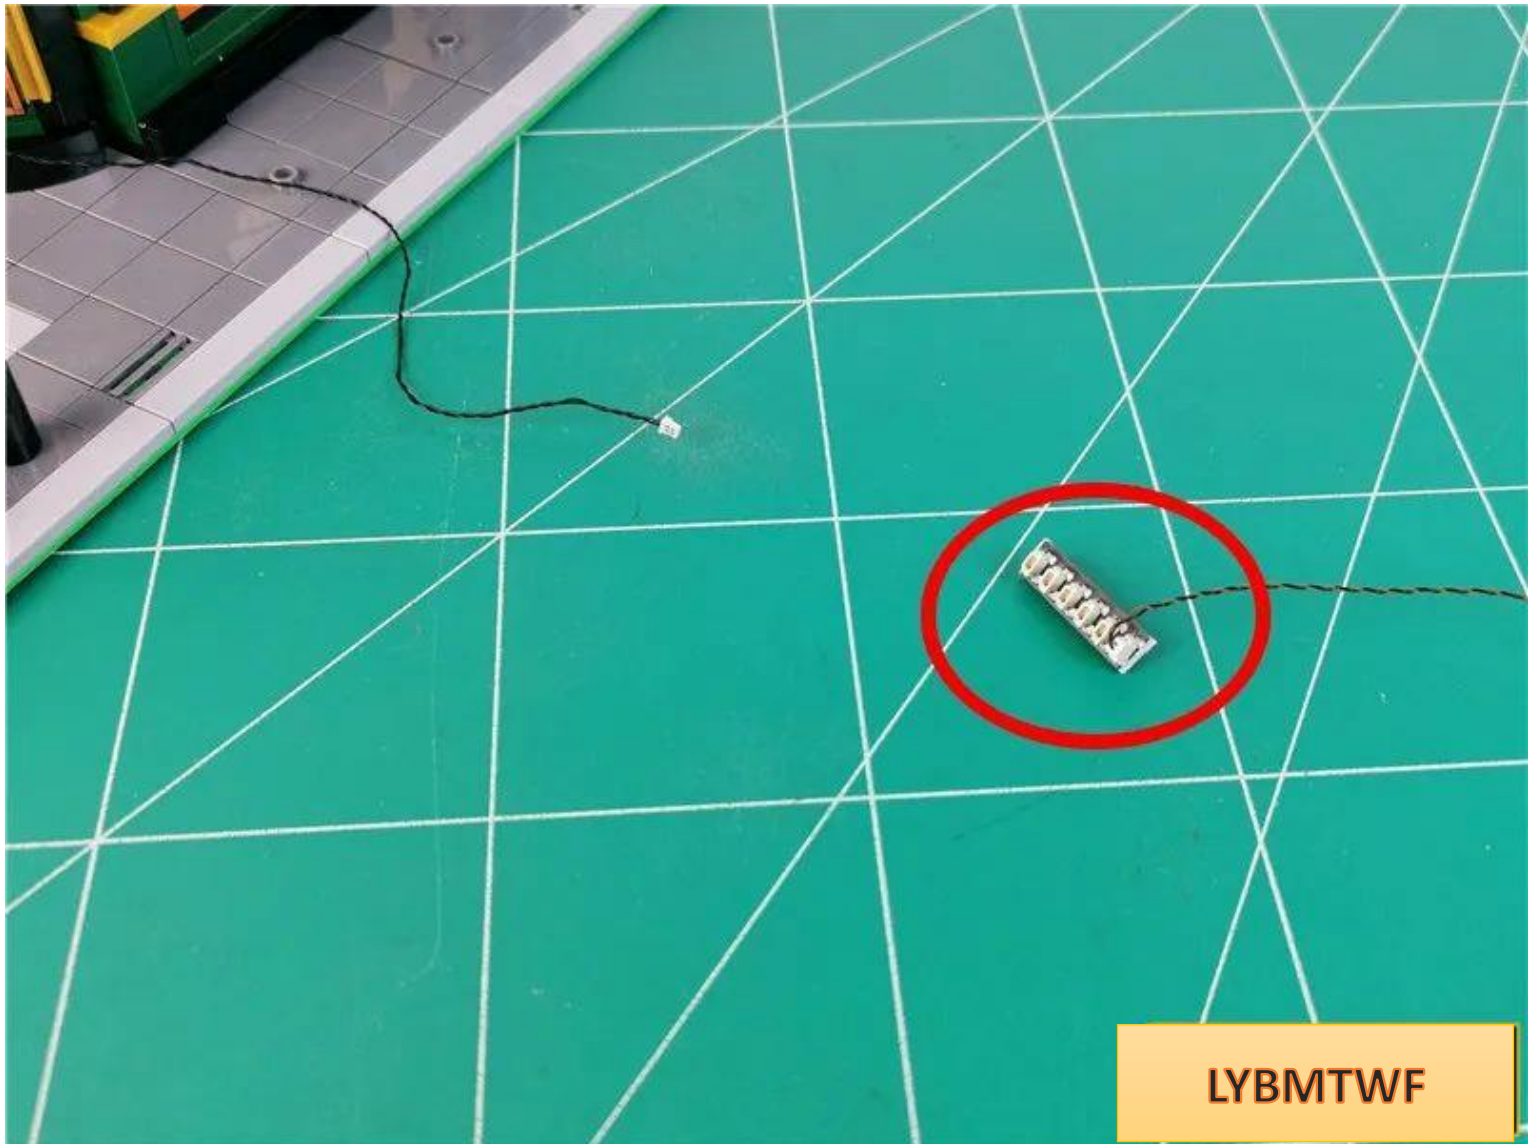

Tear off the adhesive backing of the 8 seats

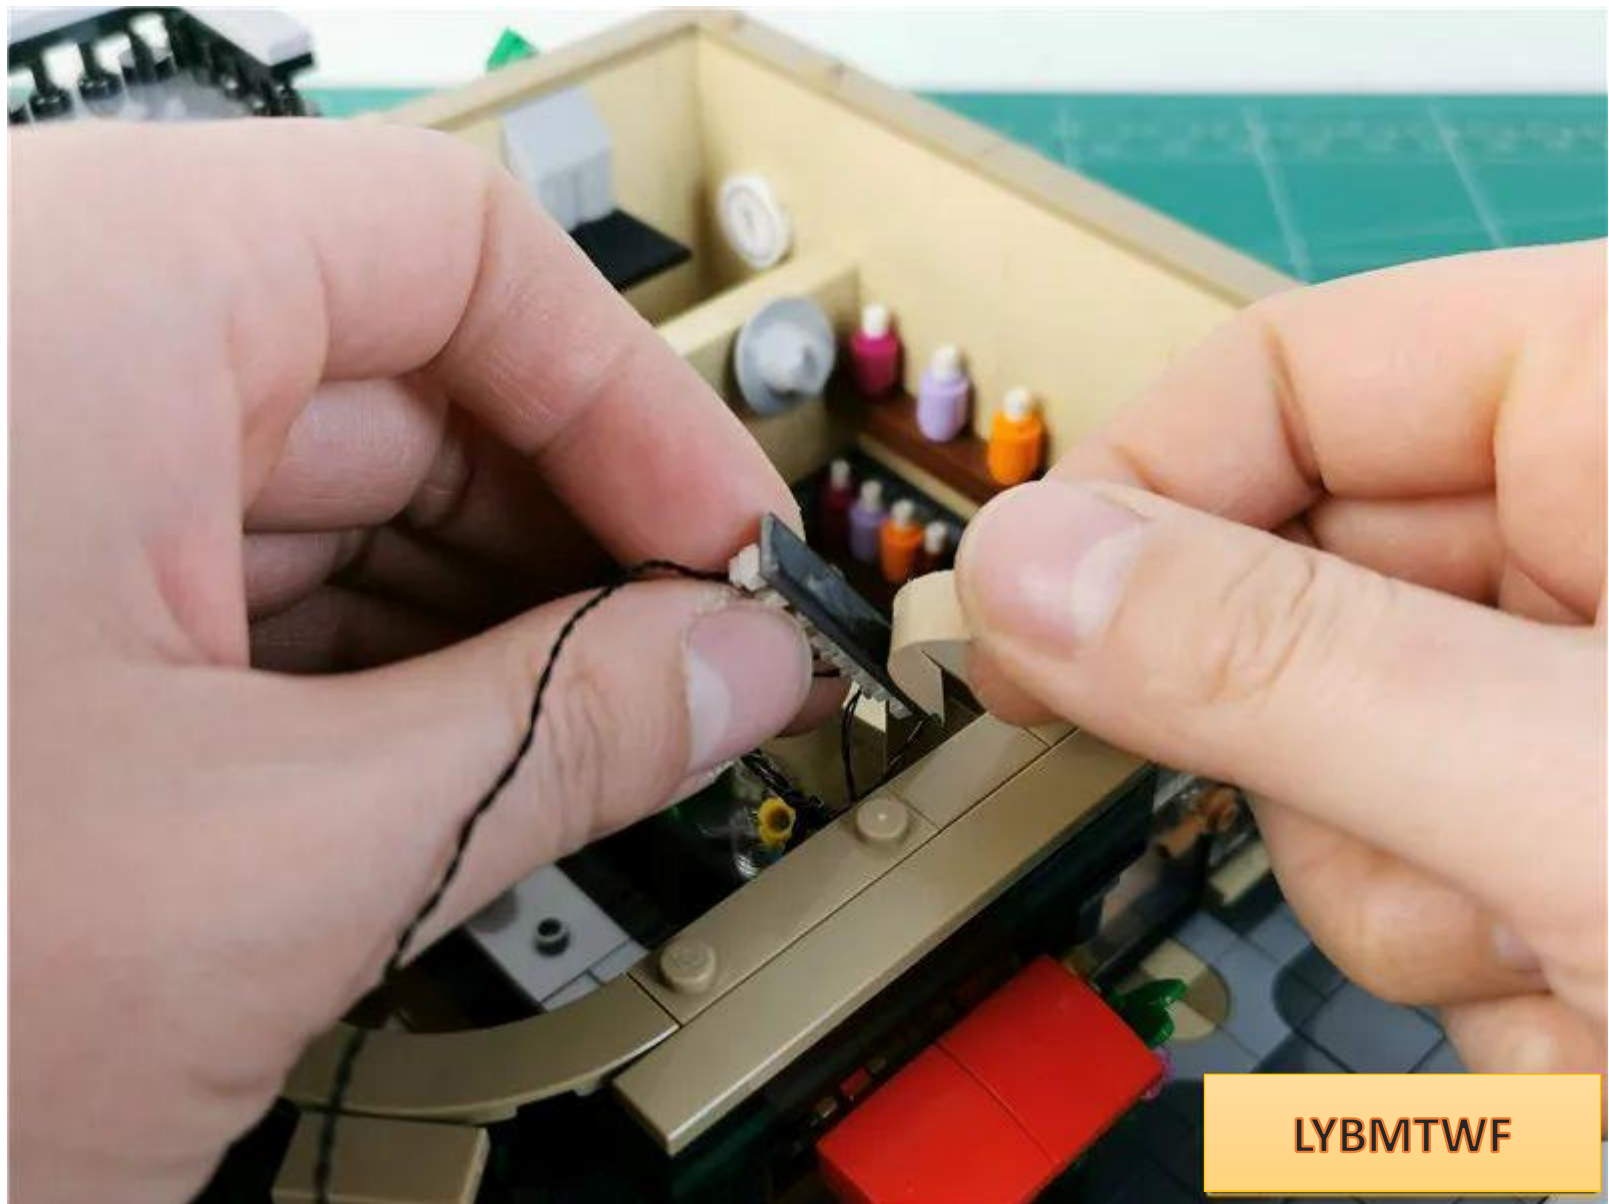


Paste the 8 seats to the position shown in the figure

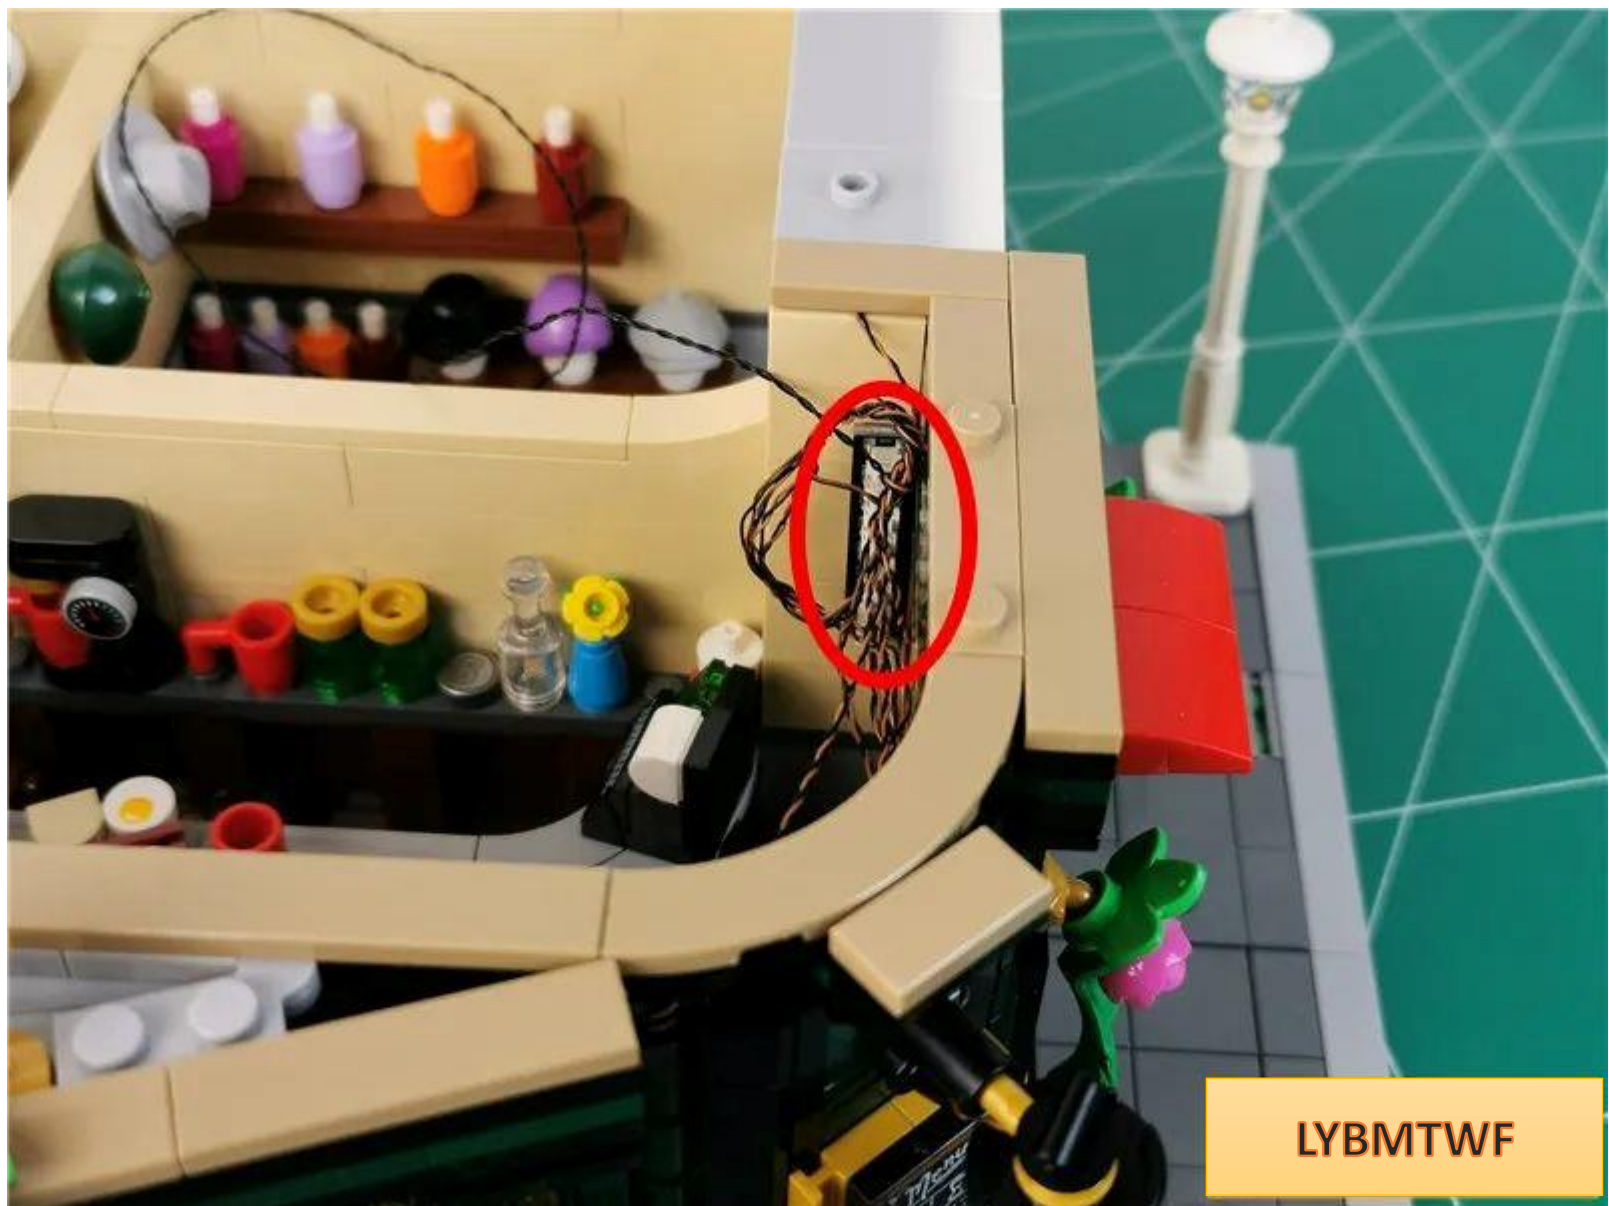



Fit the excess wire into the gap

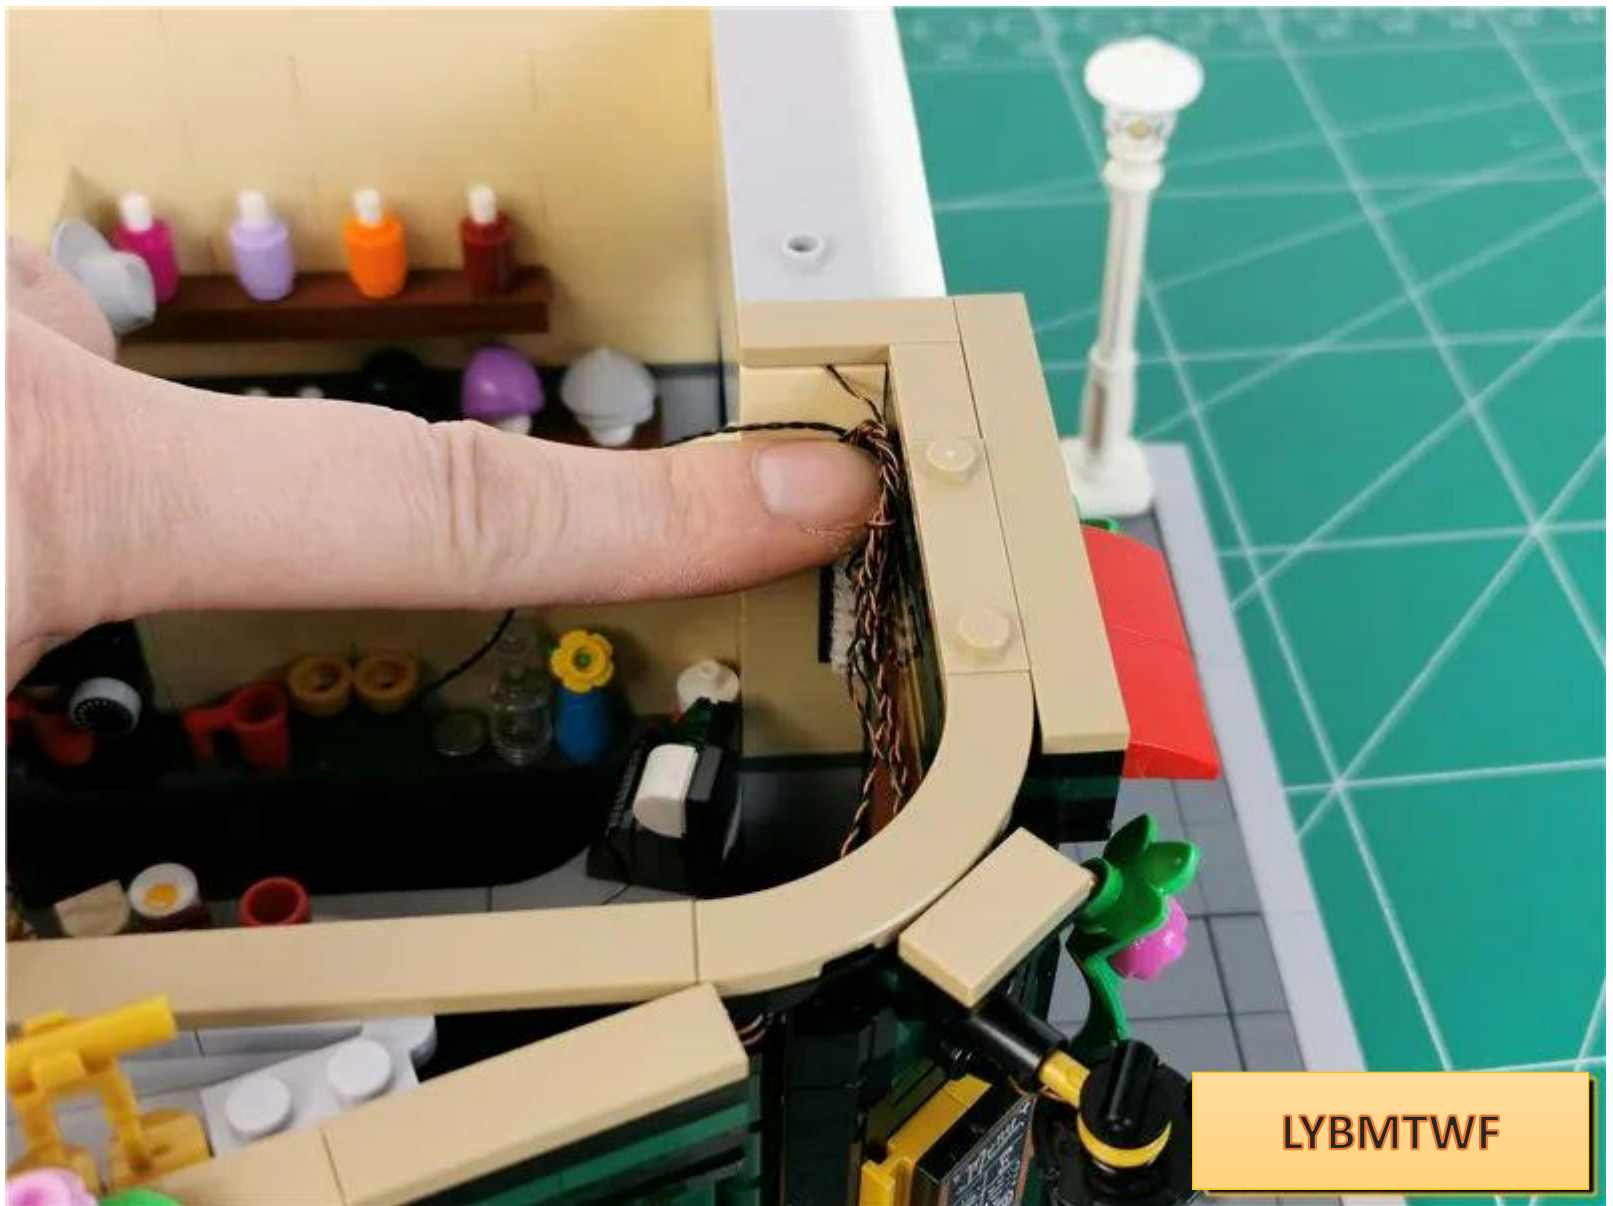

LYBMTWF


Remove the parts indicated by the arrows.








Wrap the connecting wire around the raised particles and pull it to the left

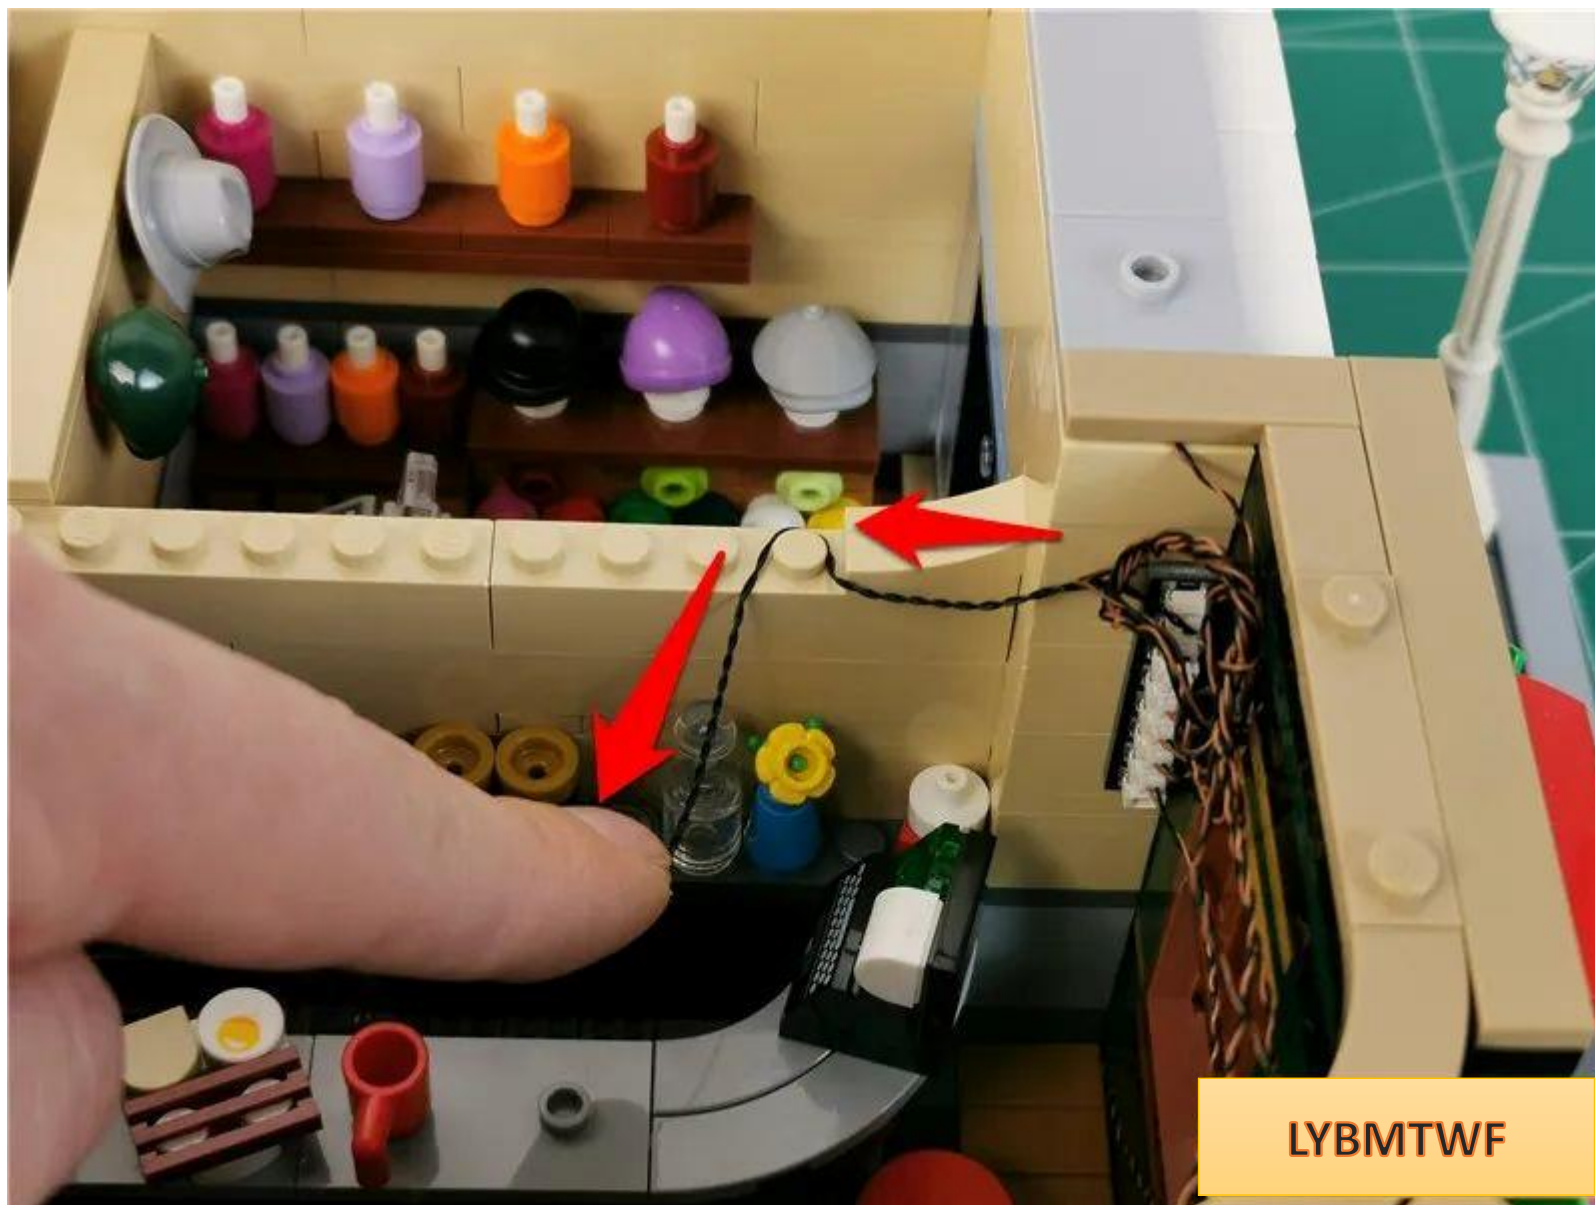

Restore parts and fix connecting wires



Continue to pull the connecting line around the raised particles and to the left.

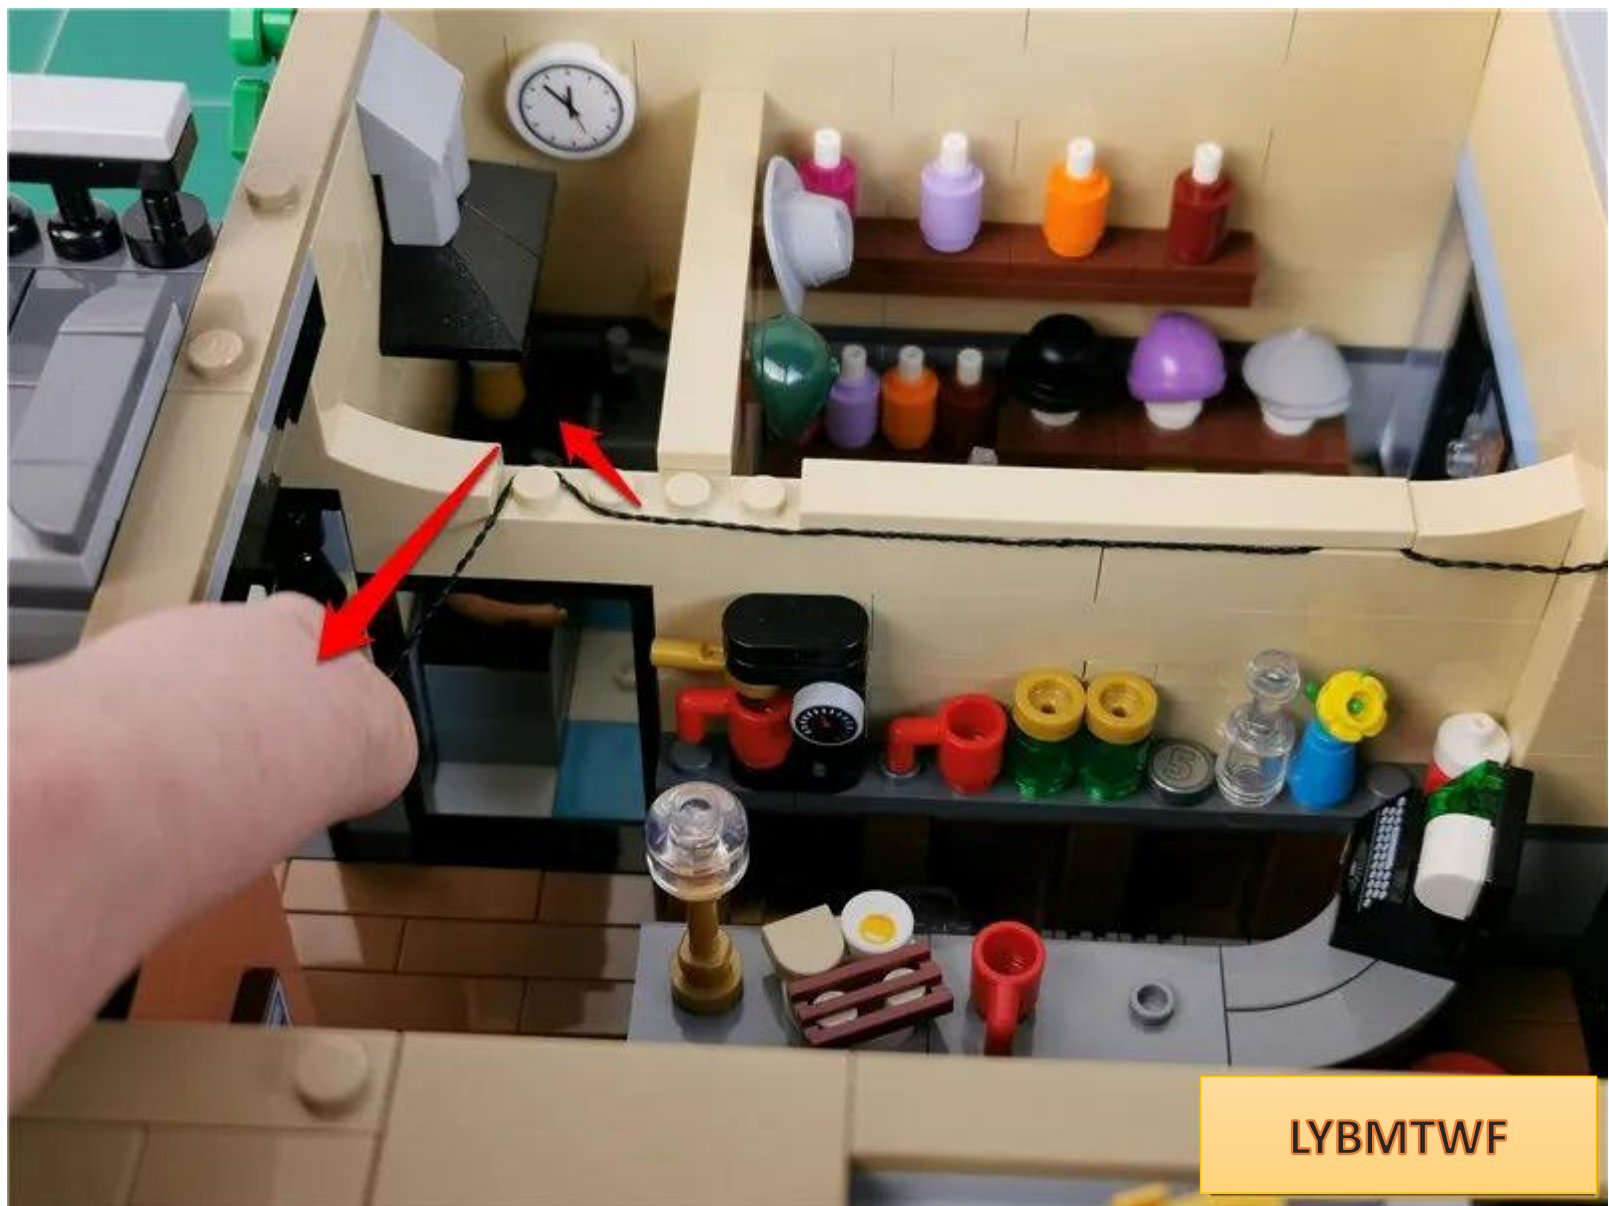


LYBMTWF



Restore parts and fix connecting wires



Pass the connecting line through the back door to the outside

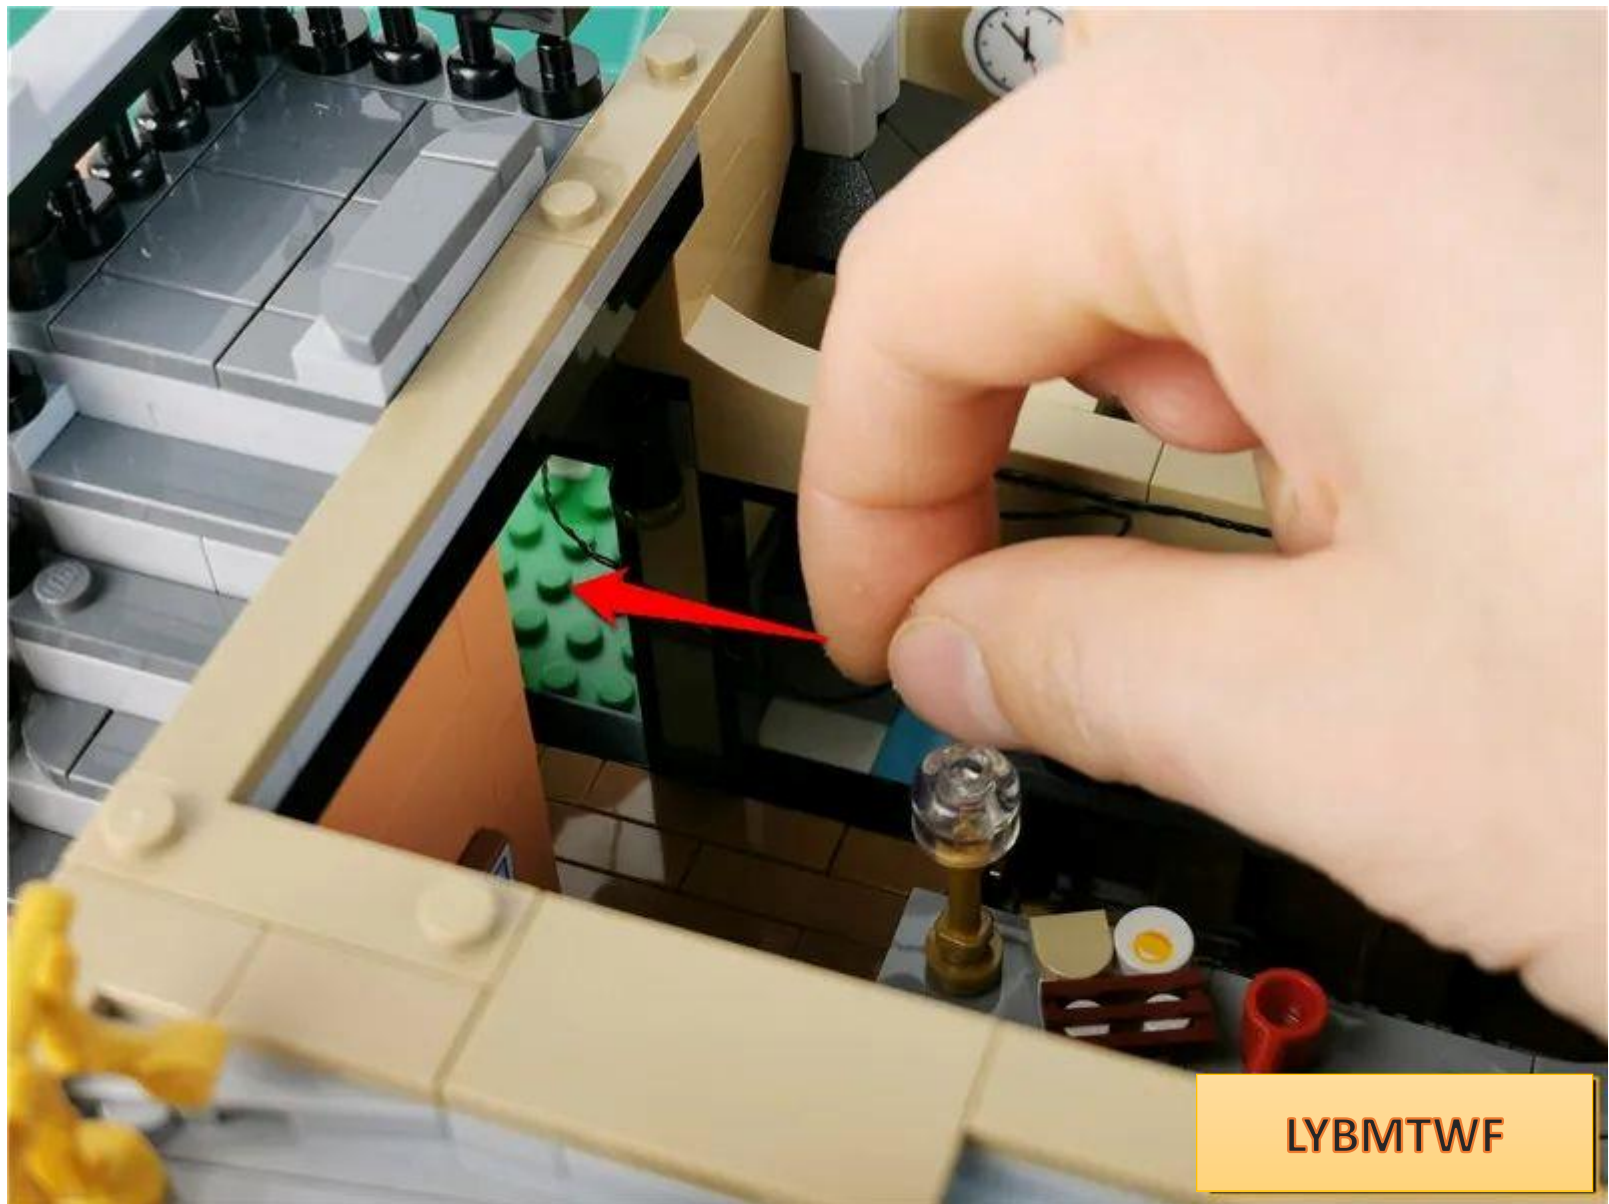

Tighten the connection wires from outside





Temporarily place the building aside




Remove the superstructure and separate into layers






Prepare to install the second floor lighting, place the building on its side, and **pay attention to the direction**

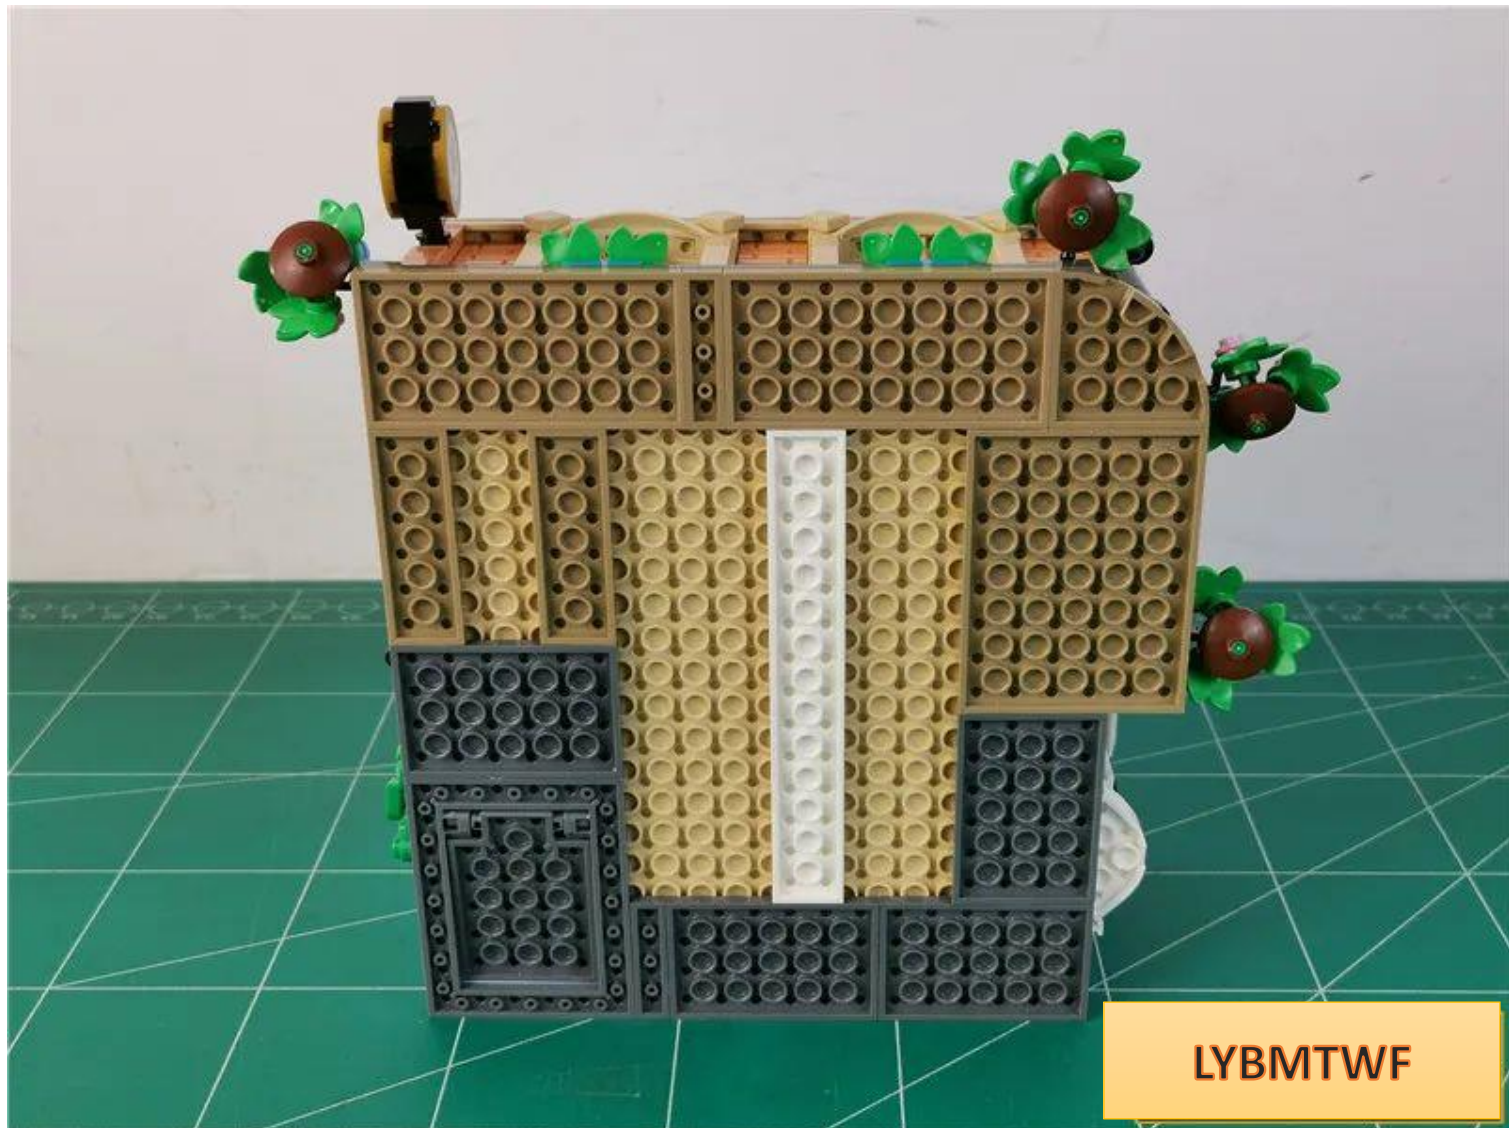





Take 3 warm light strips, 2 5cm connecting wires, 1 30cm connecting wire, and 3 hollow transparent circles

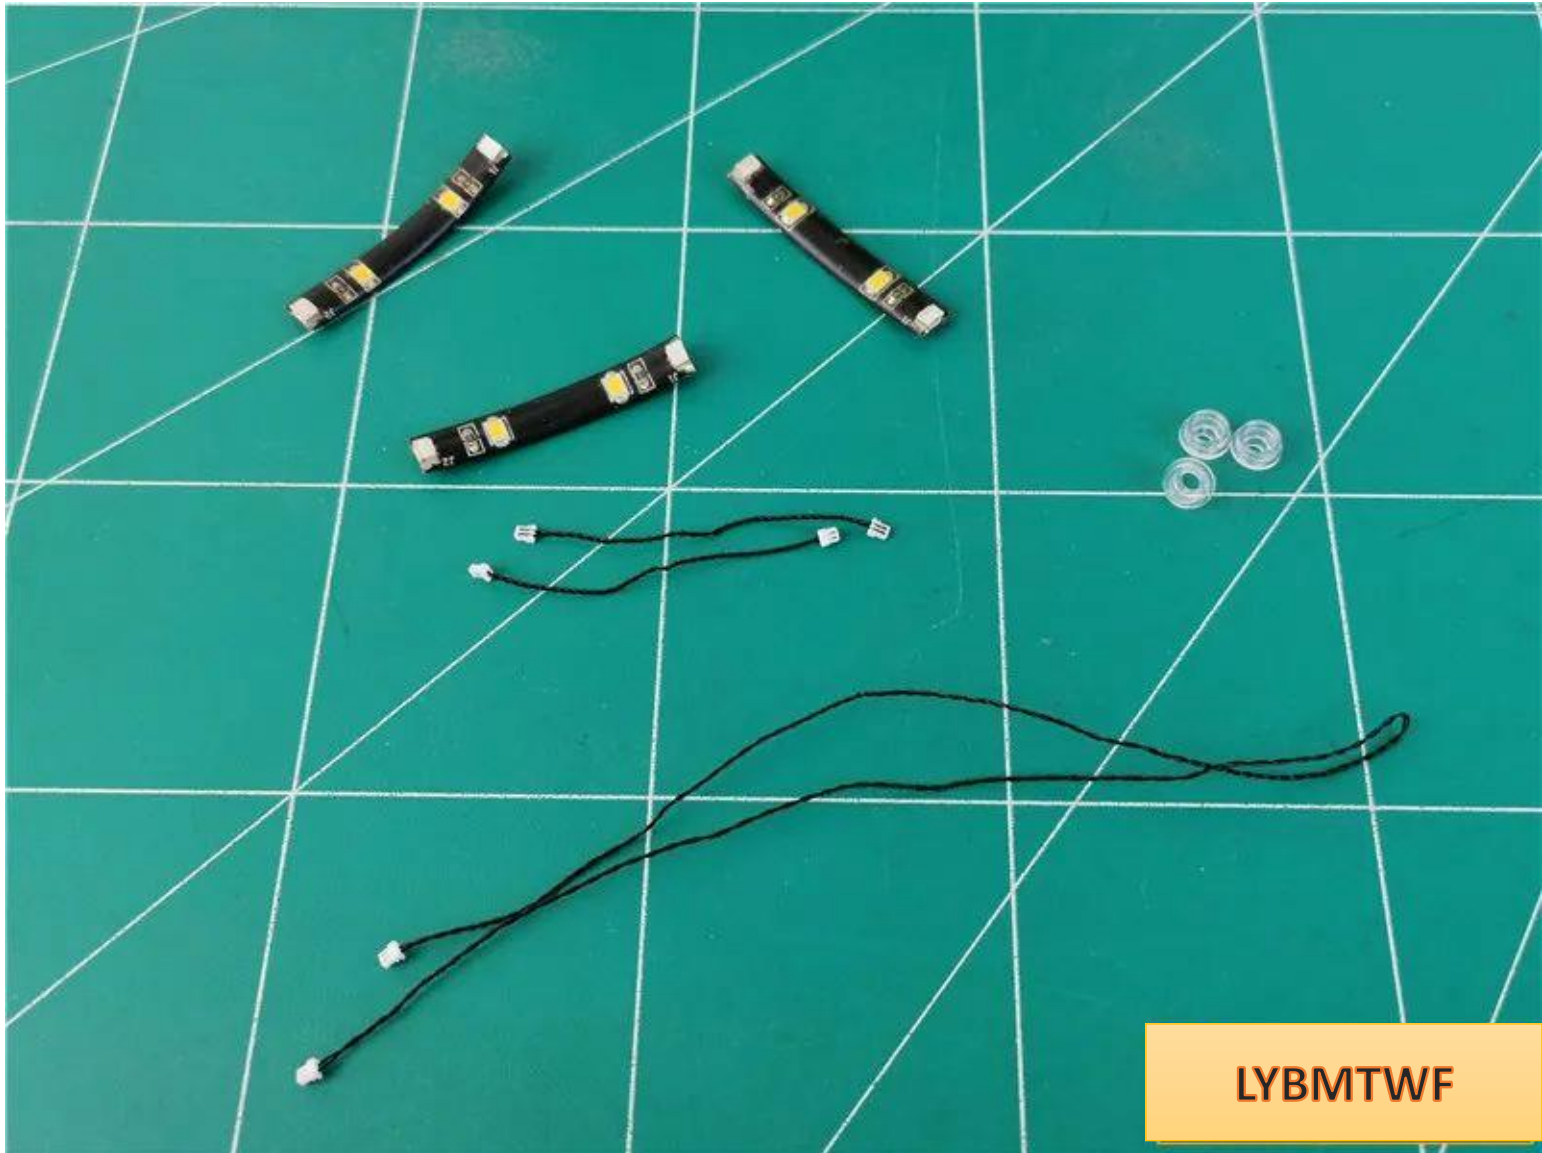

Take any 5cm connecting wire and insert it into any warm light strip

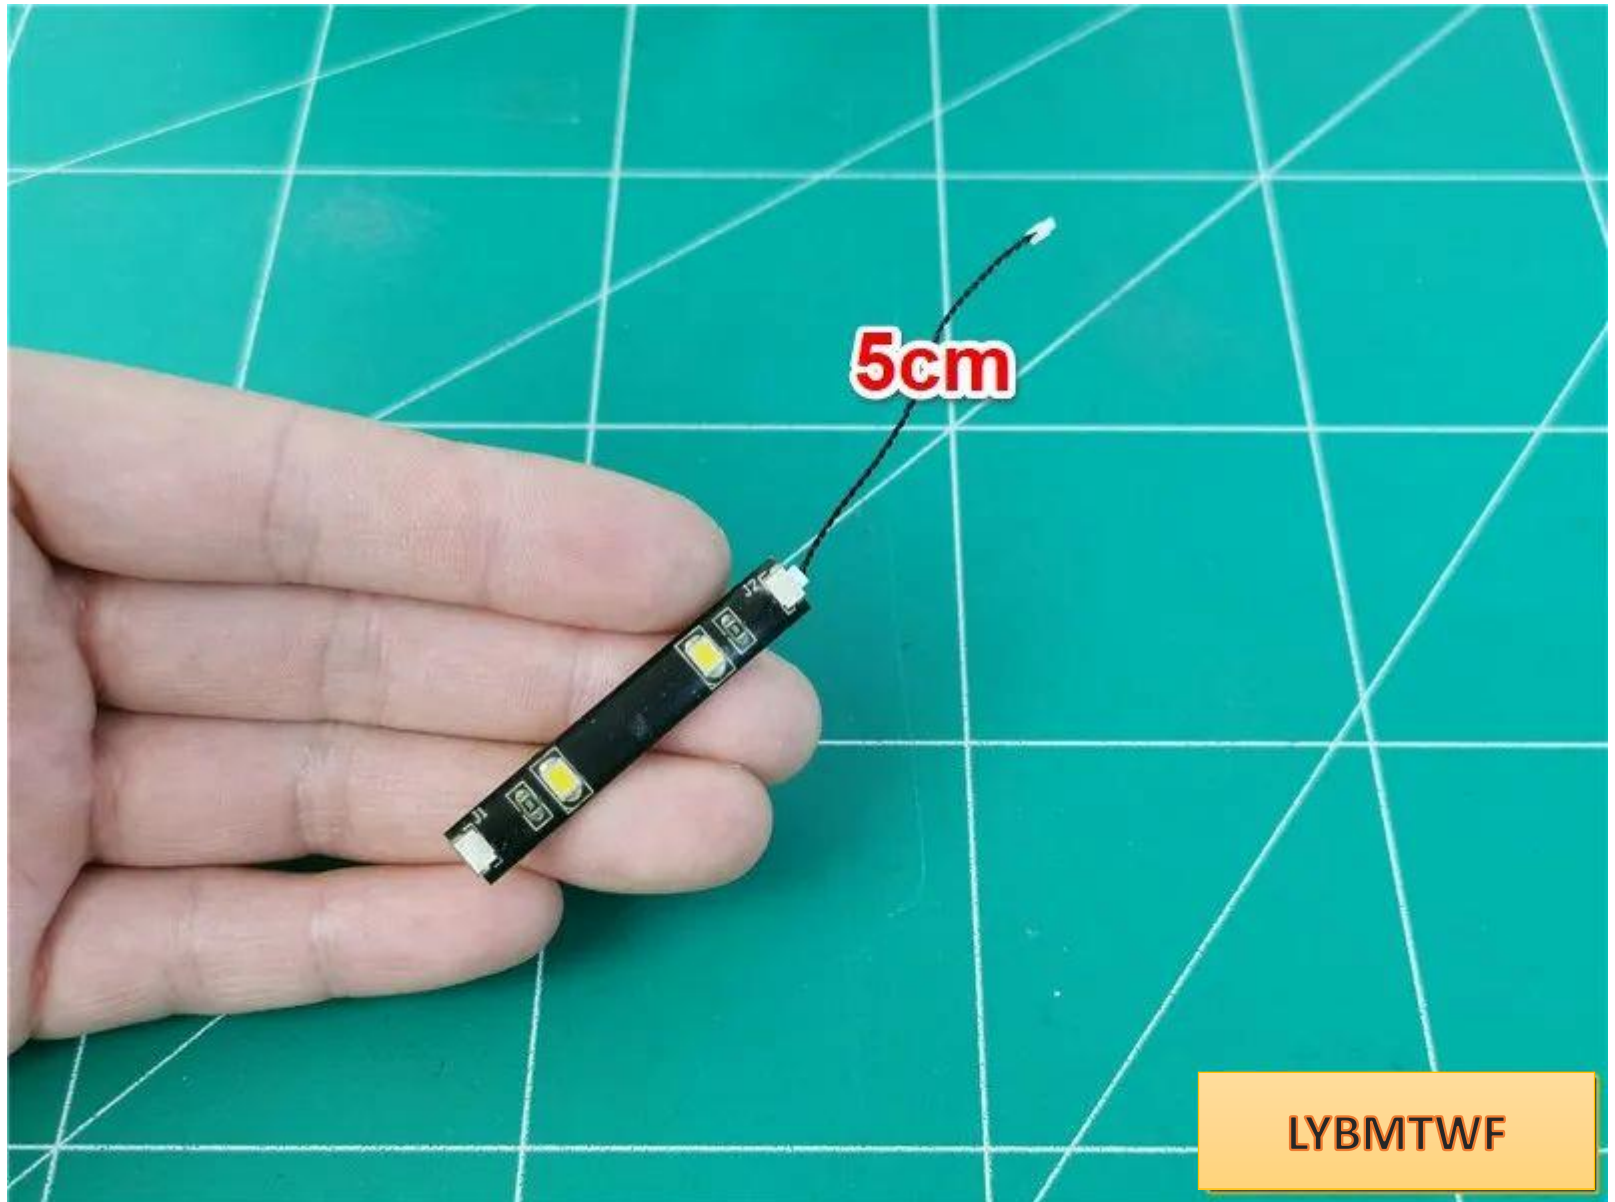


Pass the connecting wire through the transparent circle and **the small hole**.

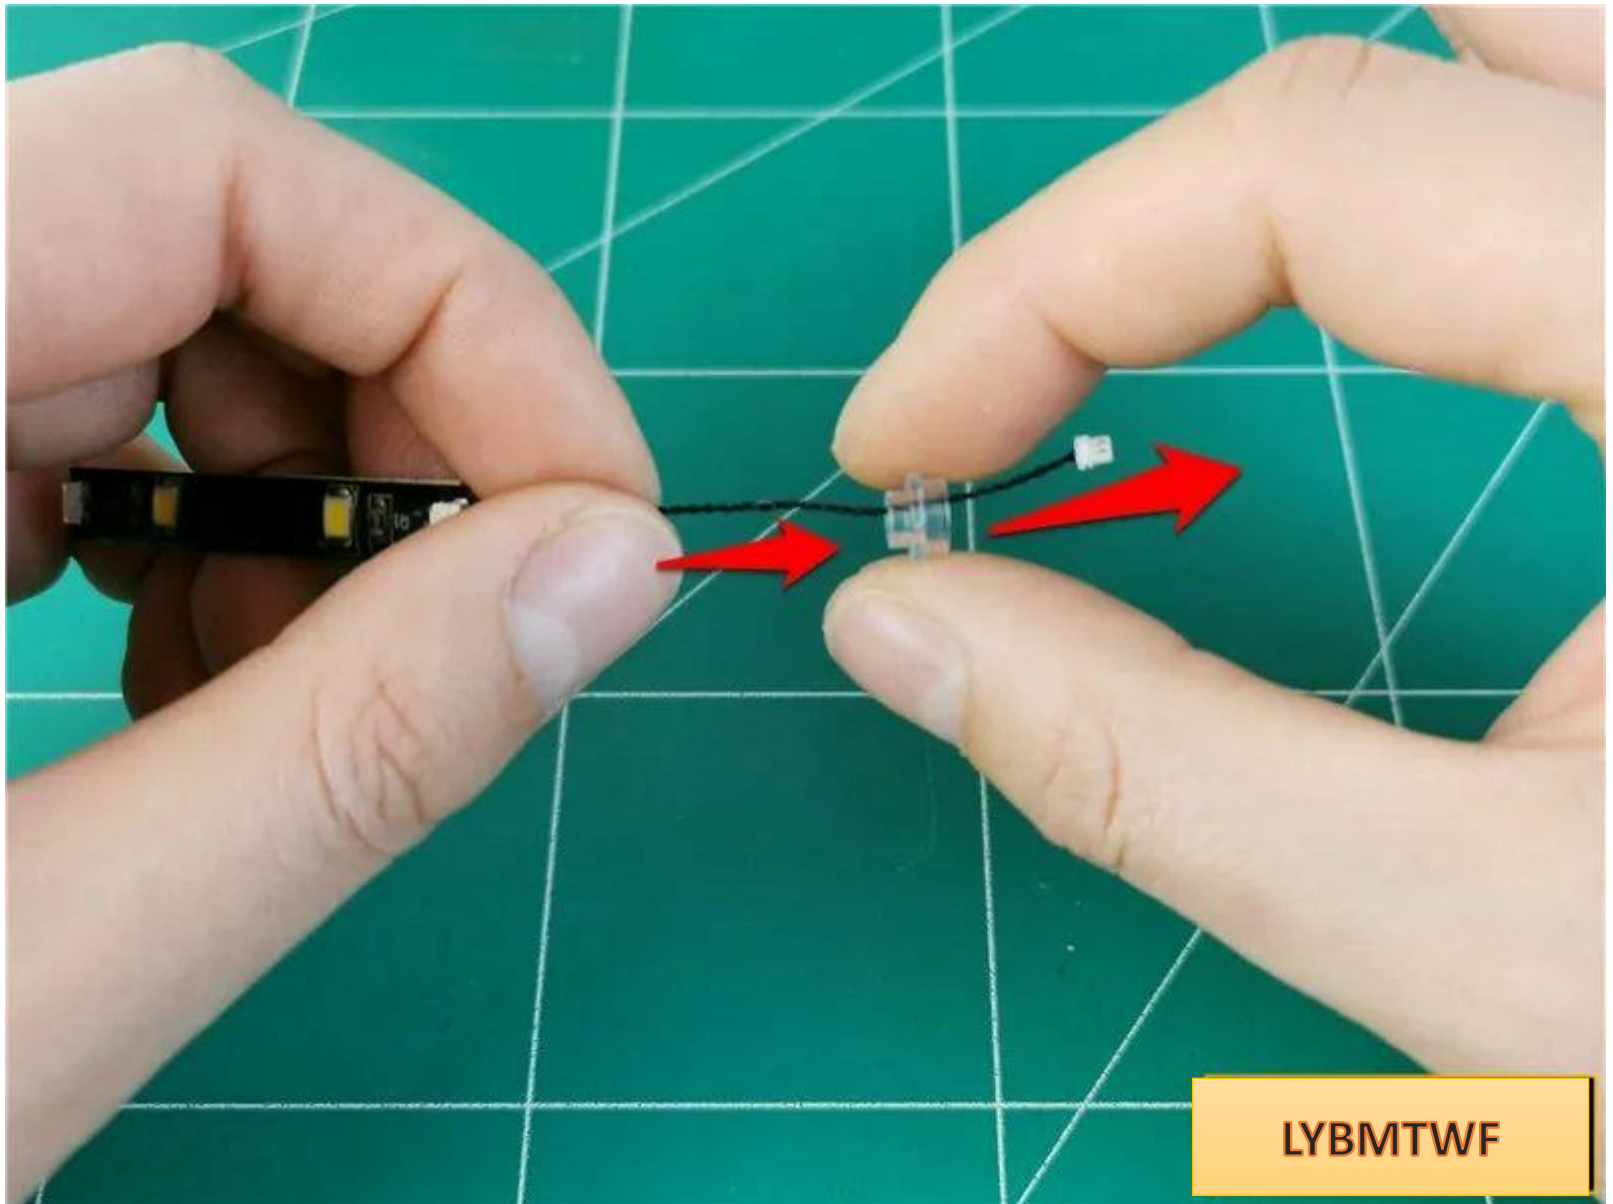


LYBMTWF




As shown in the figure, connect the light strips in sequence

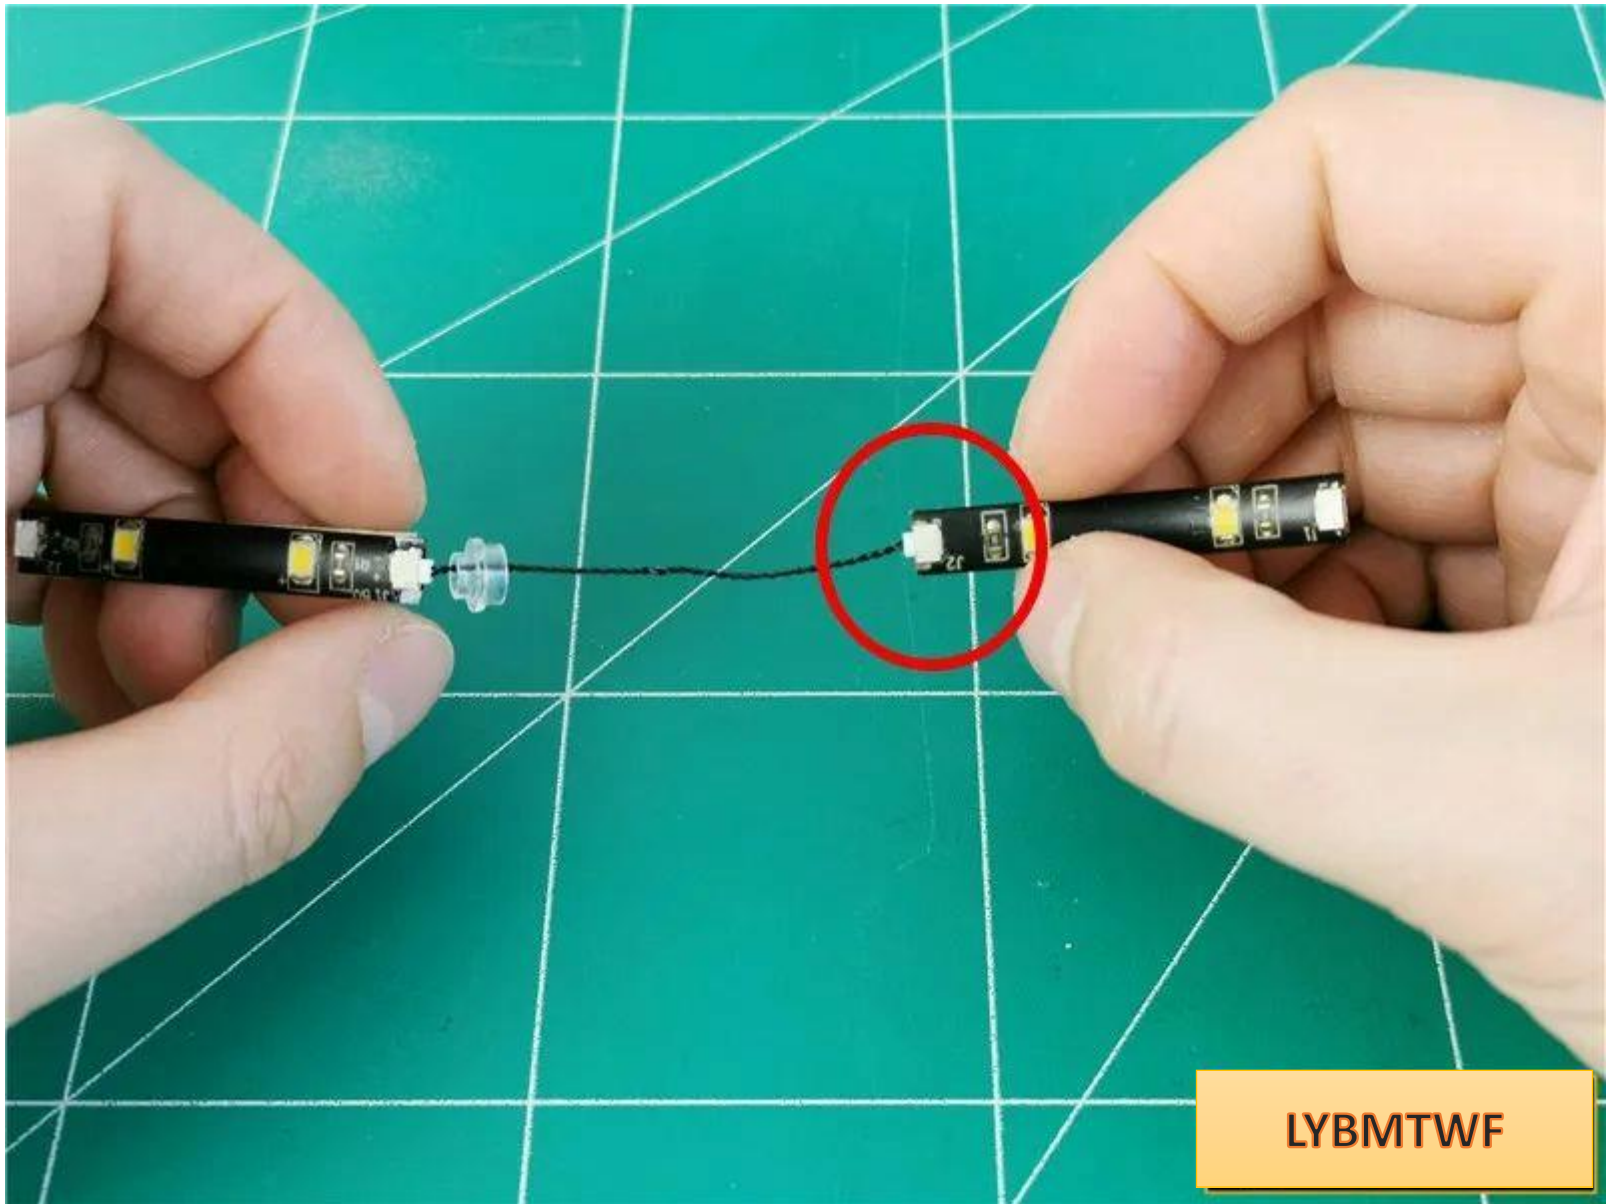

LYBMTWF

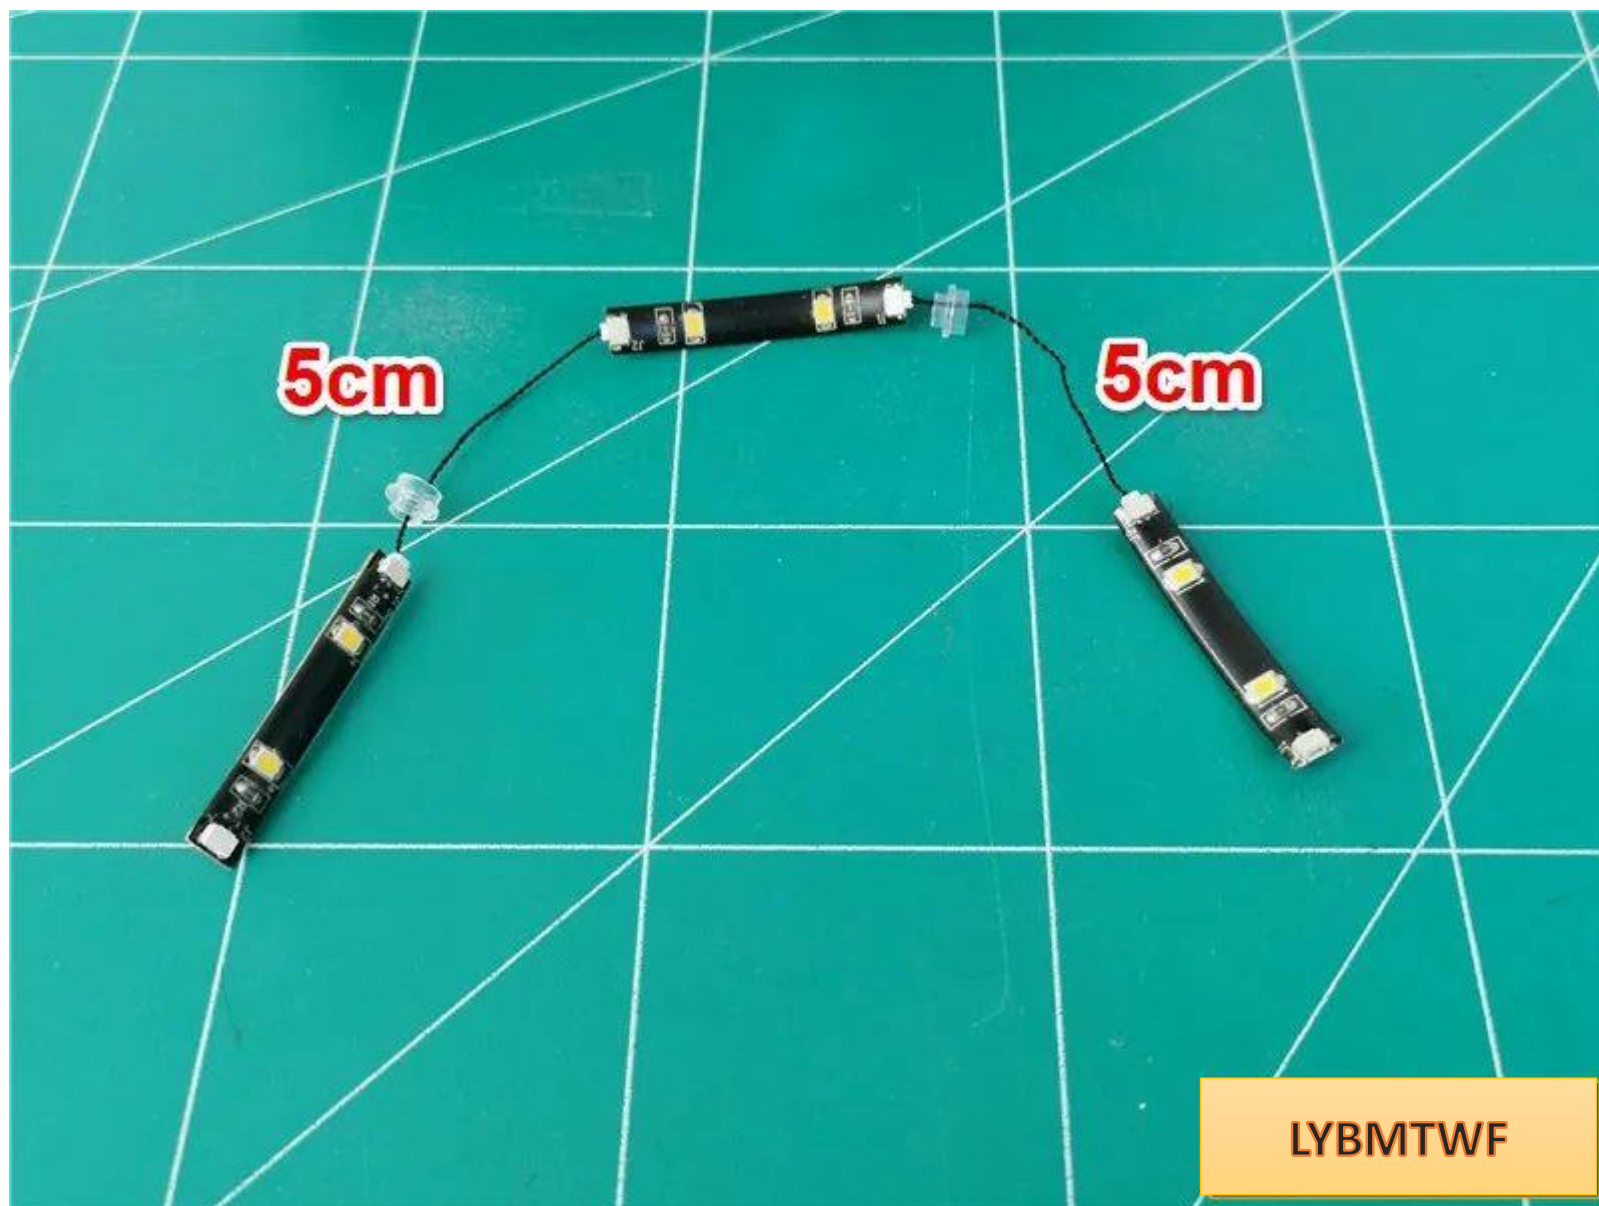


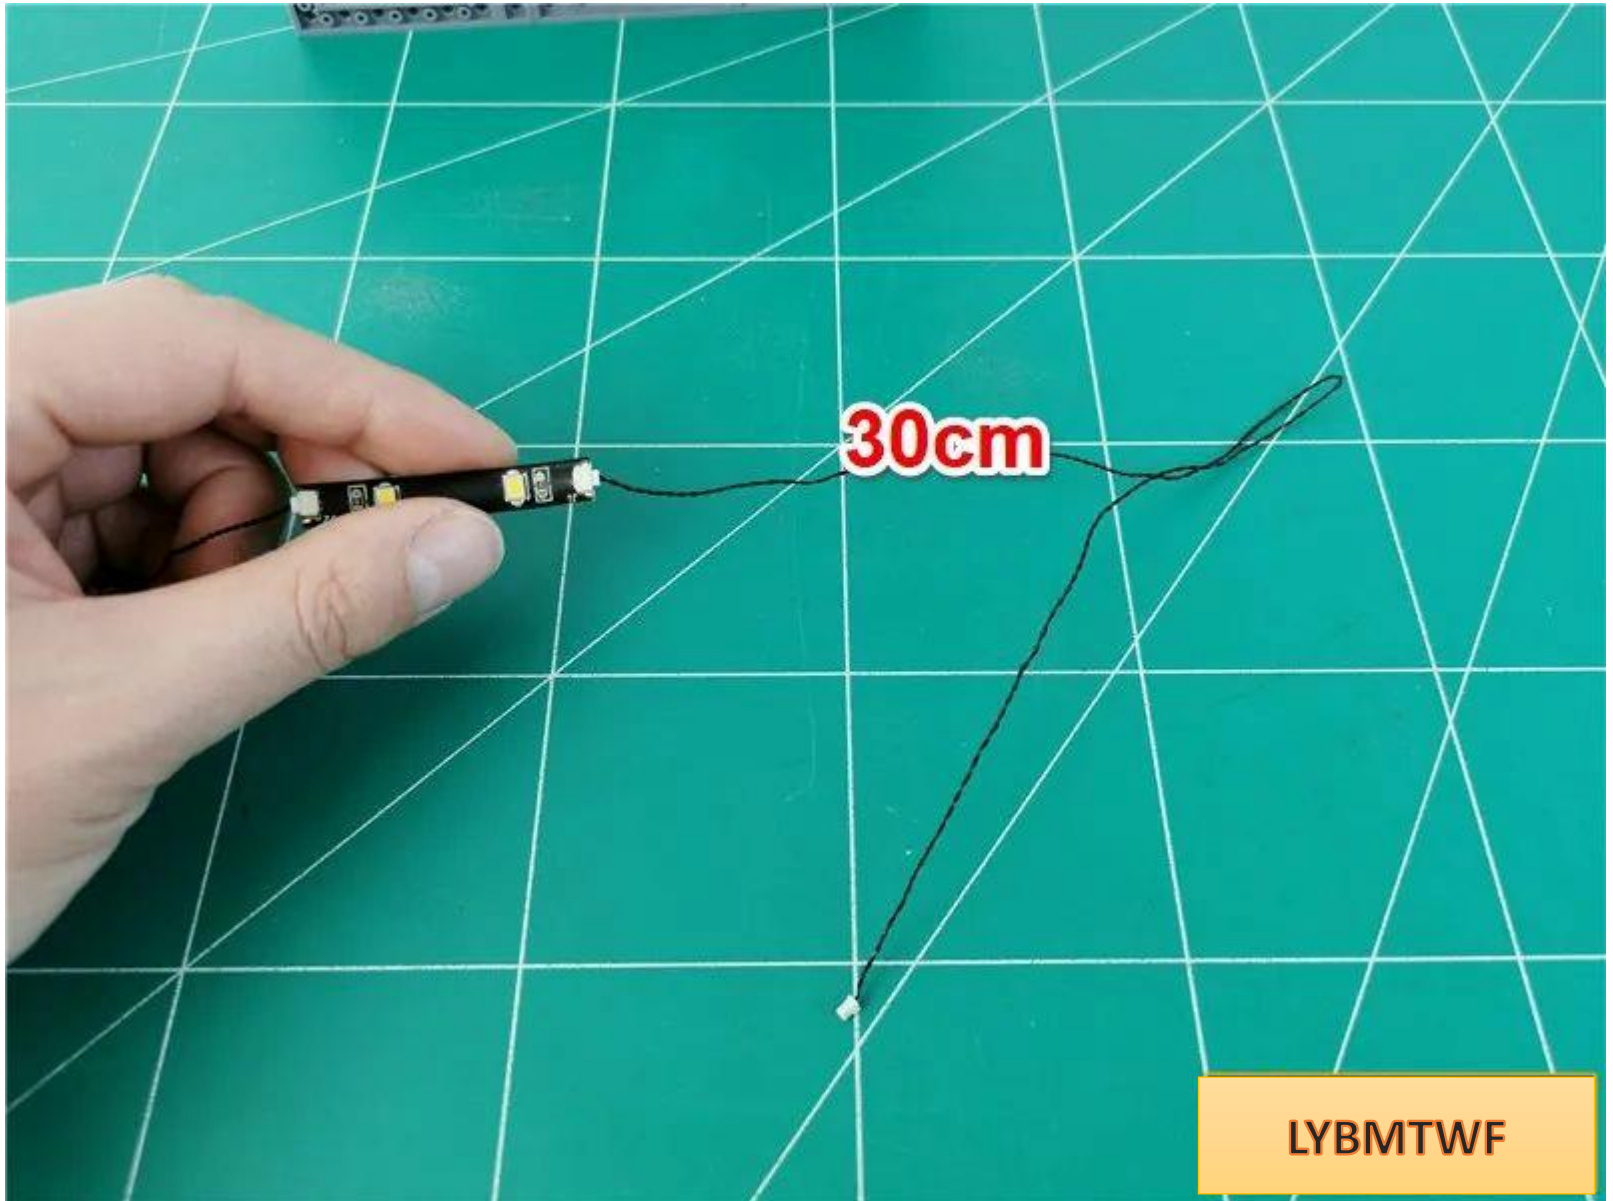

LYBMTWF




Tear off the adhesive backing of the top light strip

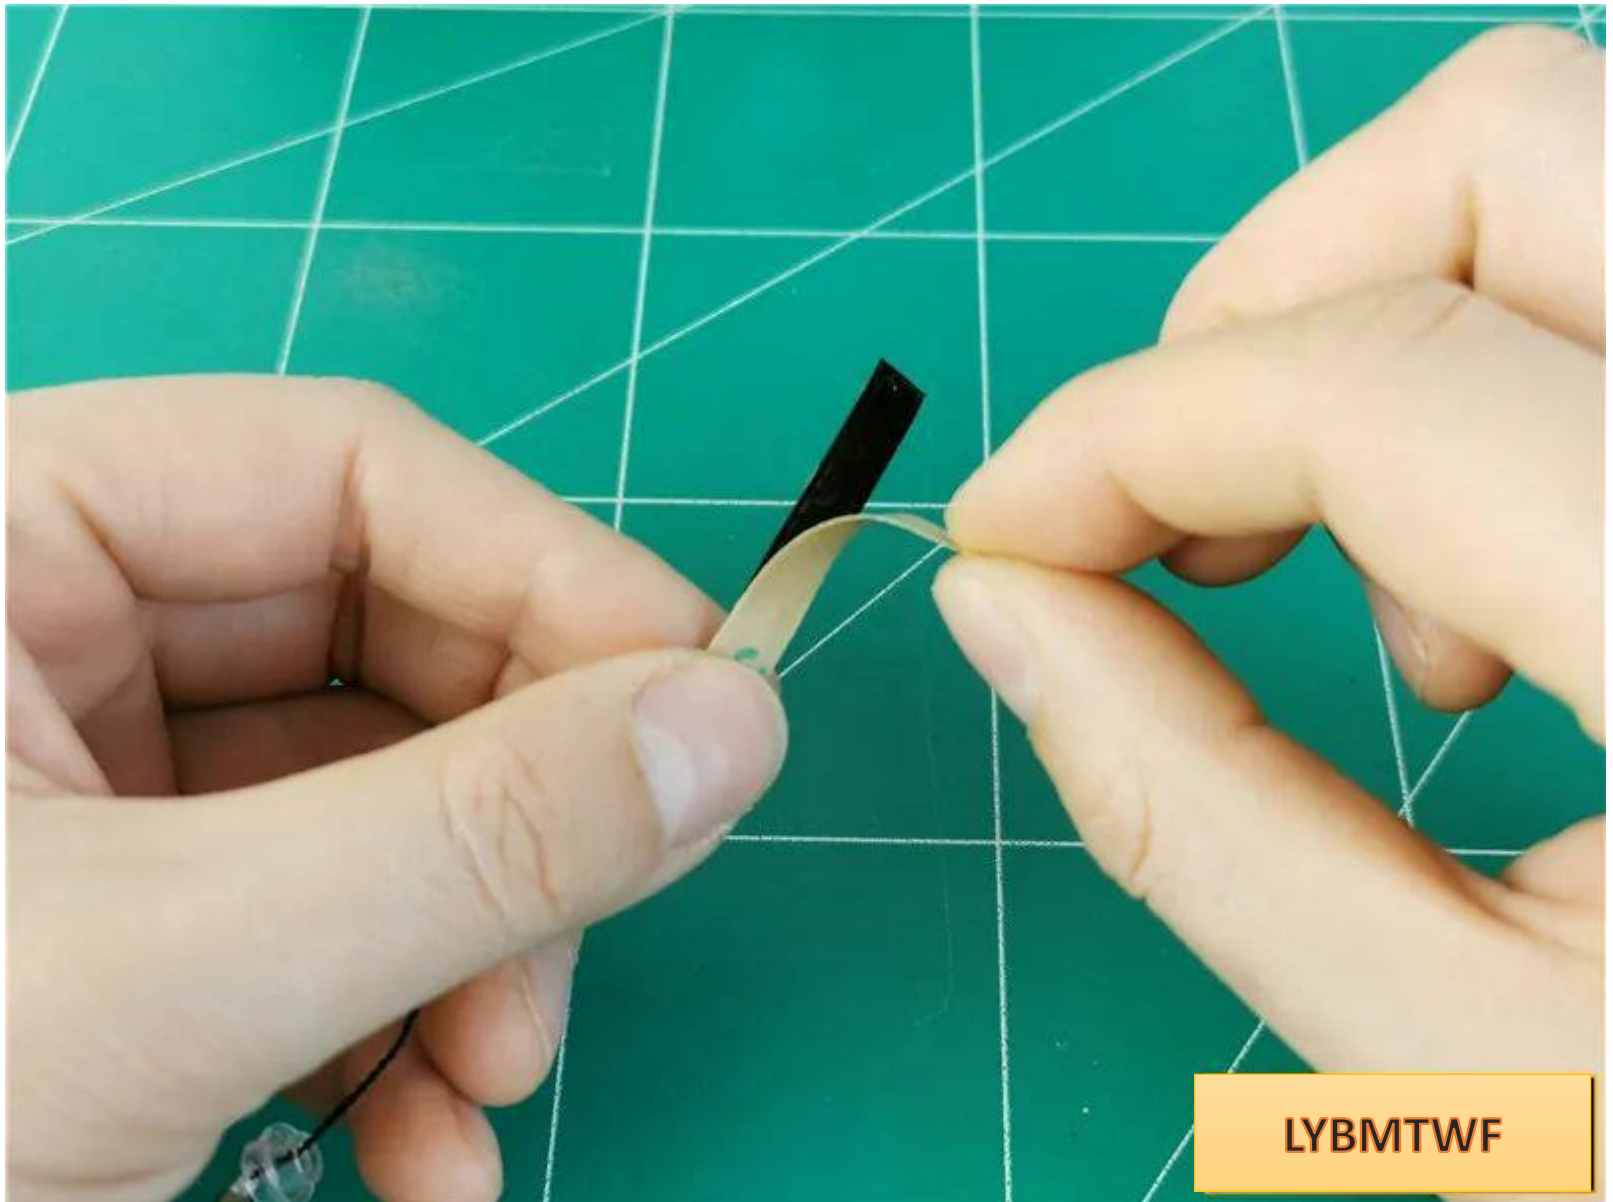


LYBMTWF

Paste the top light strip to the position shown in the picture, and the remaining light strips are on the right

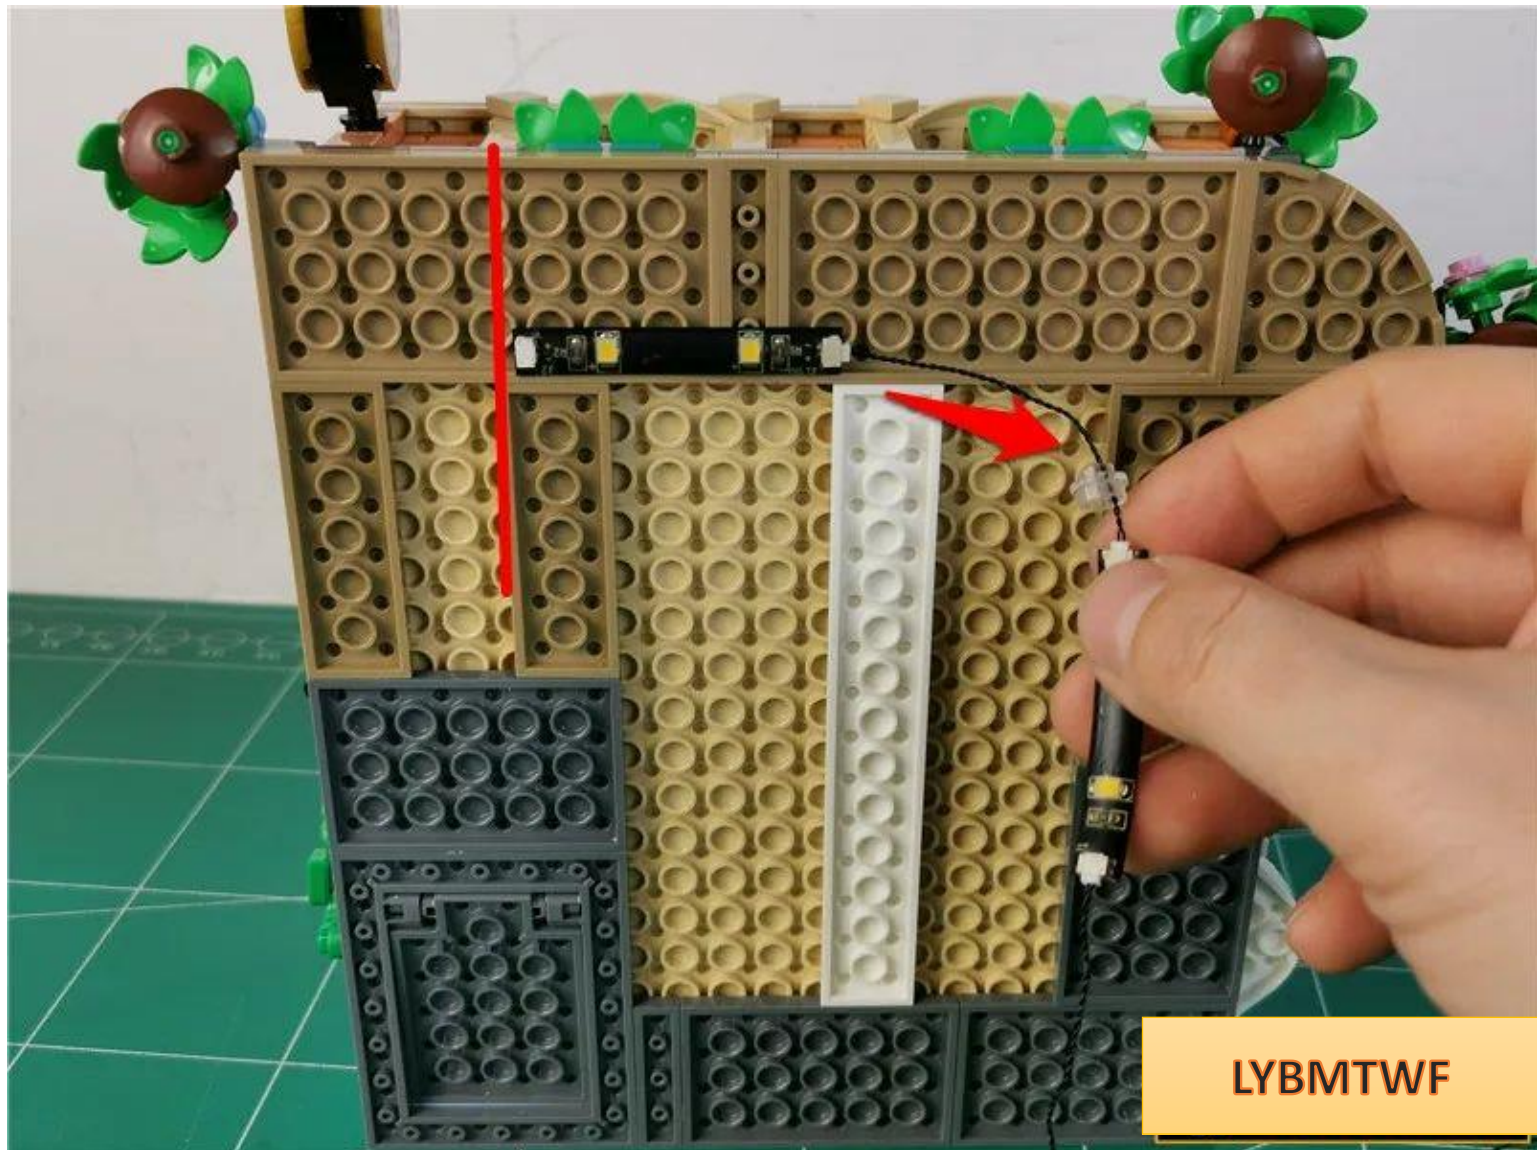





Install the transparent circle to the position shown in the figure

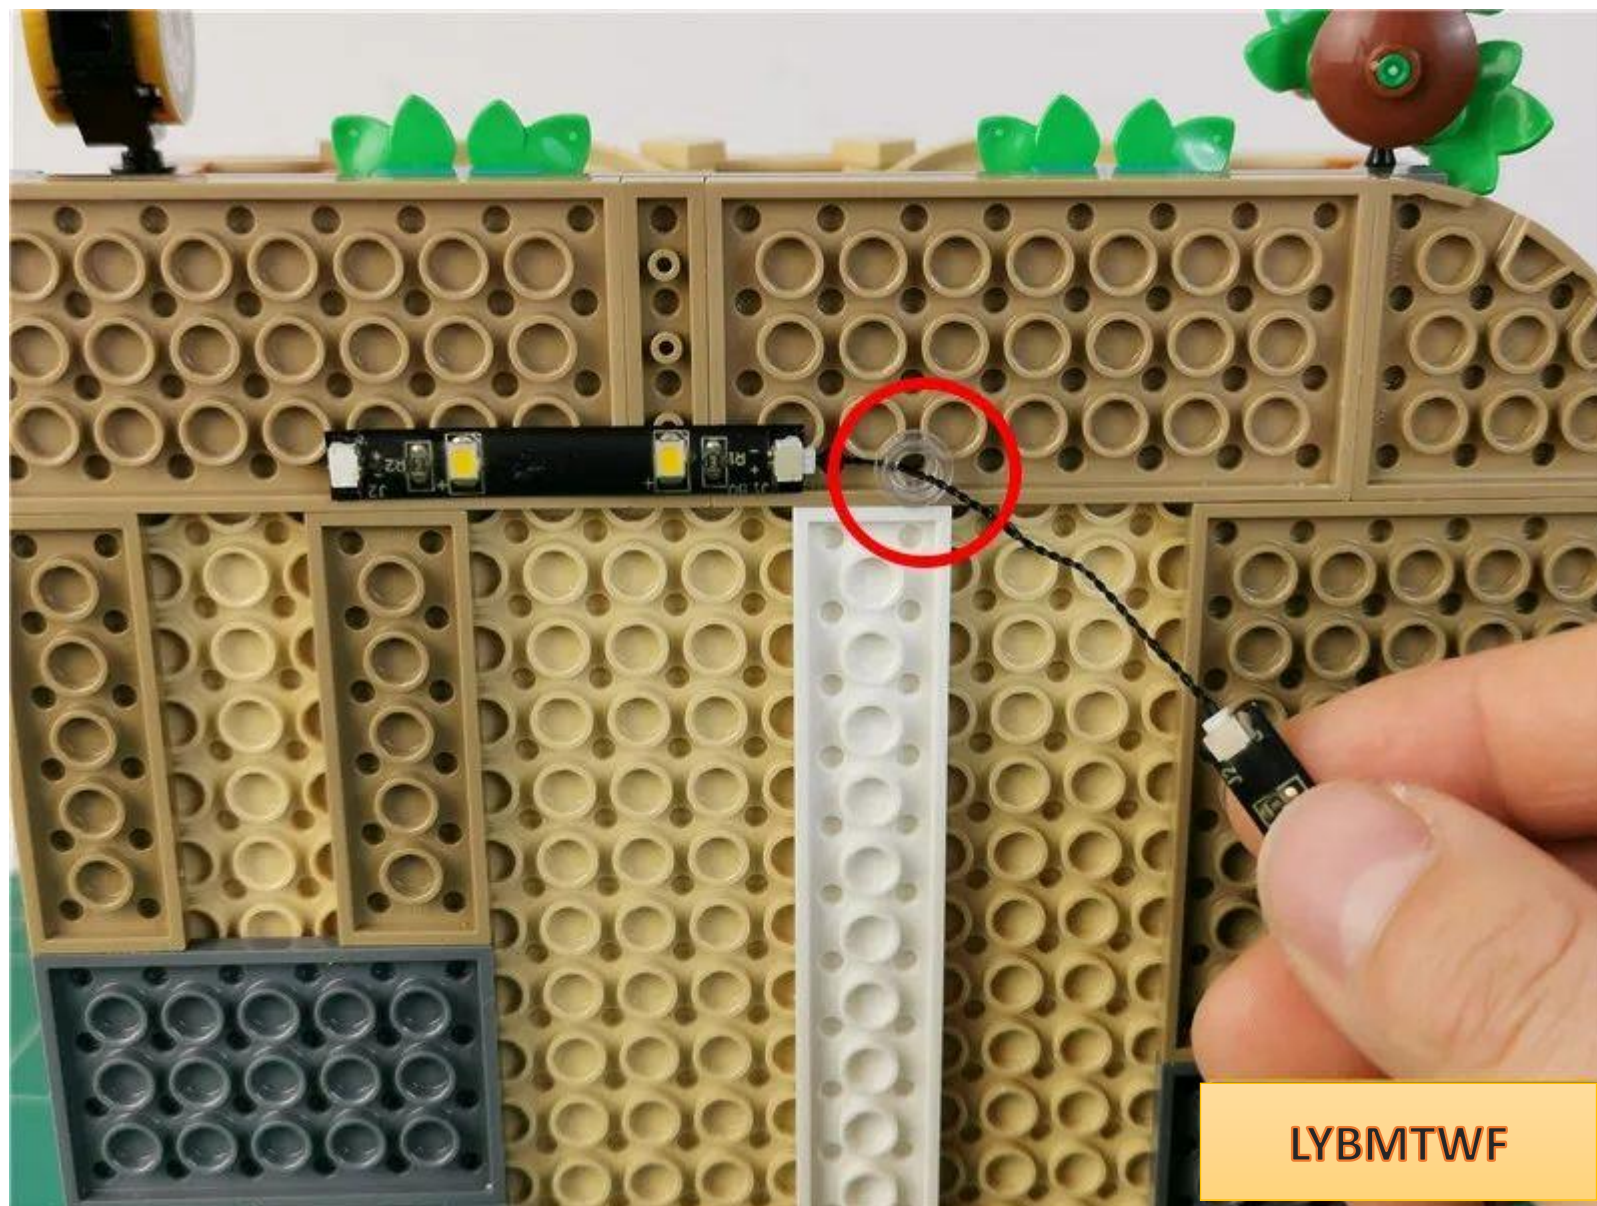




Paste the light strips in sequence as shown in the figure, install the transparent circle, and fix the connecting wires

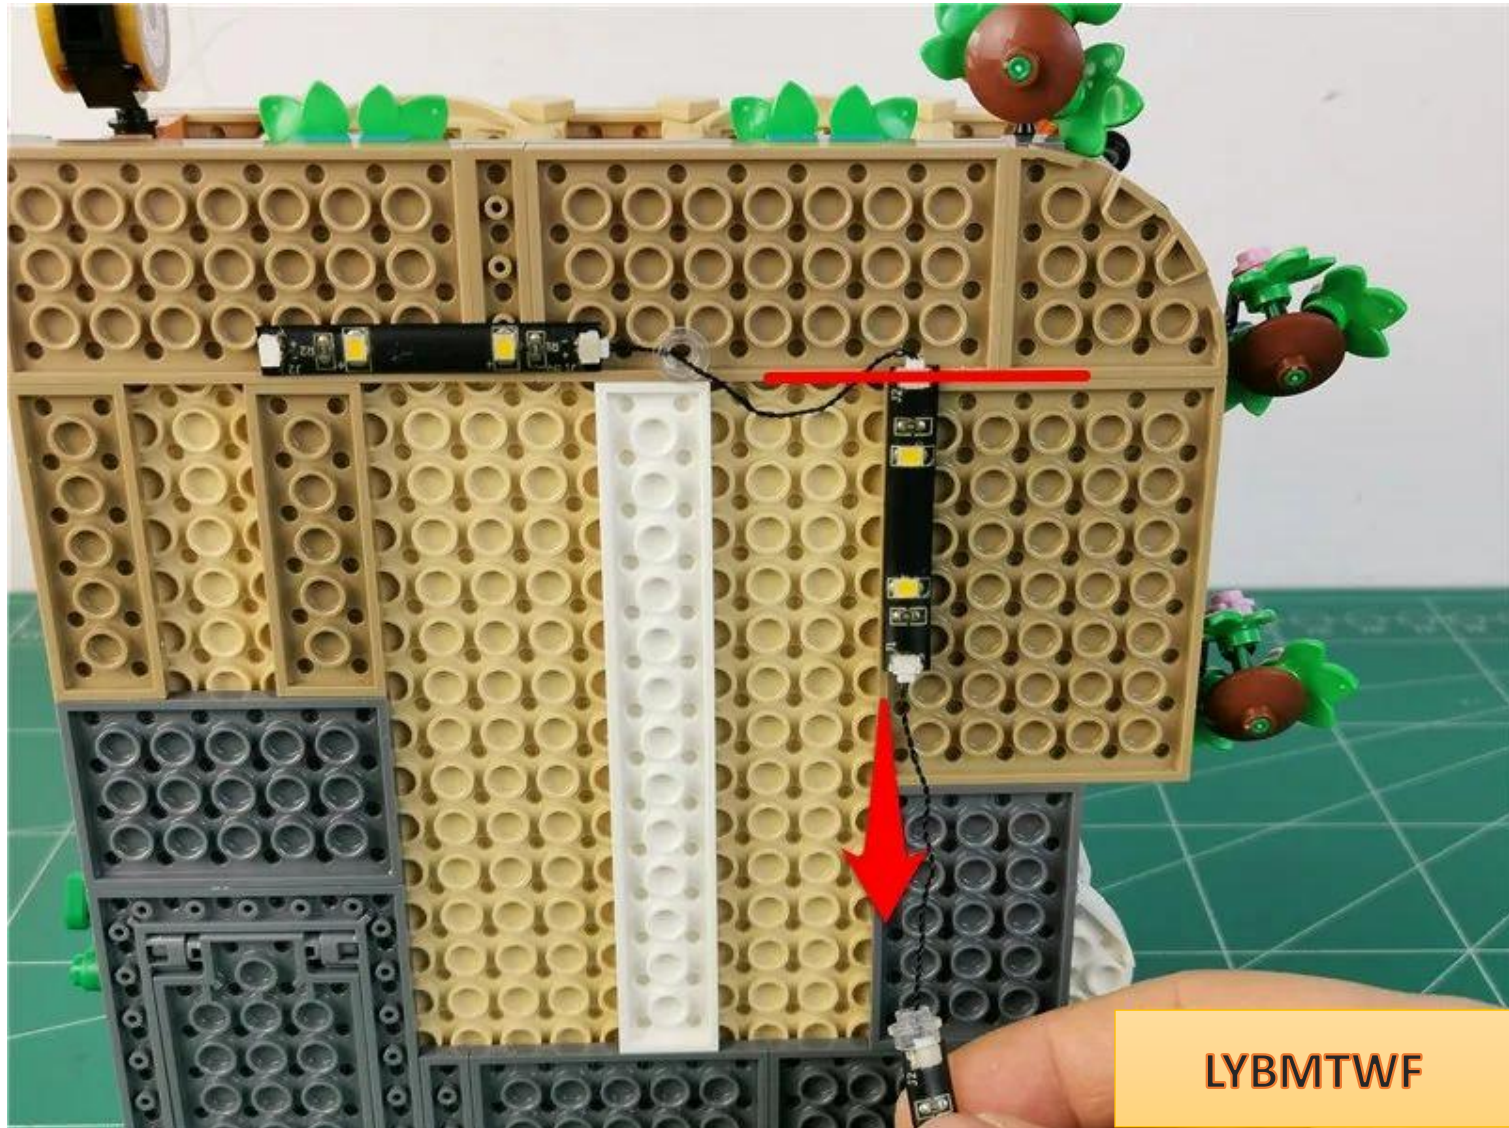

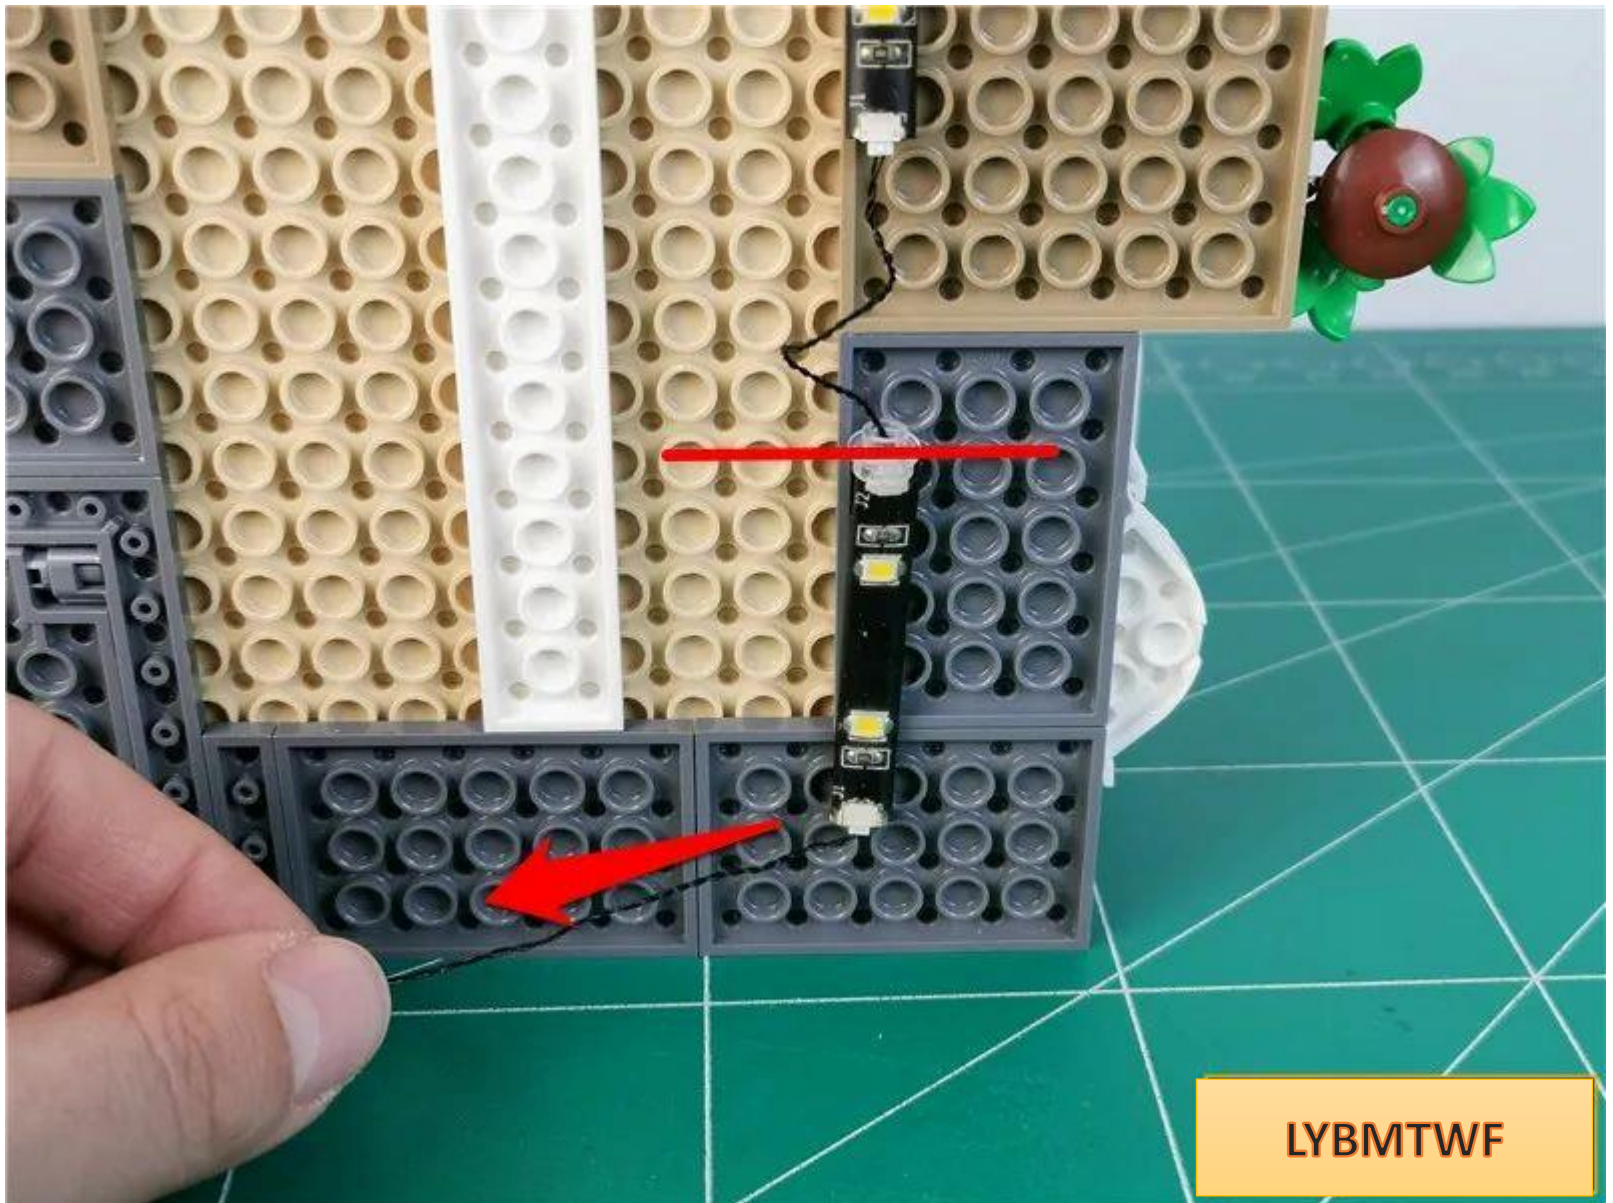




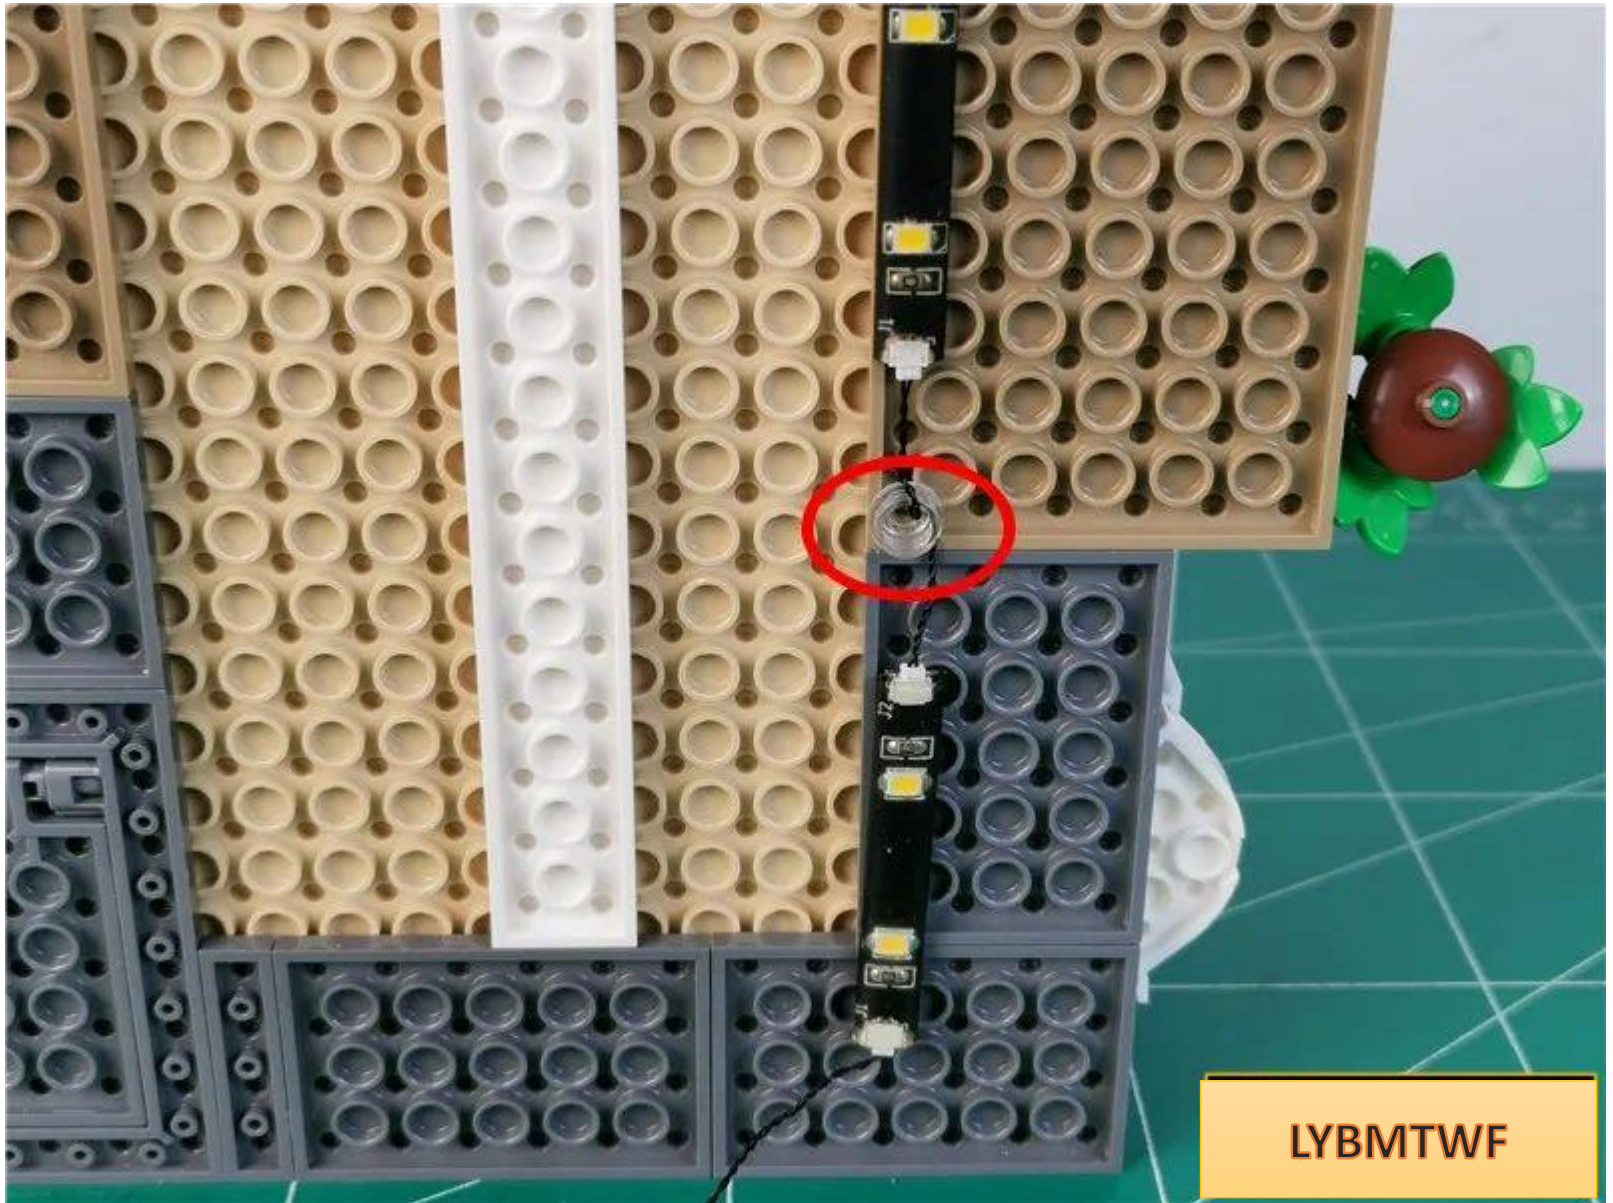


LYBMTWF



Pass the remaining connecting line through the remaining transparent circle

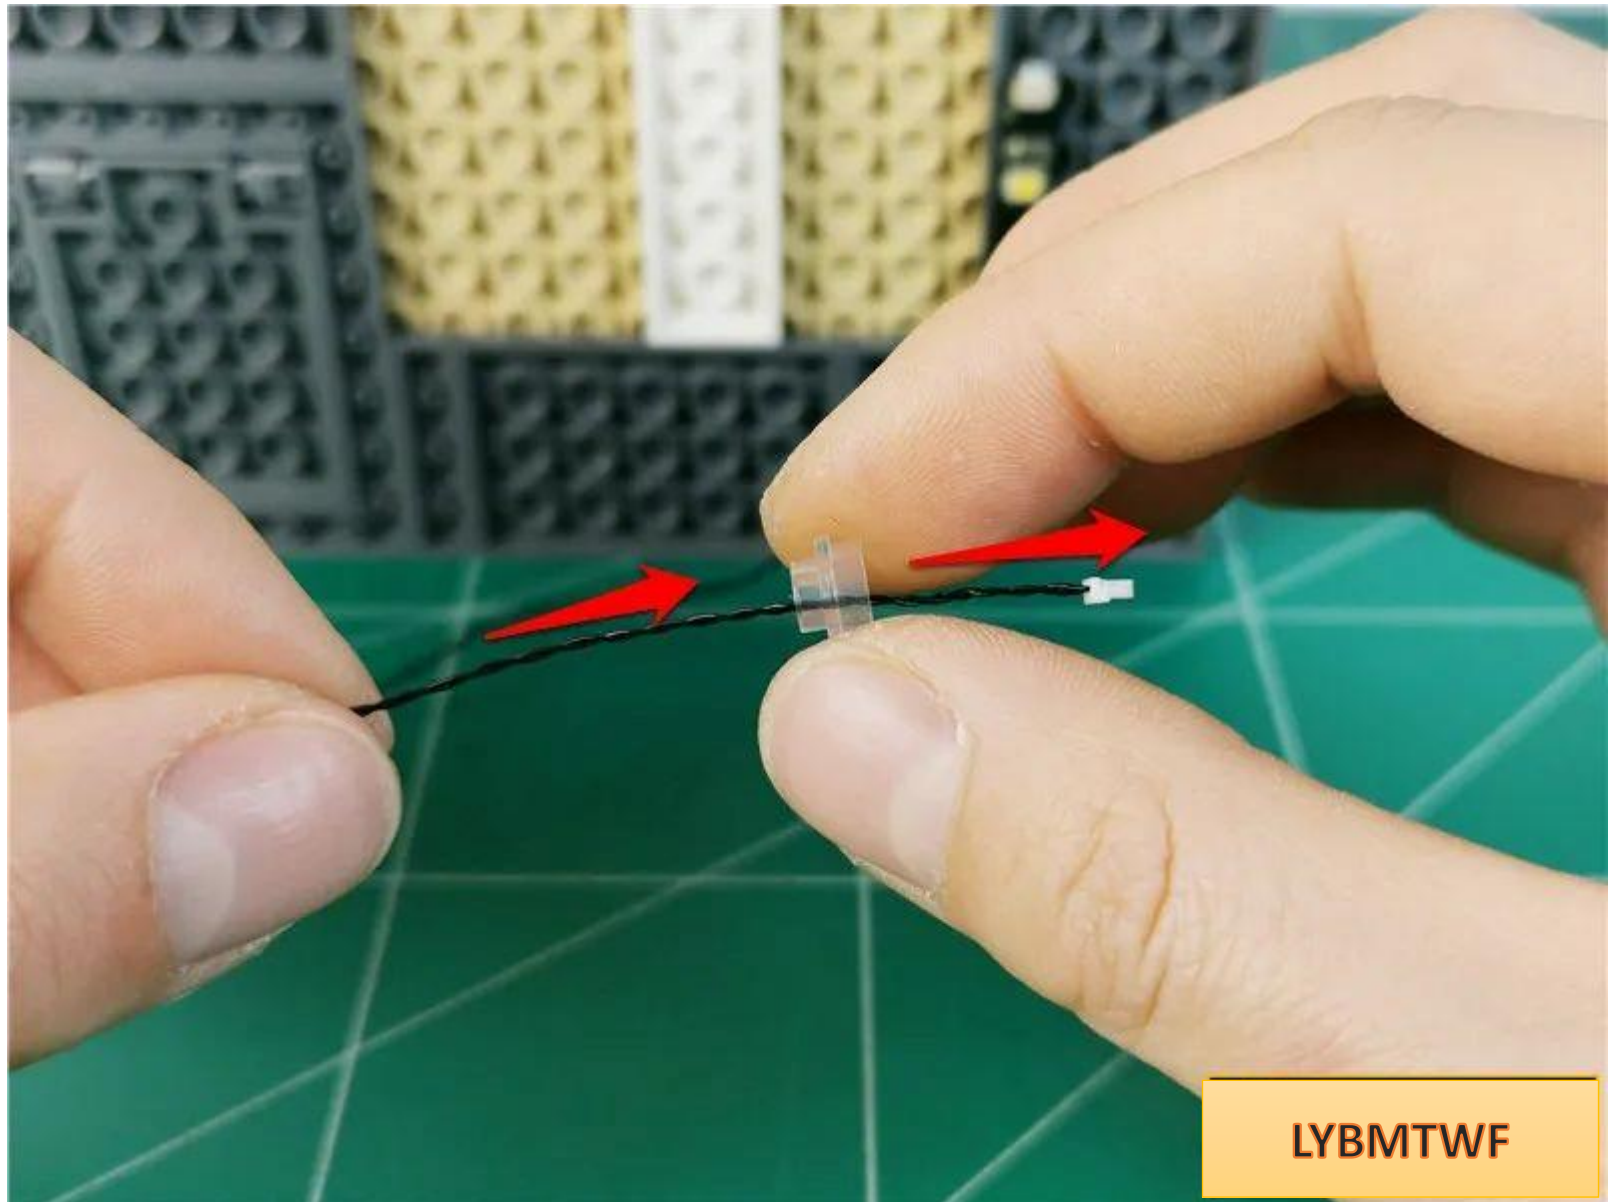


Install the transparent circle and fix the connecting wire

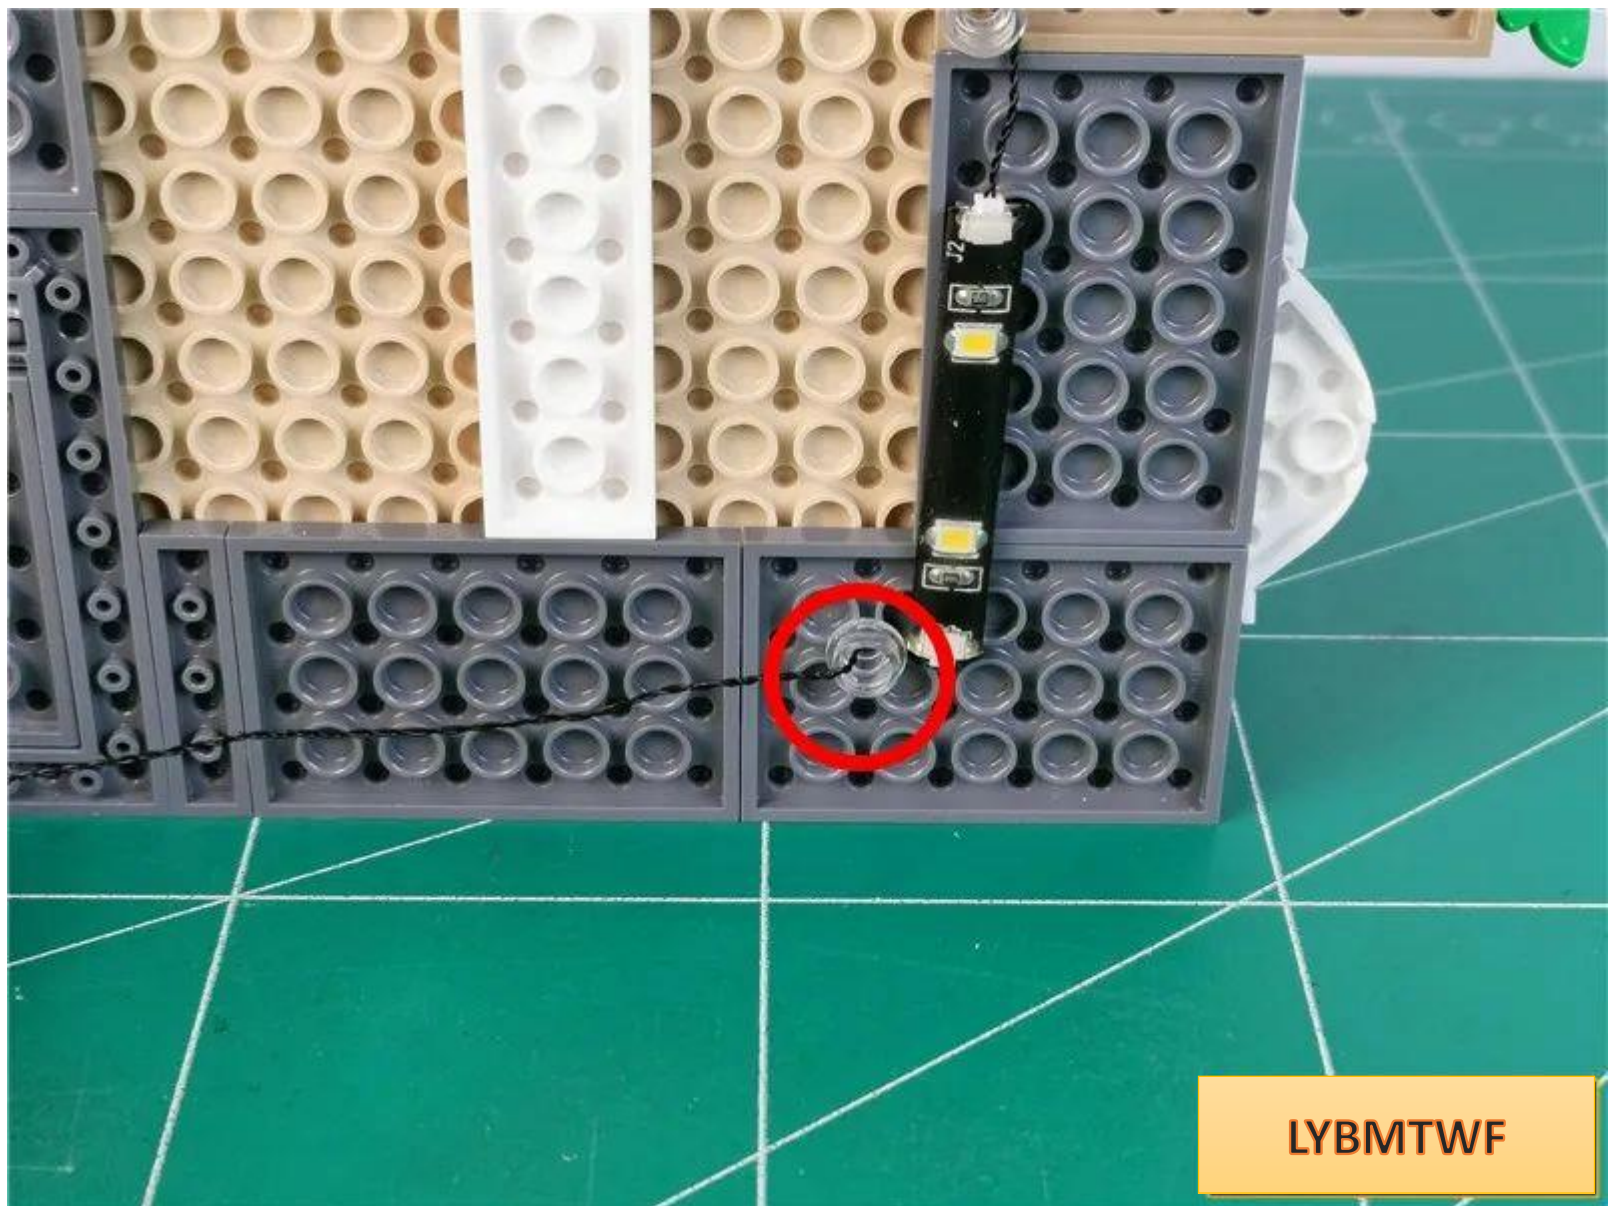




Fit the connecting wire to the part and pull it to the left

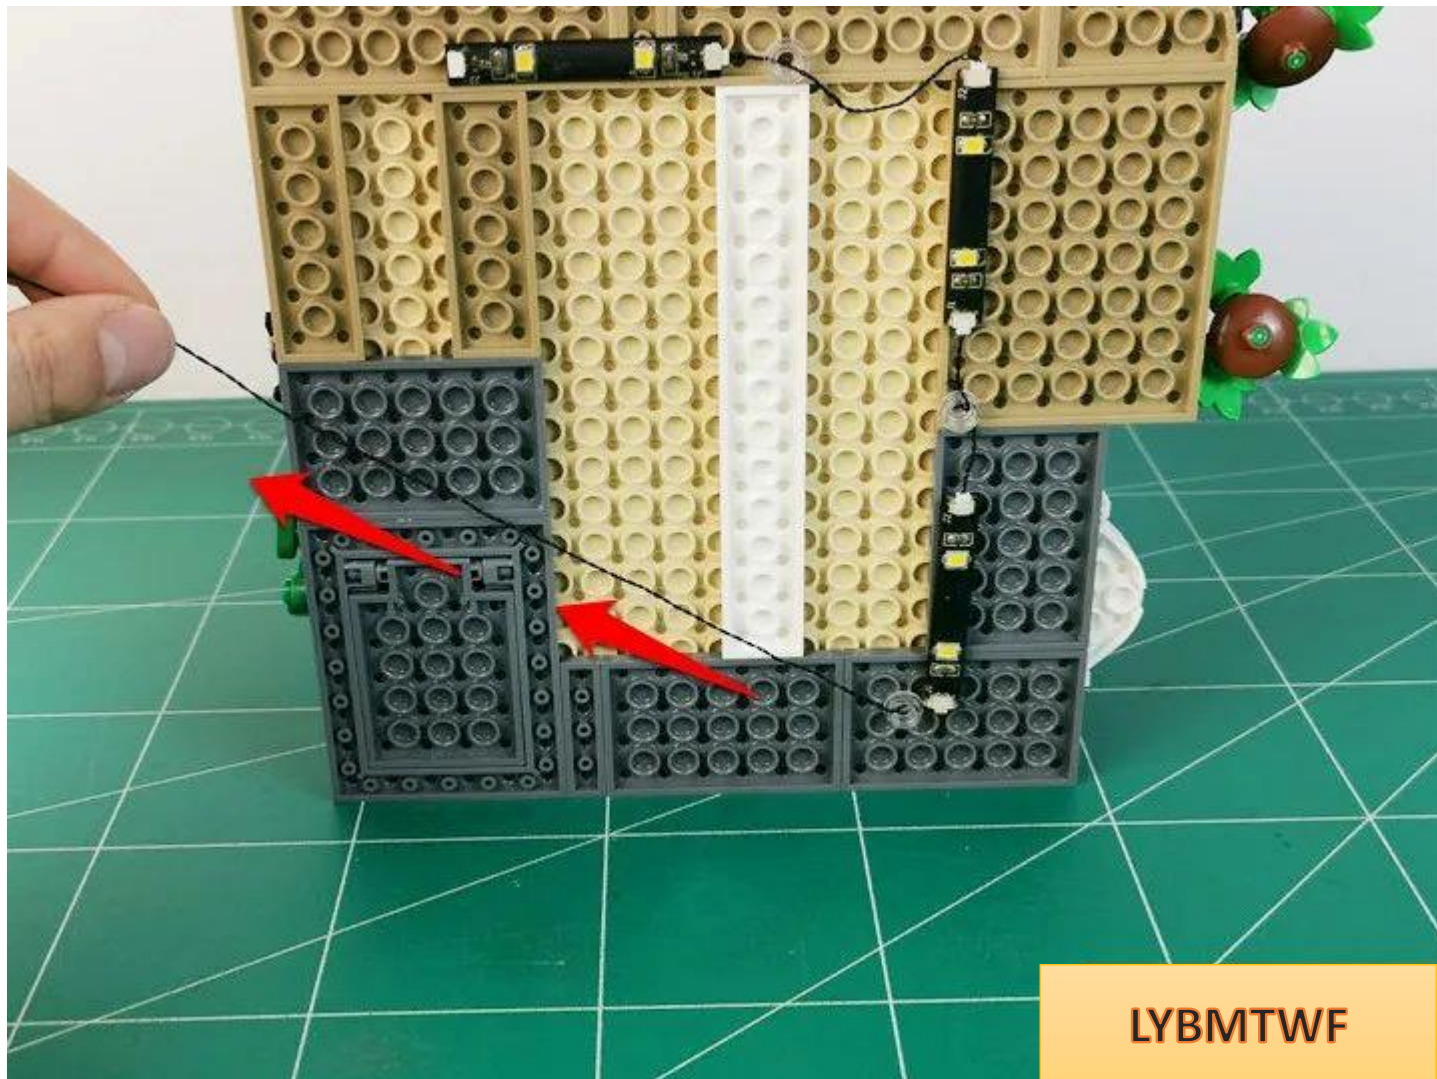



Use the red circle removed earlier to fix the connecting wire

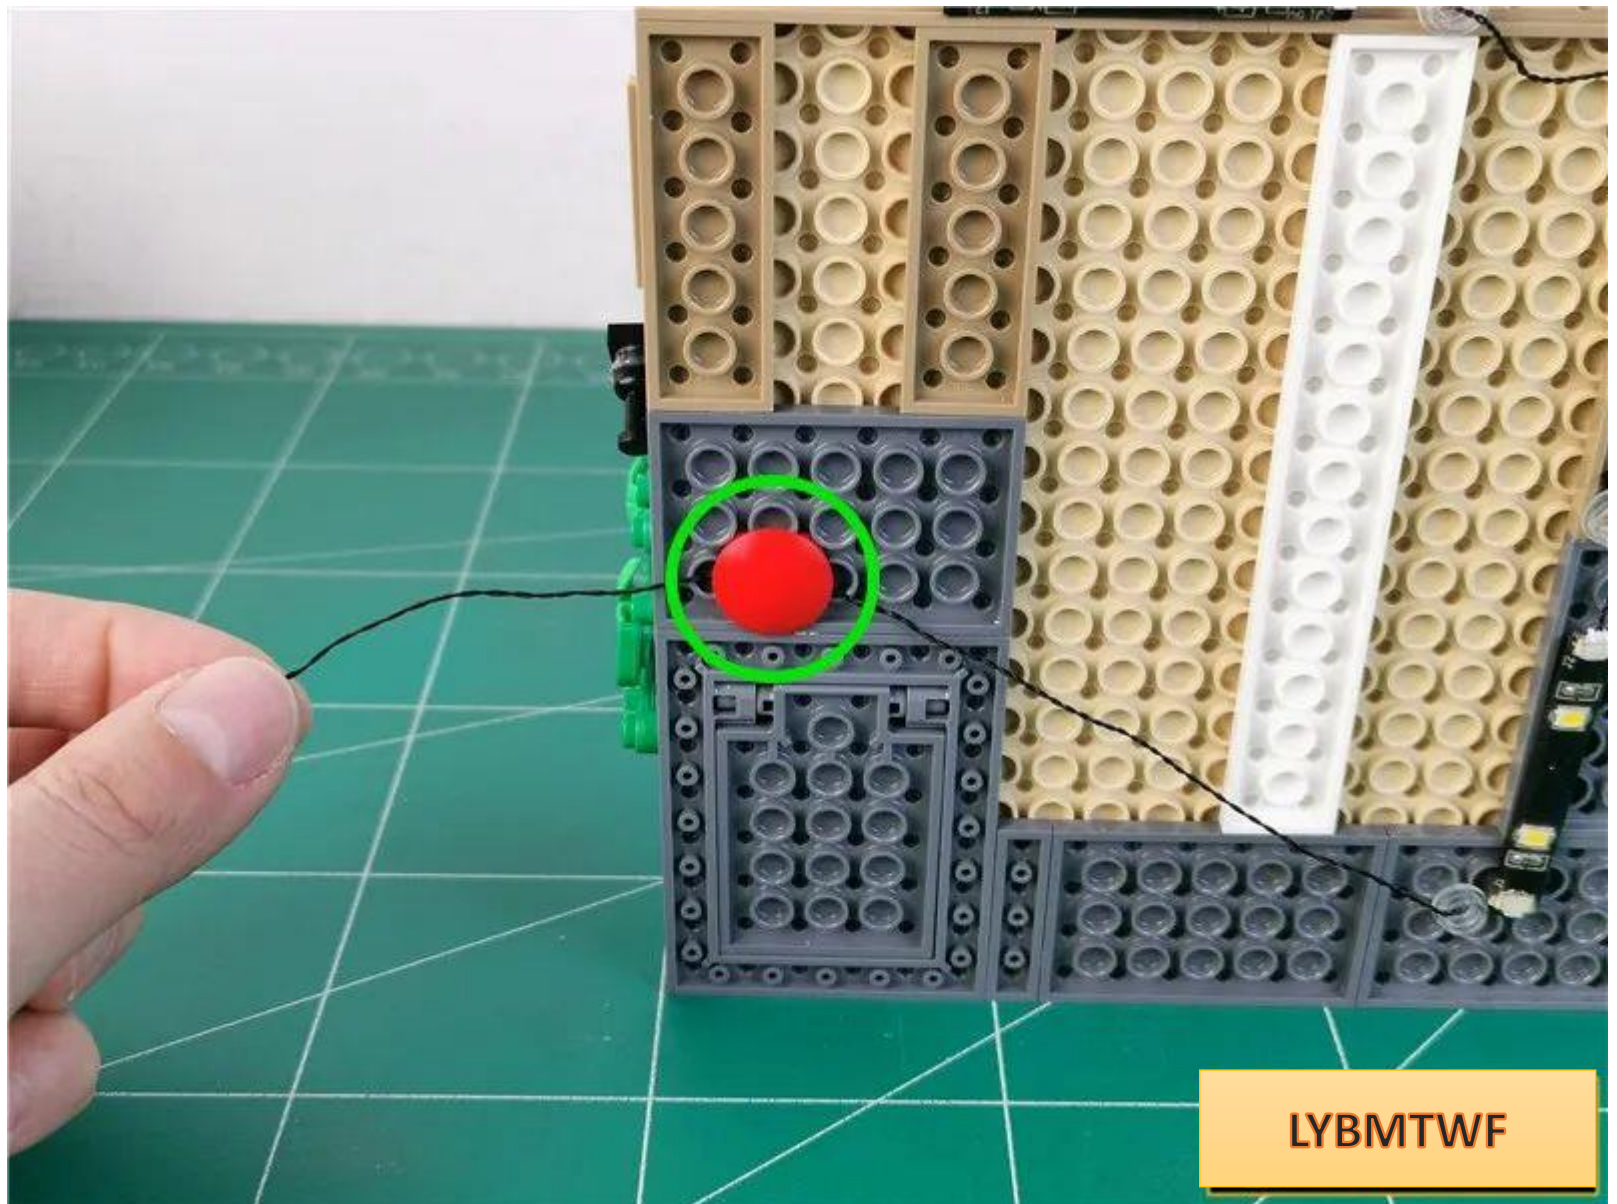

LYBMTWF

Restore the two-story building, and connect the wires outdoors







Remove the parts indicated by arrows one by one





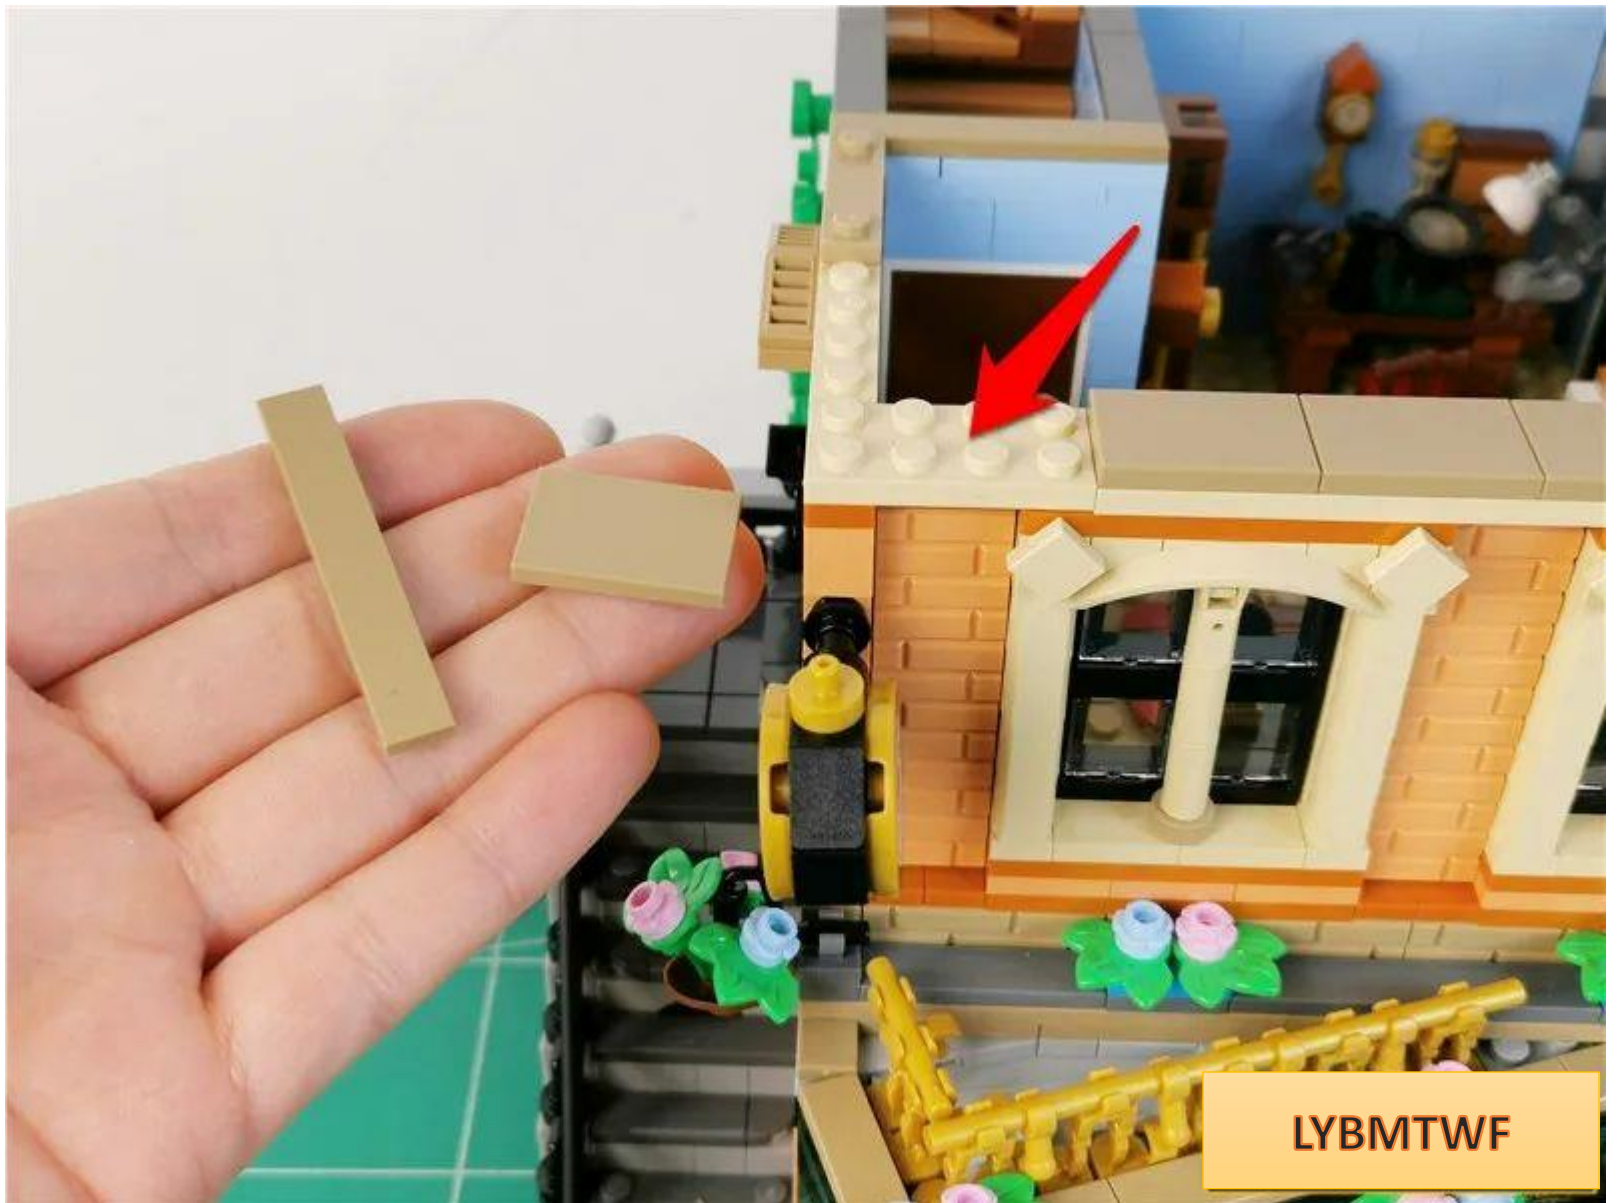

LYBMTWF

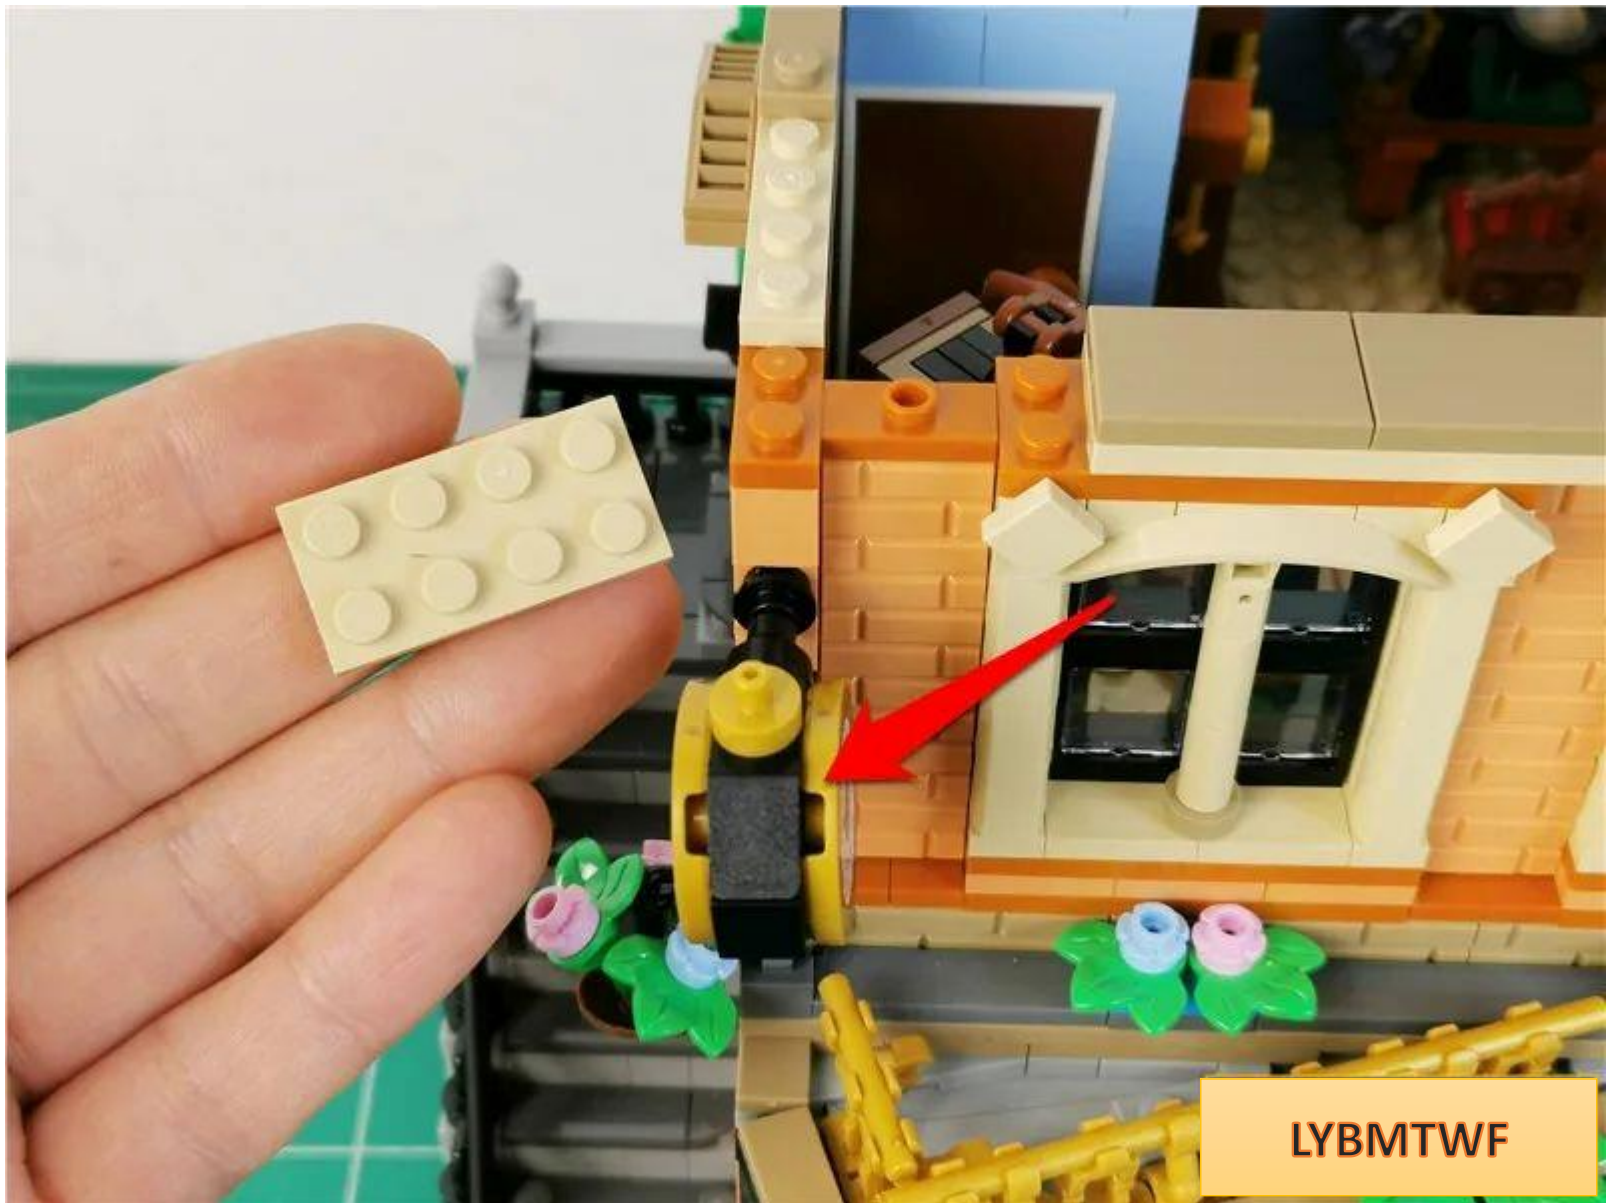

LYBMTWF






LYBMTWF






LYBMTWF

Take 1 30cm warm light headlight pellet

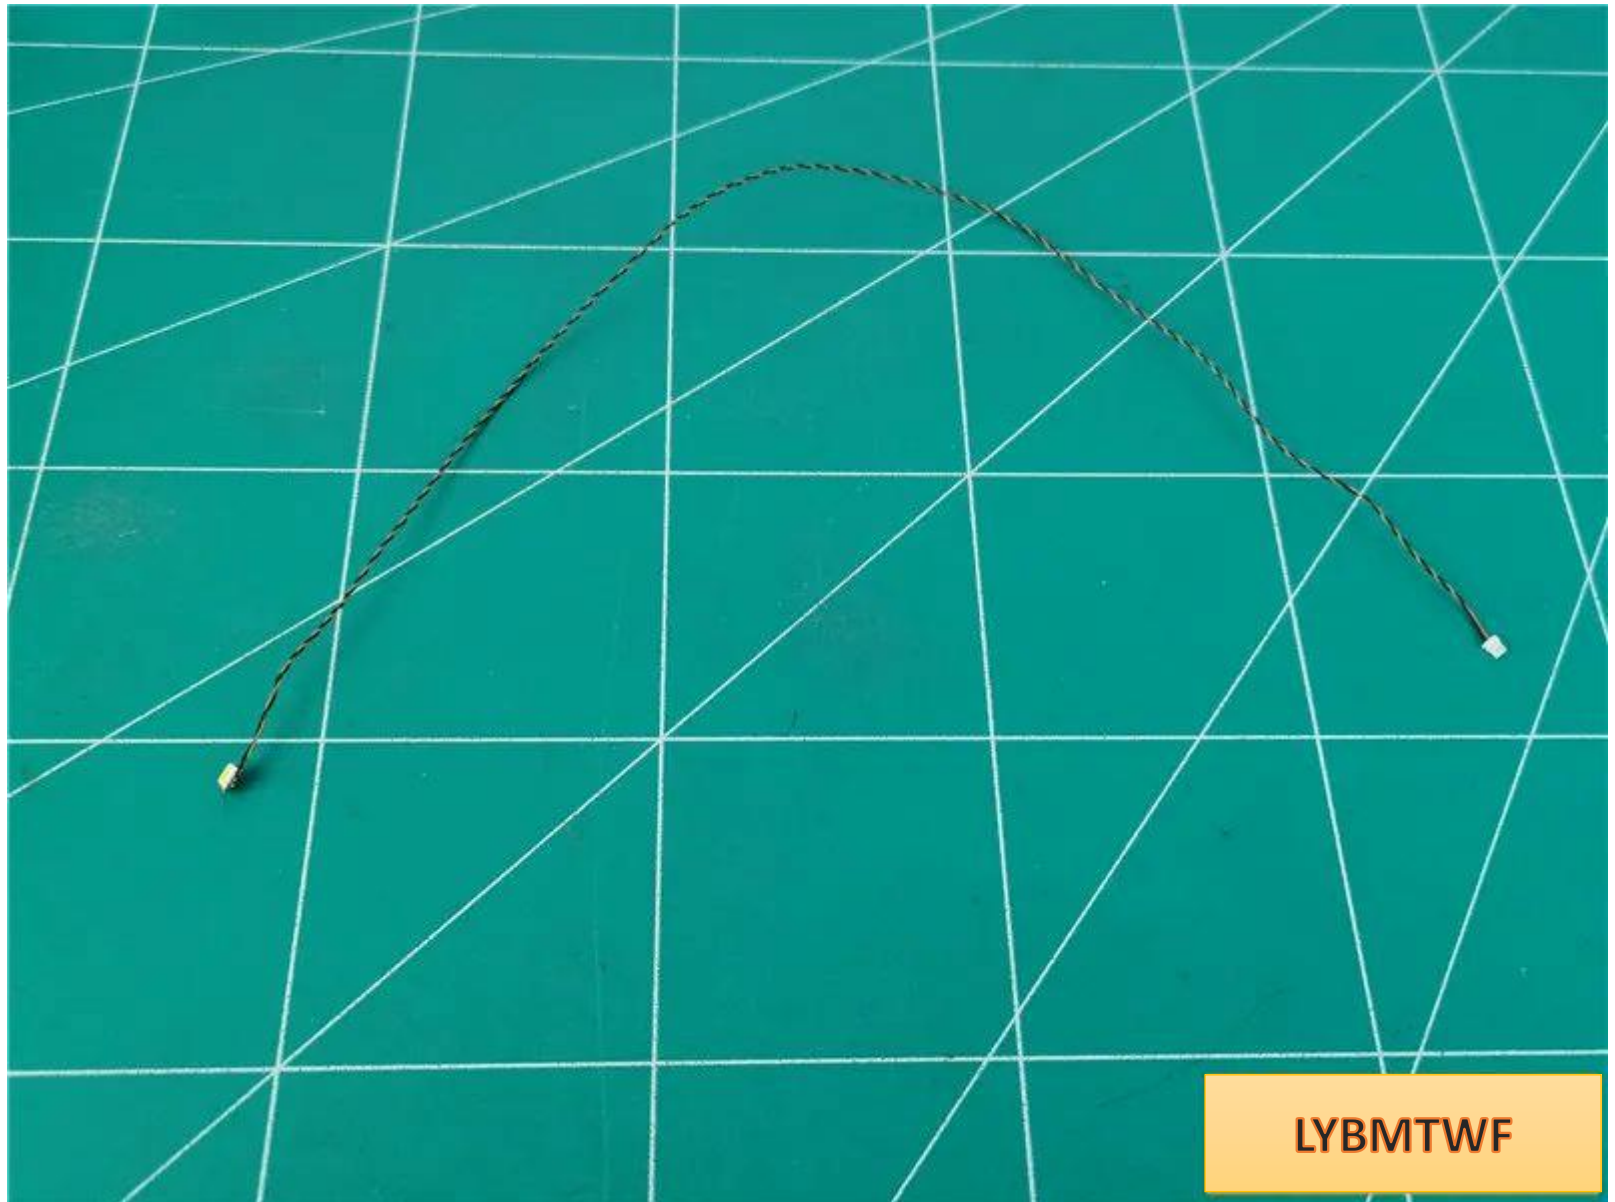

Separate the wire at the root of the lamp particle to leave a gap

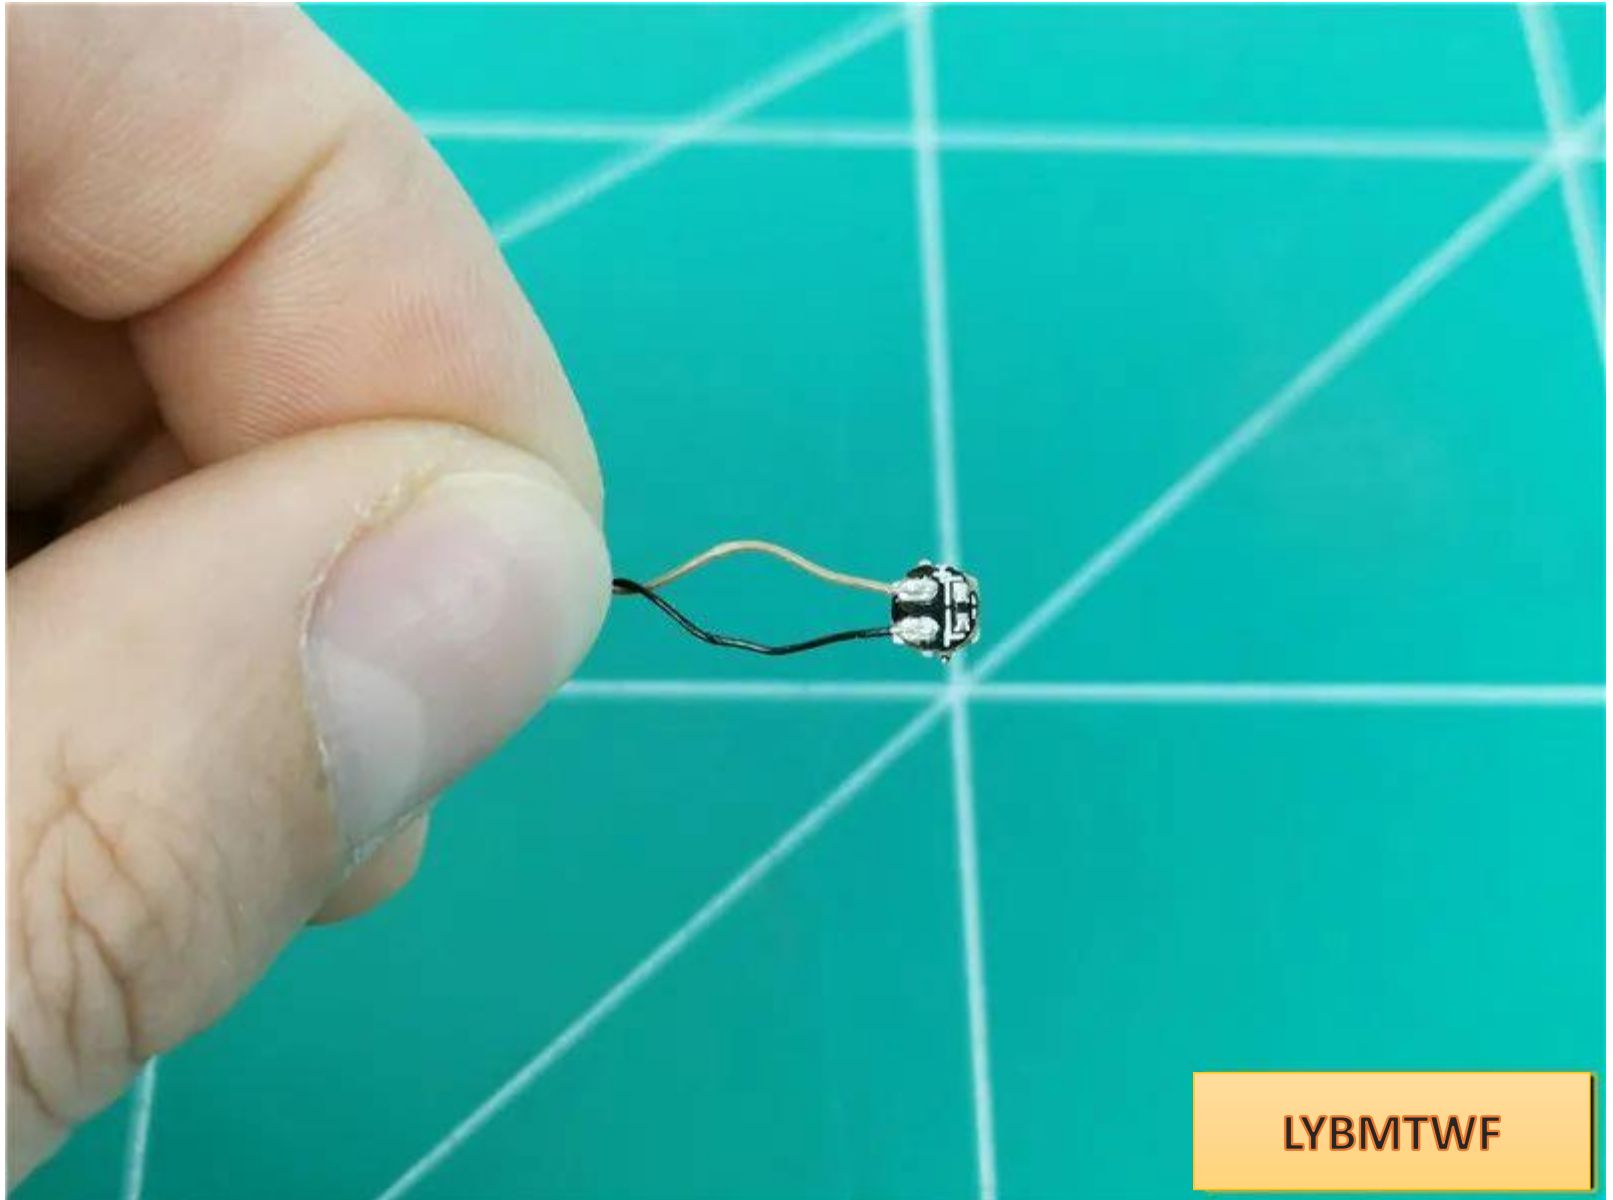

LYBMTWF




Place the light pellet with **the luminous side facing downwards** and put it on the black protrusion




LYBMTWF

Restore parts and fix lamp particles

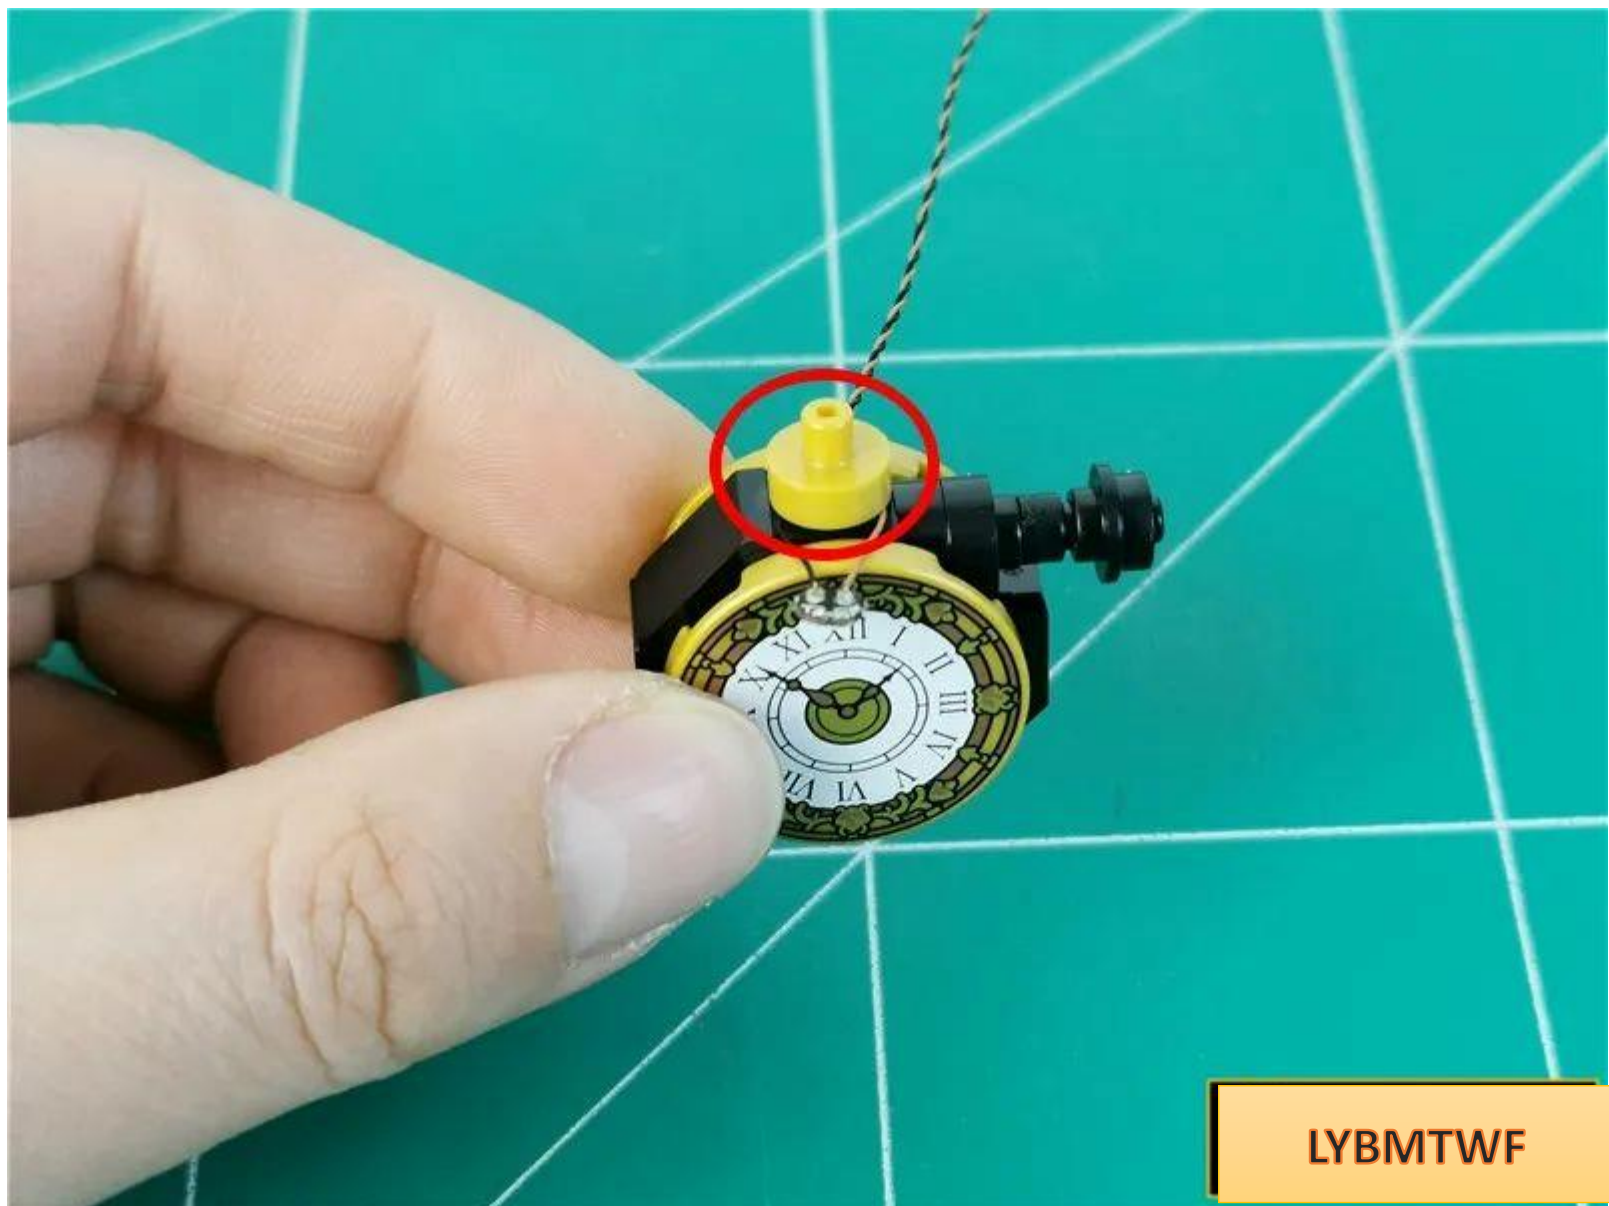

LYBMTWF


Pass the wires through the black bracket

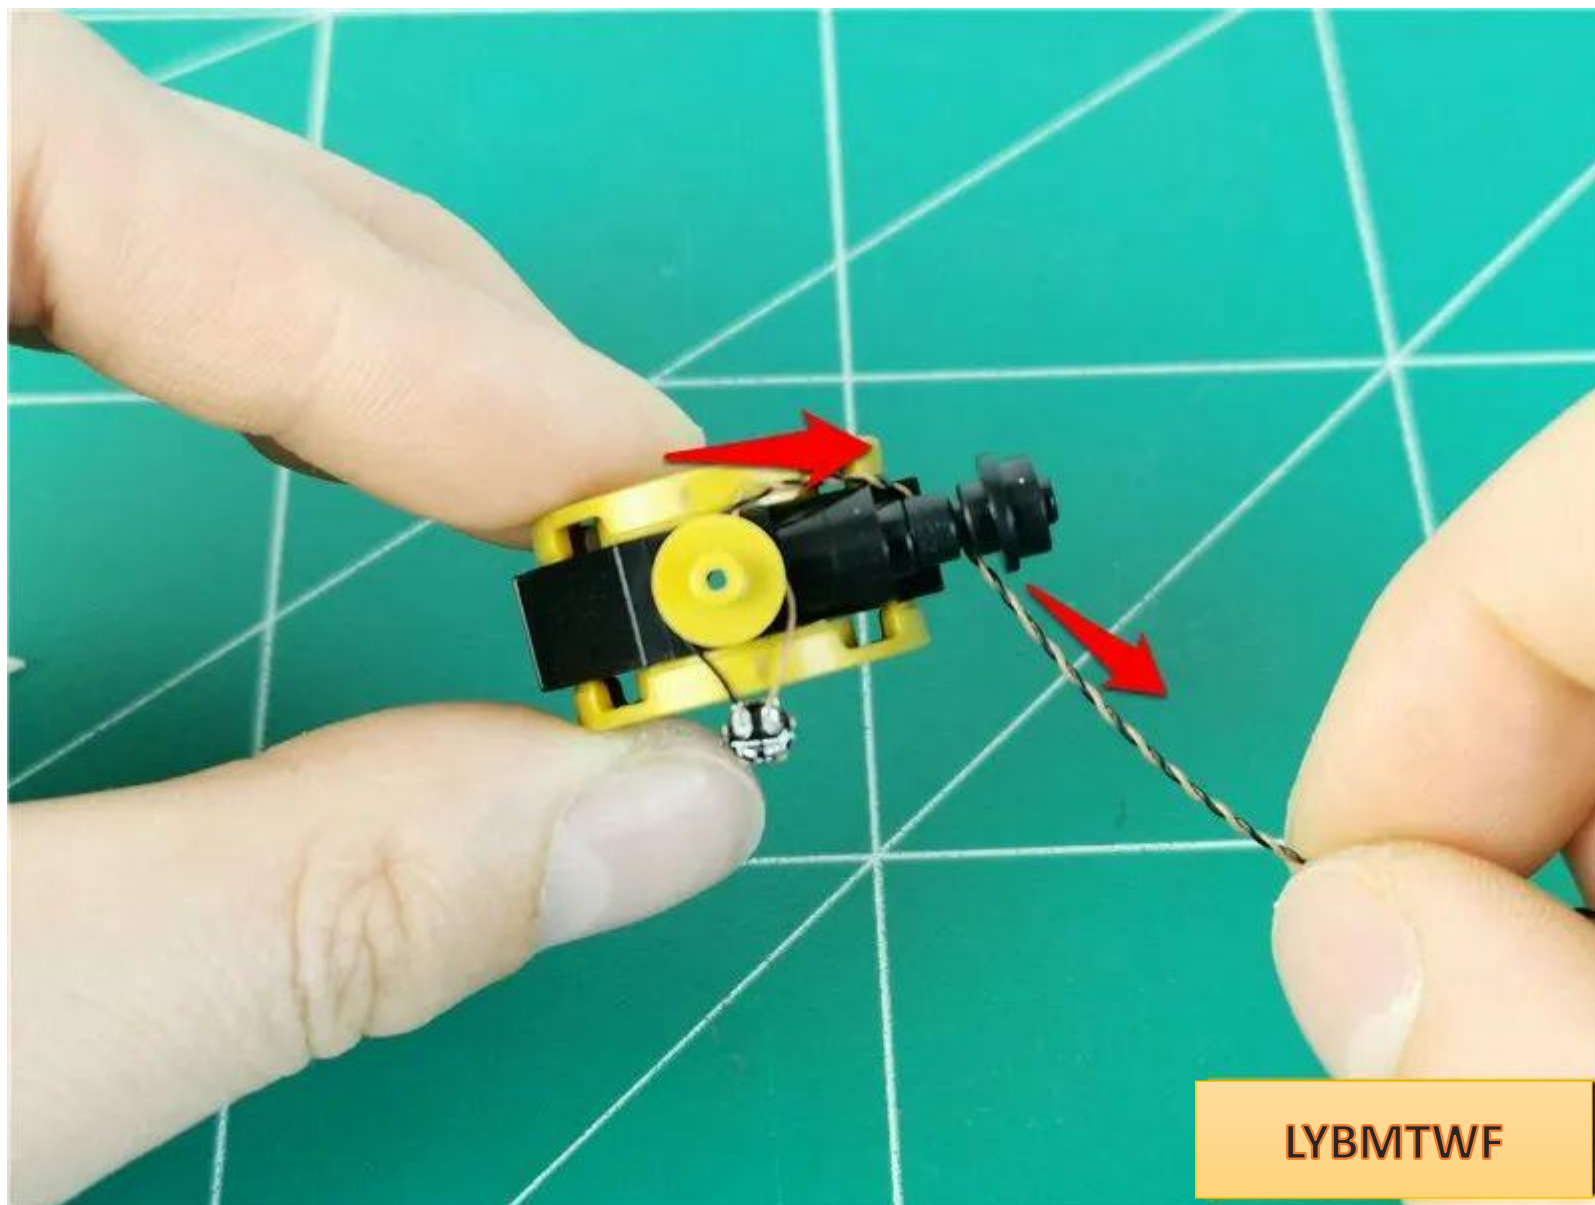


LYBMTWF



Restore the clock and **pull the wire to the right**

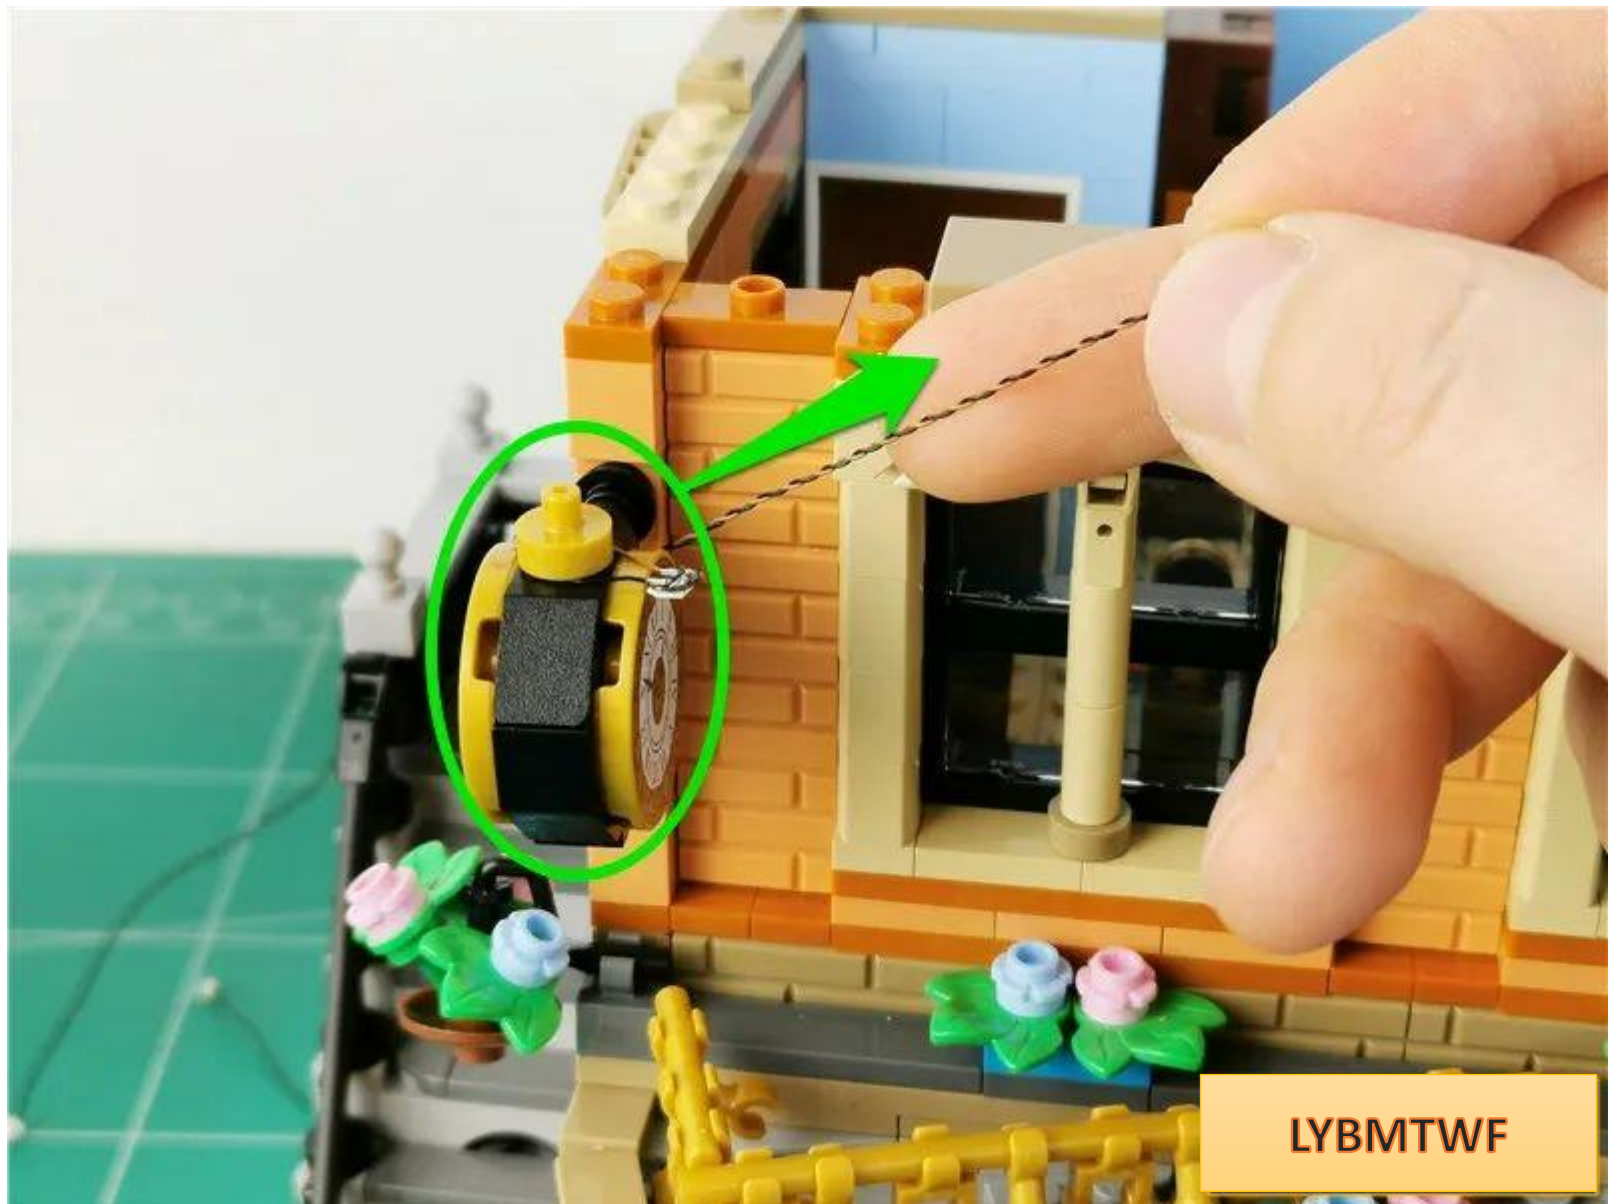


Insert the wire into the gap and pull it indoors

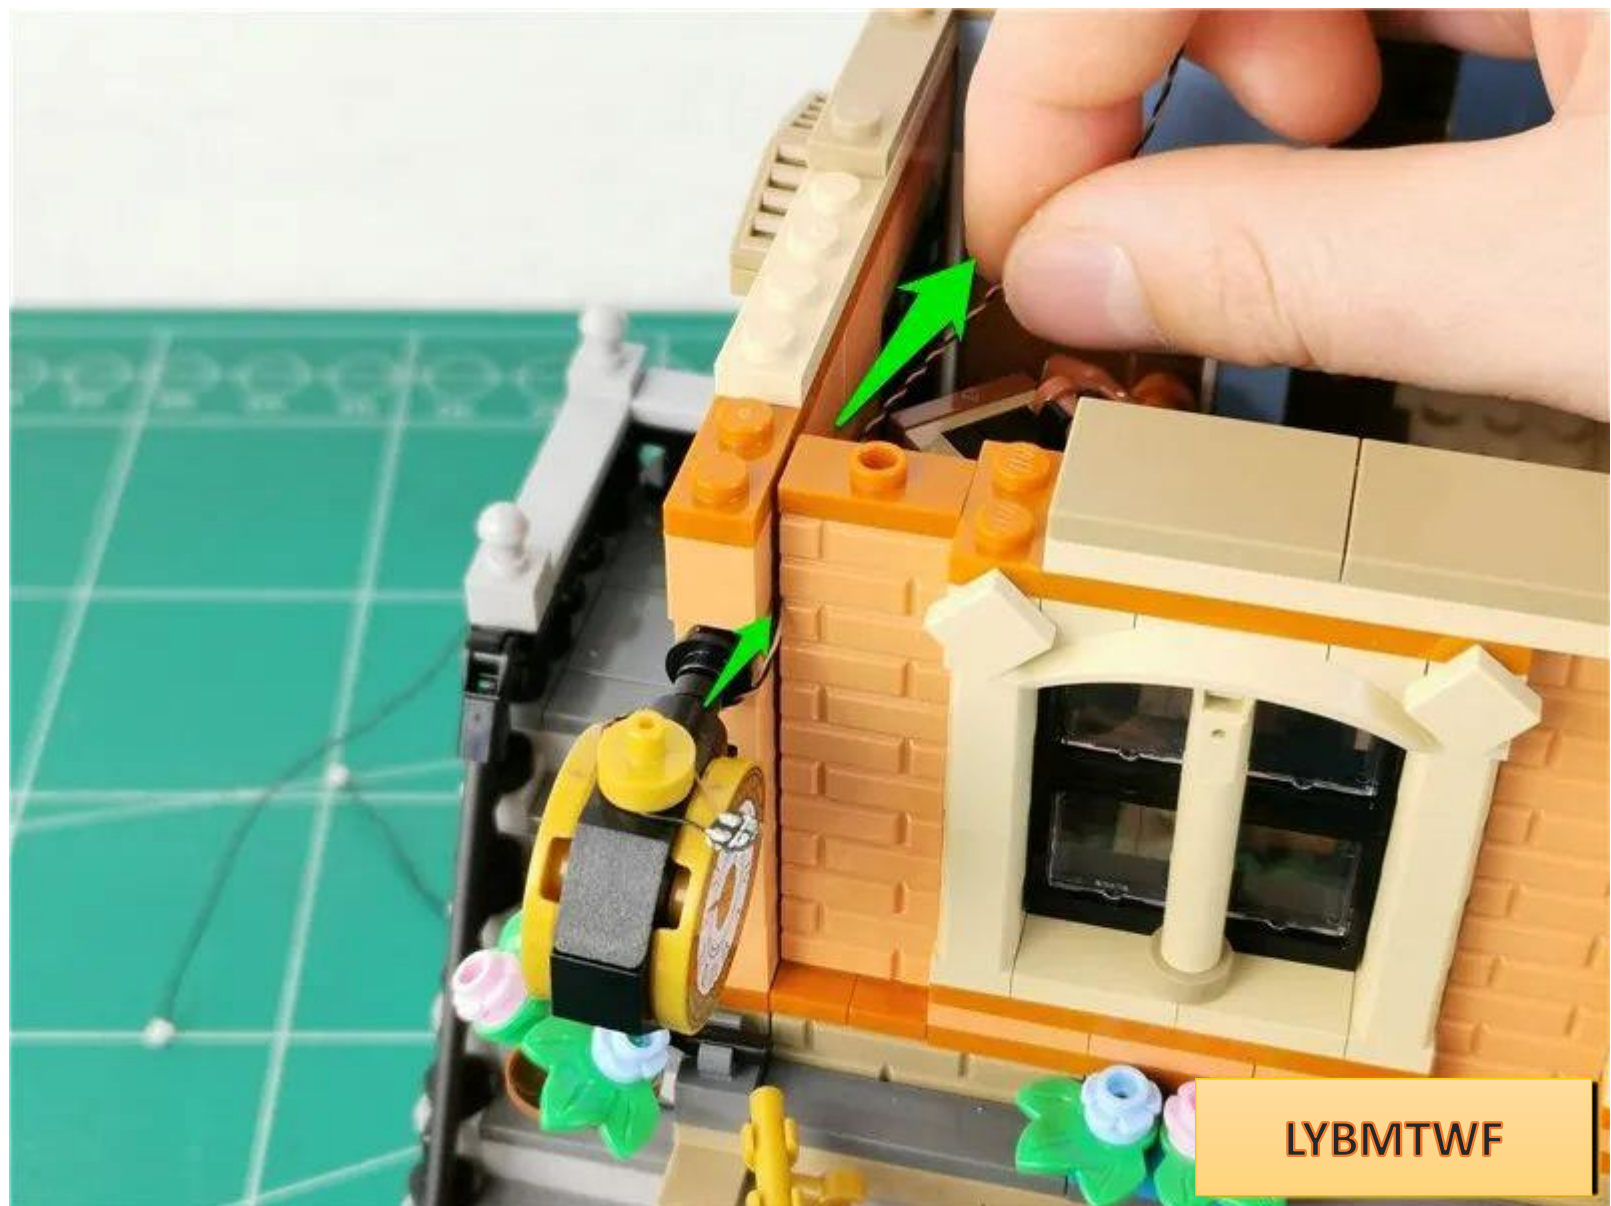

LYBMTWF

Restore the upper parts one by one

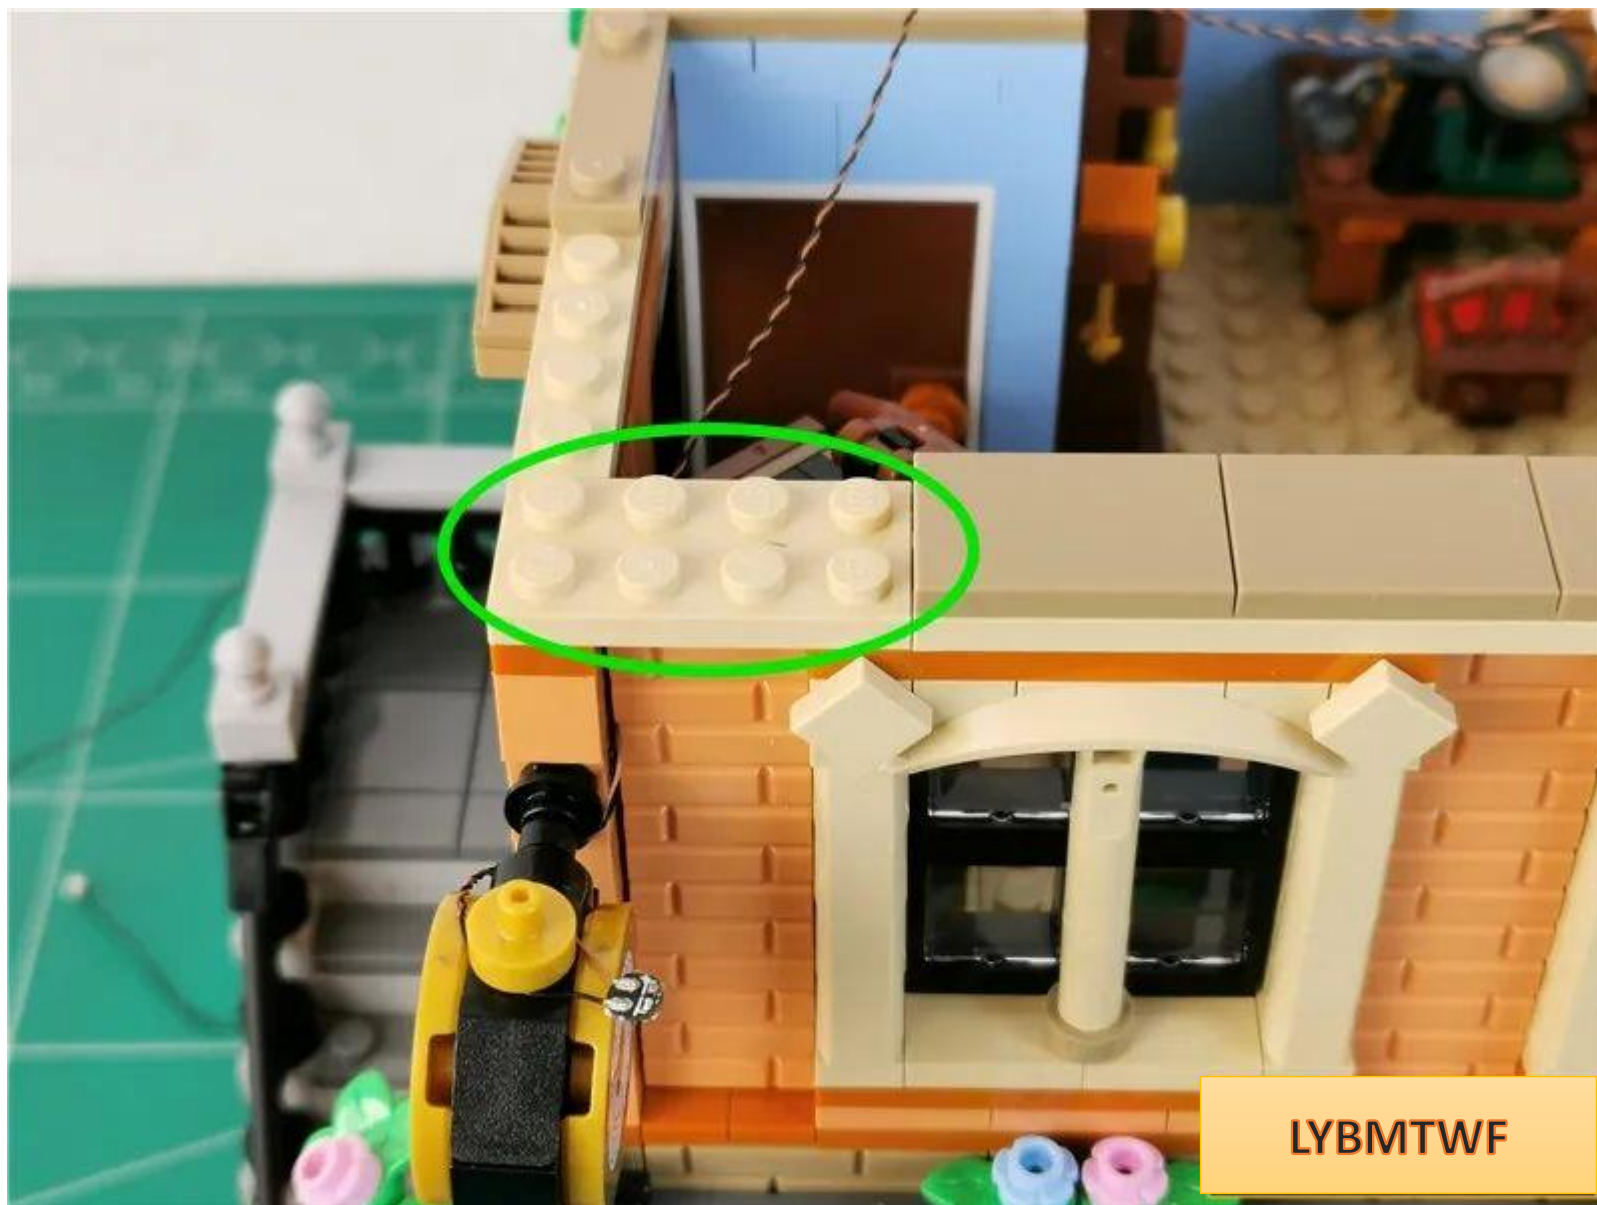

LYBMTWF





LYBMTWF

Remove the parts indicated by the arrows.






Pull the wire to the right and pass around the raised particles.



LYBMTWF



Restore parts and fix wires

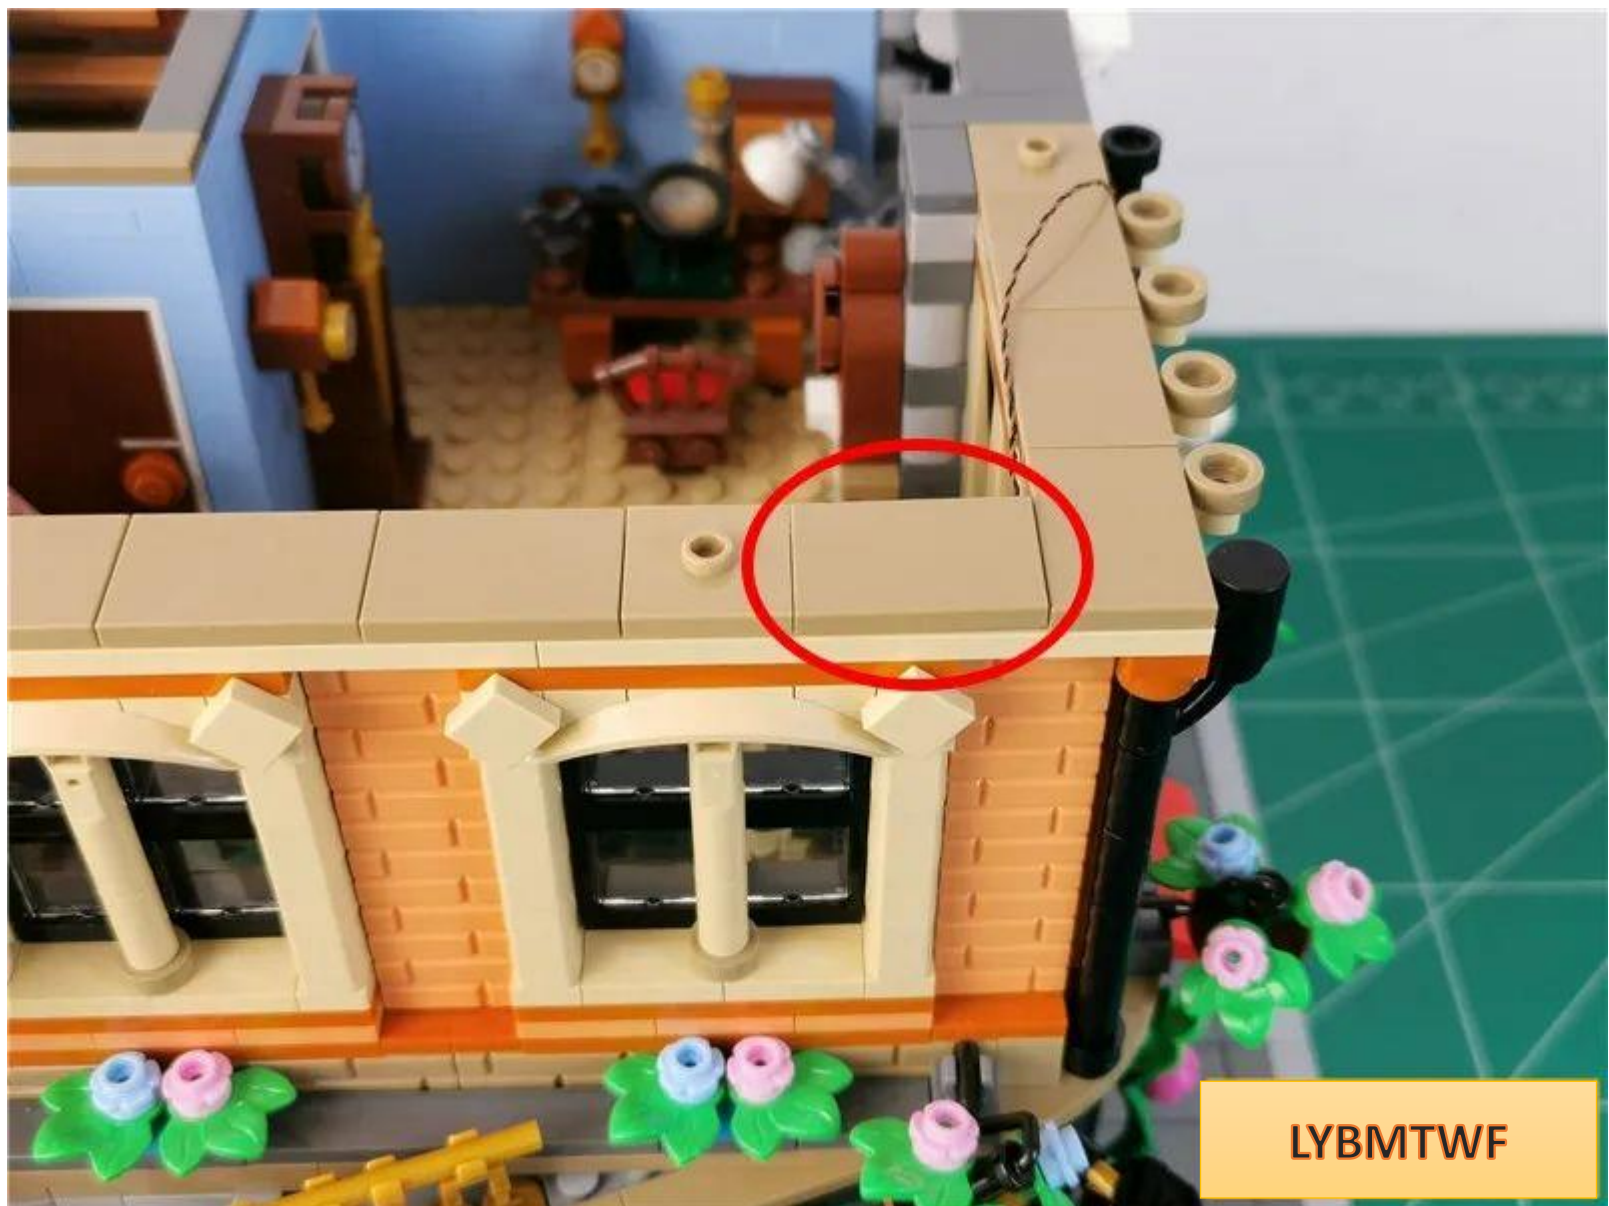

Go to the other side



LYBMTWF




Remove the parts indicated by the arrows.






LYBMTWF

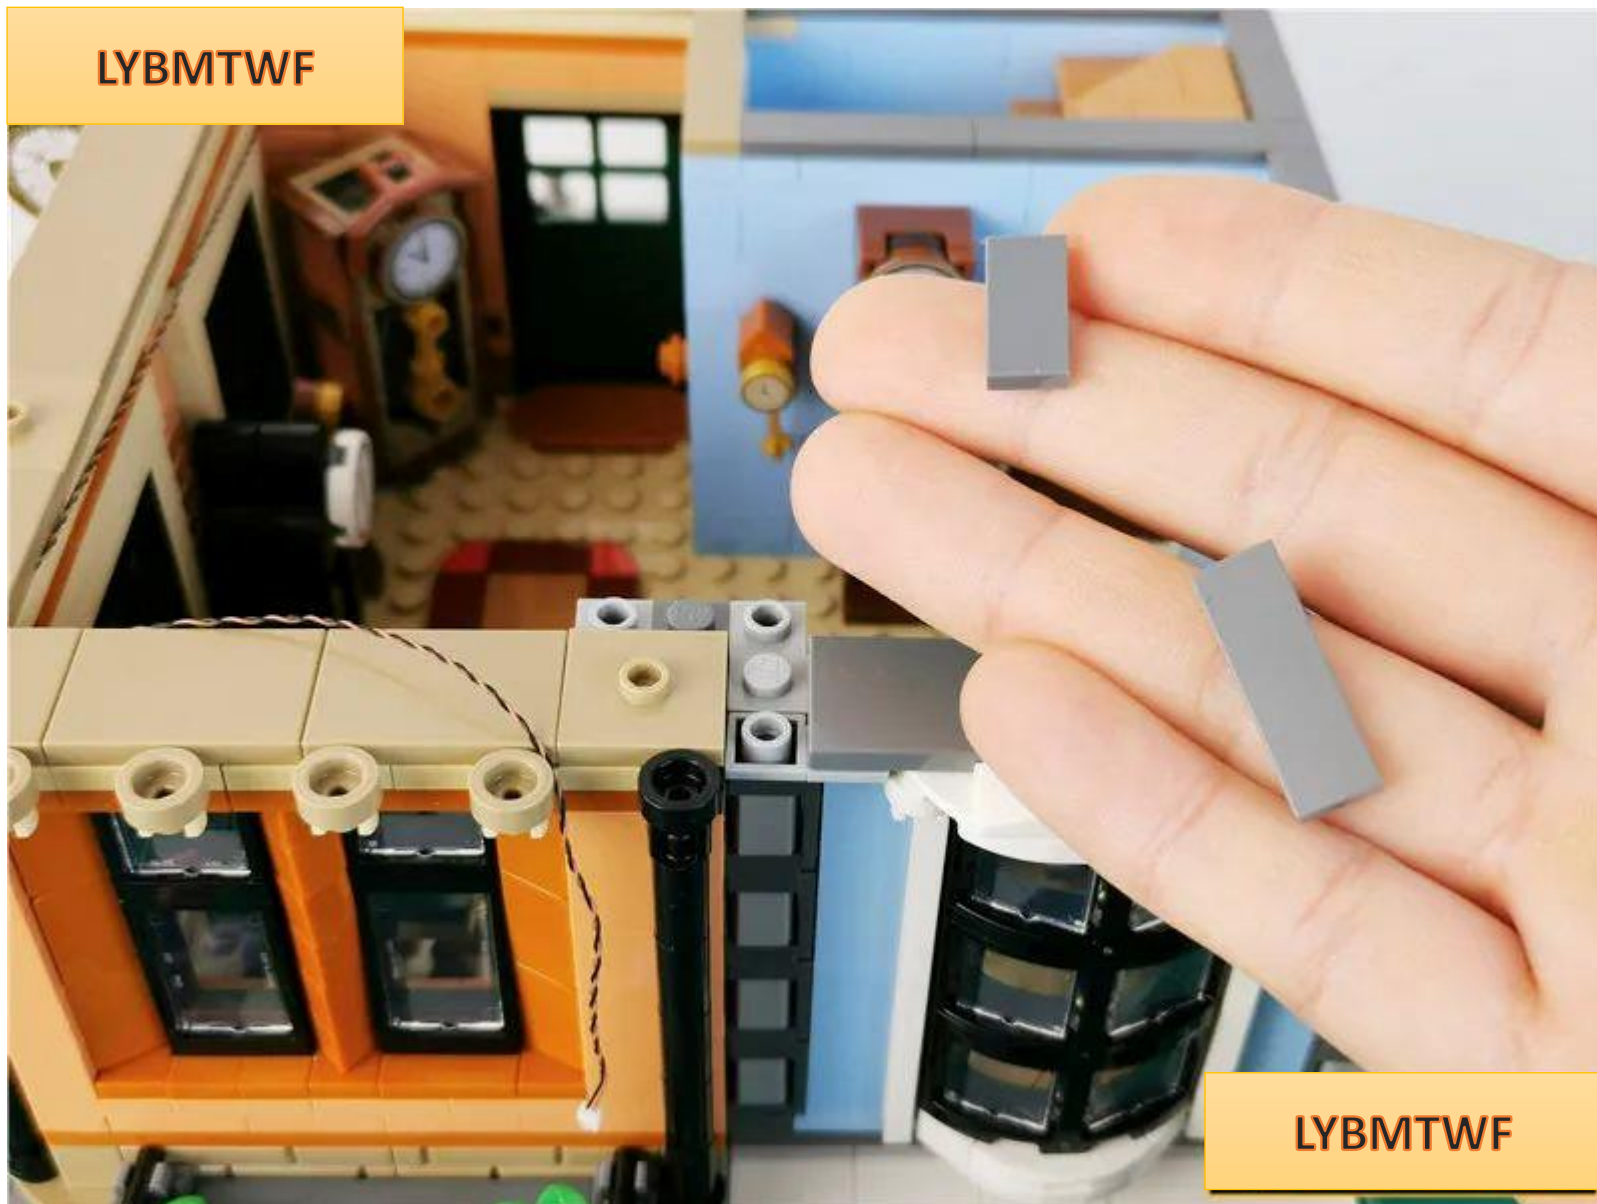

LYBMTWF

Fit the wire to the edge of the part and pull it to the right

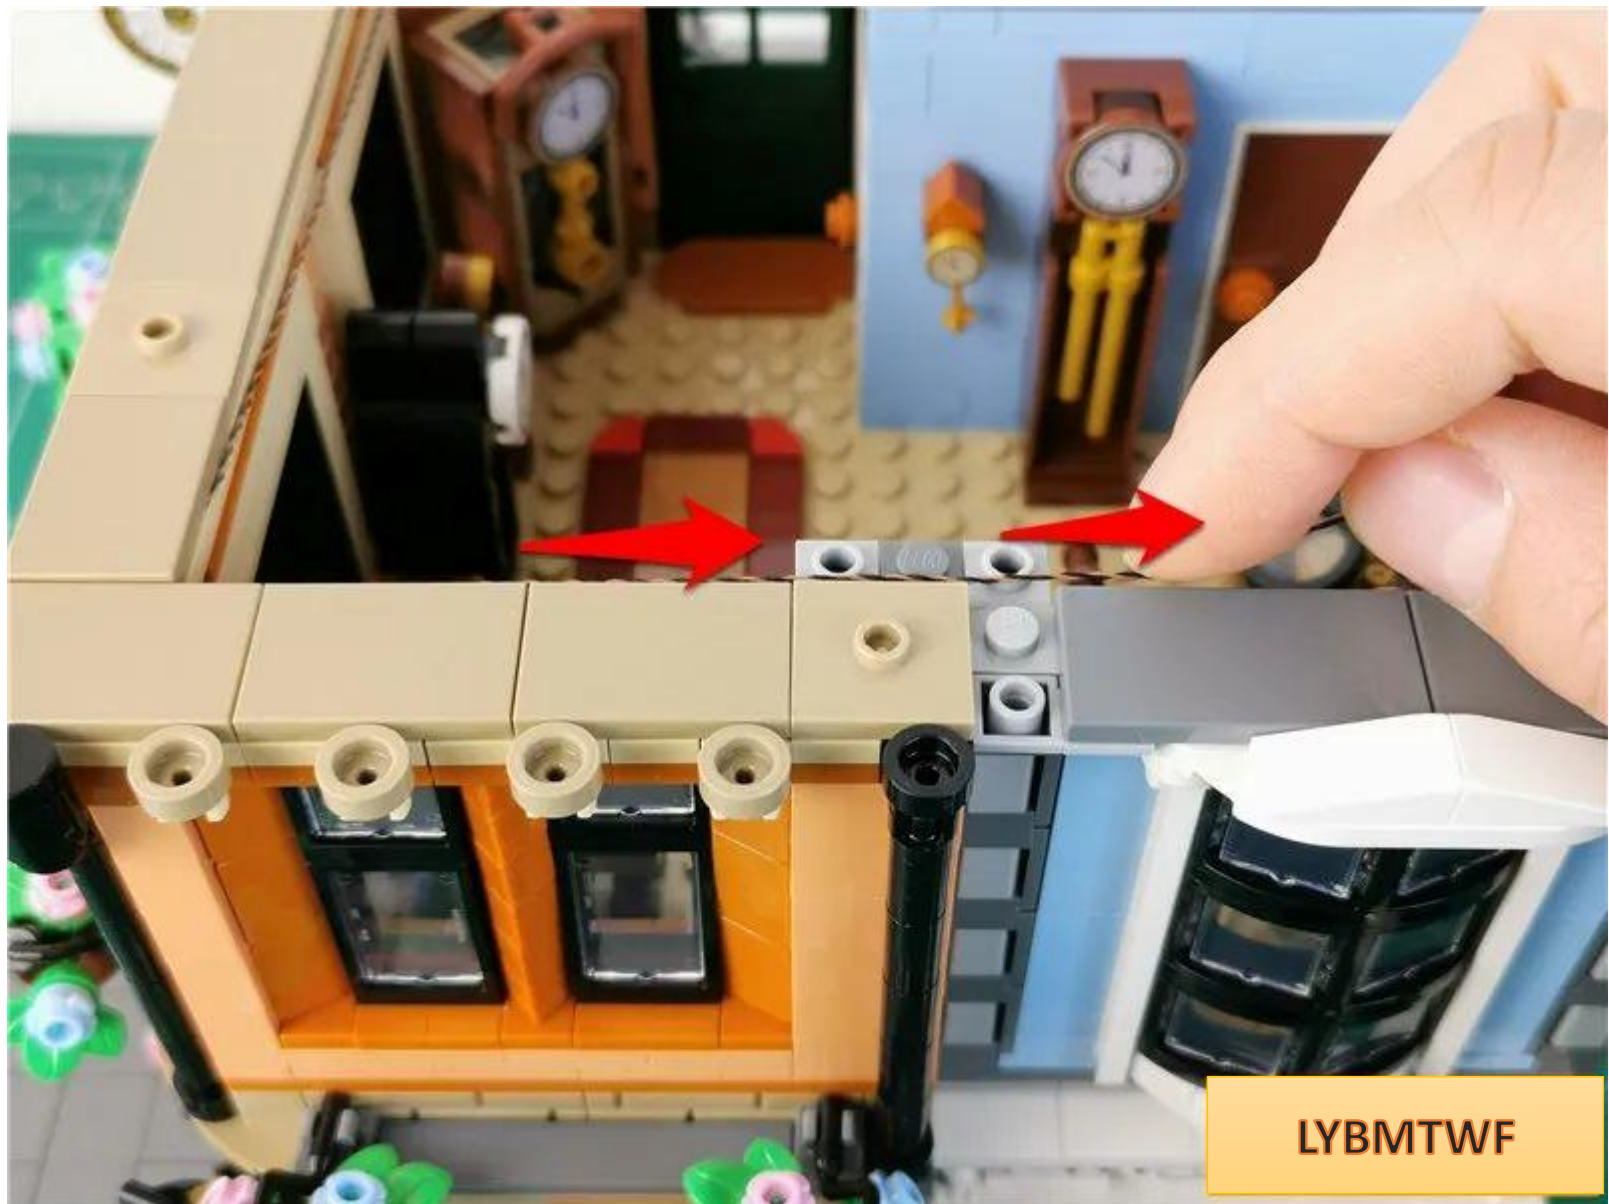



Restore parts and fix wires





Remove the parts indicated by arrows one by one





LYBMTWF





LYBMTWF






LYBMTWF

Take out the colorful light string




LYBMTWF

As shown in the picture, bend the light string appropriately and **pay attention to the position**

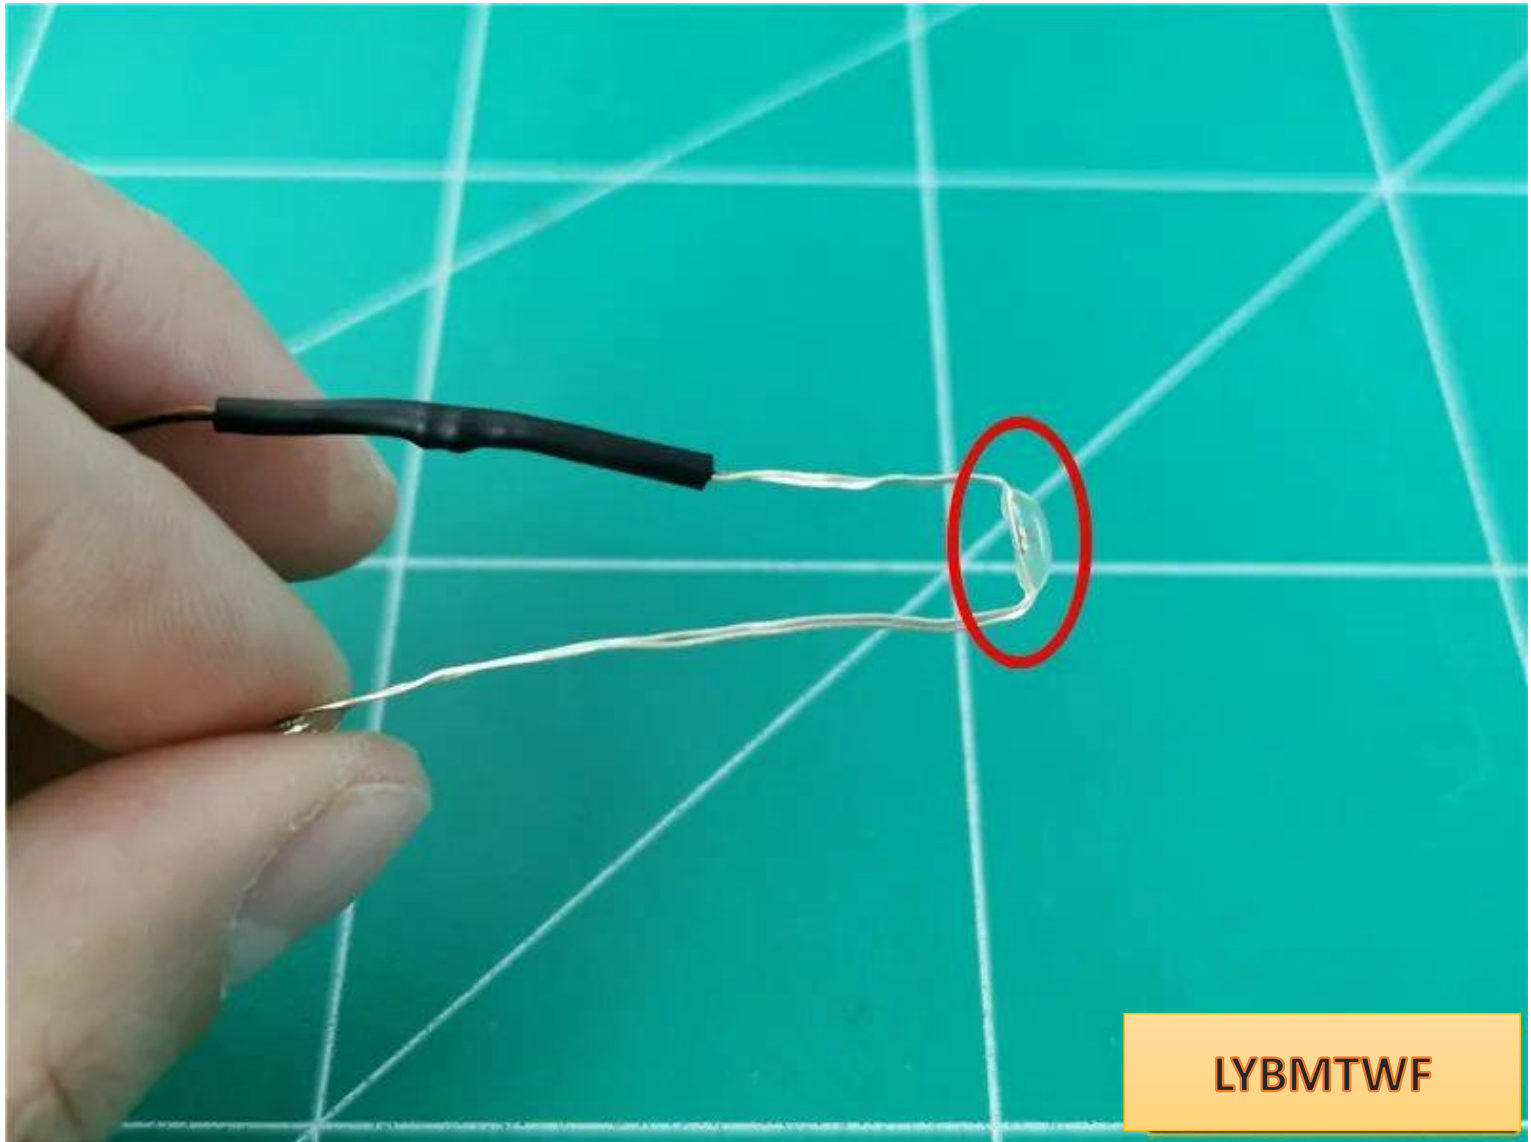



Place the light string on the flower basket, **paying attention to the position of the light points**

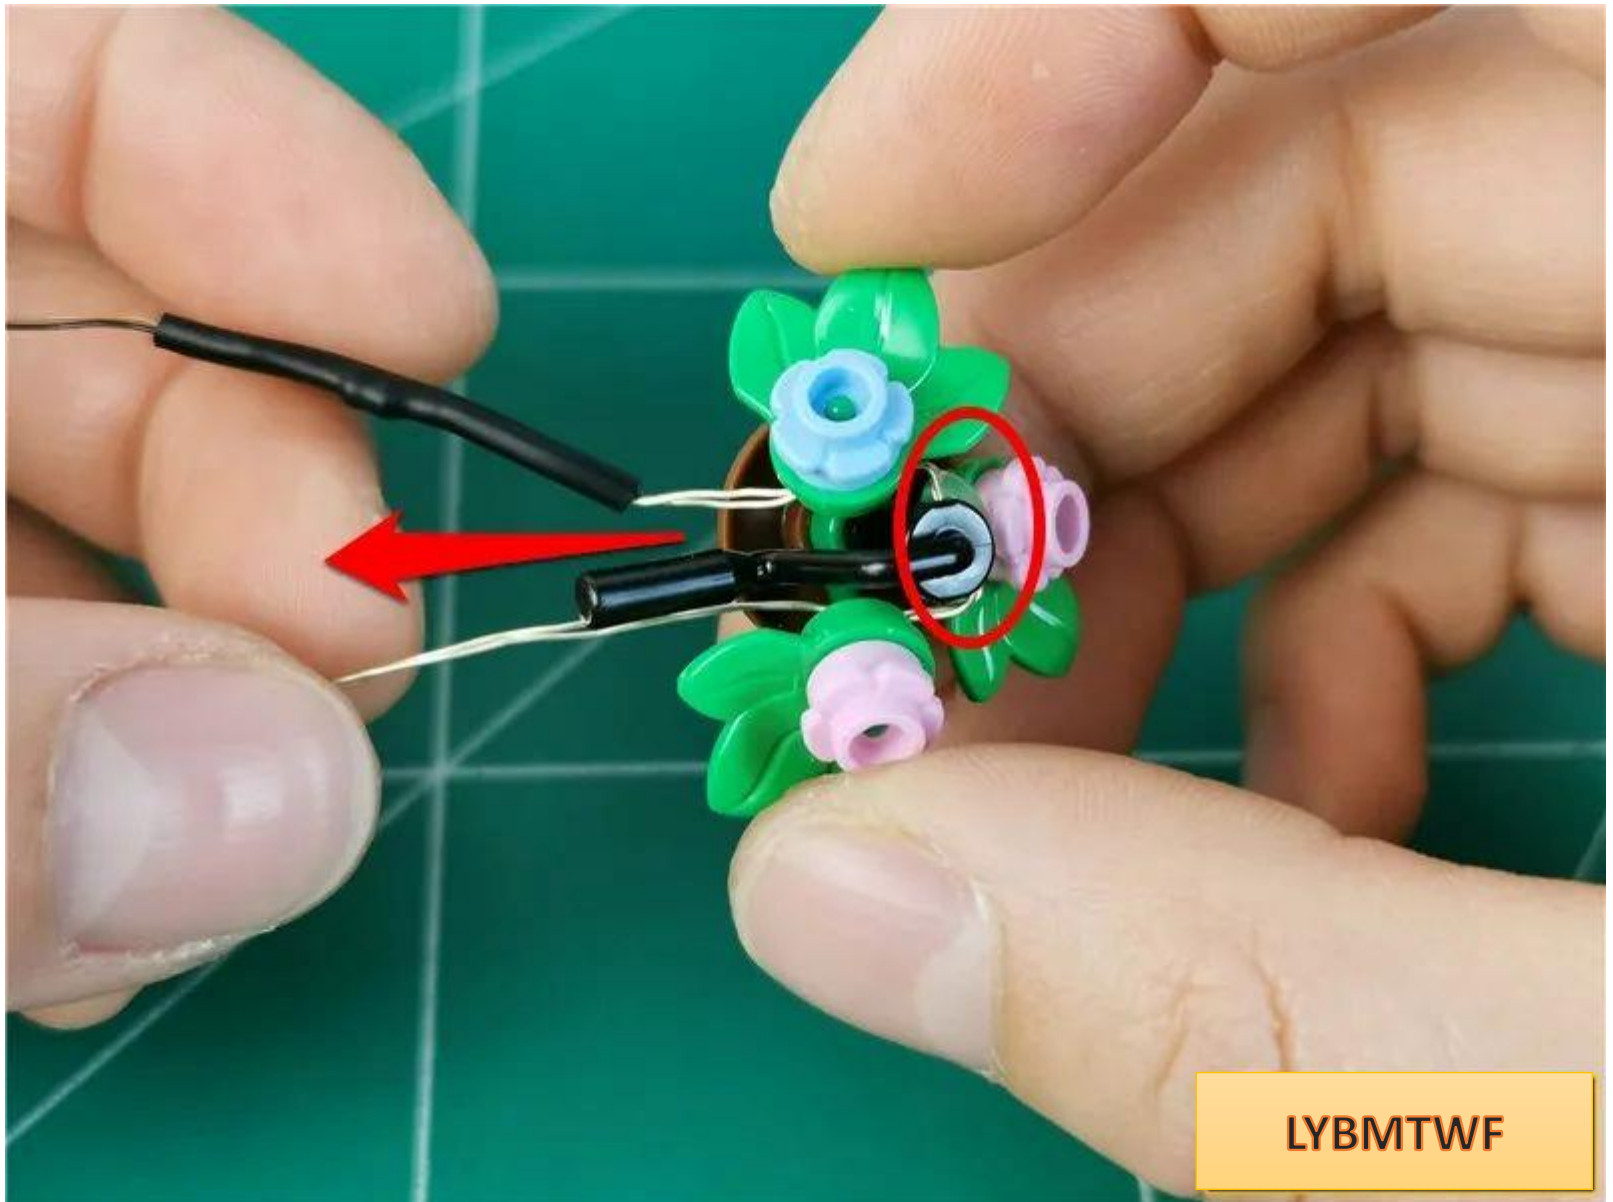


LYBMTWF

Restore the flower basket





Place the remaining light strings around the raised particles

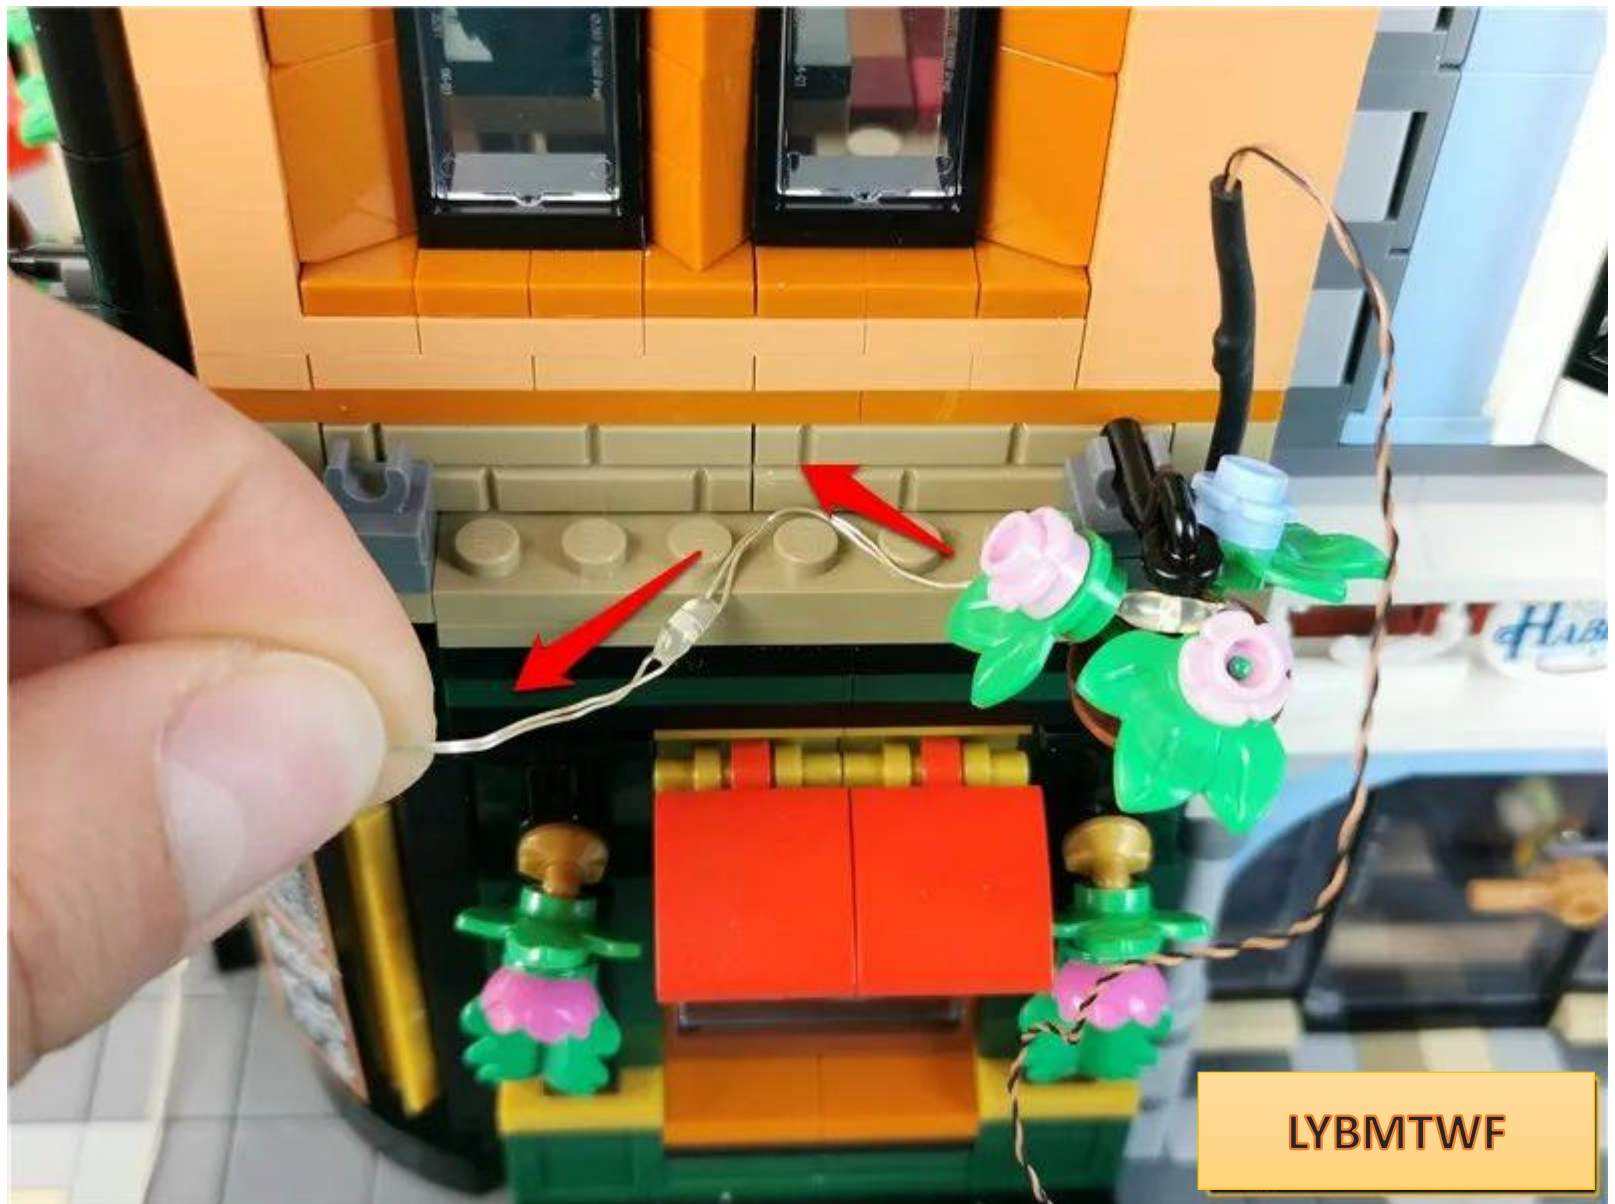




Restore parts and fix the light string



Fit the tail wire to the building and wrap it around the black part above

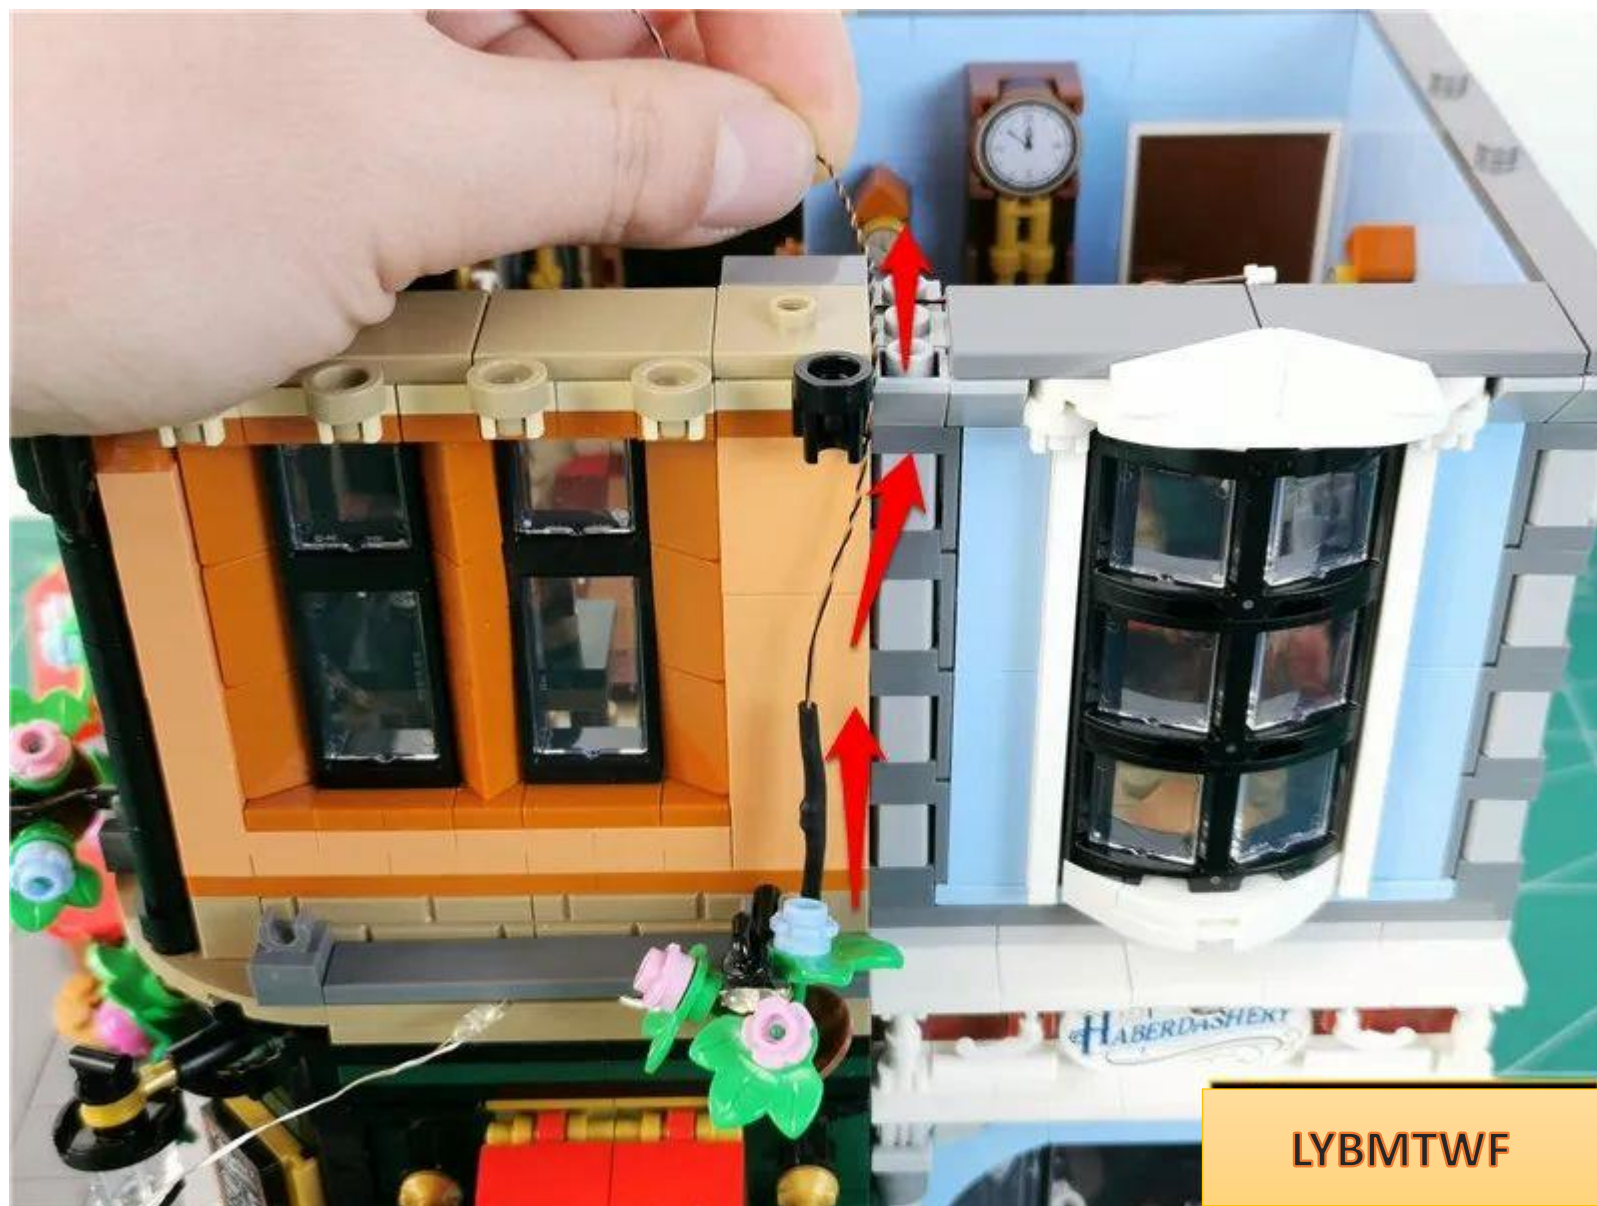




Restore black parts







Continue to pull the tail line to the right along the gap between the raised particles.

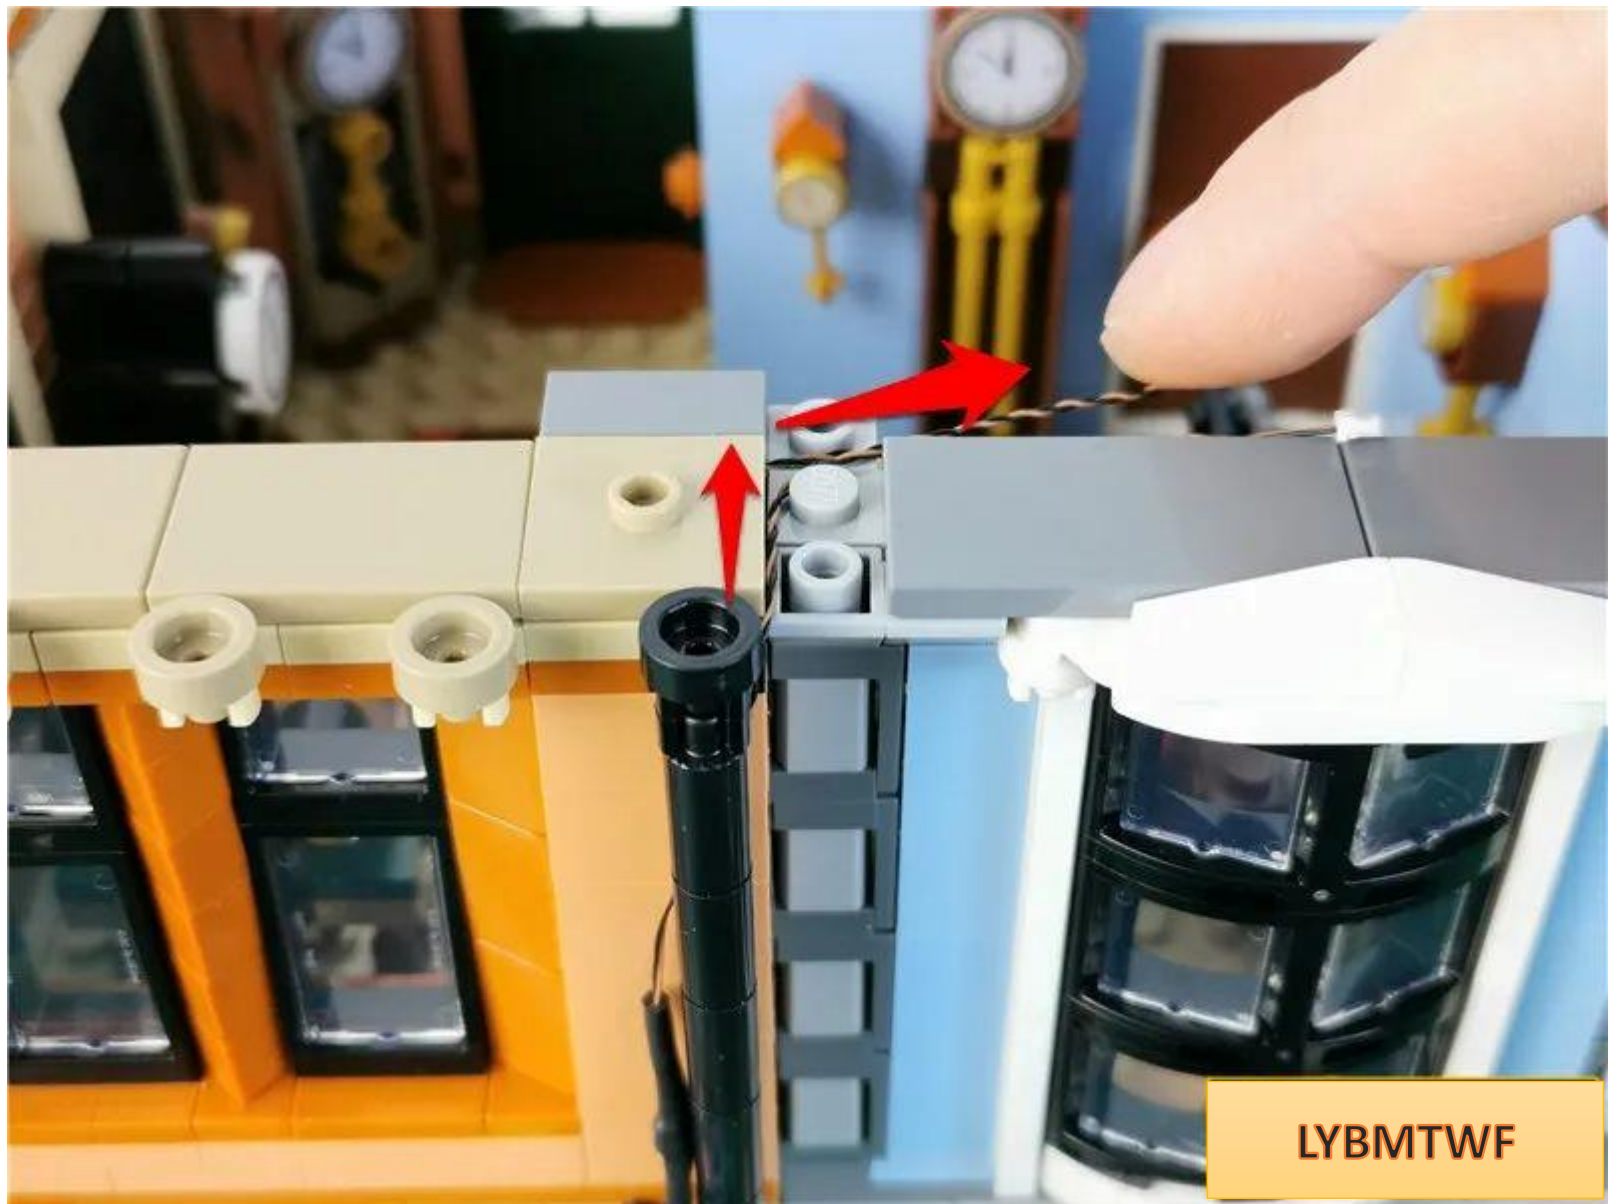

Restore parts and fix tail wires

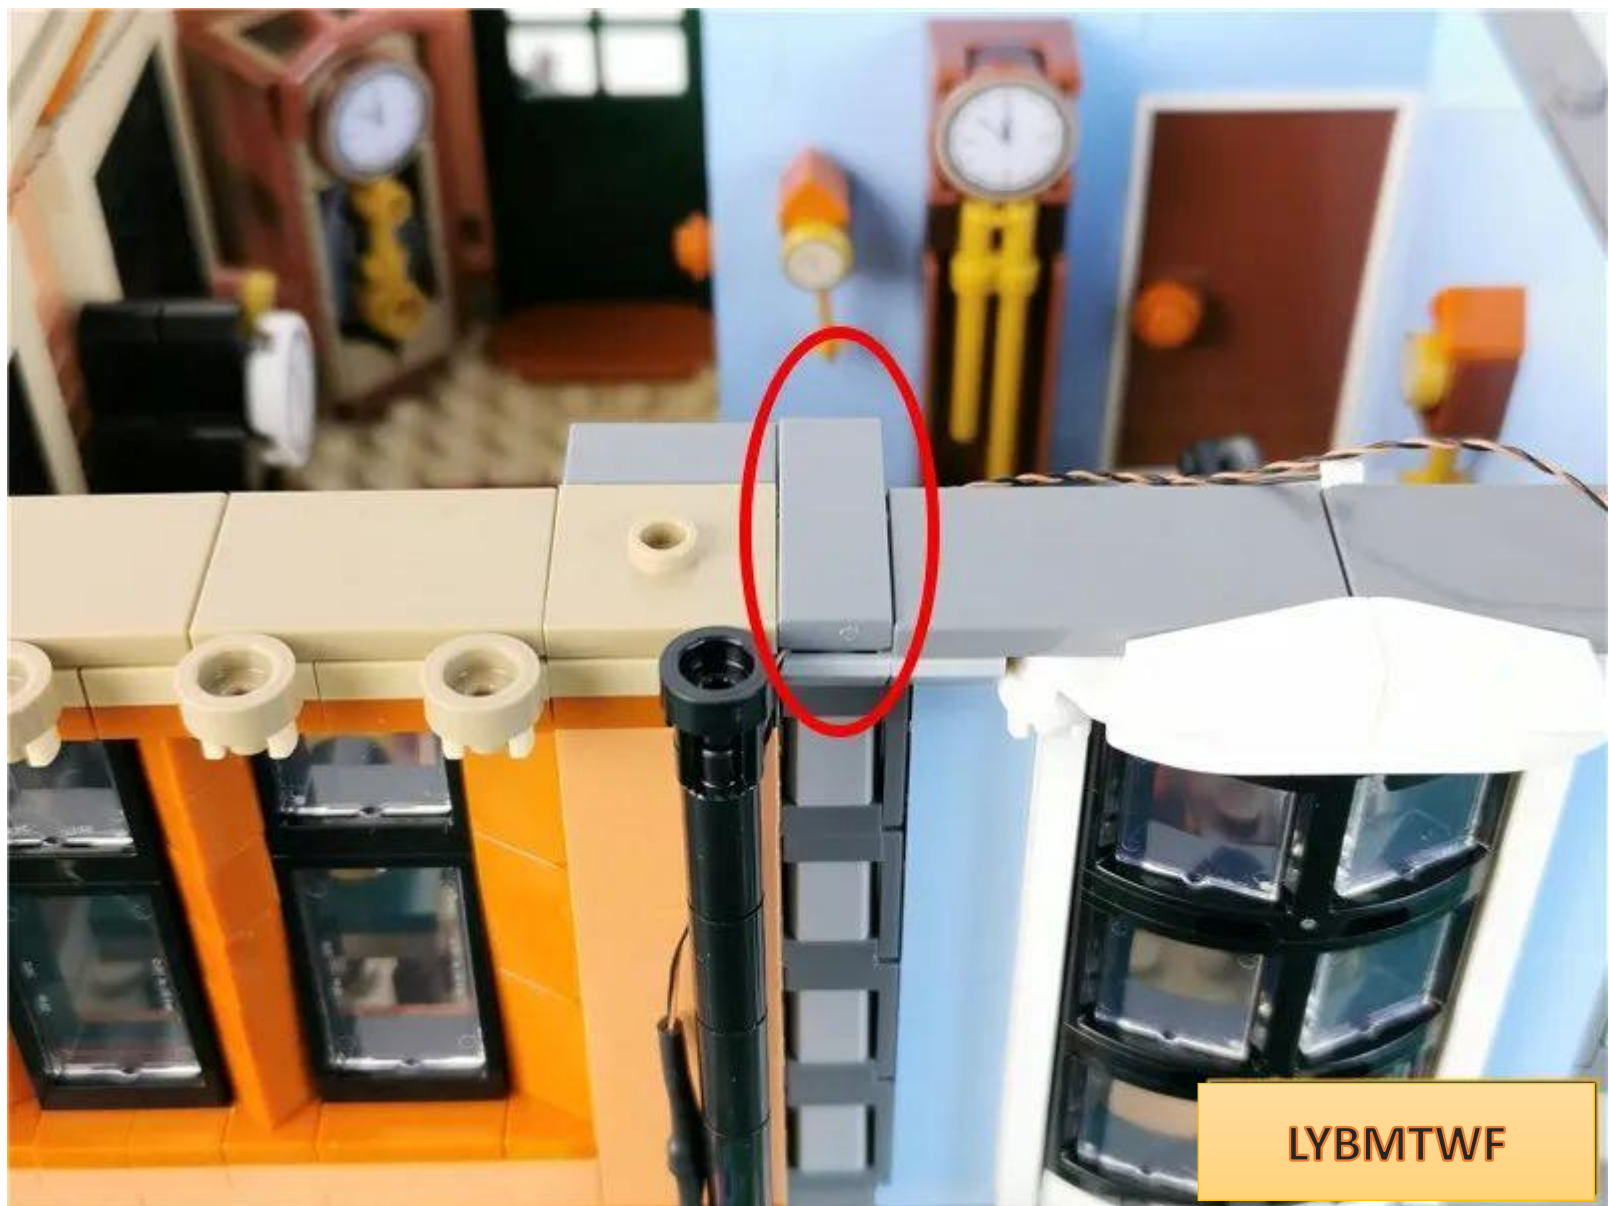


Use the tool to insert the black sleeve into the gap.

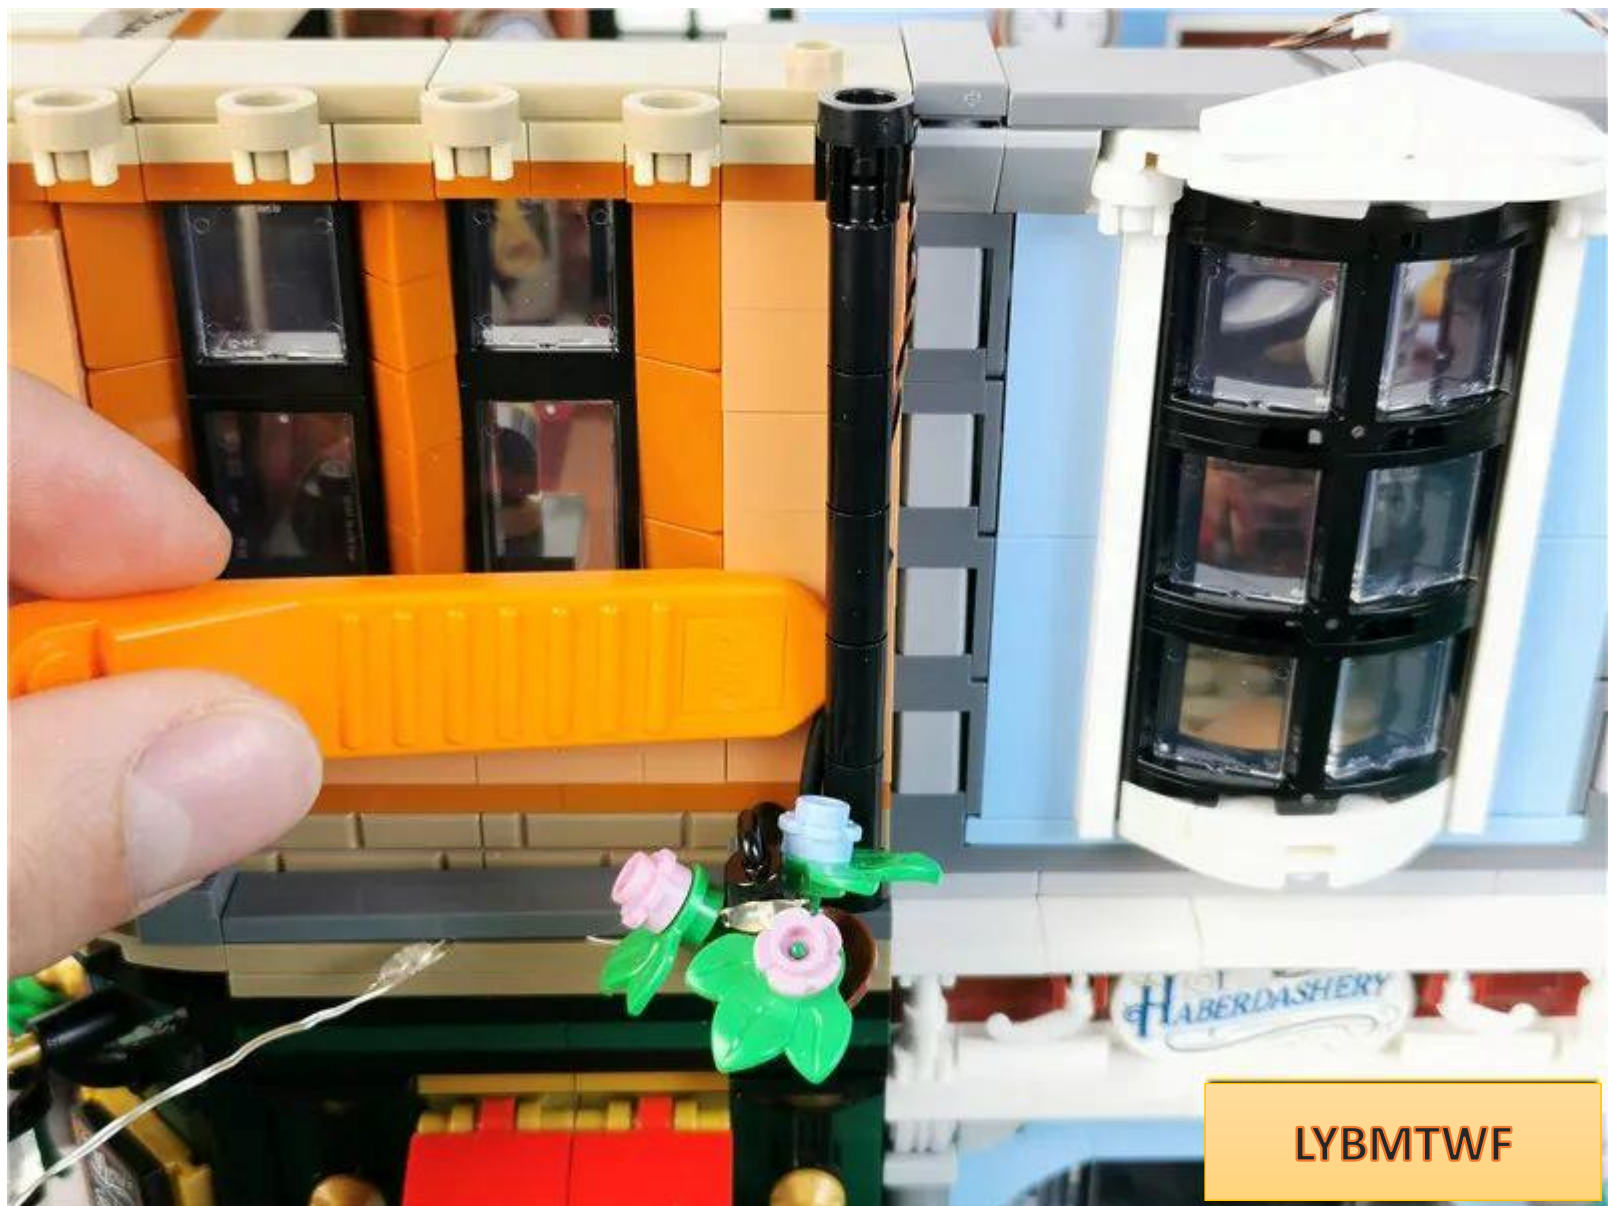



The effect after sorting is as follows

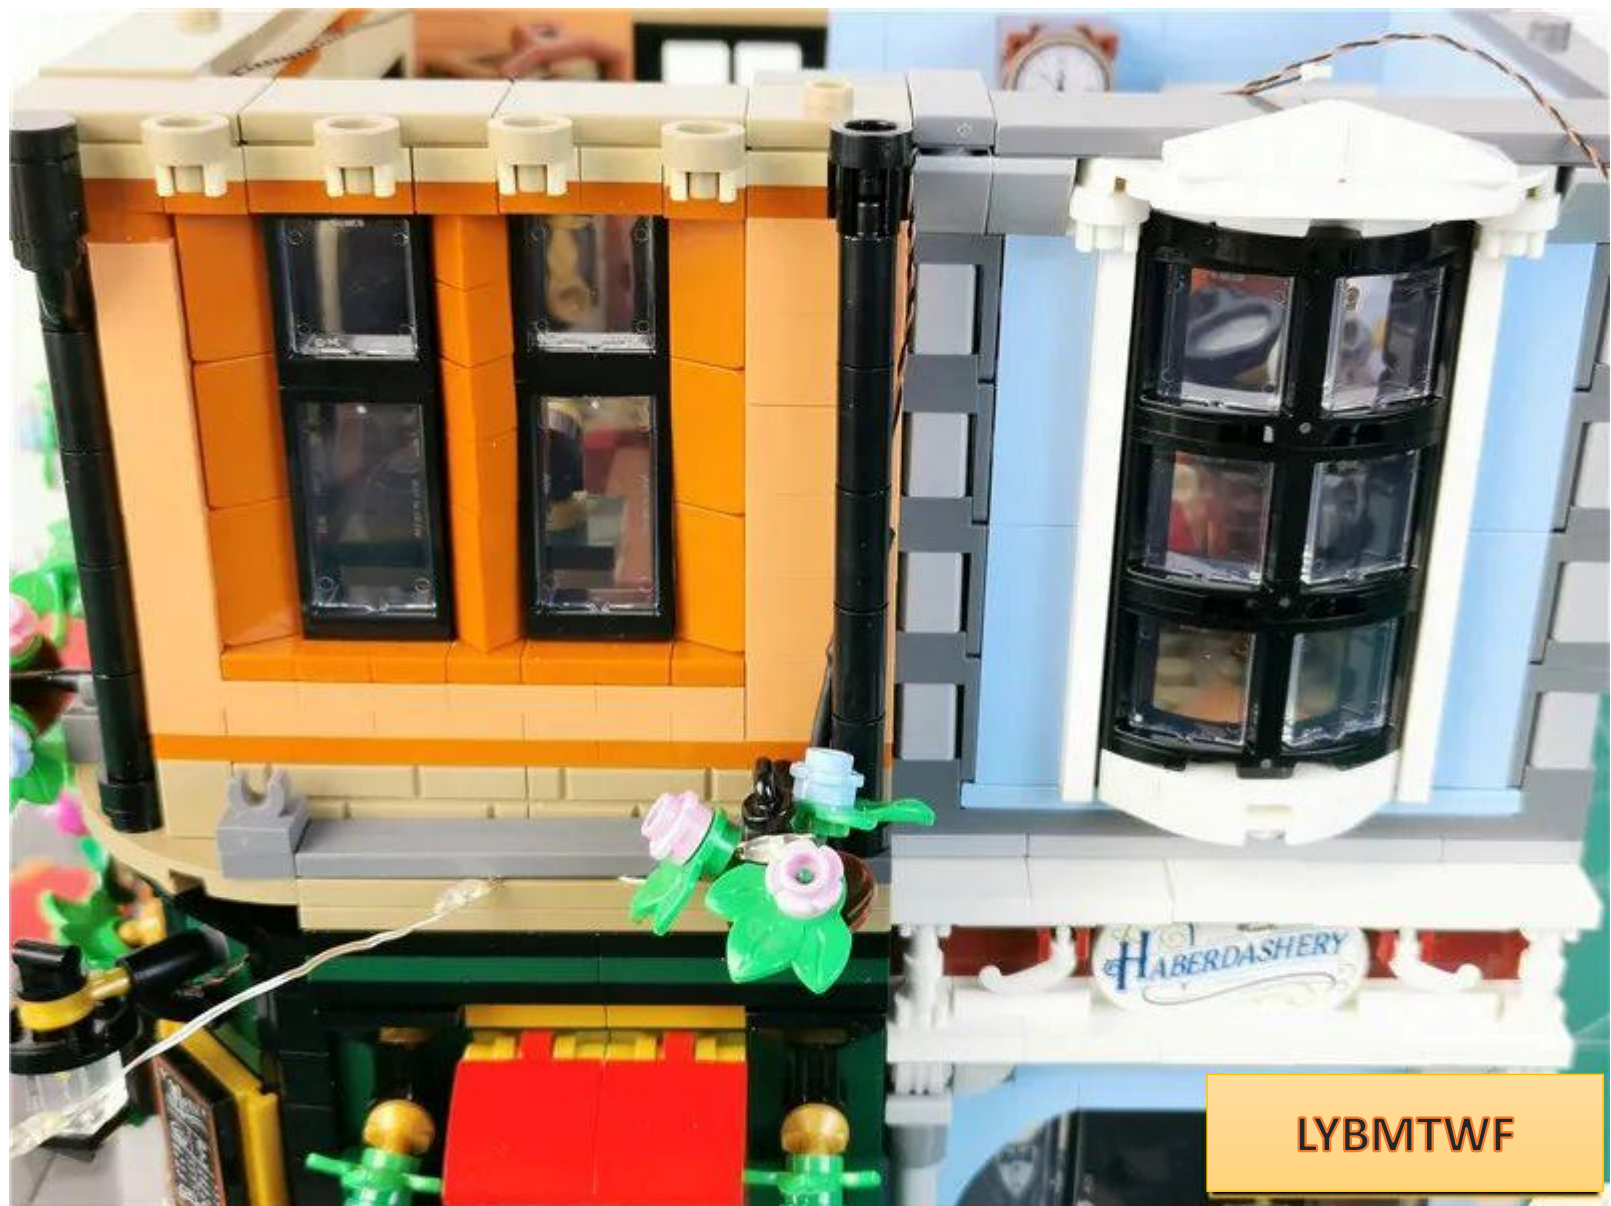

Restore the left flower basket





Place the remaining light strings around the black bracket






Pull to the right along the bottom of the green leaves




Continue around the pink part and pull to the left

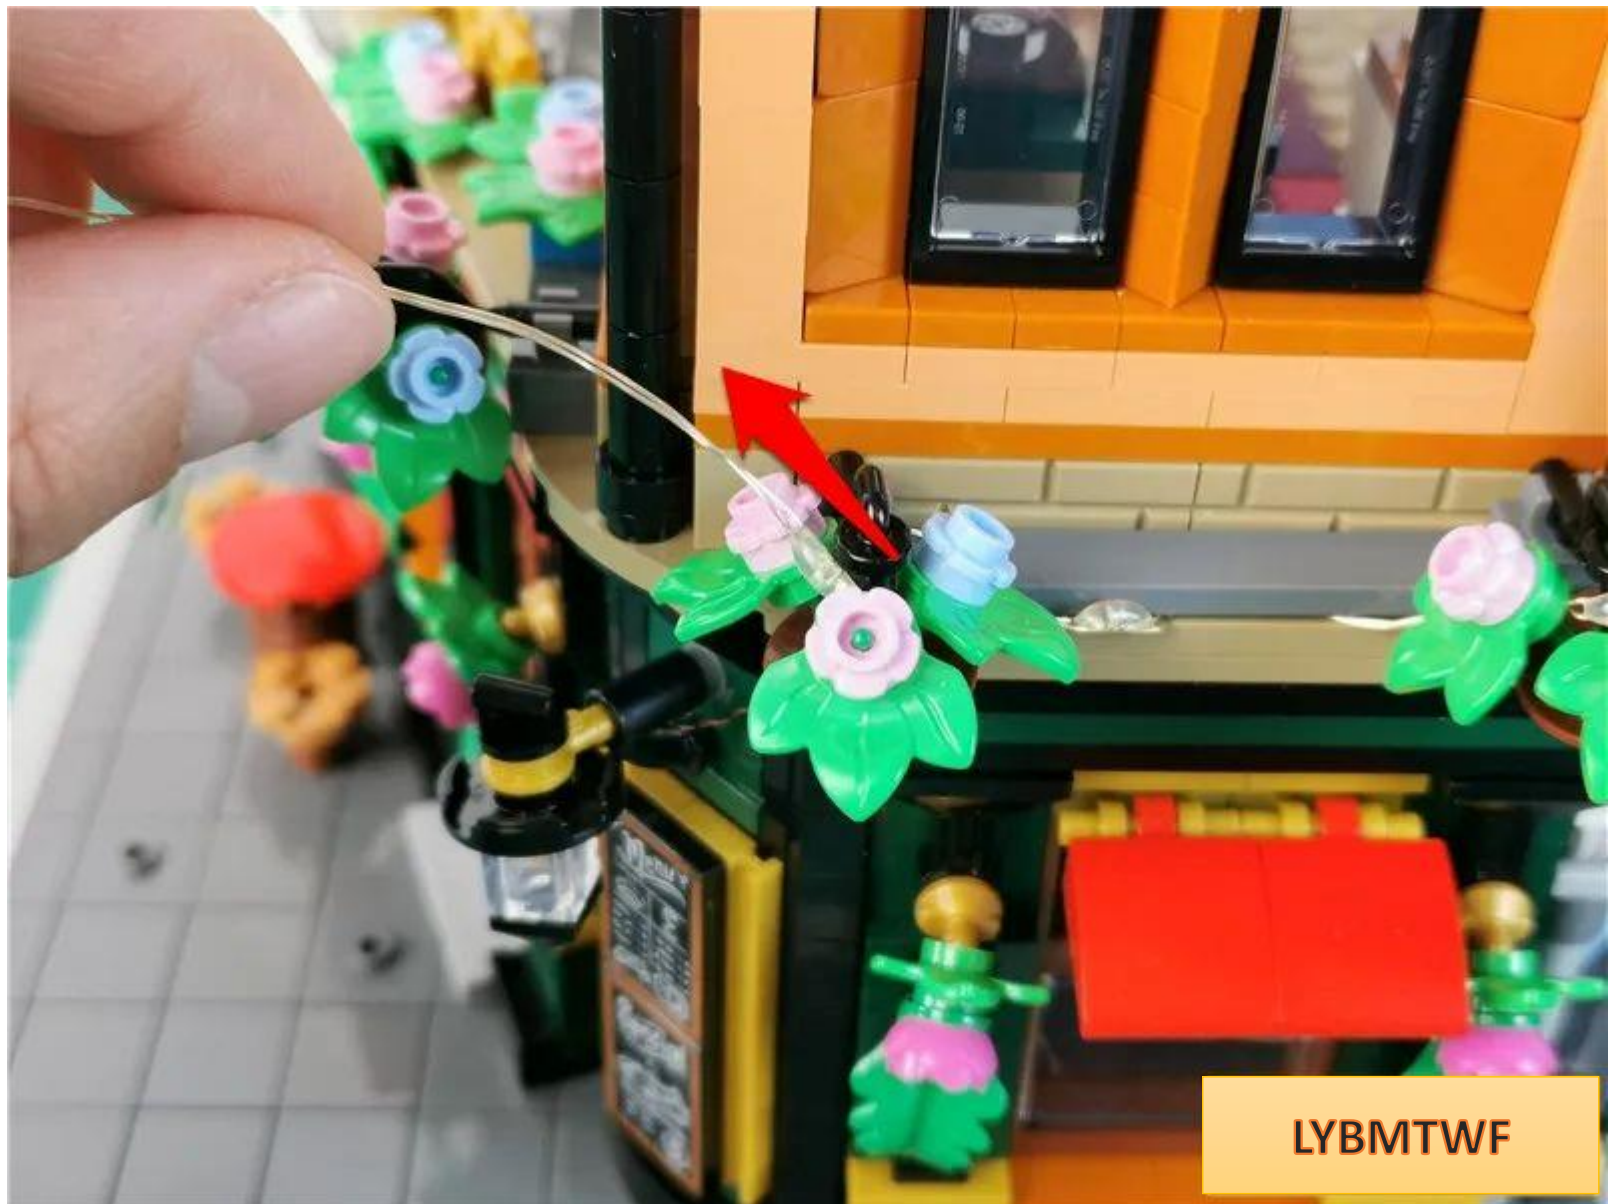




Note the location of **the light**

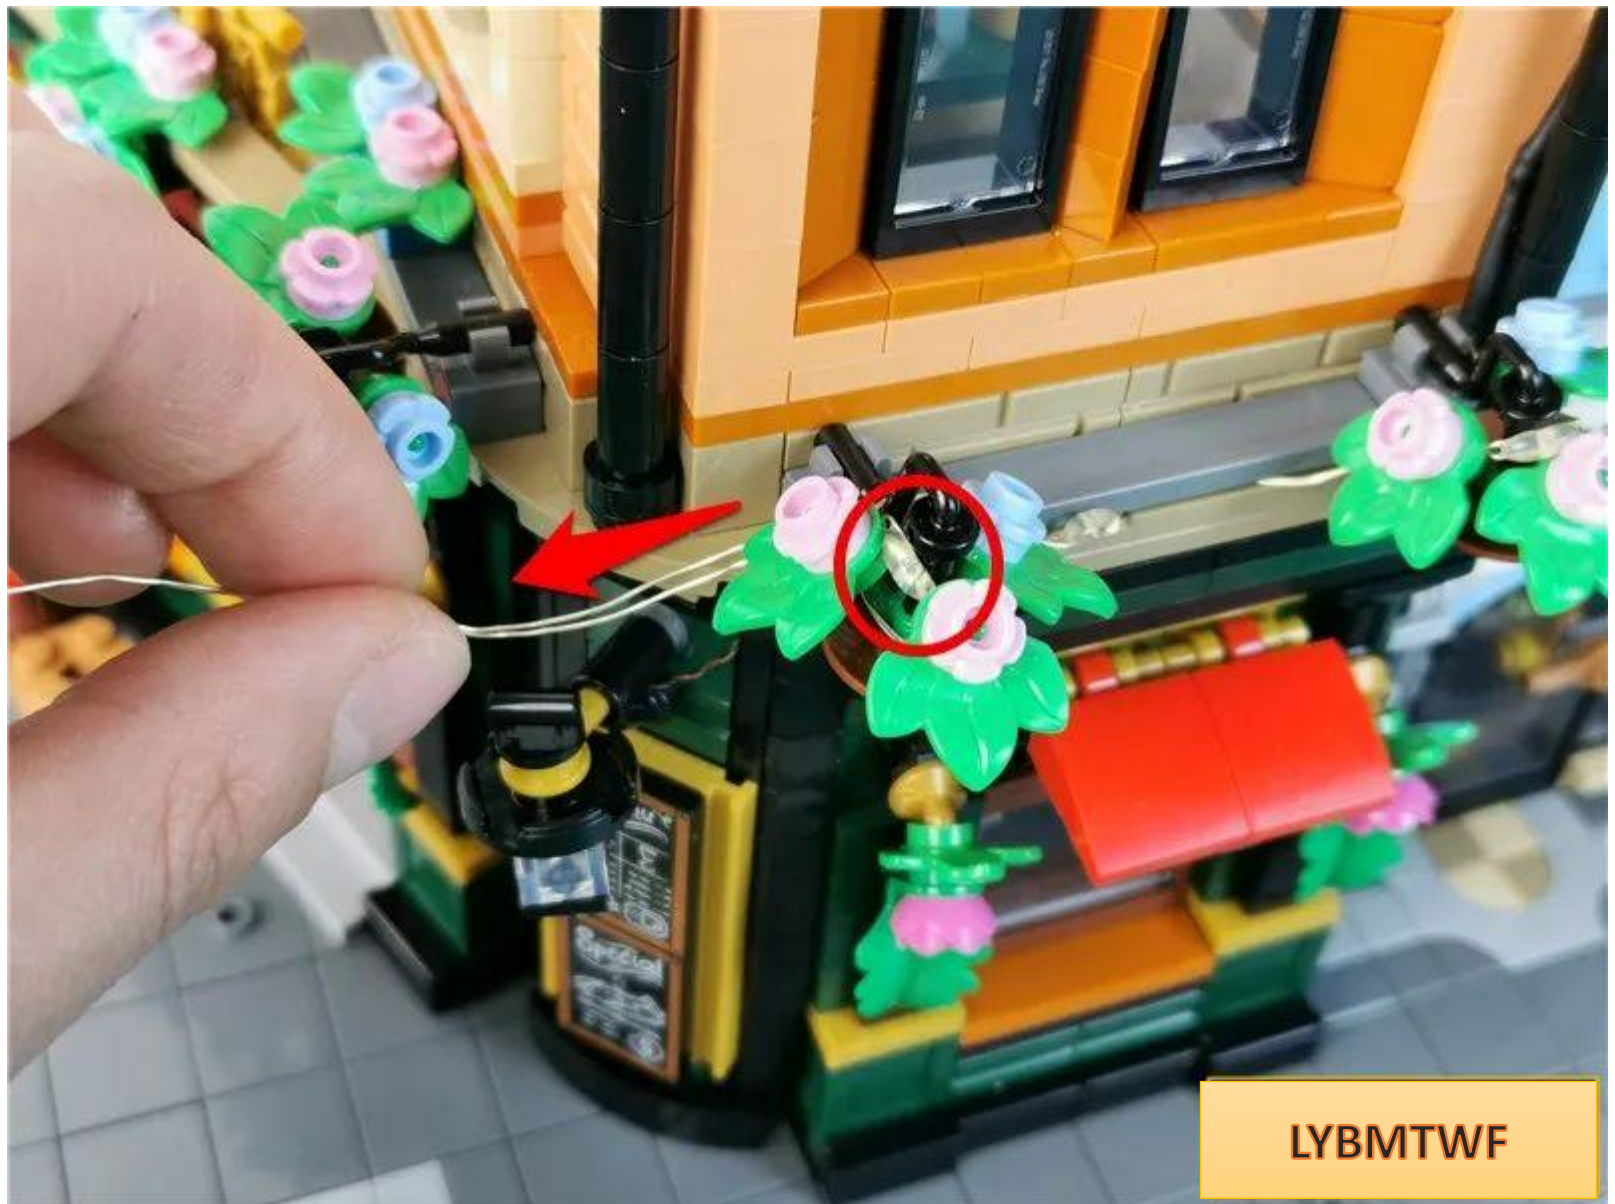


LYBMTWF



Separate the position shown in the figure by 1 gap

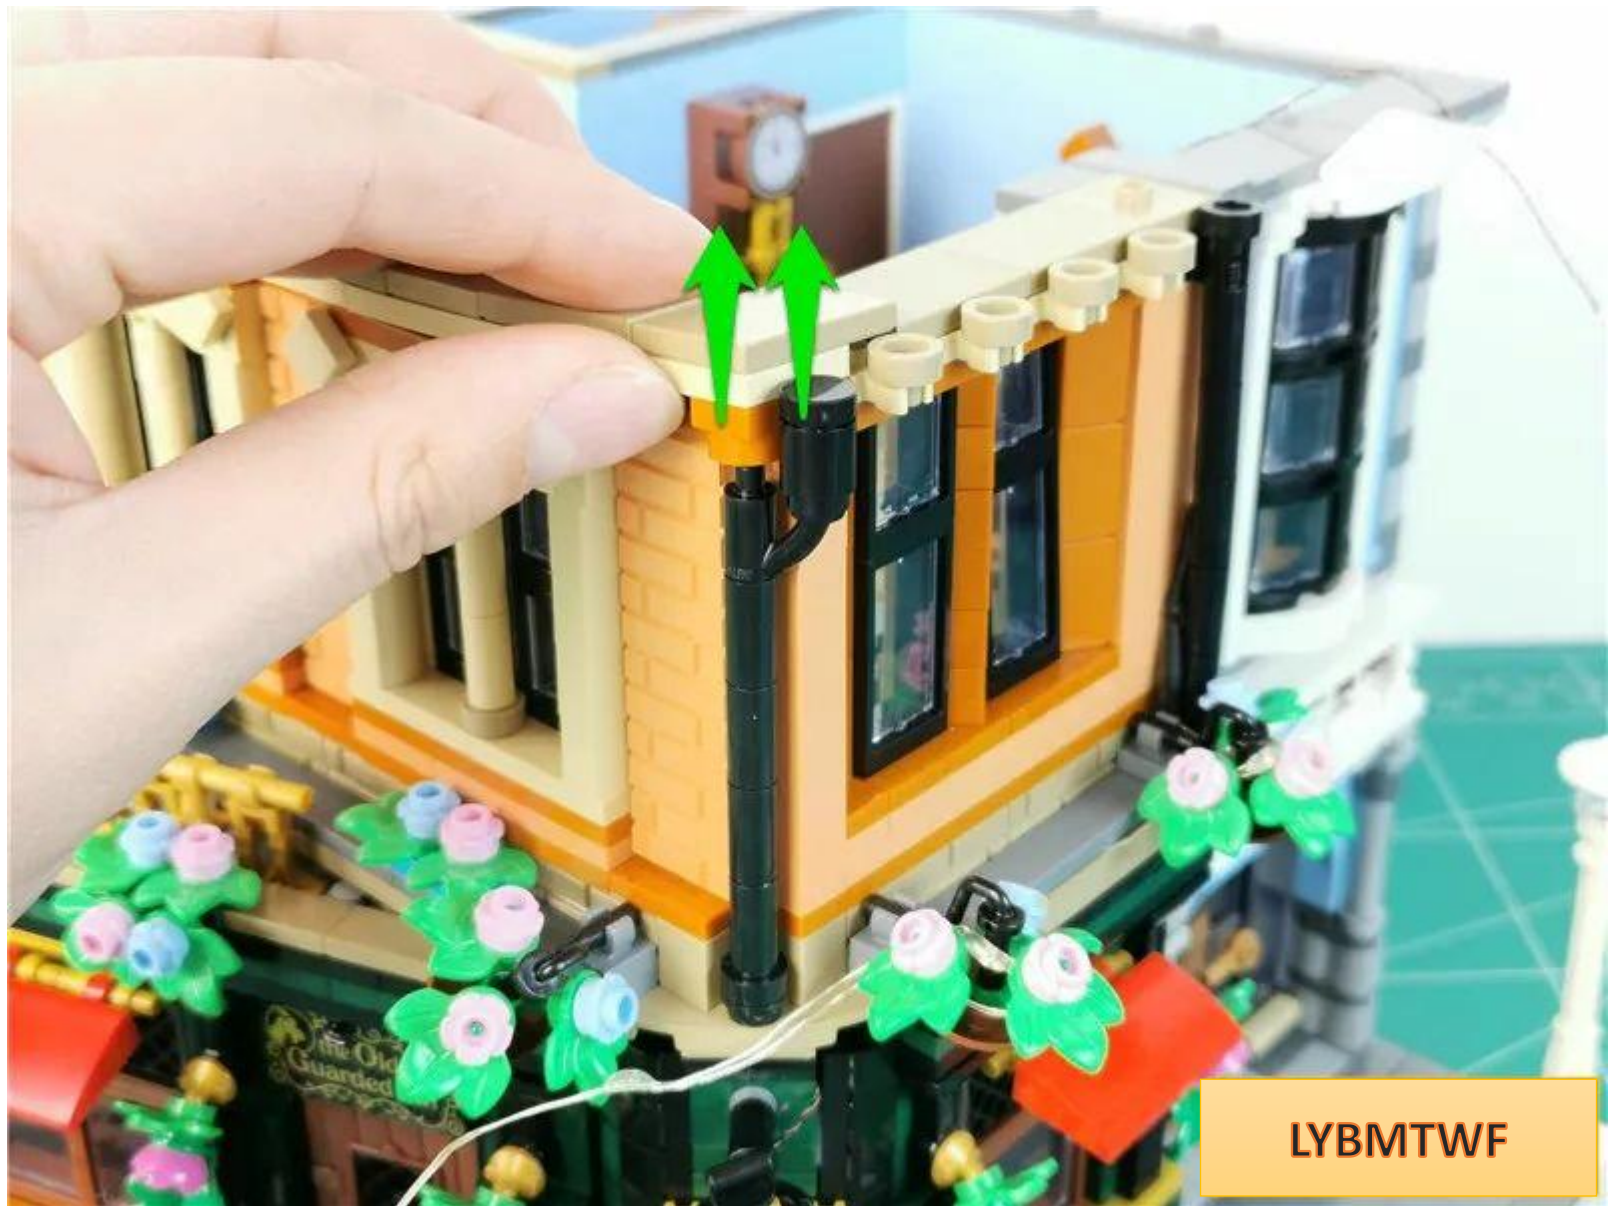

Remove the black parts

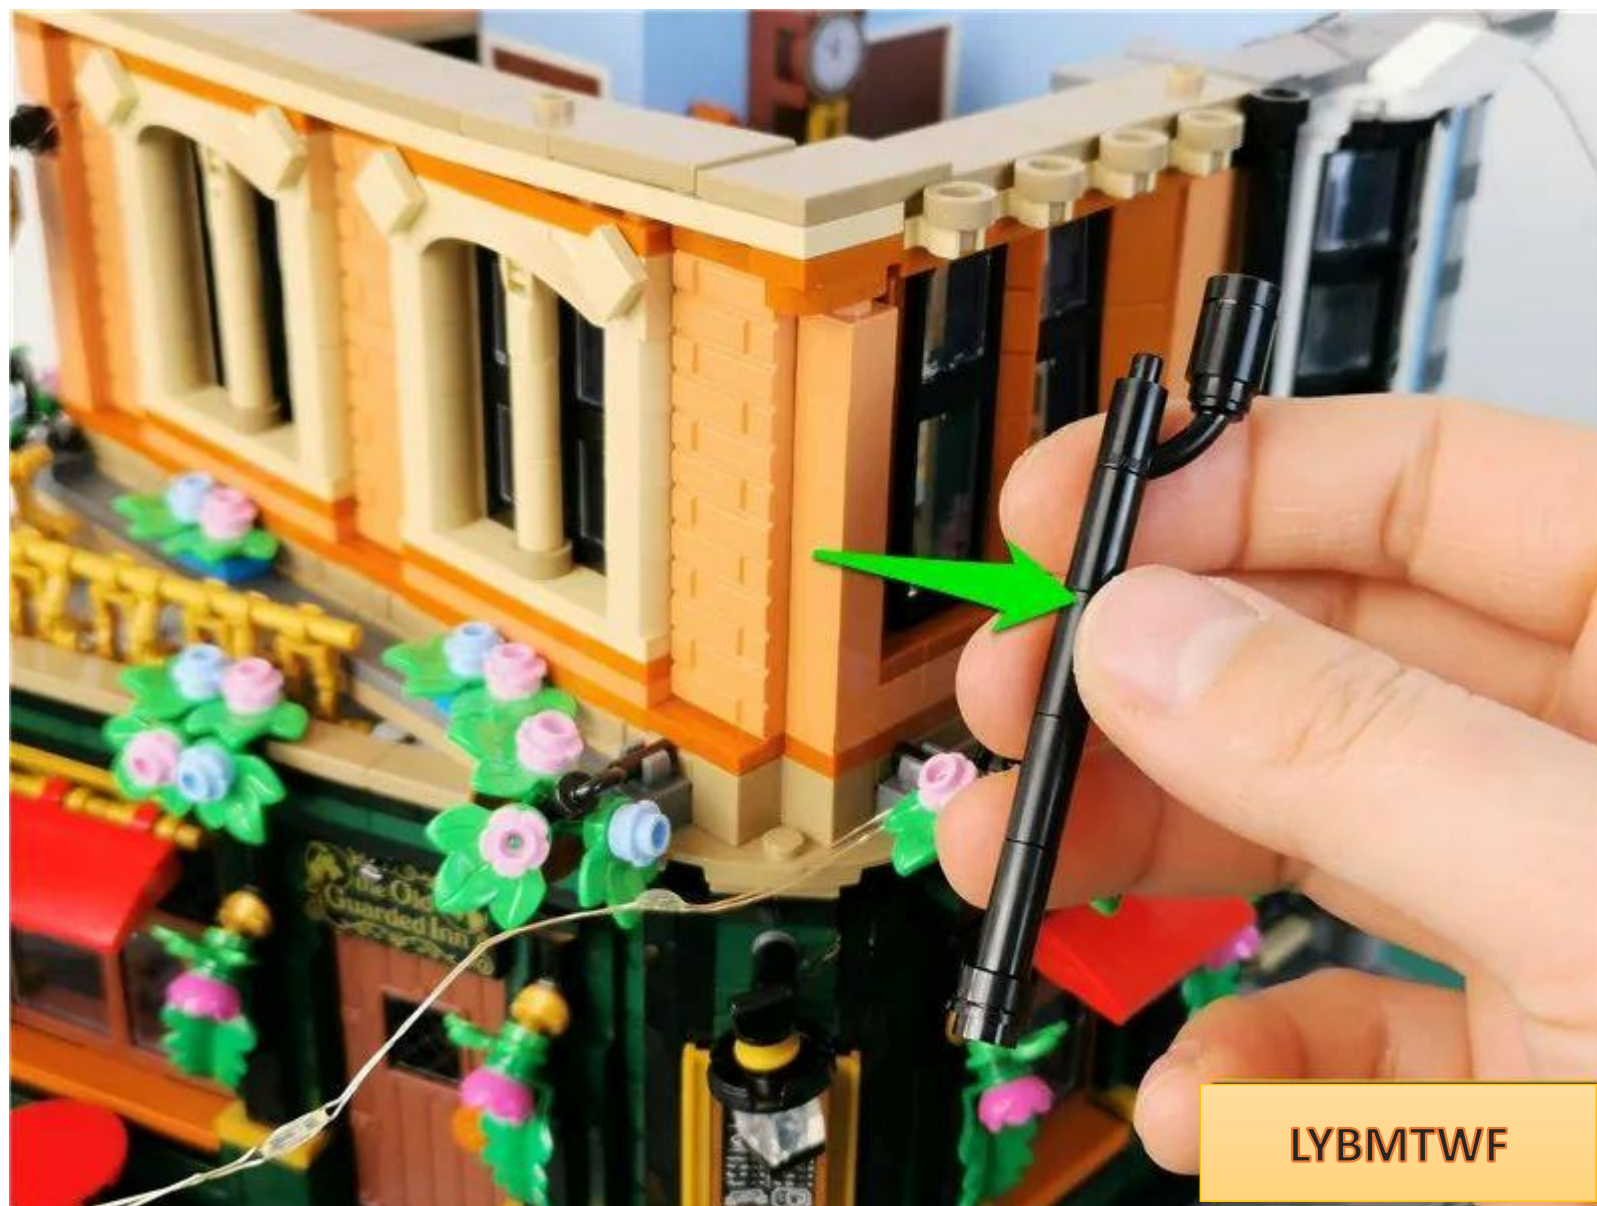




Pull the remaining light strings to the left, close to the building.



LYBMTWF



Restore black parts

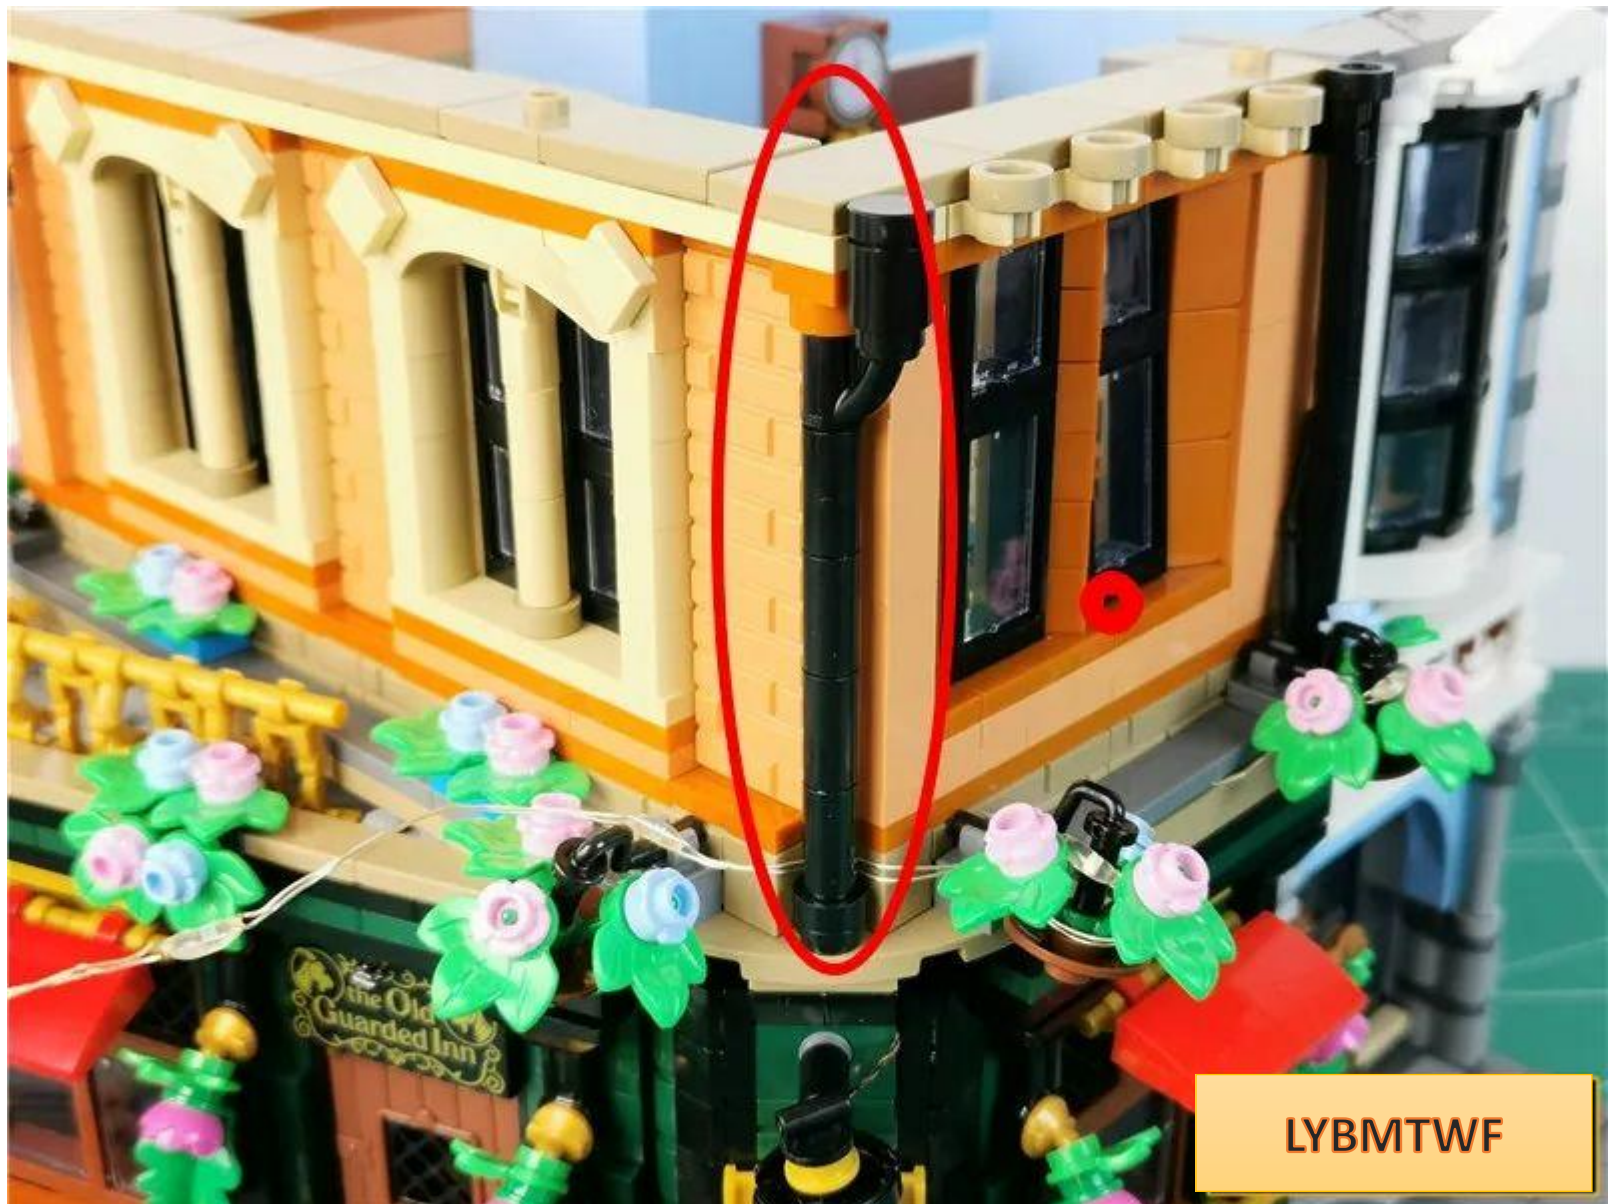

Go to the other side





Pass the light string around the flower basket bracket and pull it to the left



LYBMTWF



Remove the parts indicated by the arrows.



Use parts to fix the light string







Remove the parts indicated by the arrows.






As shown in the figure, arrange the light strings one by one, restore the parts to fix the light strings, and **pay attention to the position of the lights.**

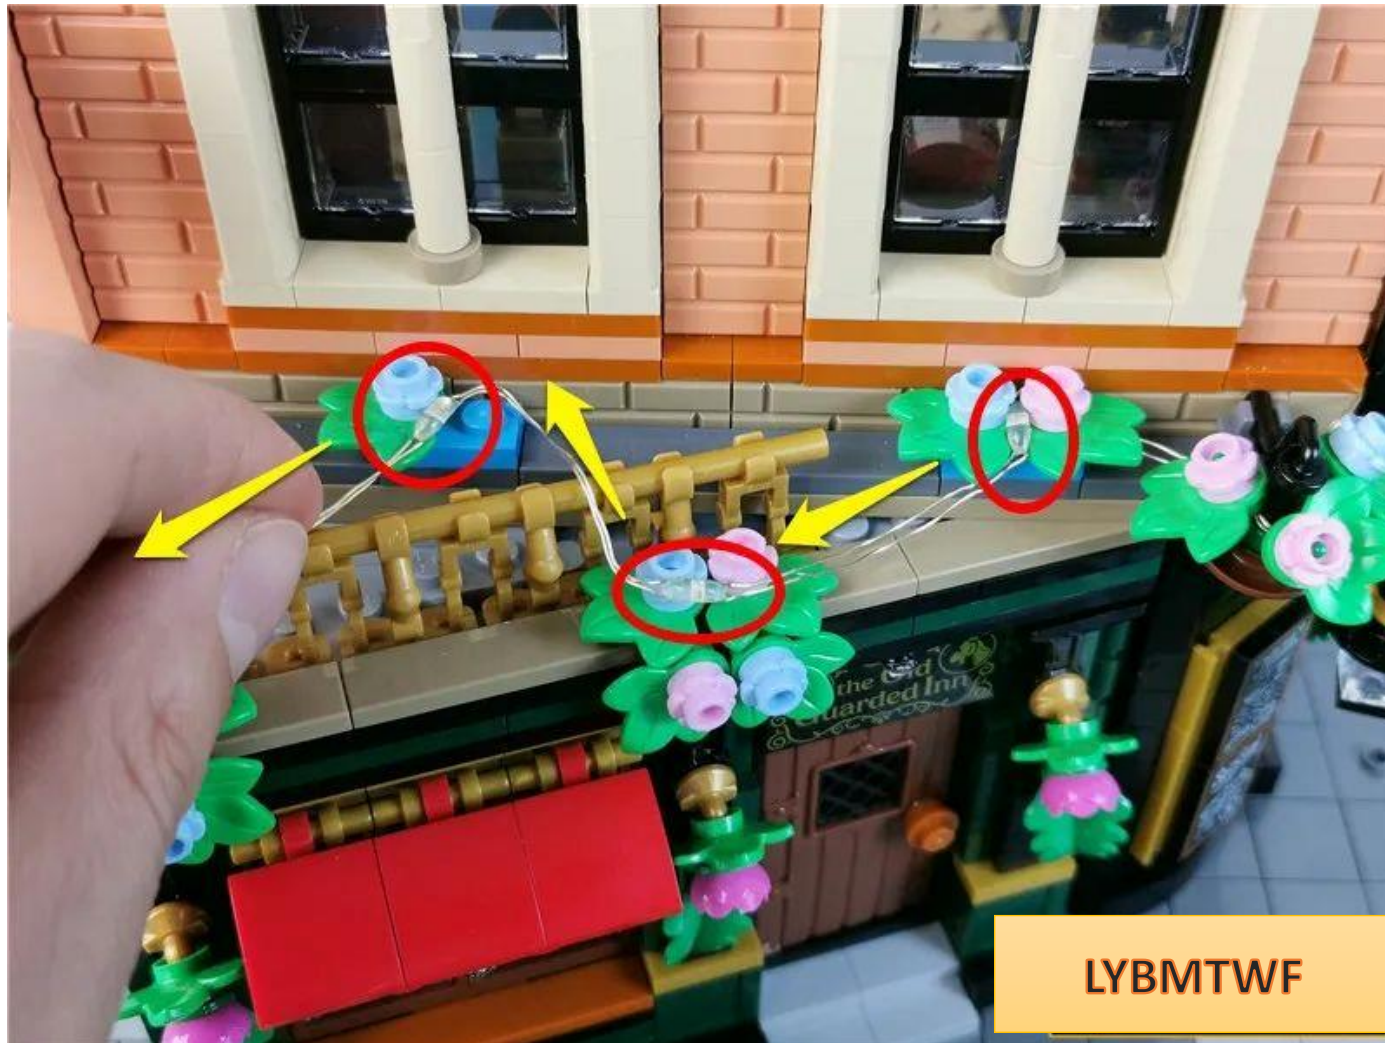

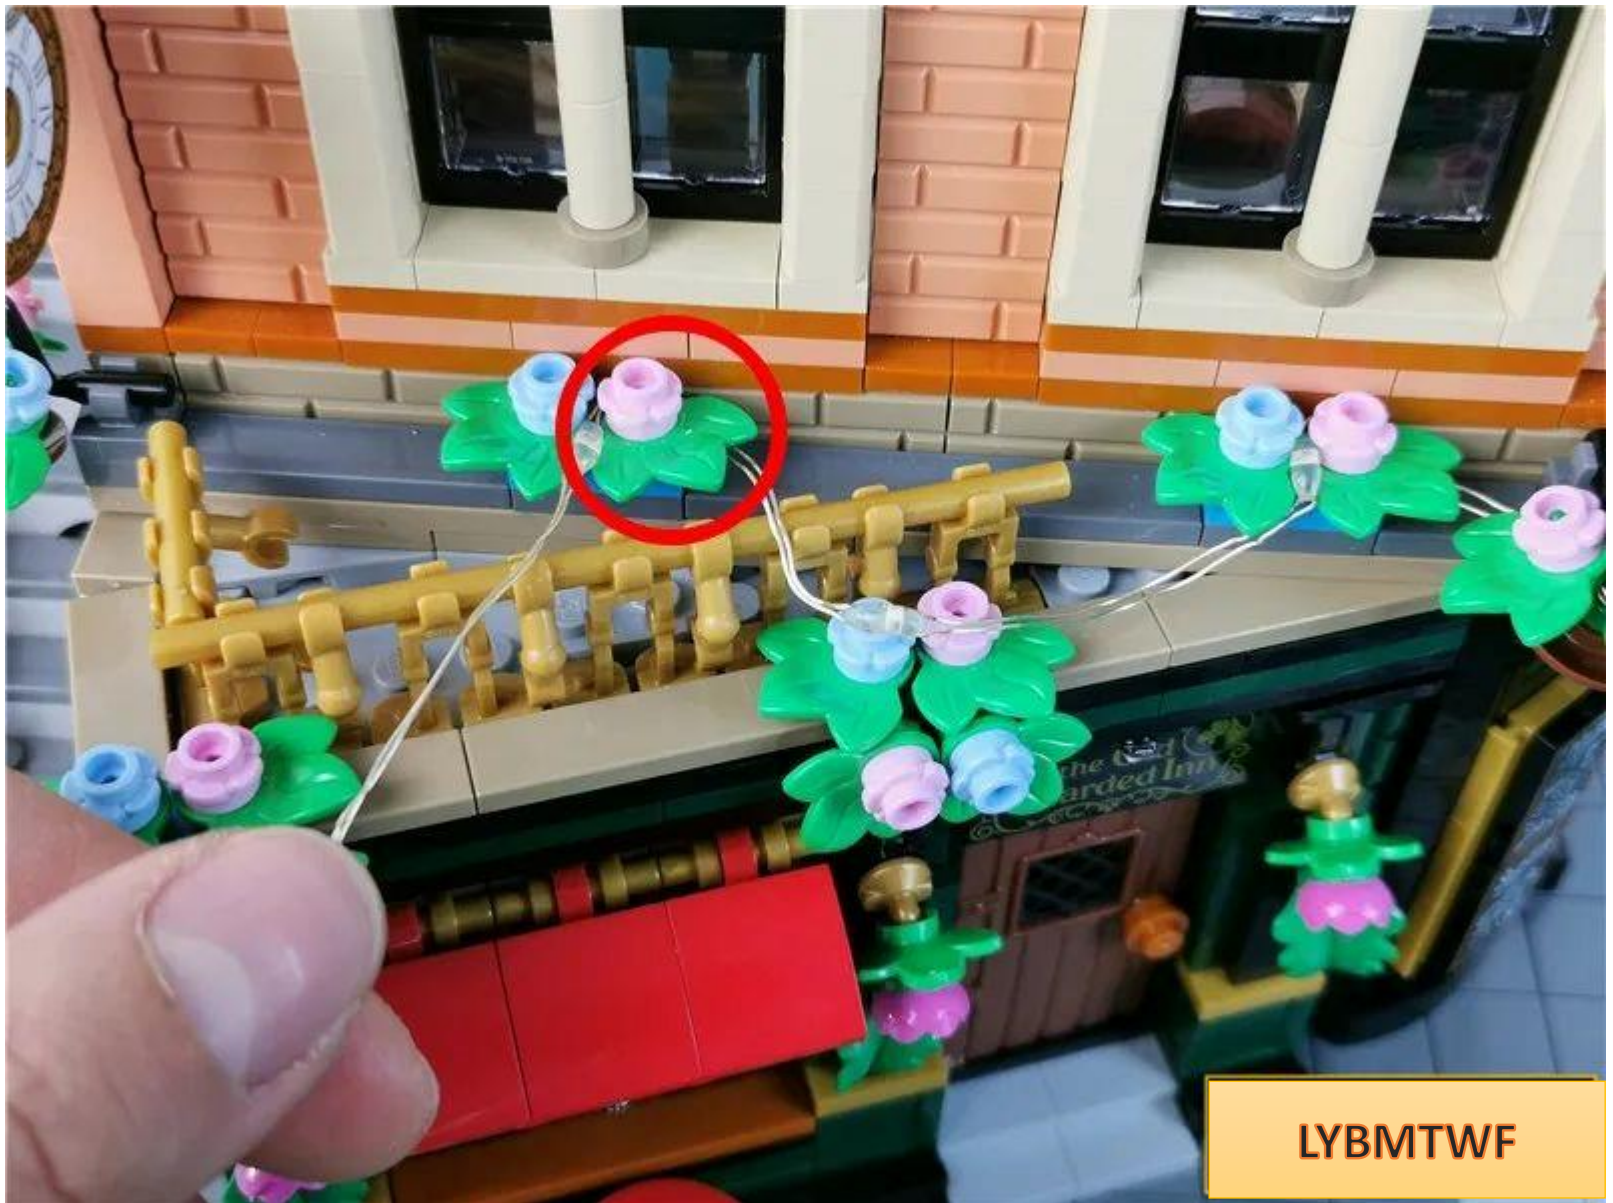



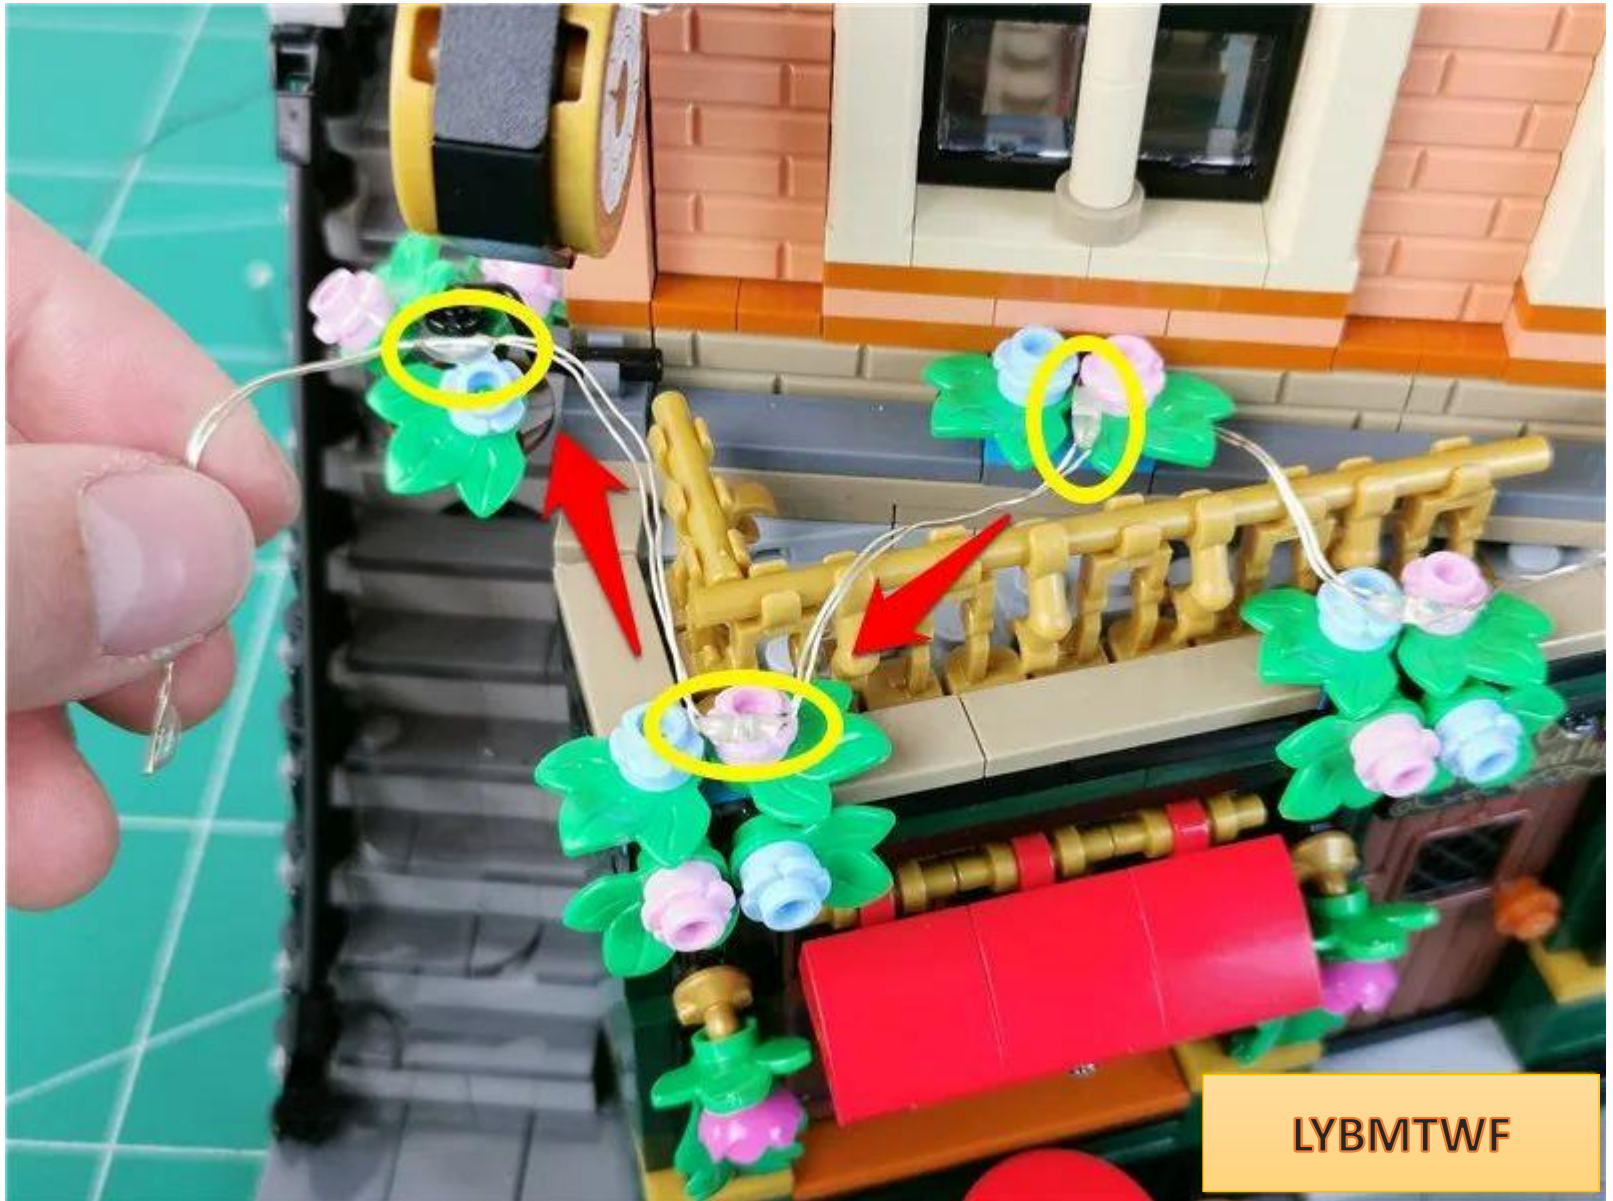



Wrap the remaining light strings around the flower basket




Test lighting installation without affecting the normal stratification of the building






Take 1 4-socket and 1 50cm connecting wire and connect them together

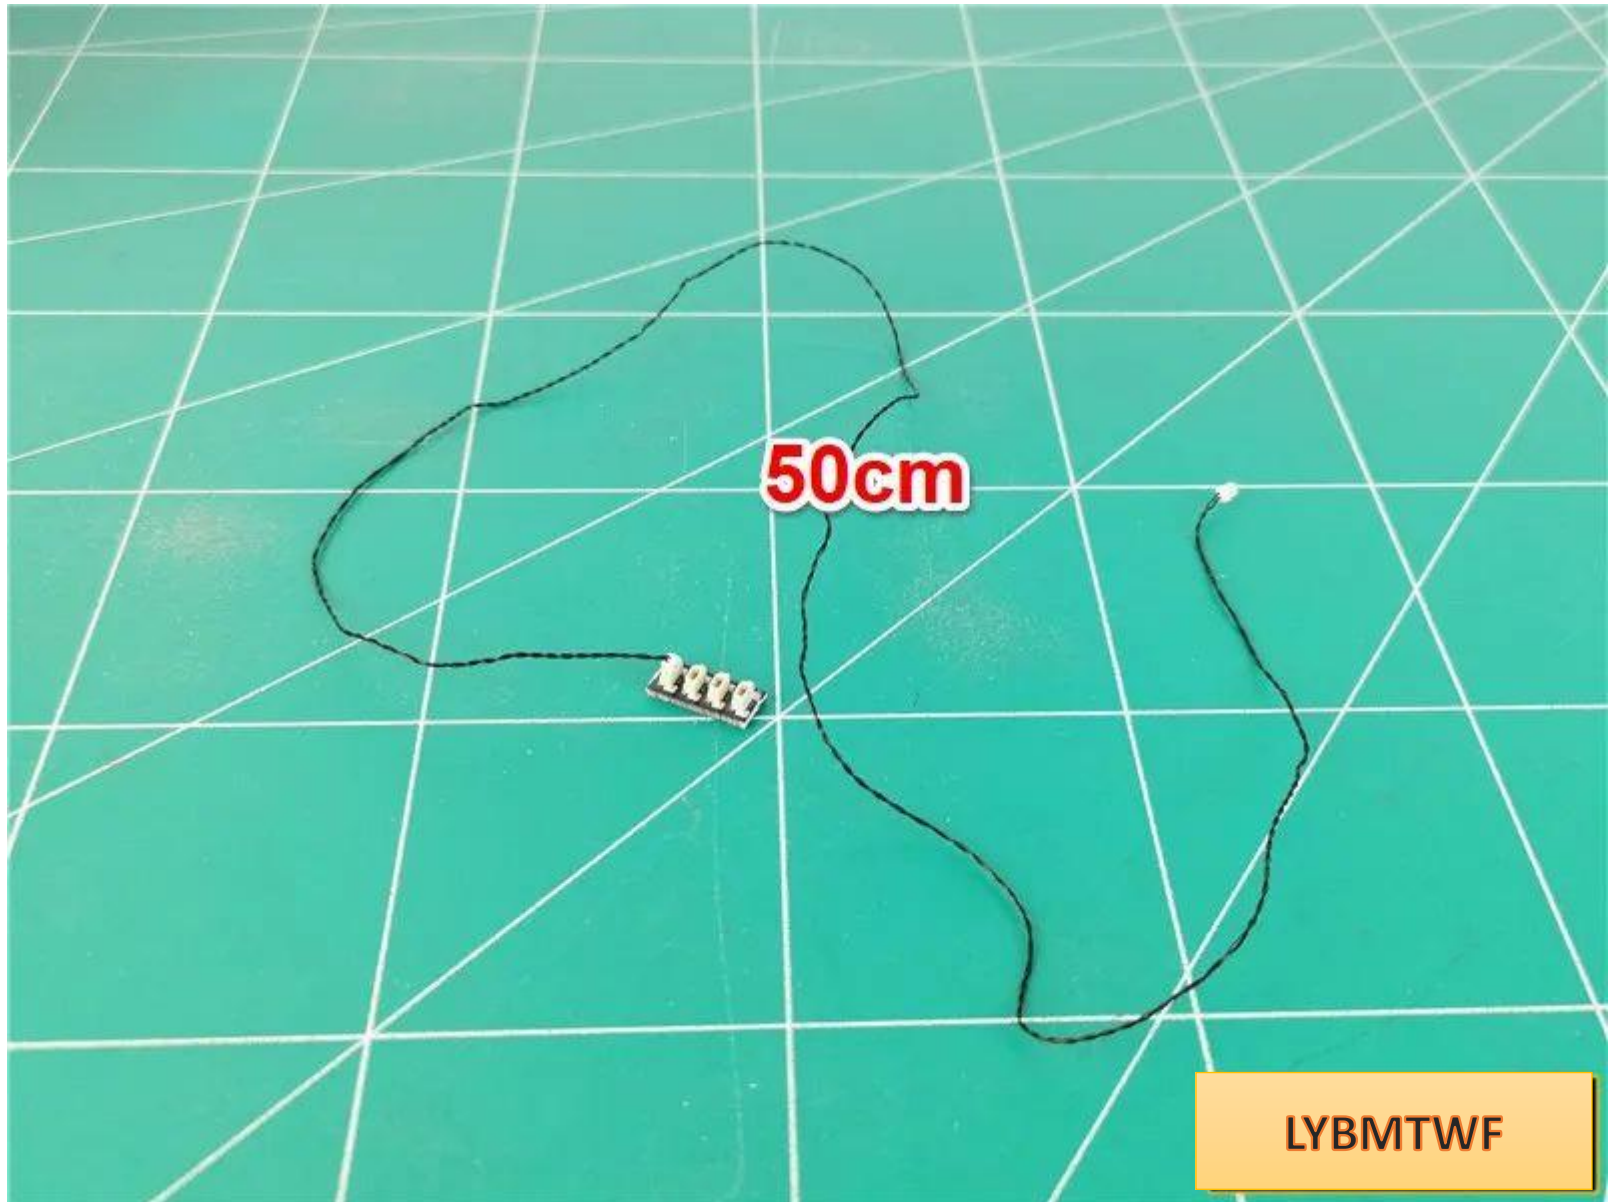




Insert the 2 tail wires into the 4 sockets

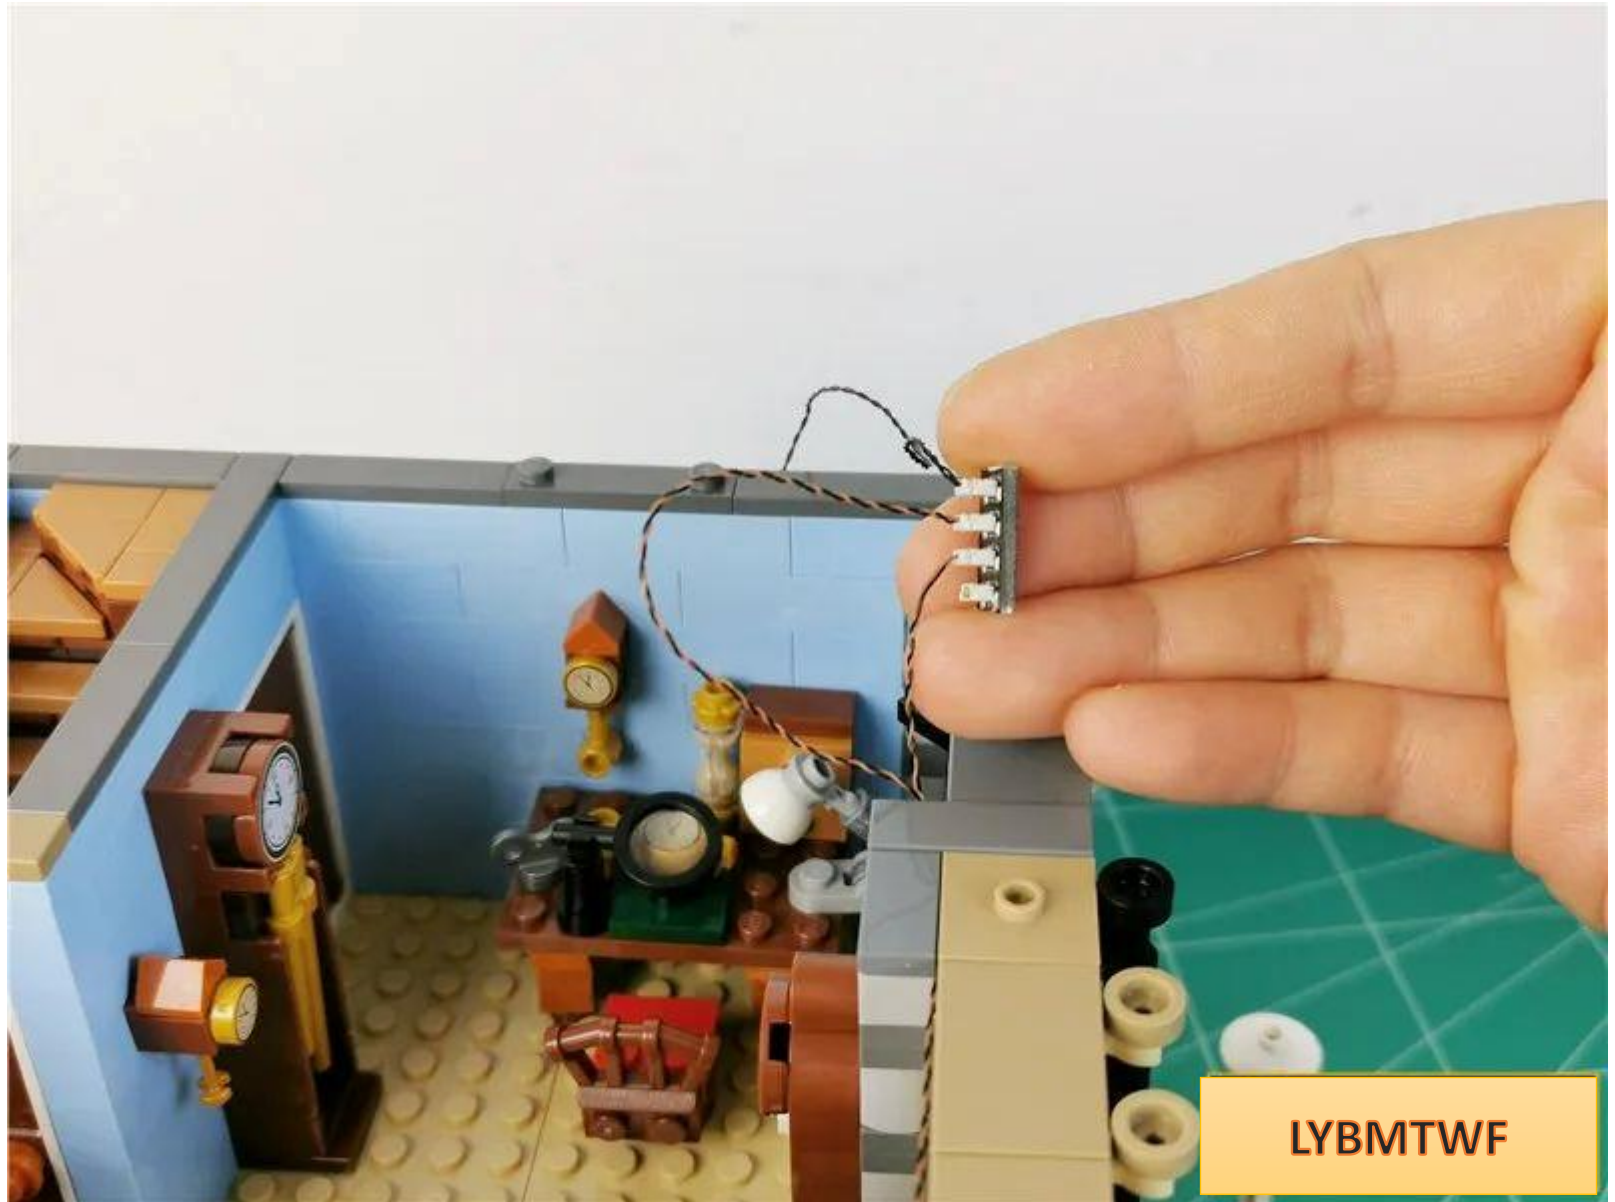


Plug the connecting wire on the 4th socket into the 6th socket connected to the power supply

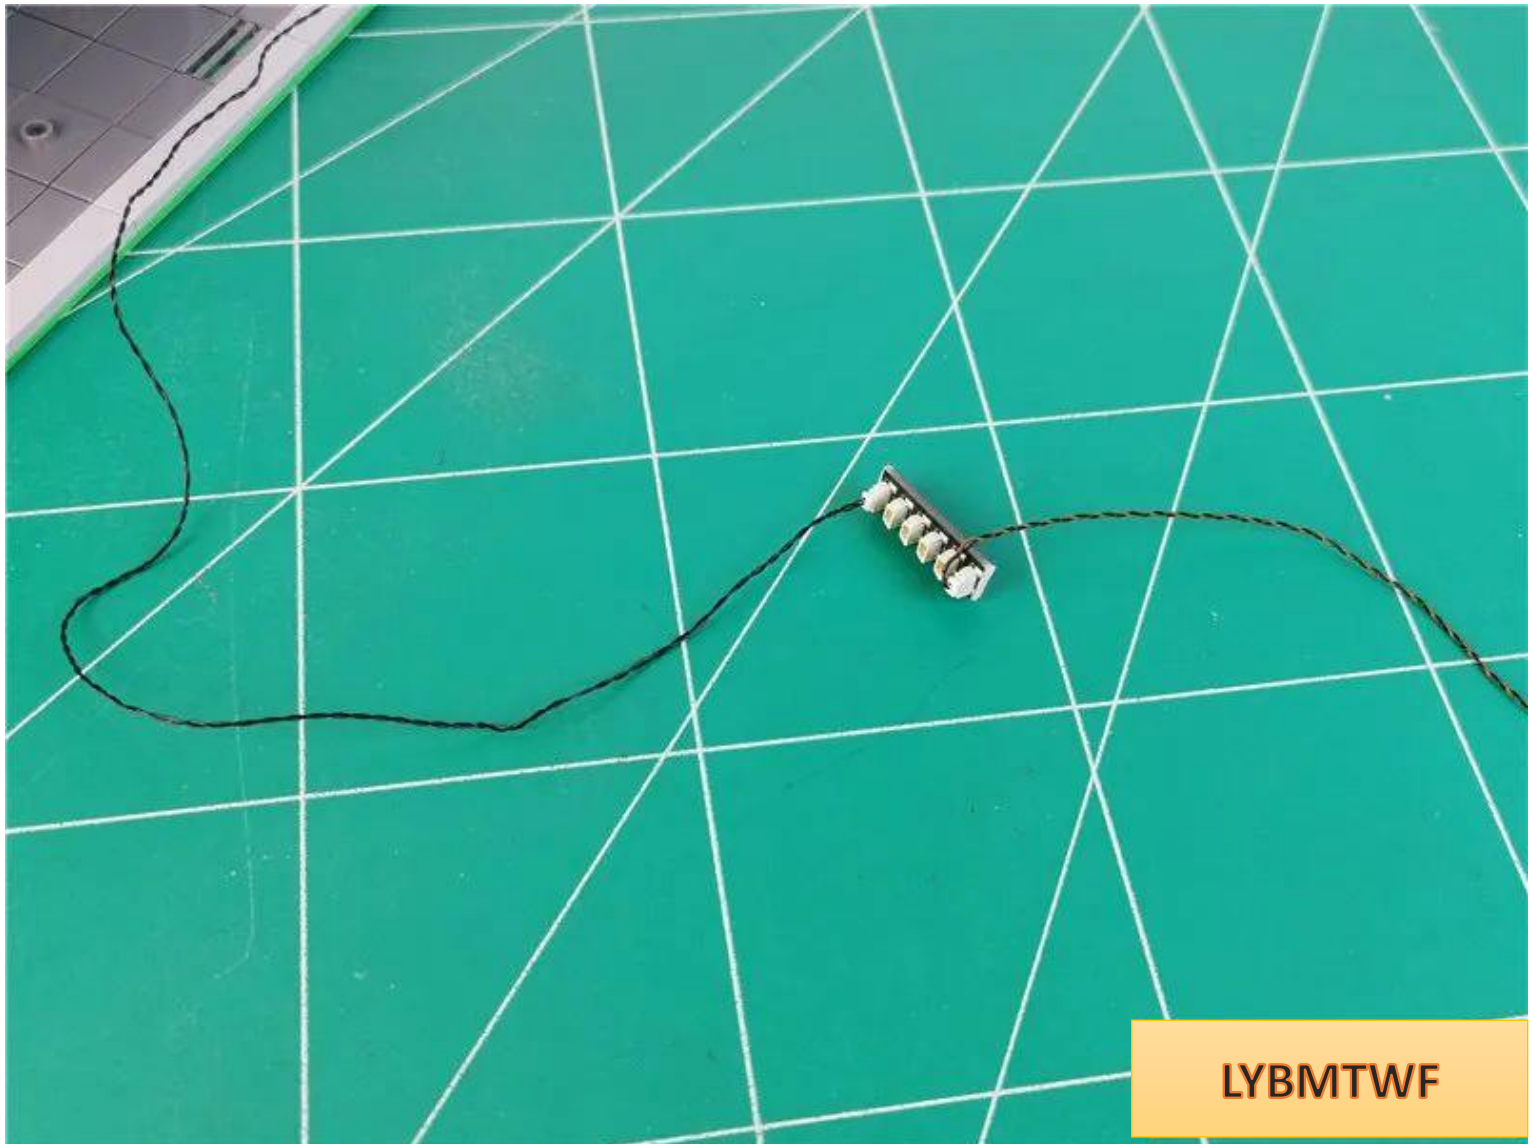

LYBMTWF




After the test, turn off the power supply, unplug the connecting wires, and **leave the 6 sockets connected to the power supply.**

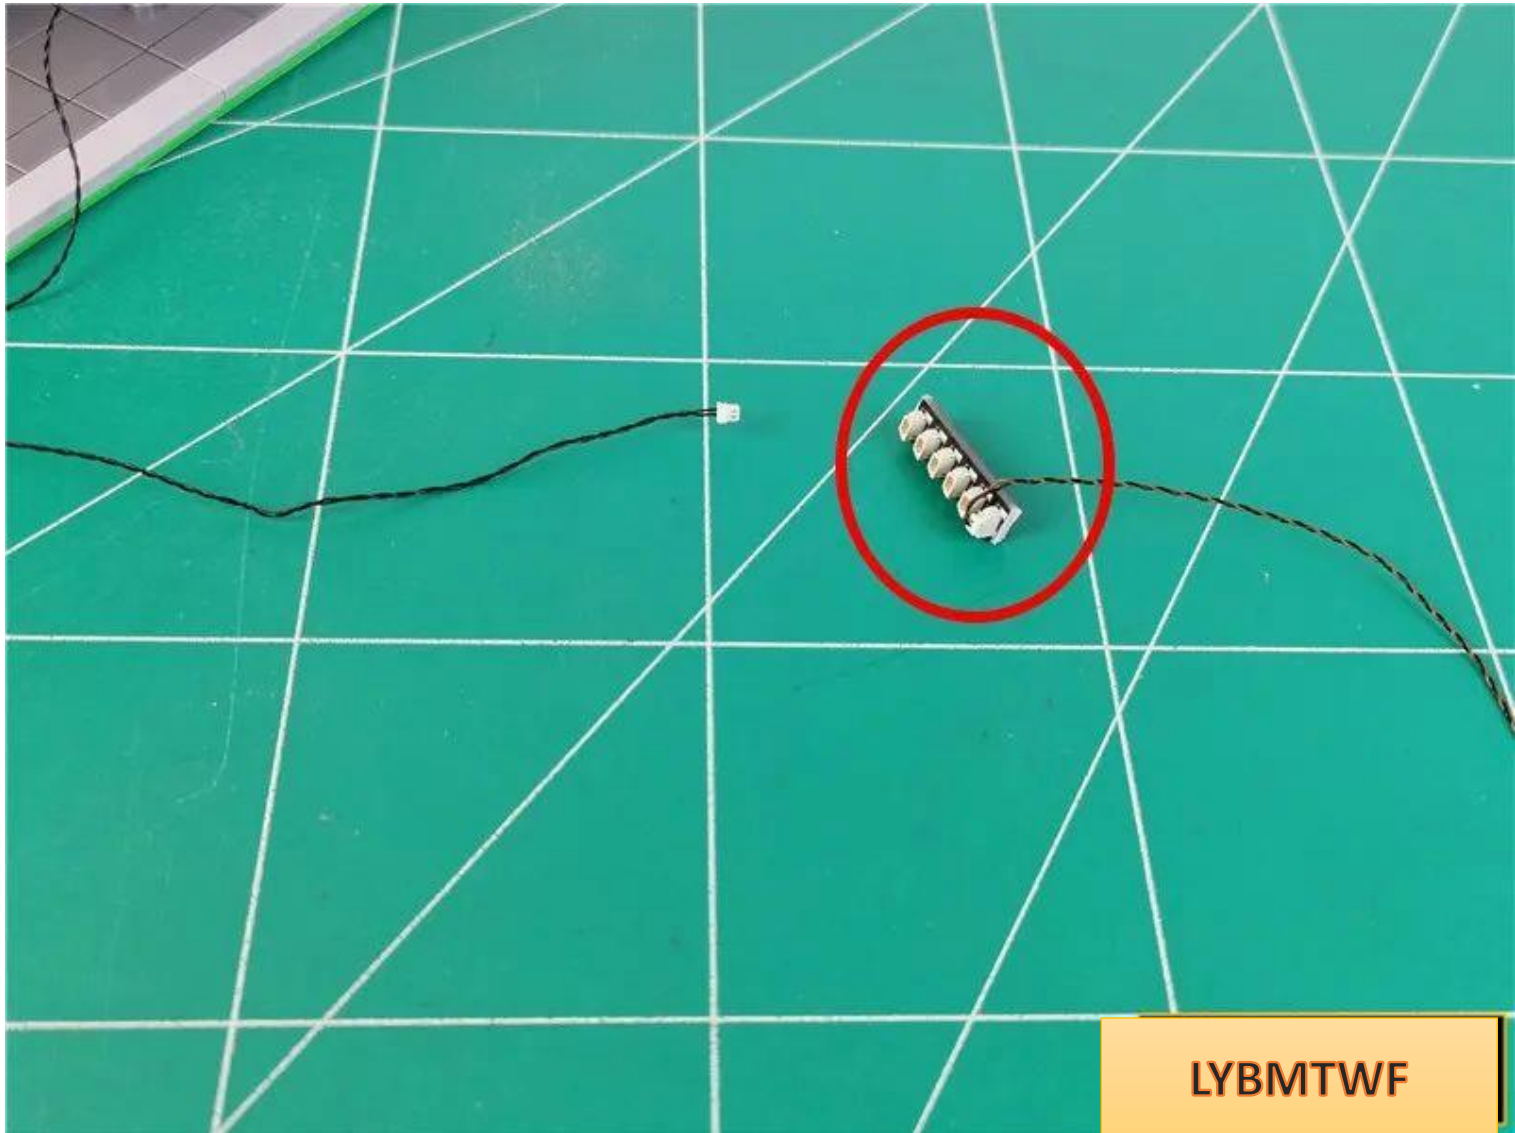

Paste the 4 seats to the positions shown in the figure




Fit the excess wire into the gap

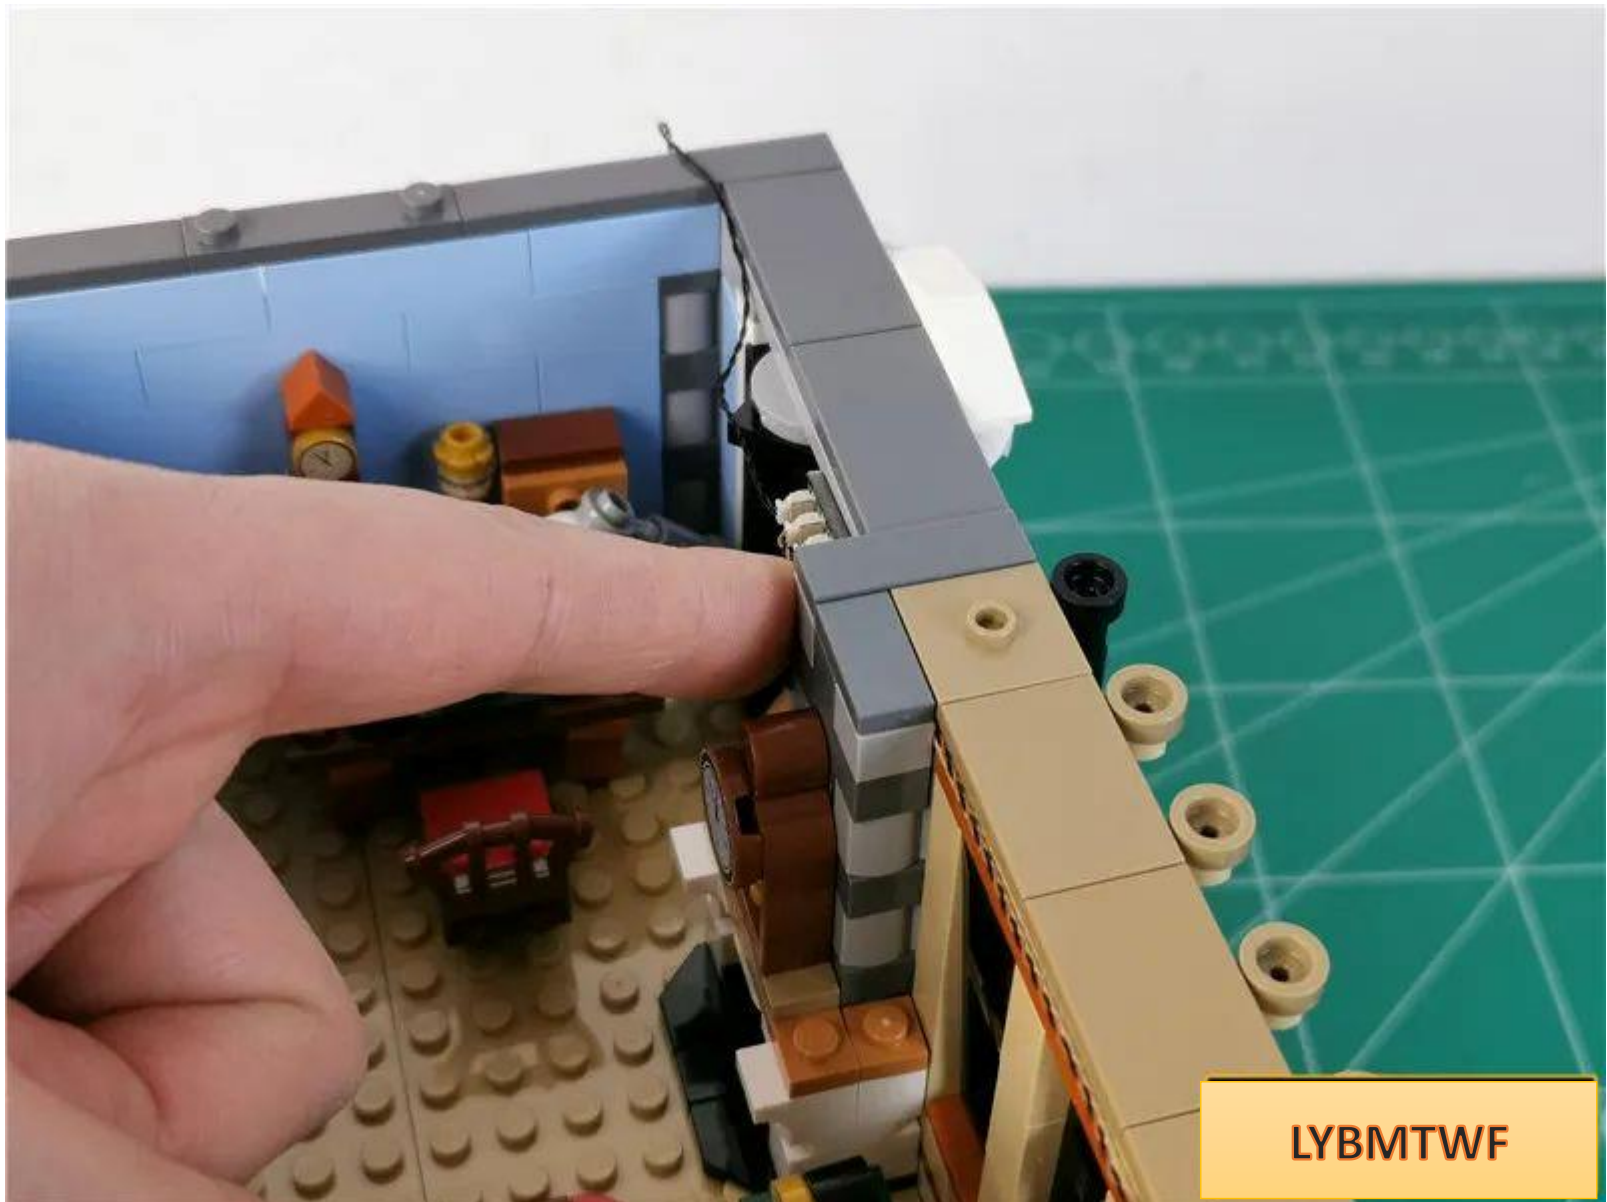


LYBMTWF




Remove the parts indicated by the arrows.

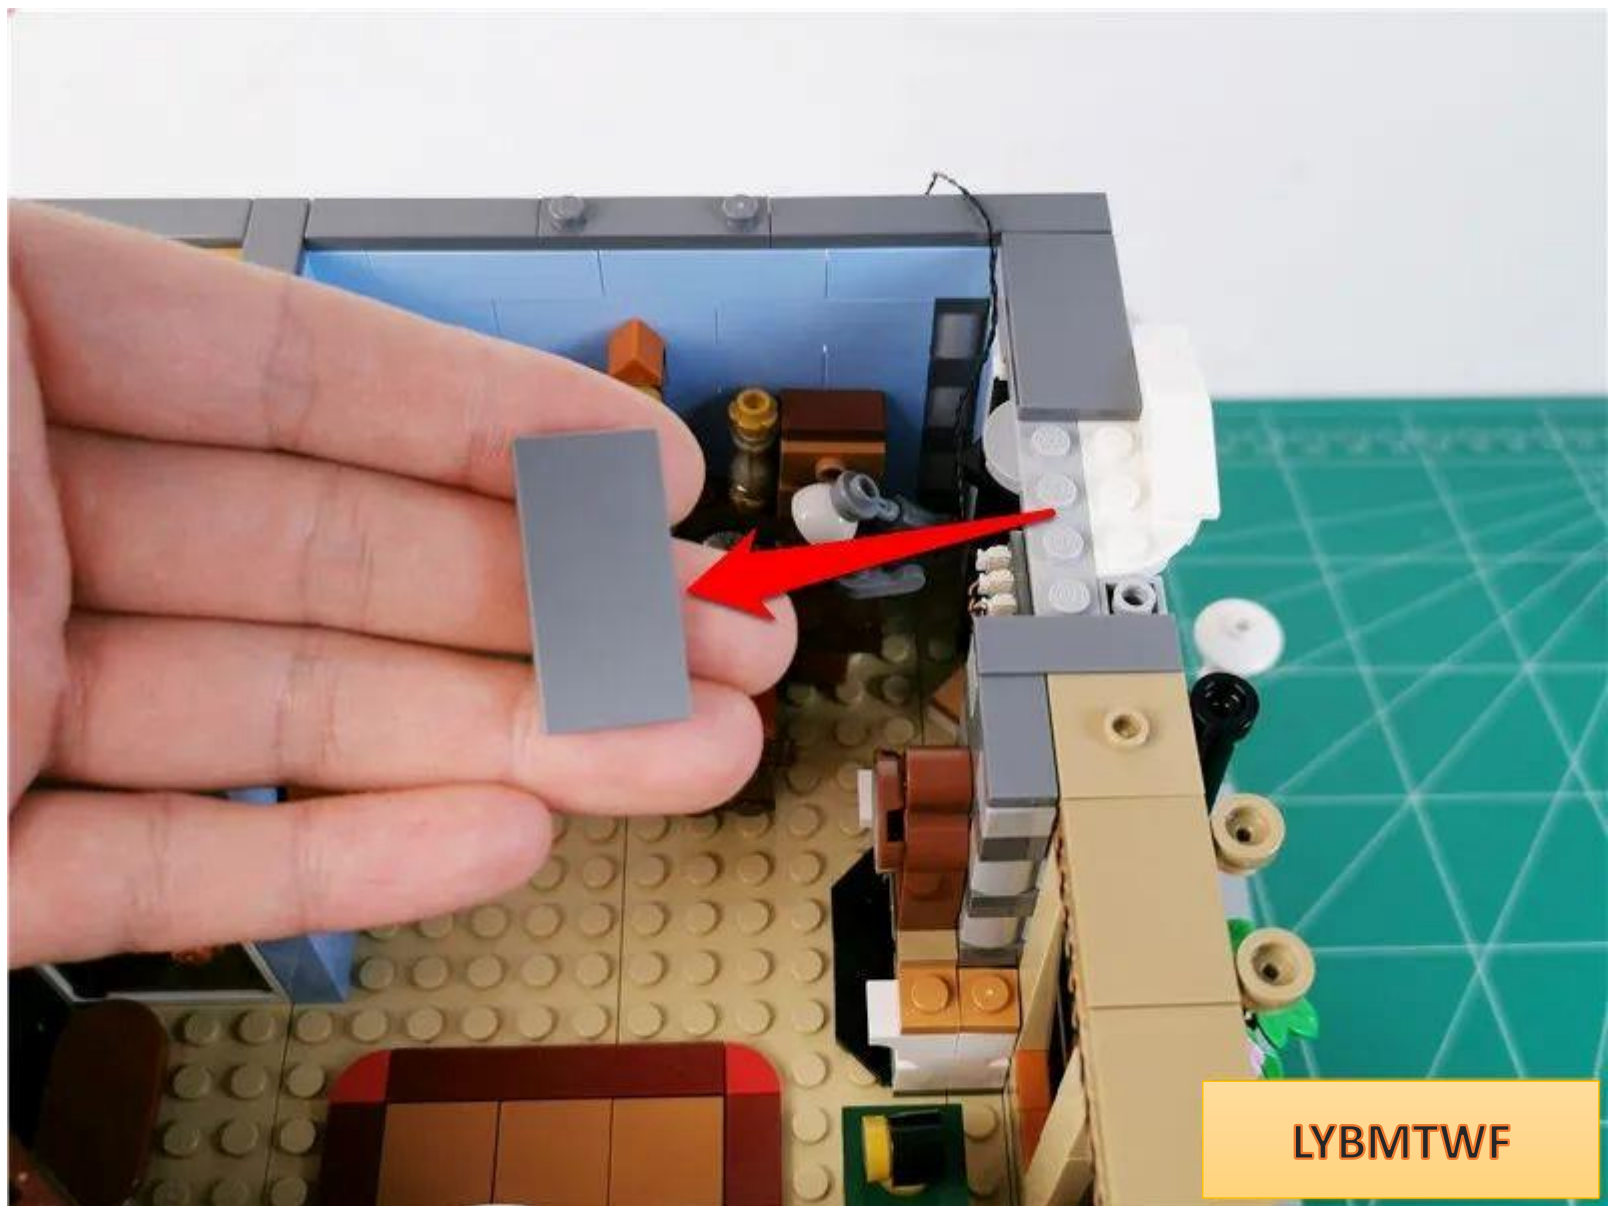

Connect the wire around the raised particles

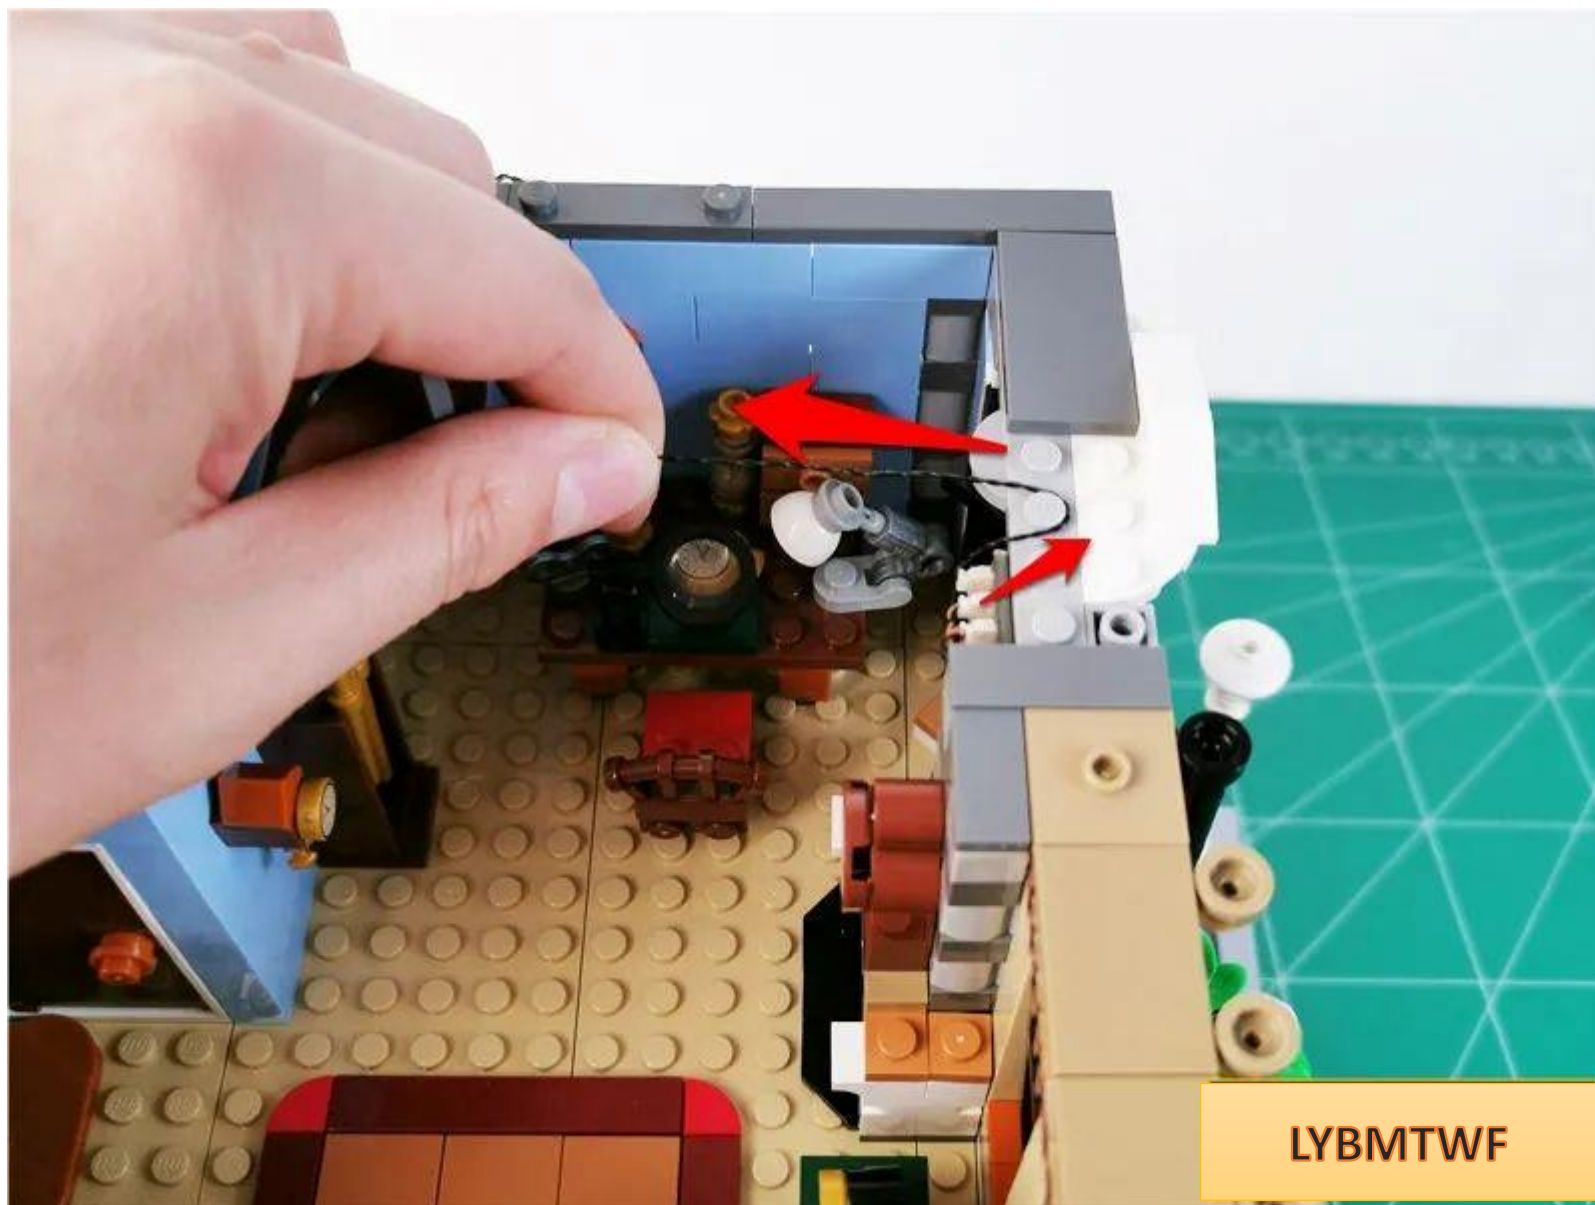


Restore parts and fix connecting wires

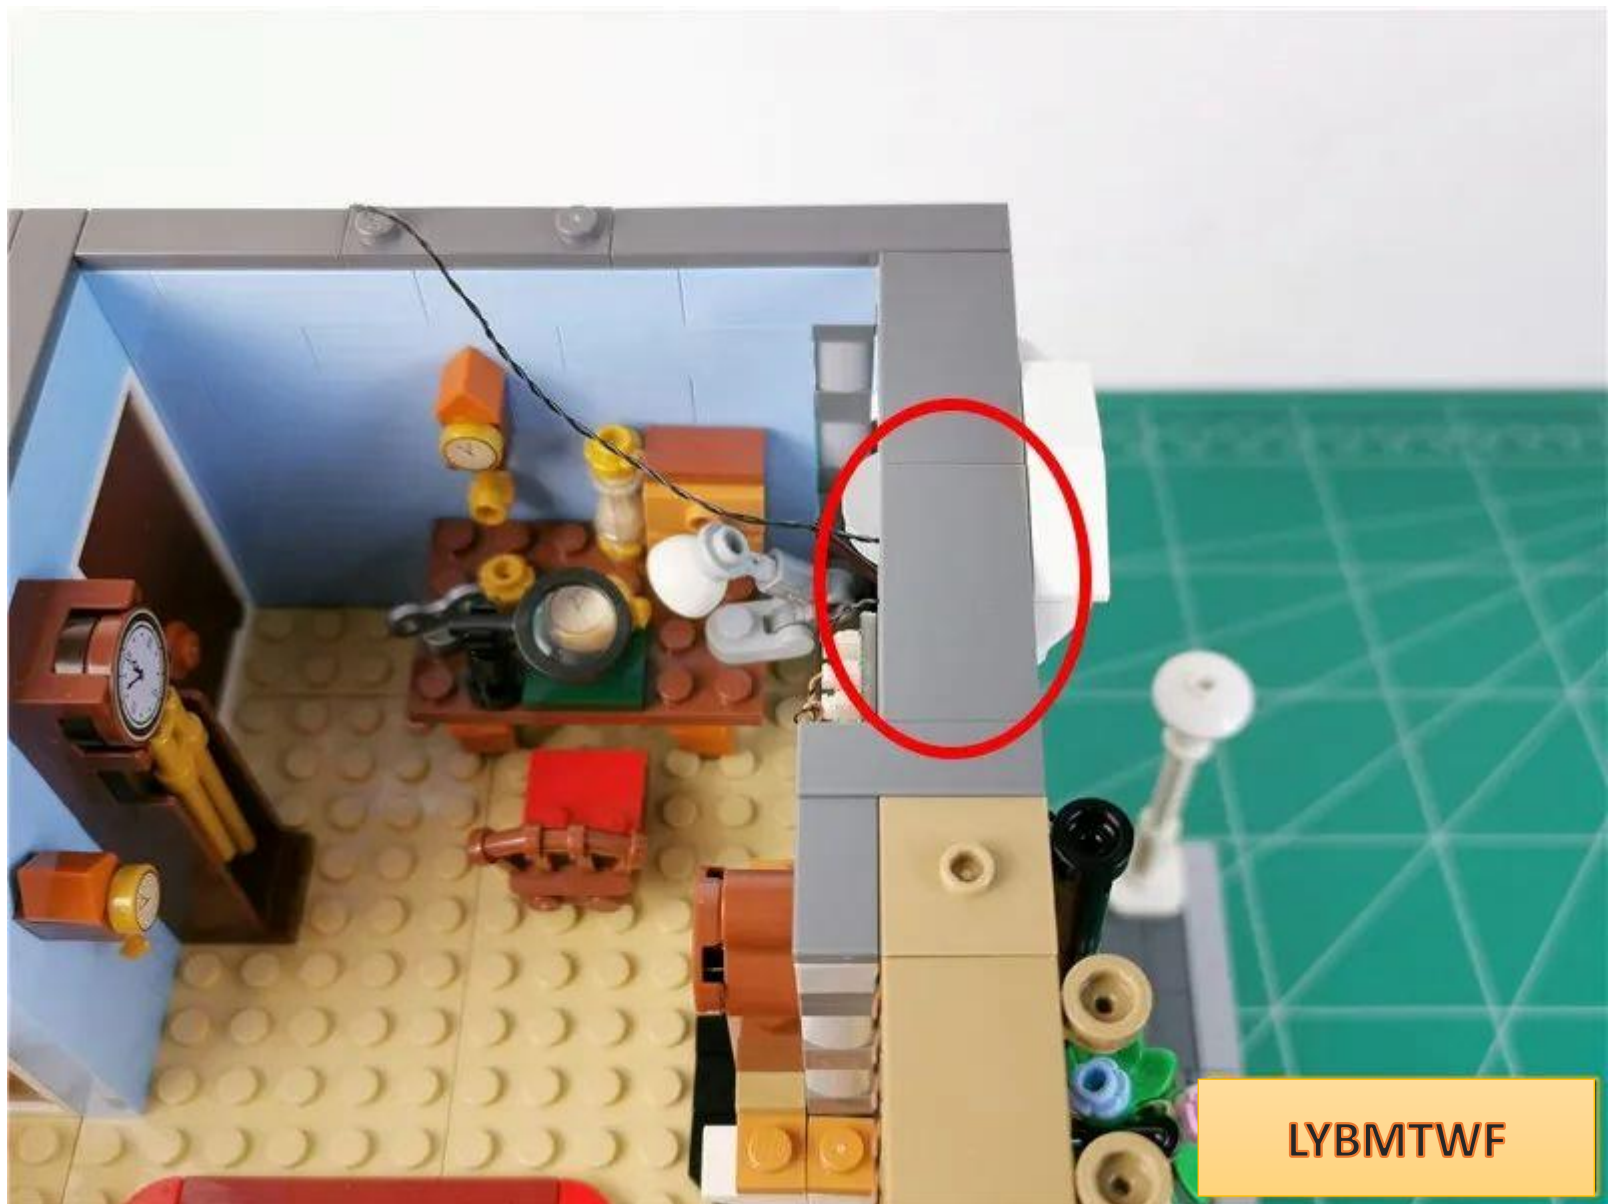


LYBMTWF




Remove the parts indicated by the arrows one by one, and use the parts to fix the connecting wires.

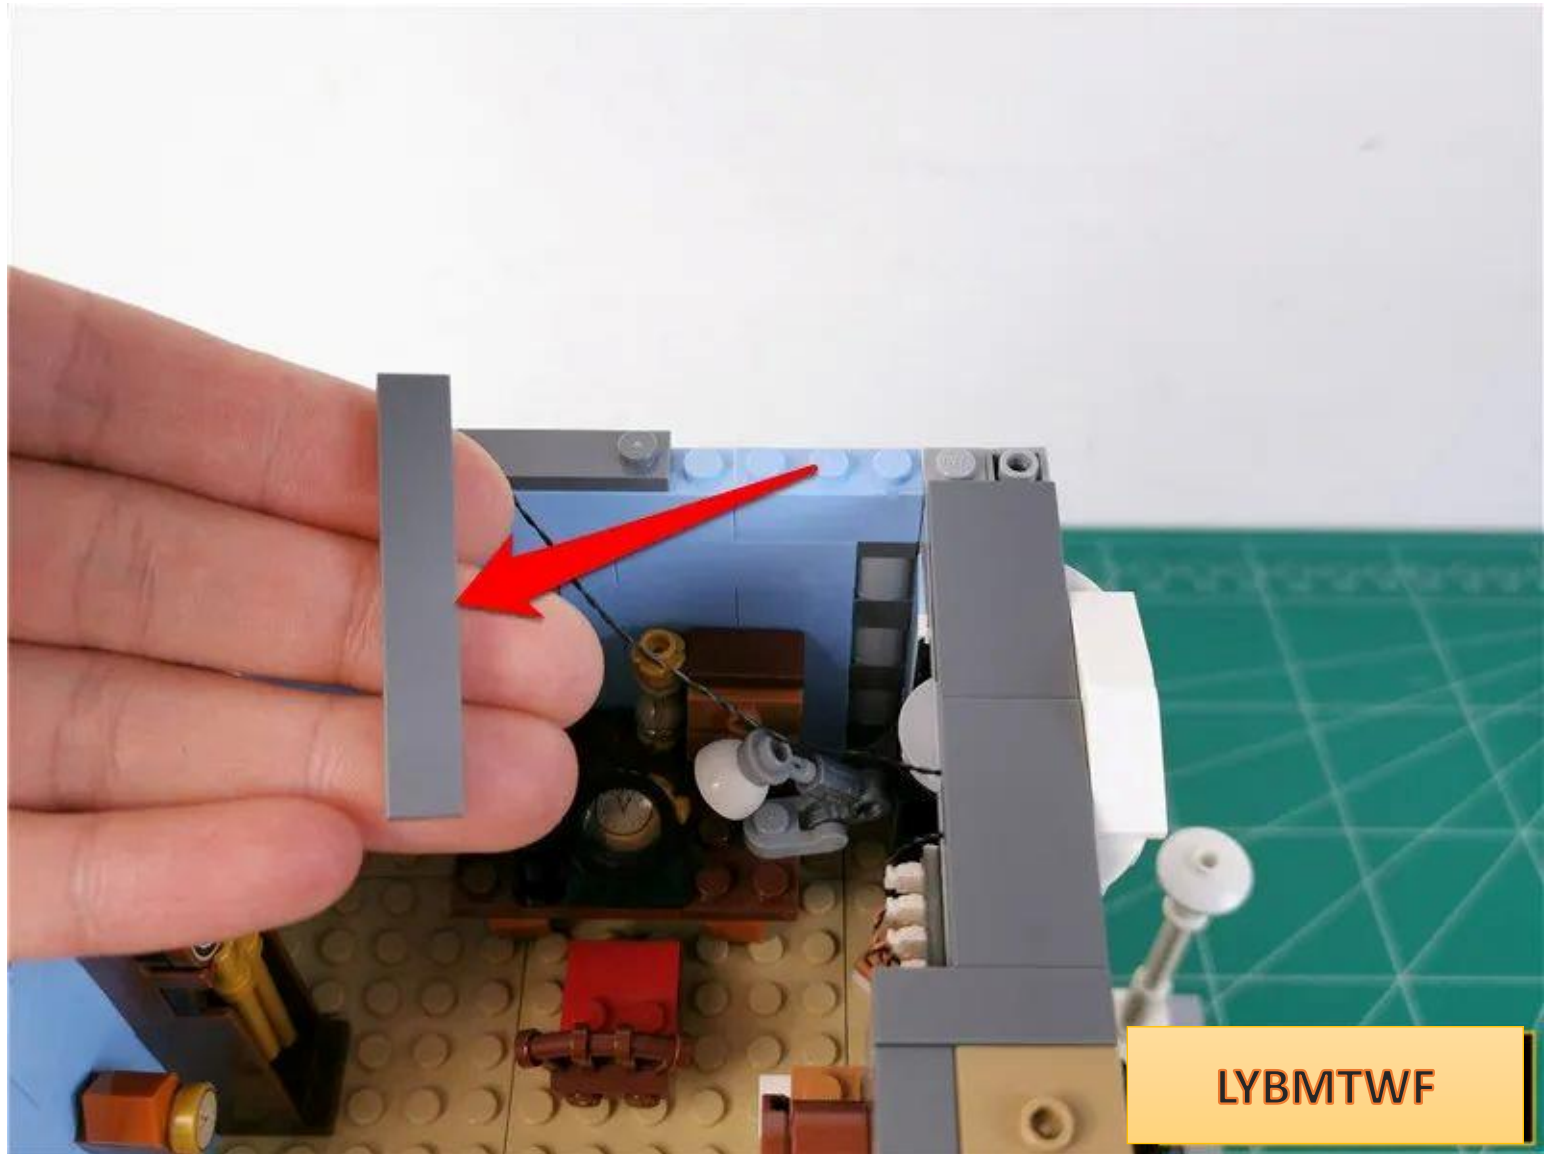

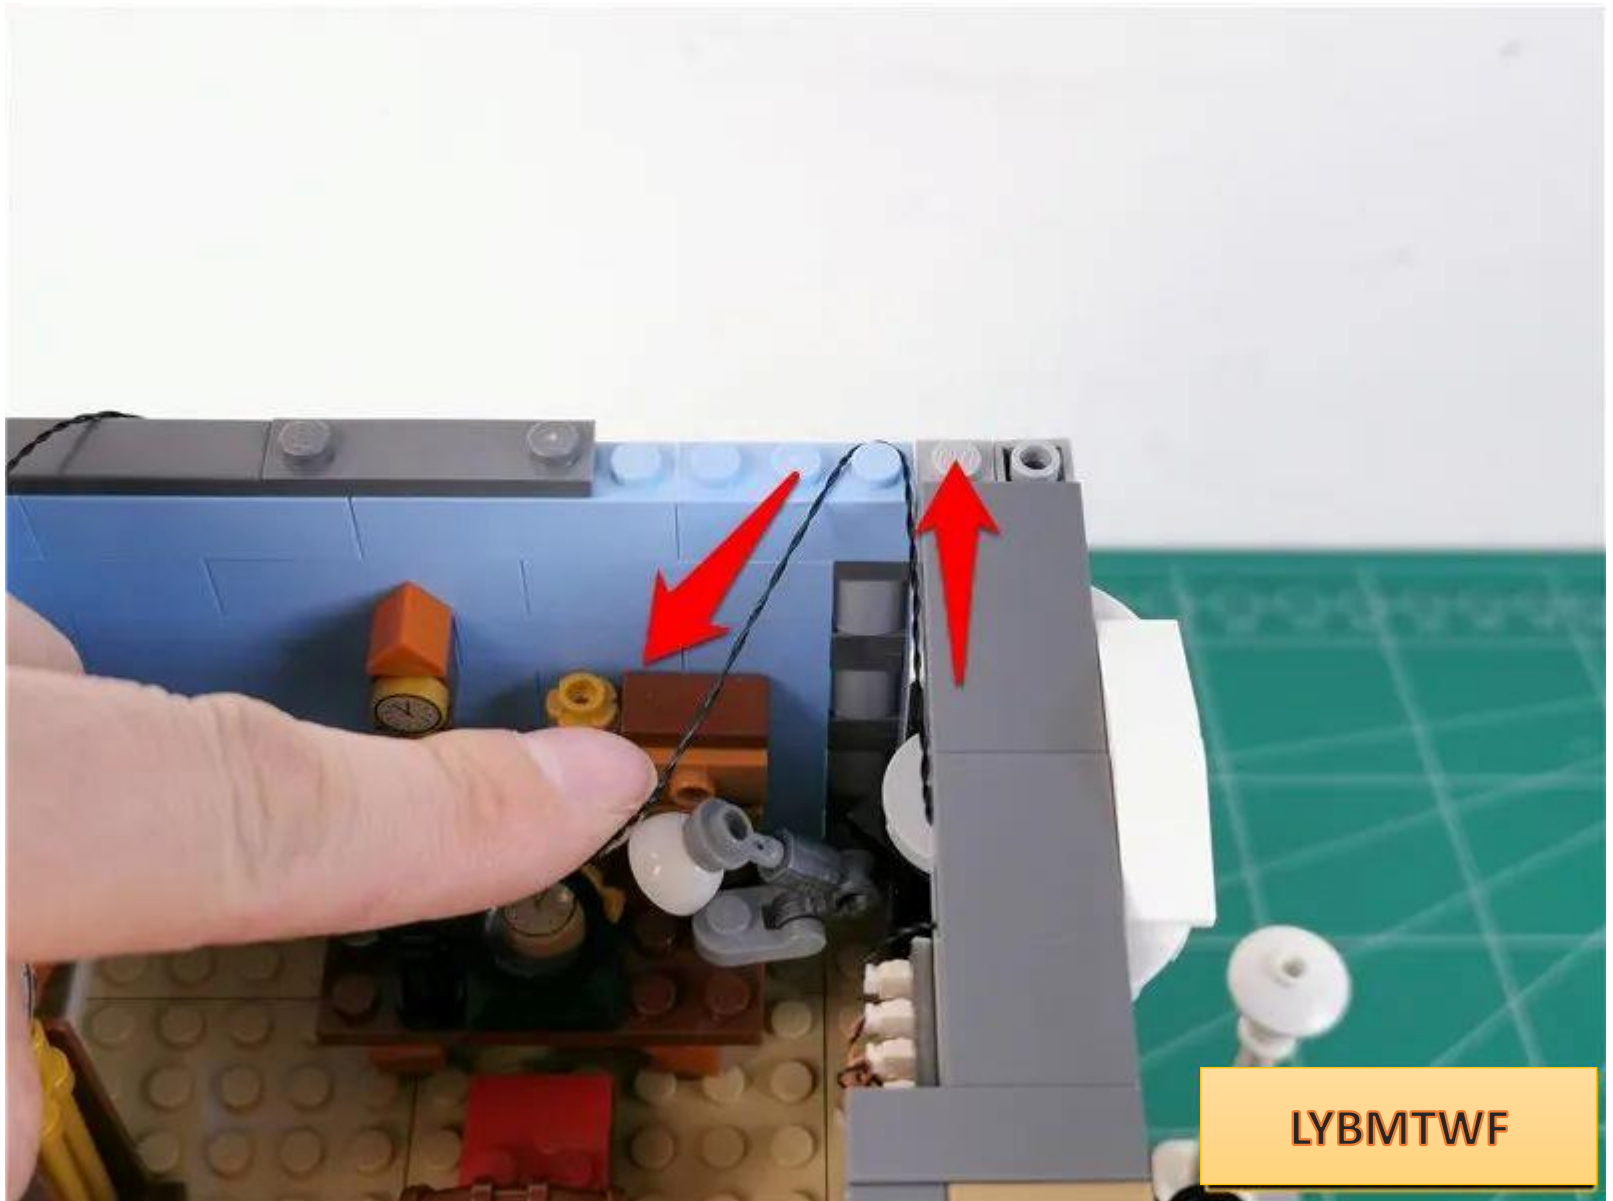


LYBMTWF

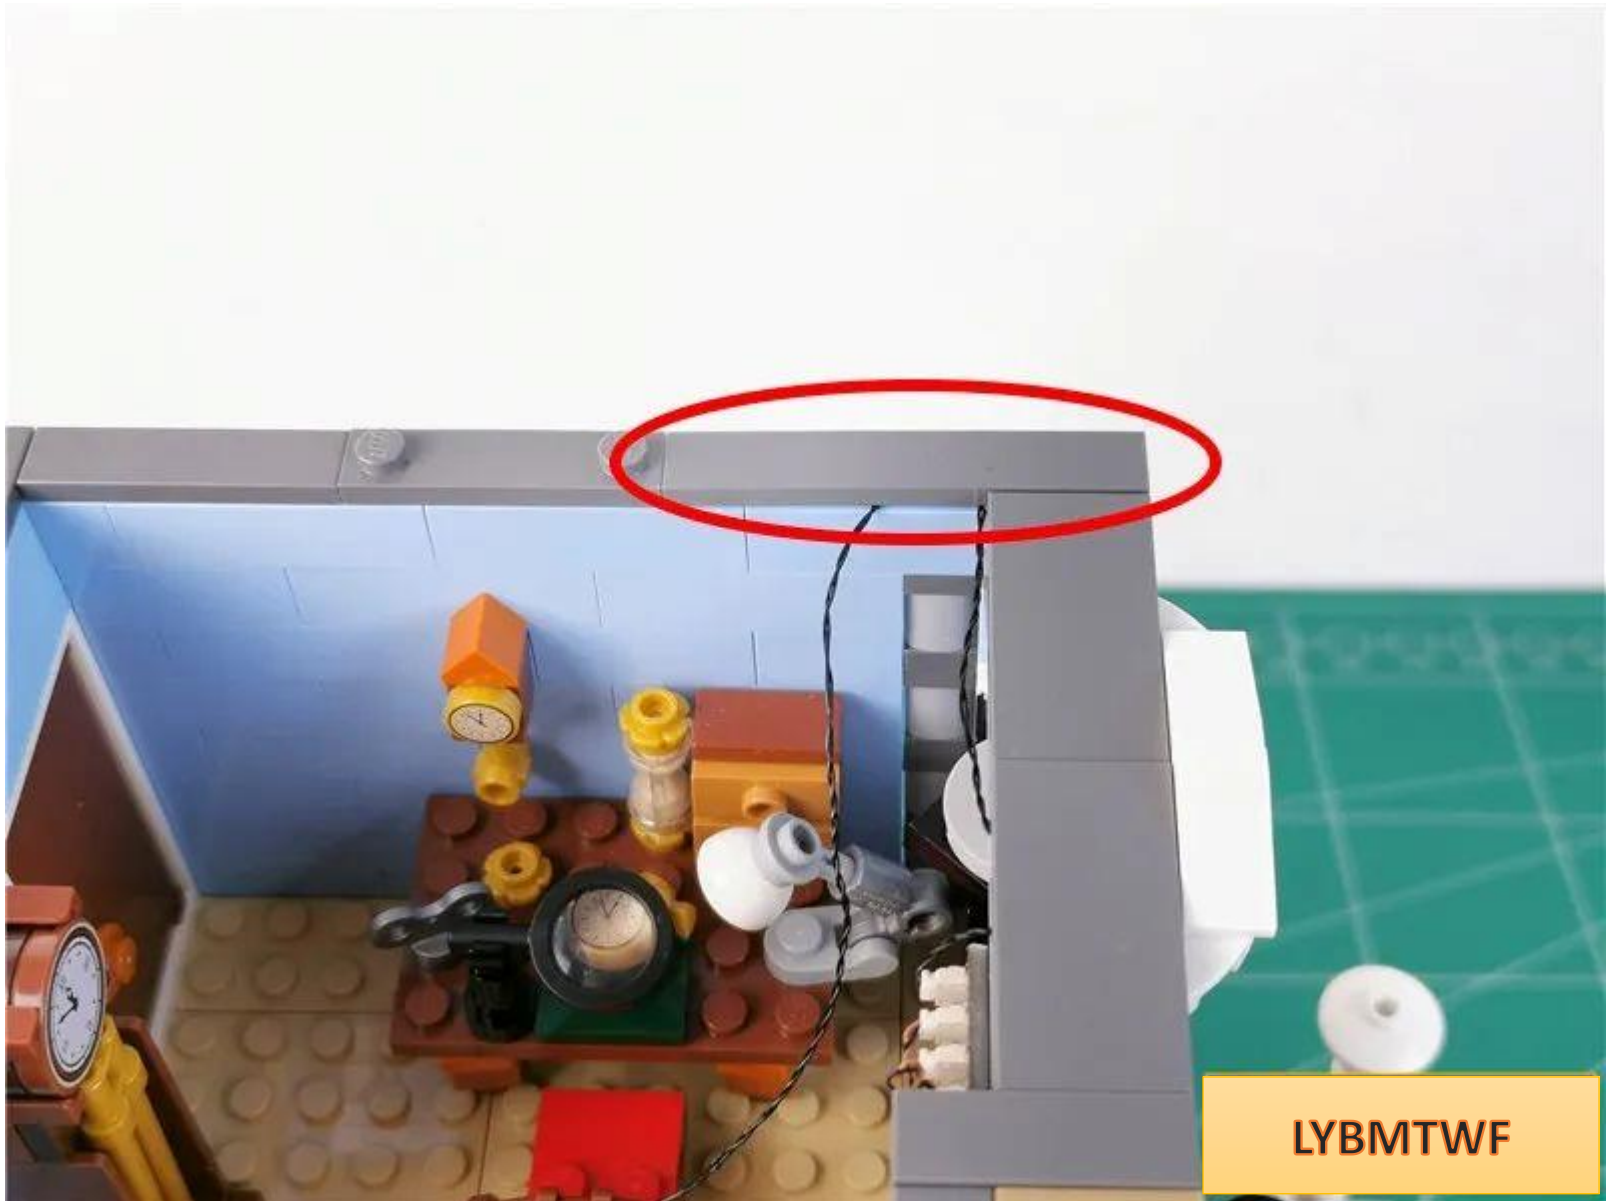


LYBMTWF




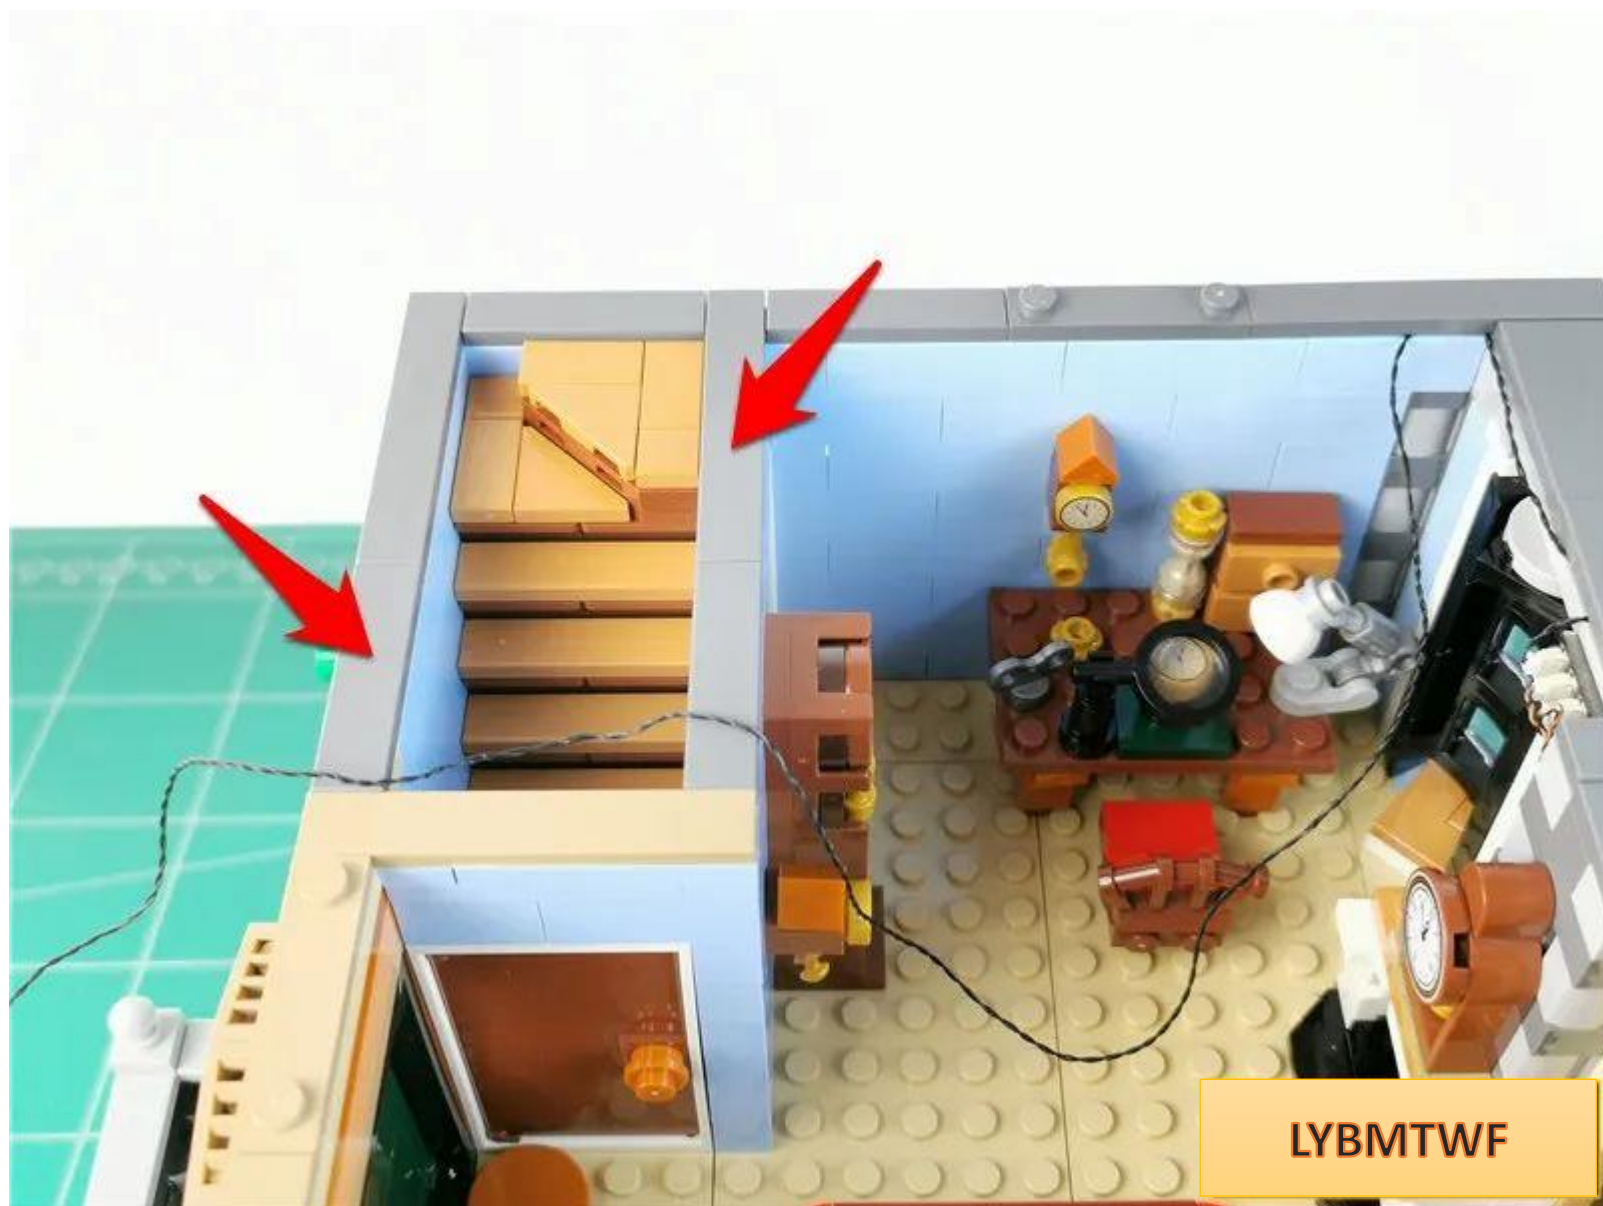



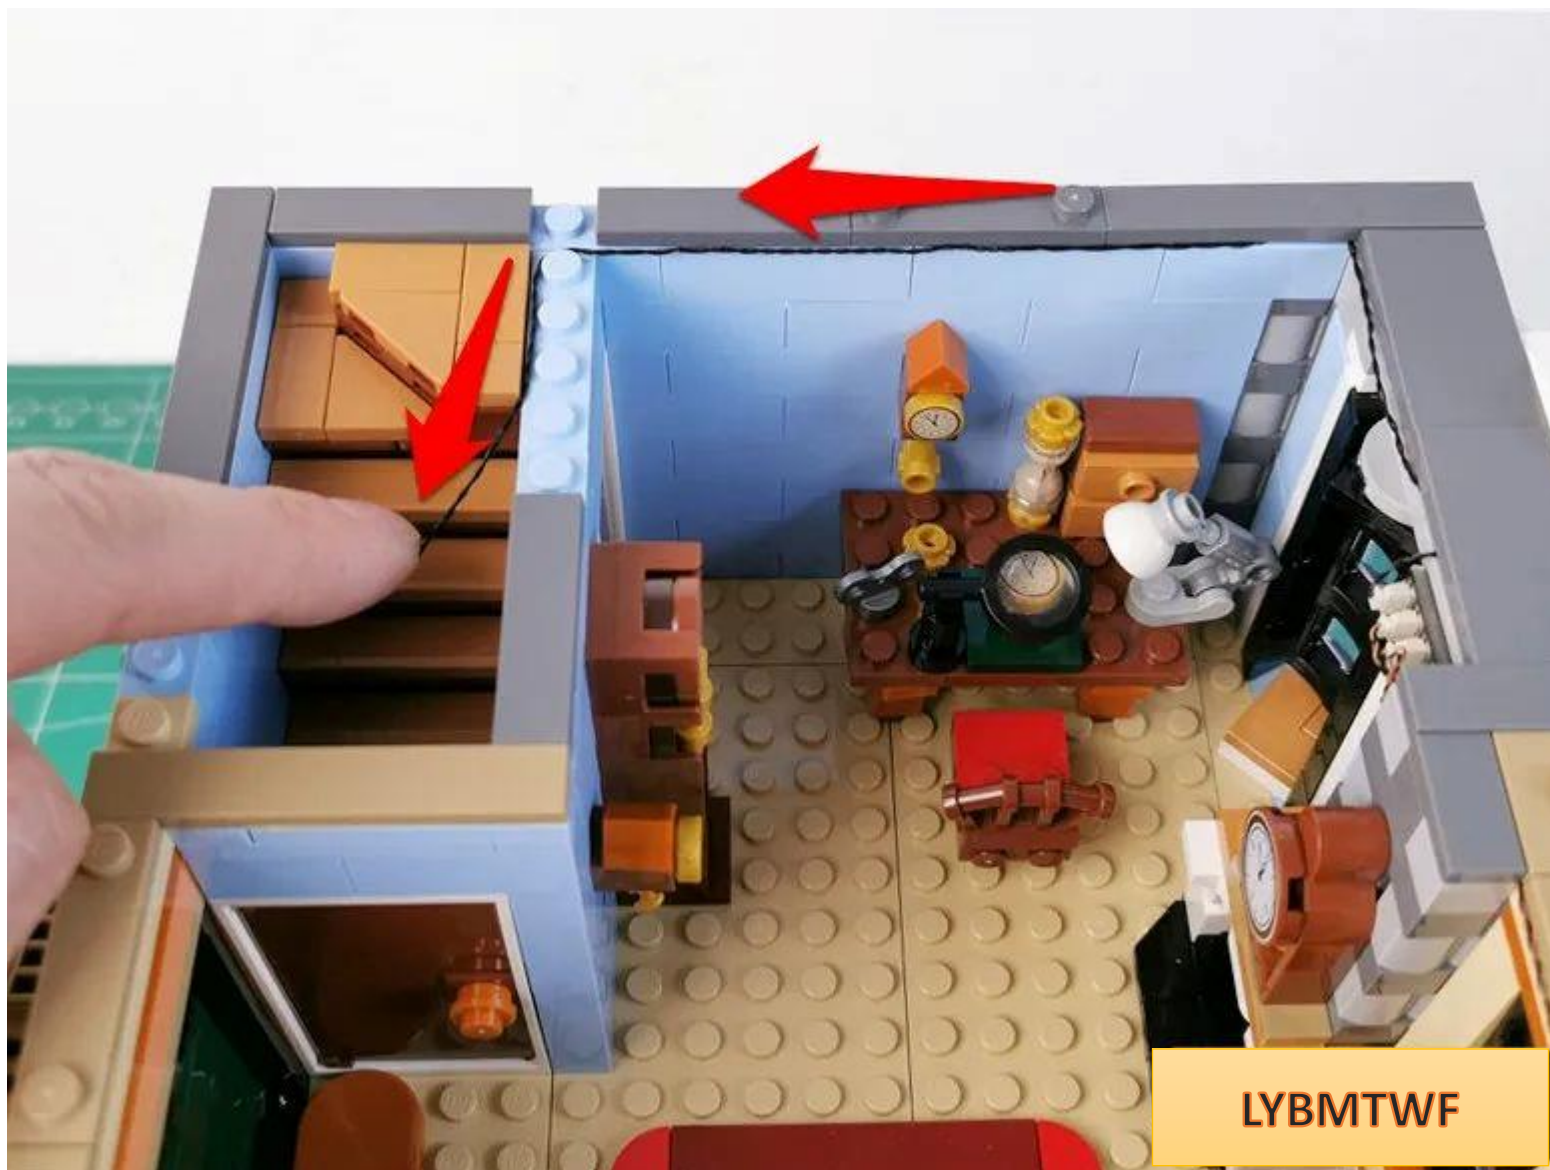



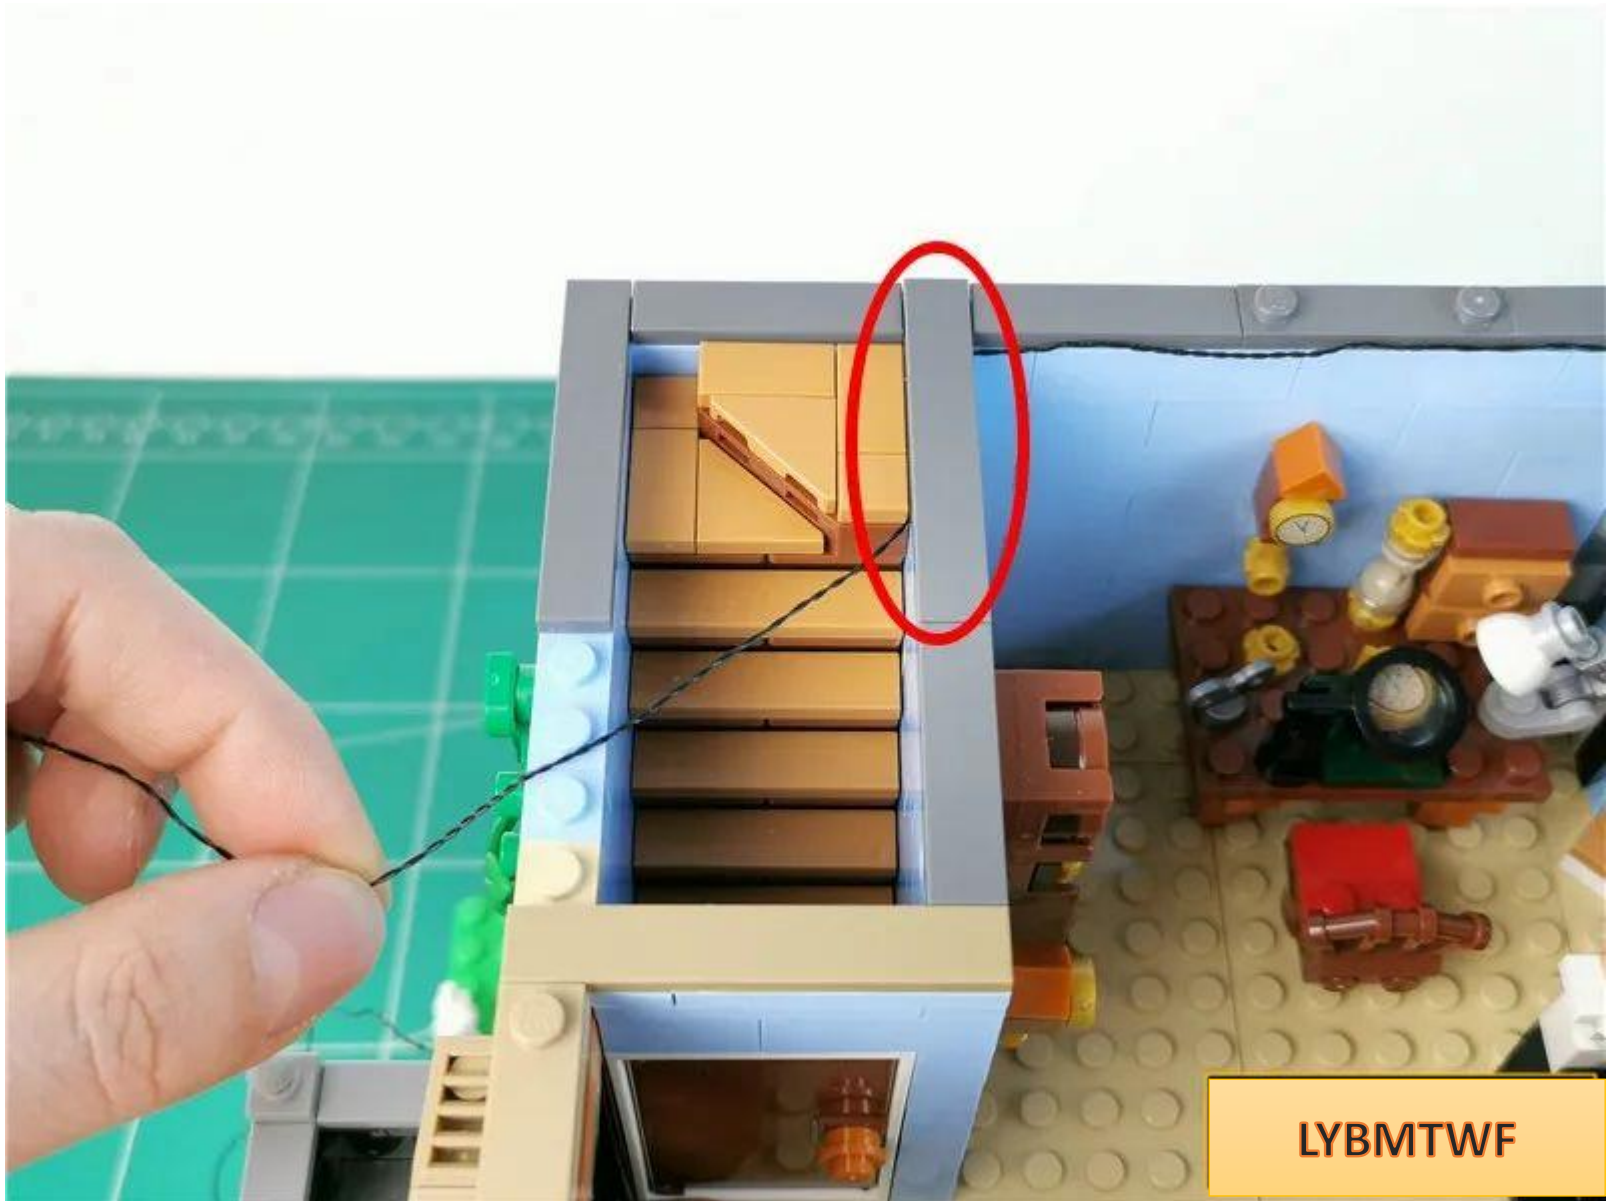




LYBMTWF

Temporarily place the building aside





Take out the warm light strip and prepare to install the roof lighting

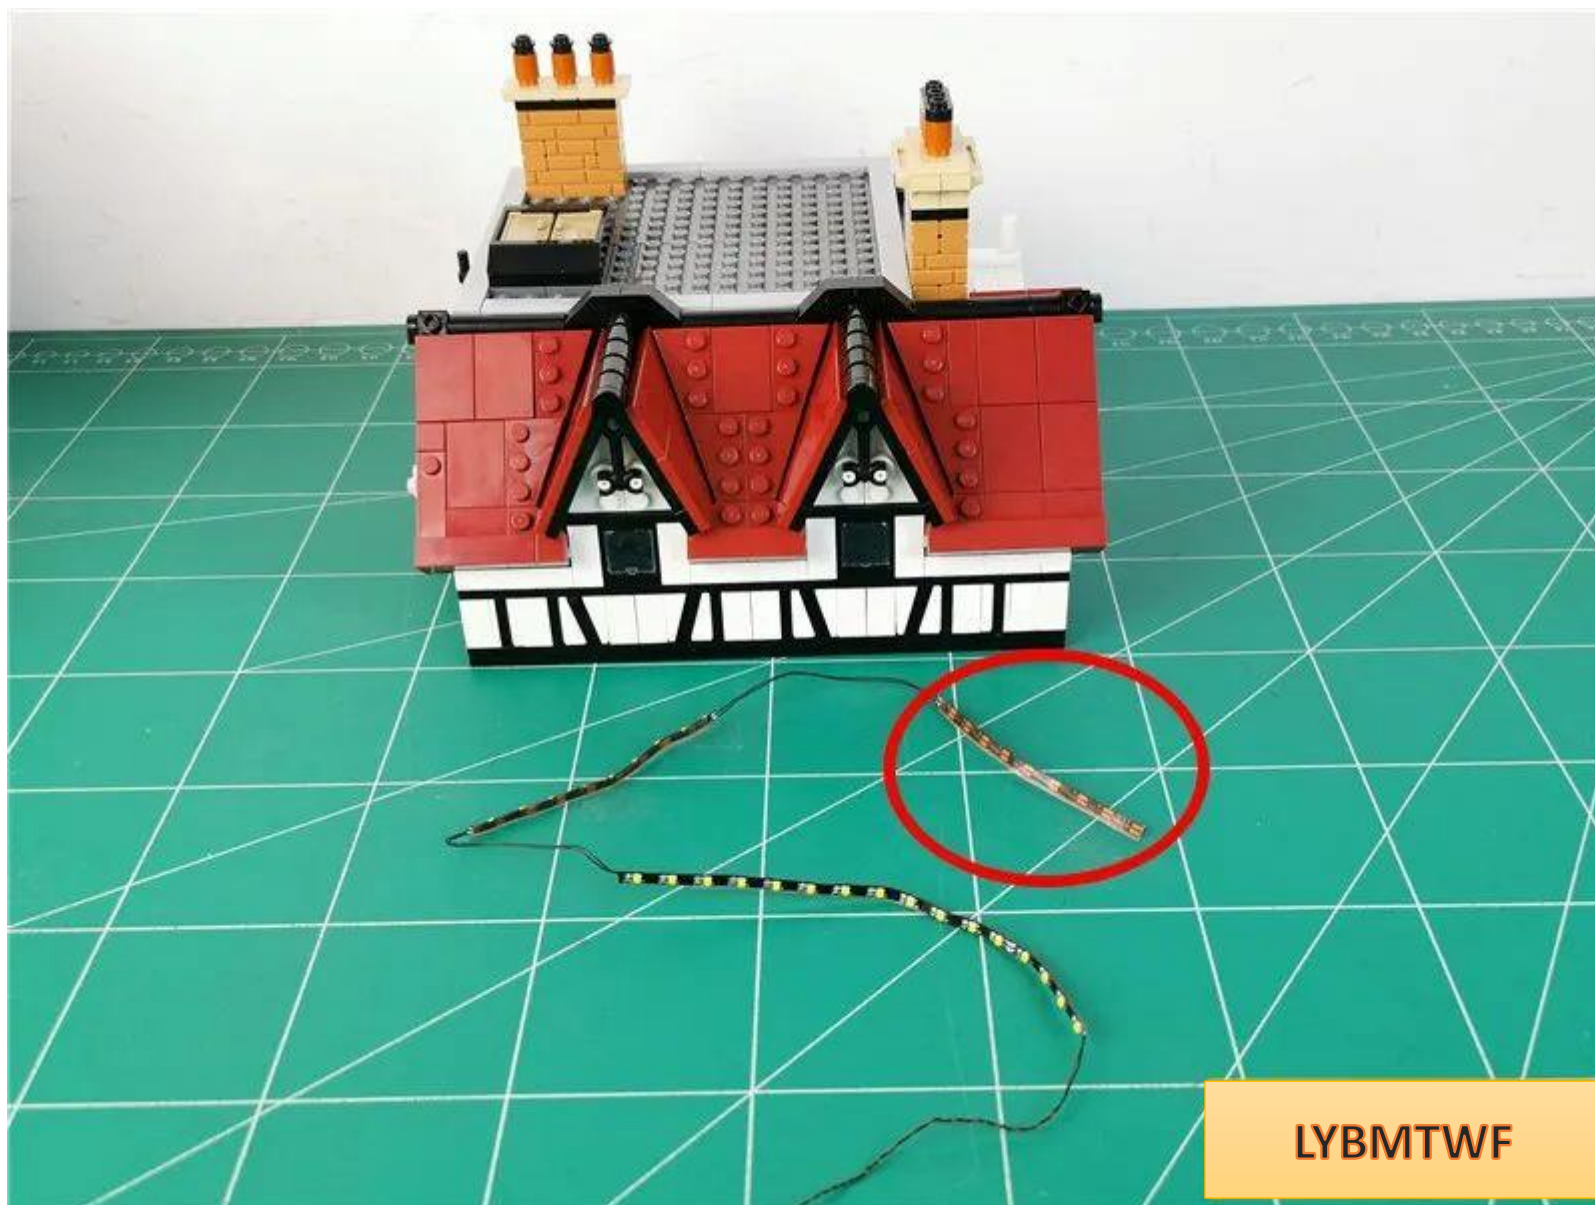


LYBMTWF

Tear off the adhesive backing of the headlight strip



LYBMTWF


Paste the light strip to the roof, with the remaining light strip on the right

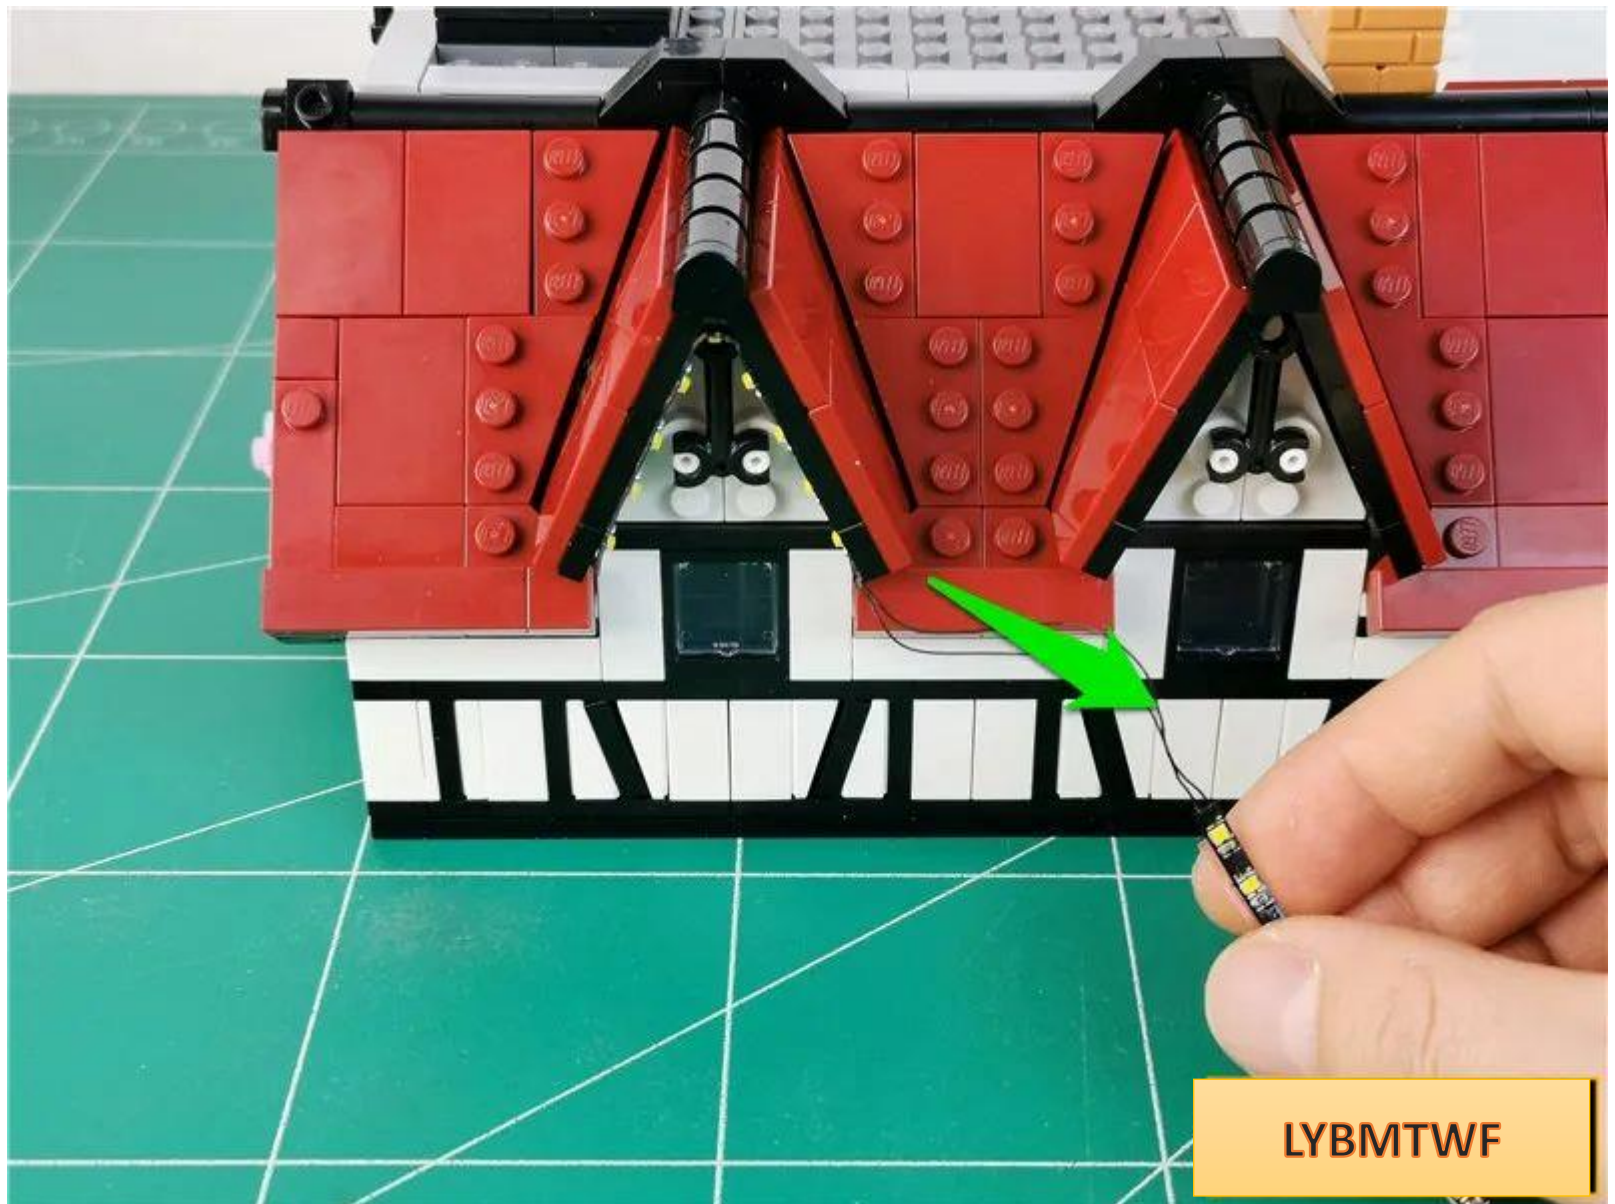


LYBMTWF



The specific location is as follows

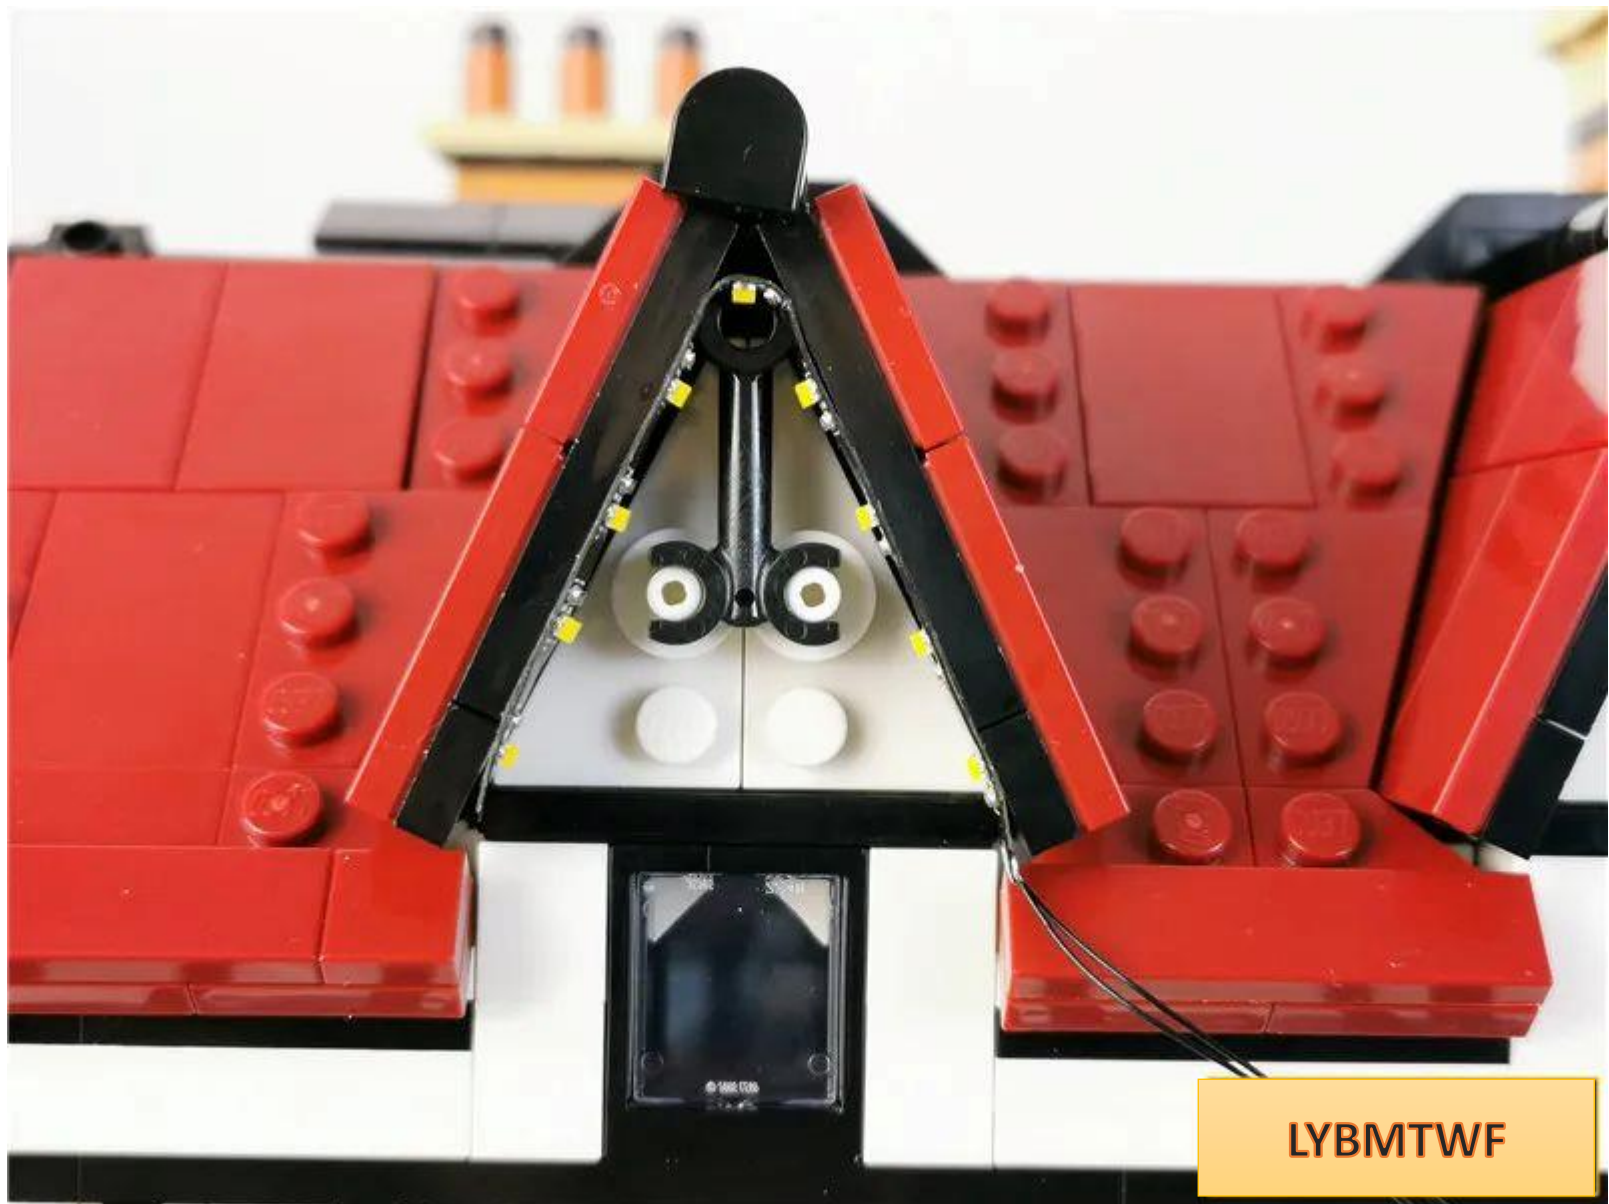

Continue to paste the adjacent light strips

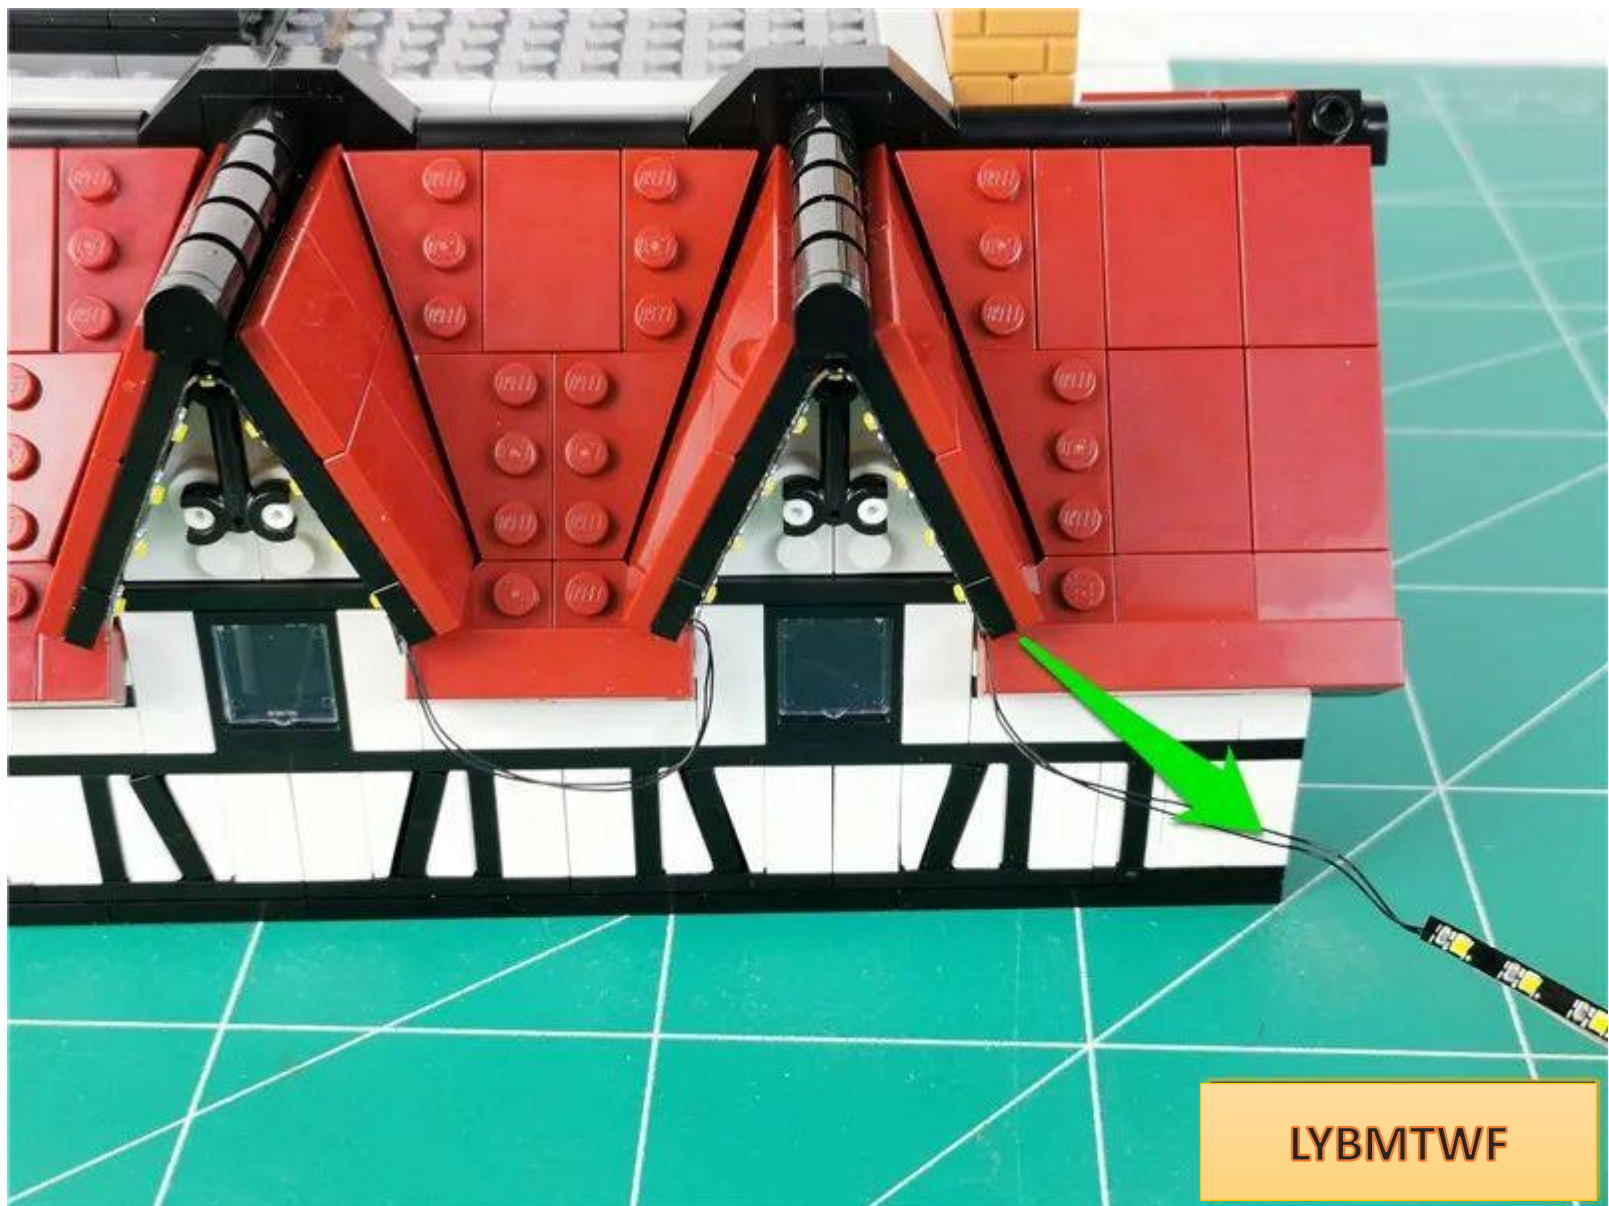




Fit the wires between the light strips to the angles





Pull the remaining light strip to the right side, close to the bottom of the parts.

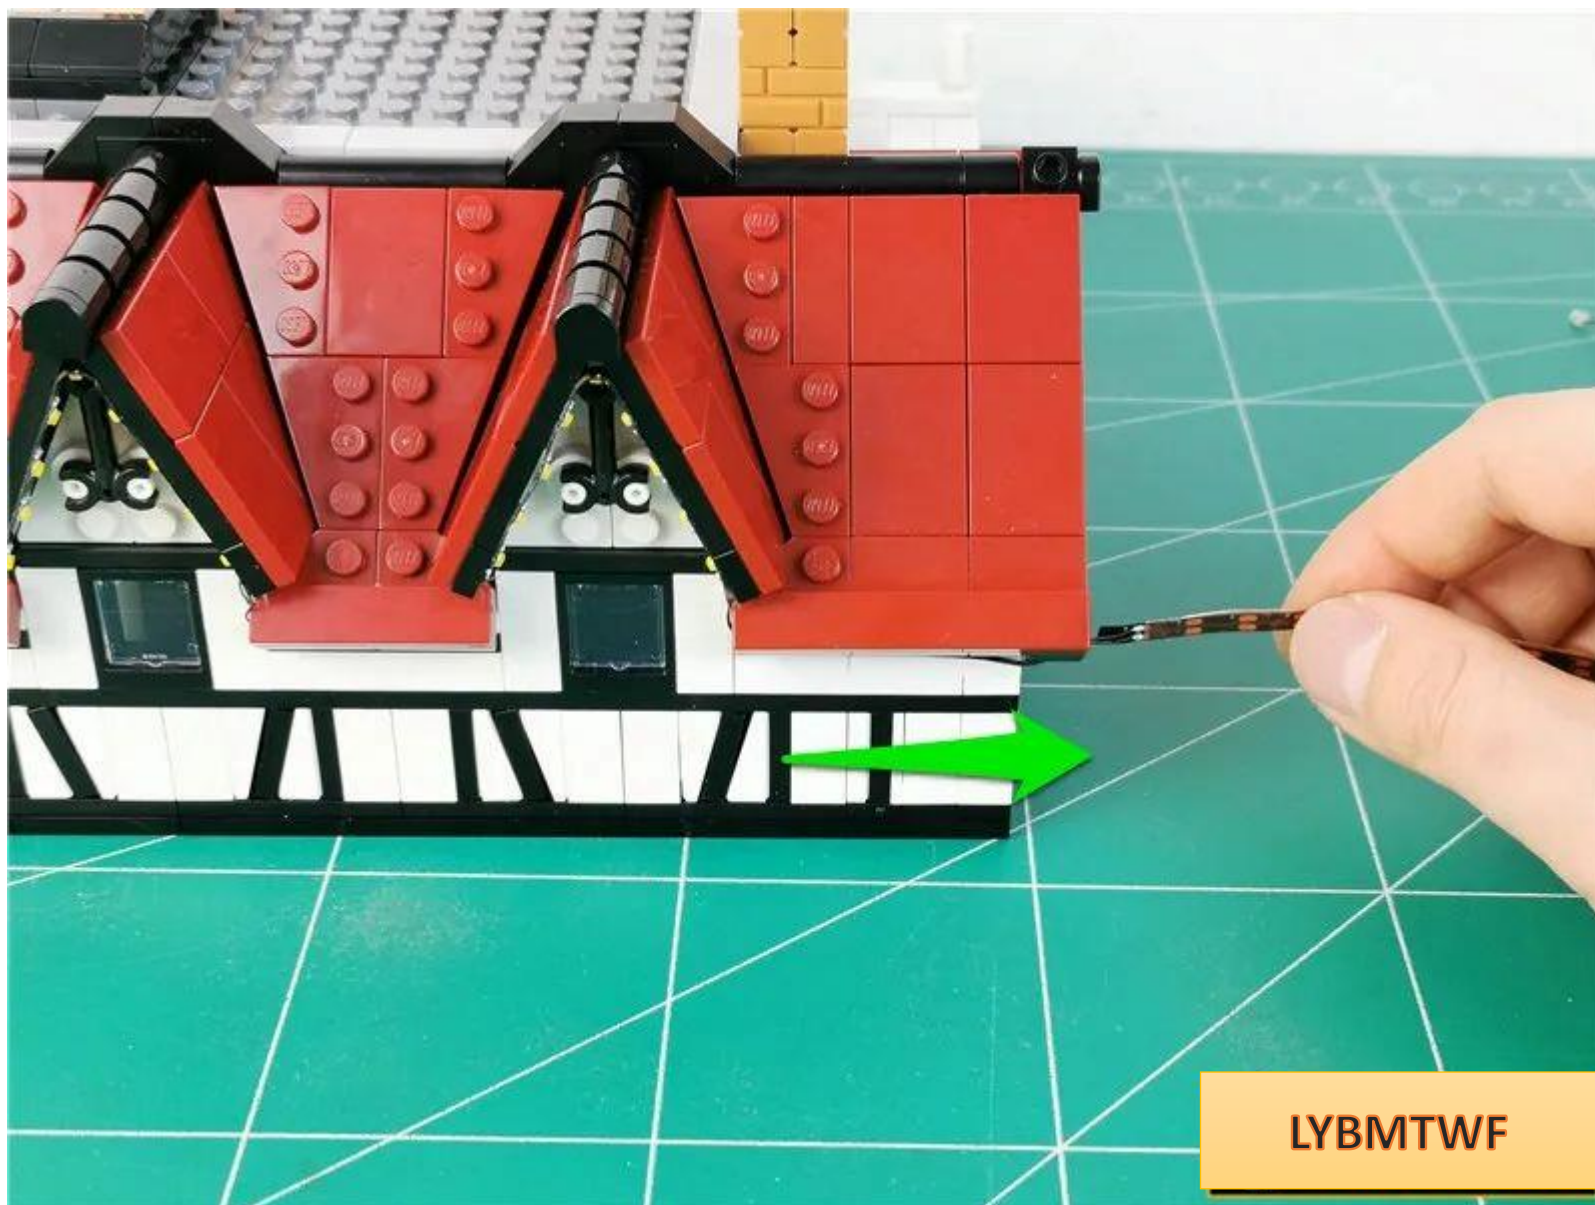

Go to the other side






Paste the remaining light strips, **with the wires on the right**



LYBMTWF



Fit the wires between the light strips to the gaps

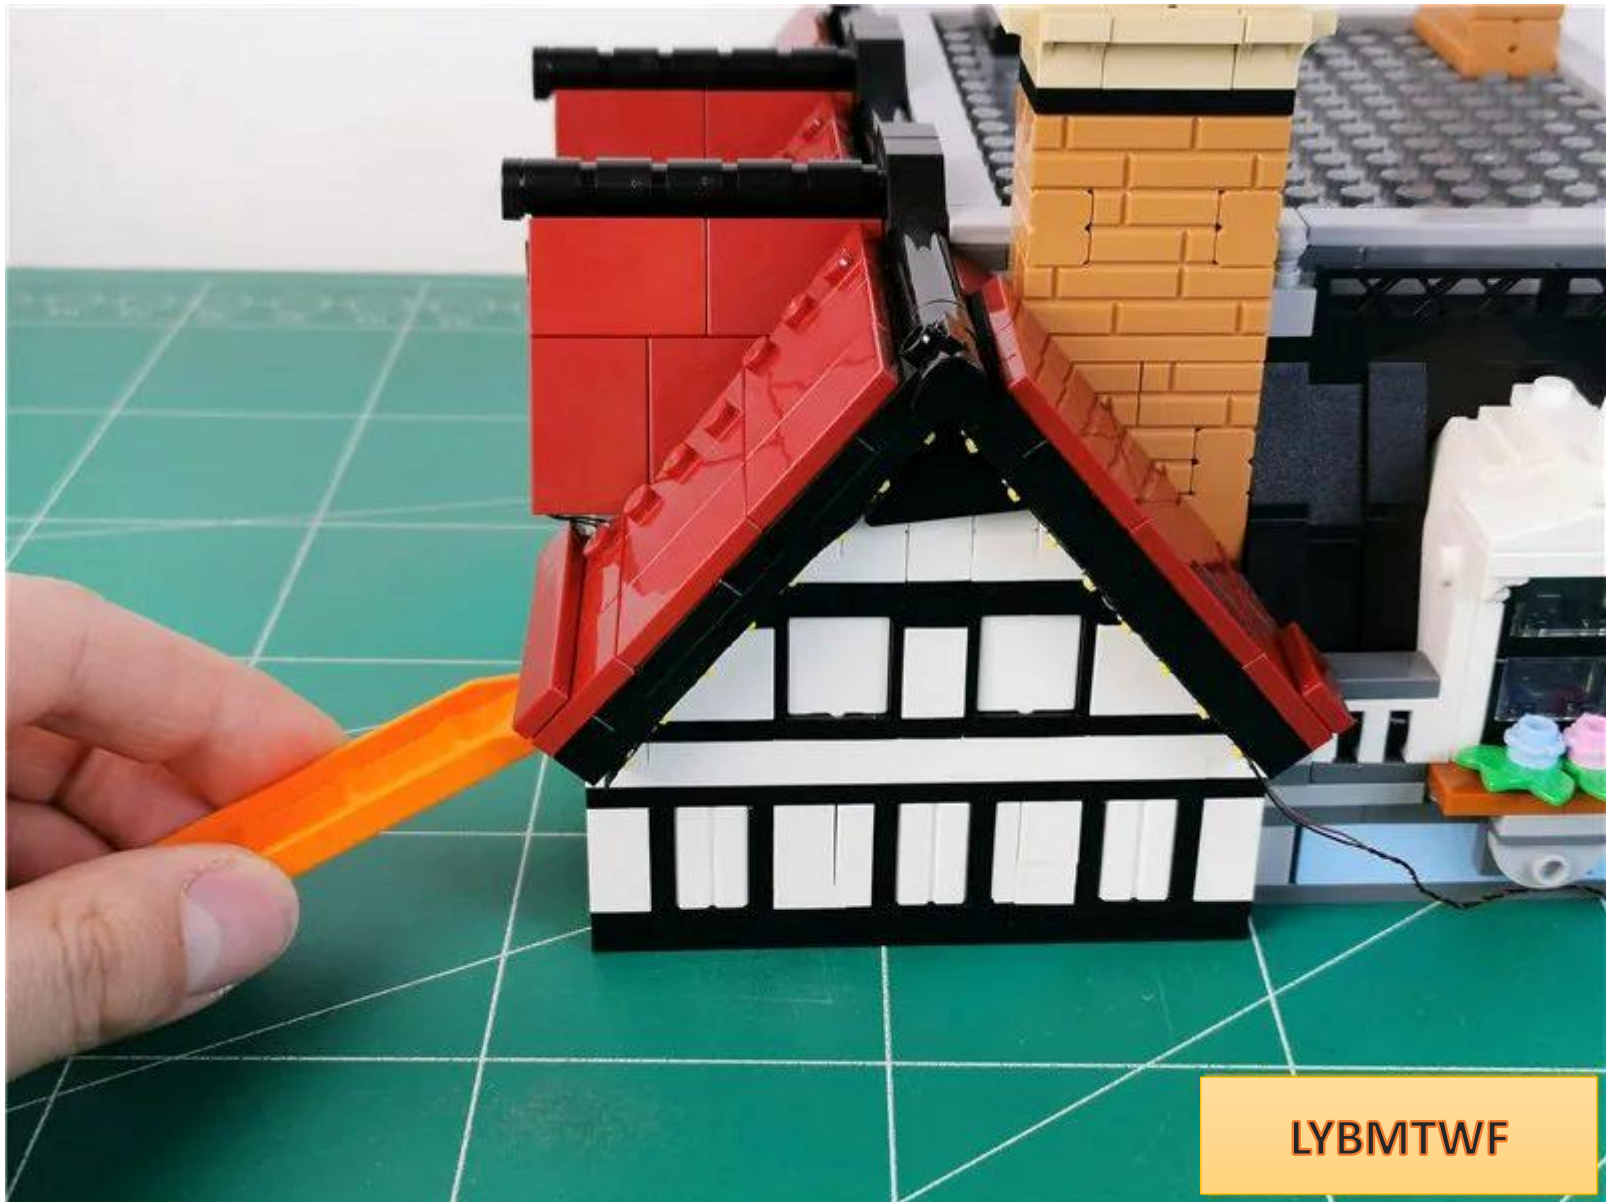

Remove the top cover



LYBMTWF




Remove the parts indicated by arrows one by one




LYBMTWF



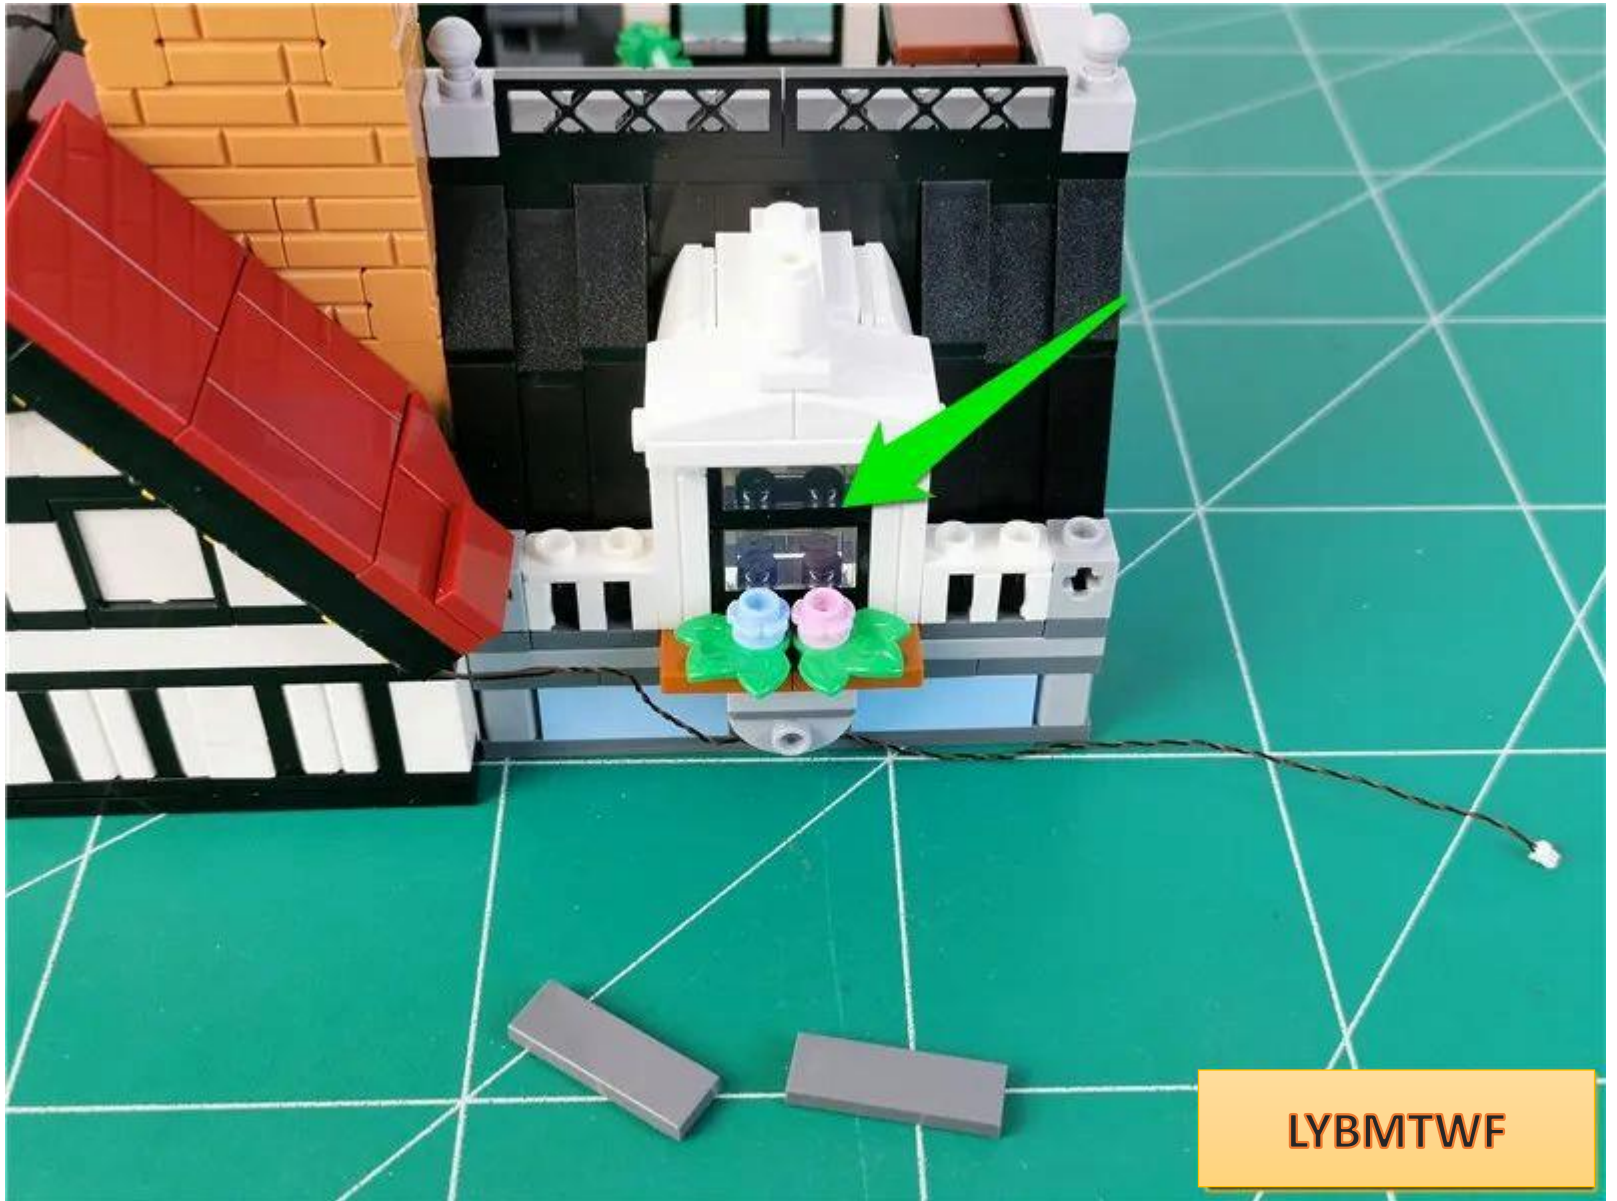

LYBMTWF

Pinch the parts and pry them apart.

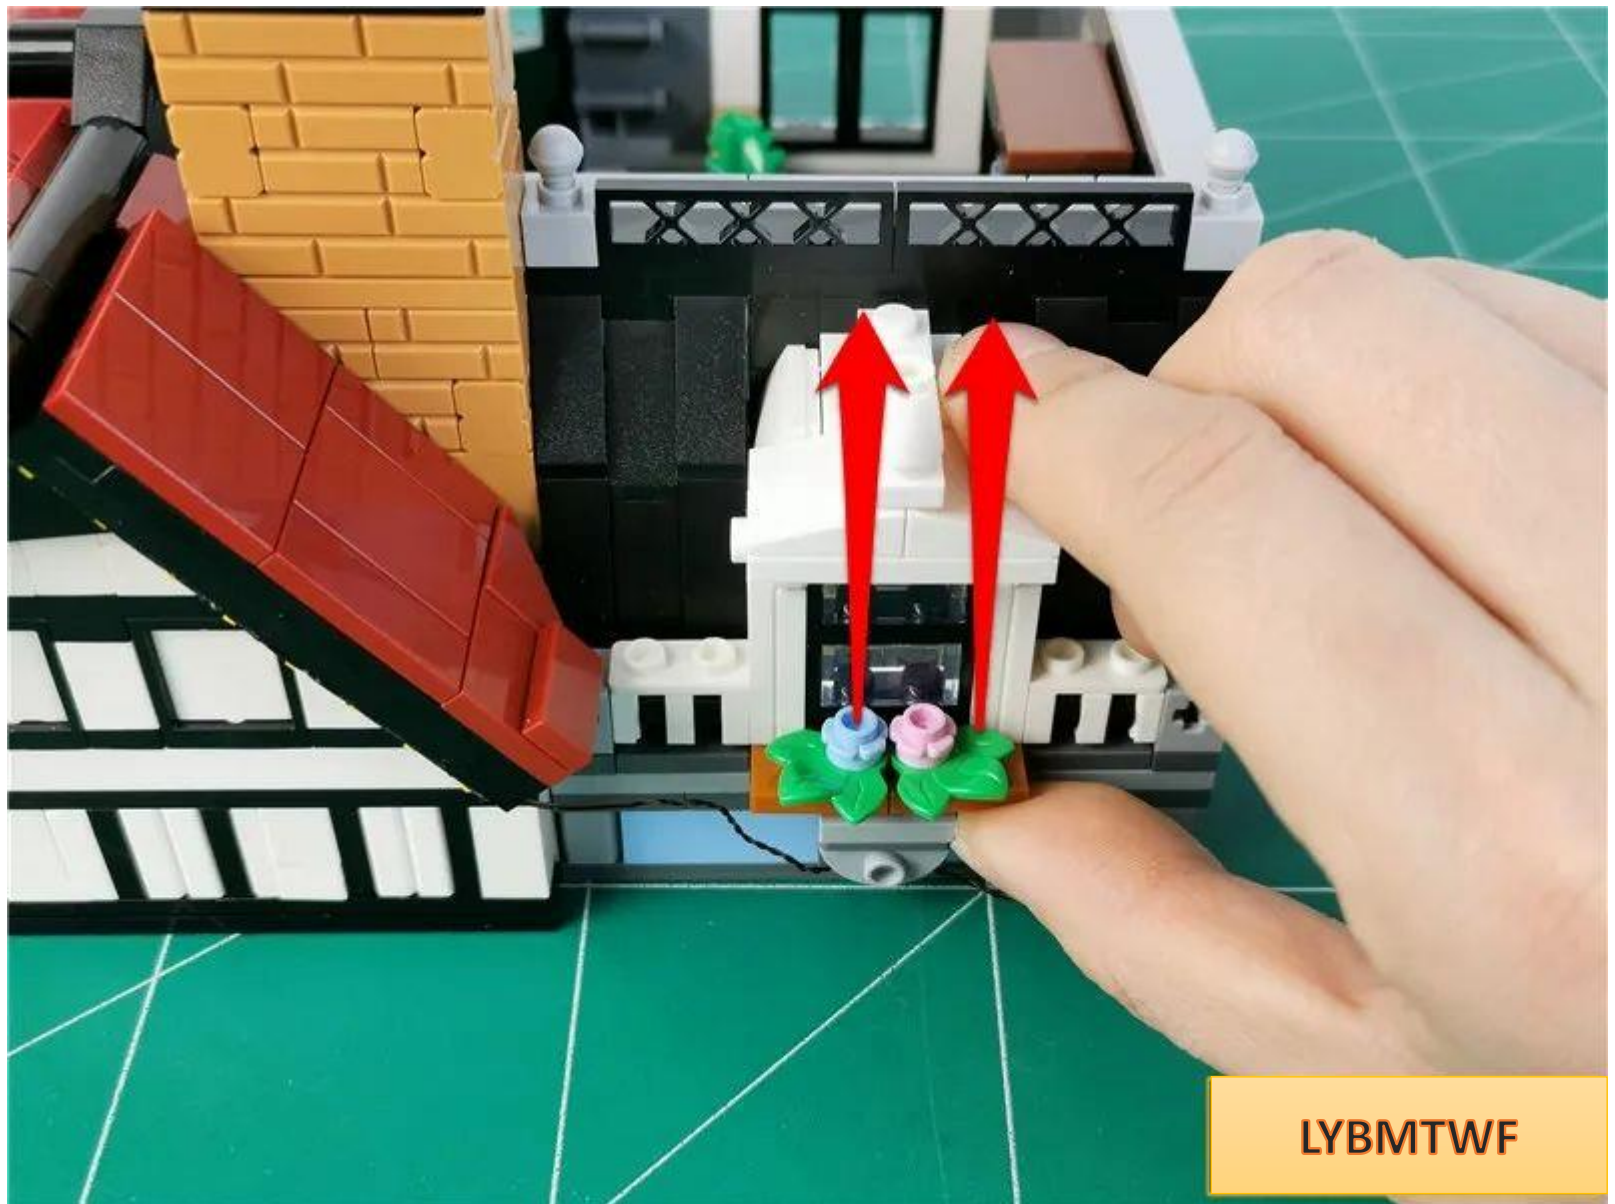


LYBMTWF






LYBMTWF



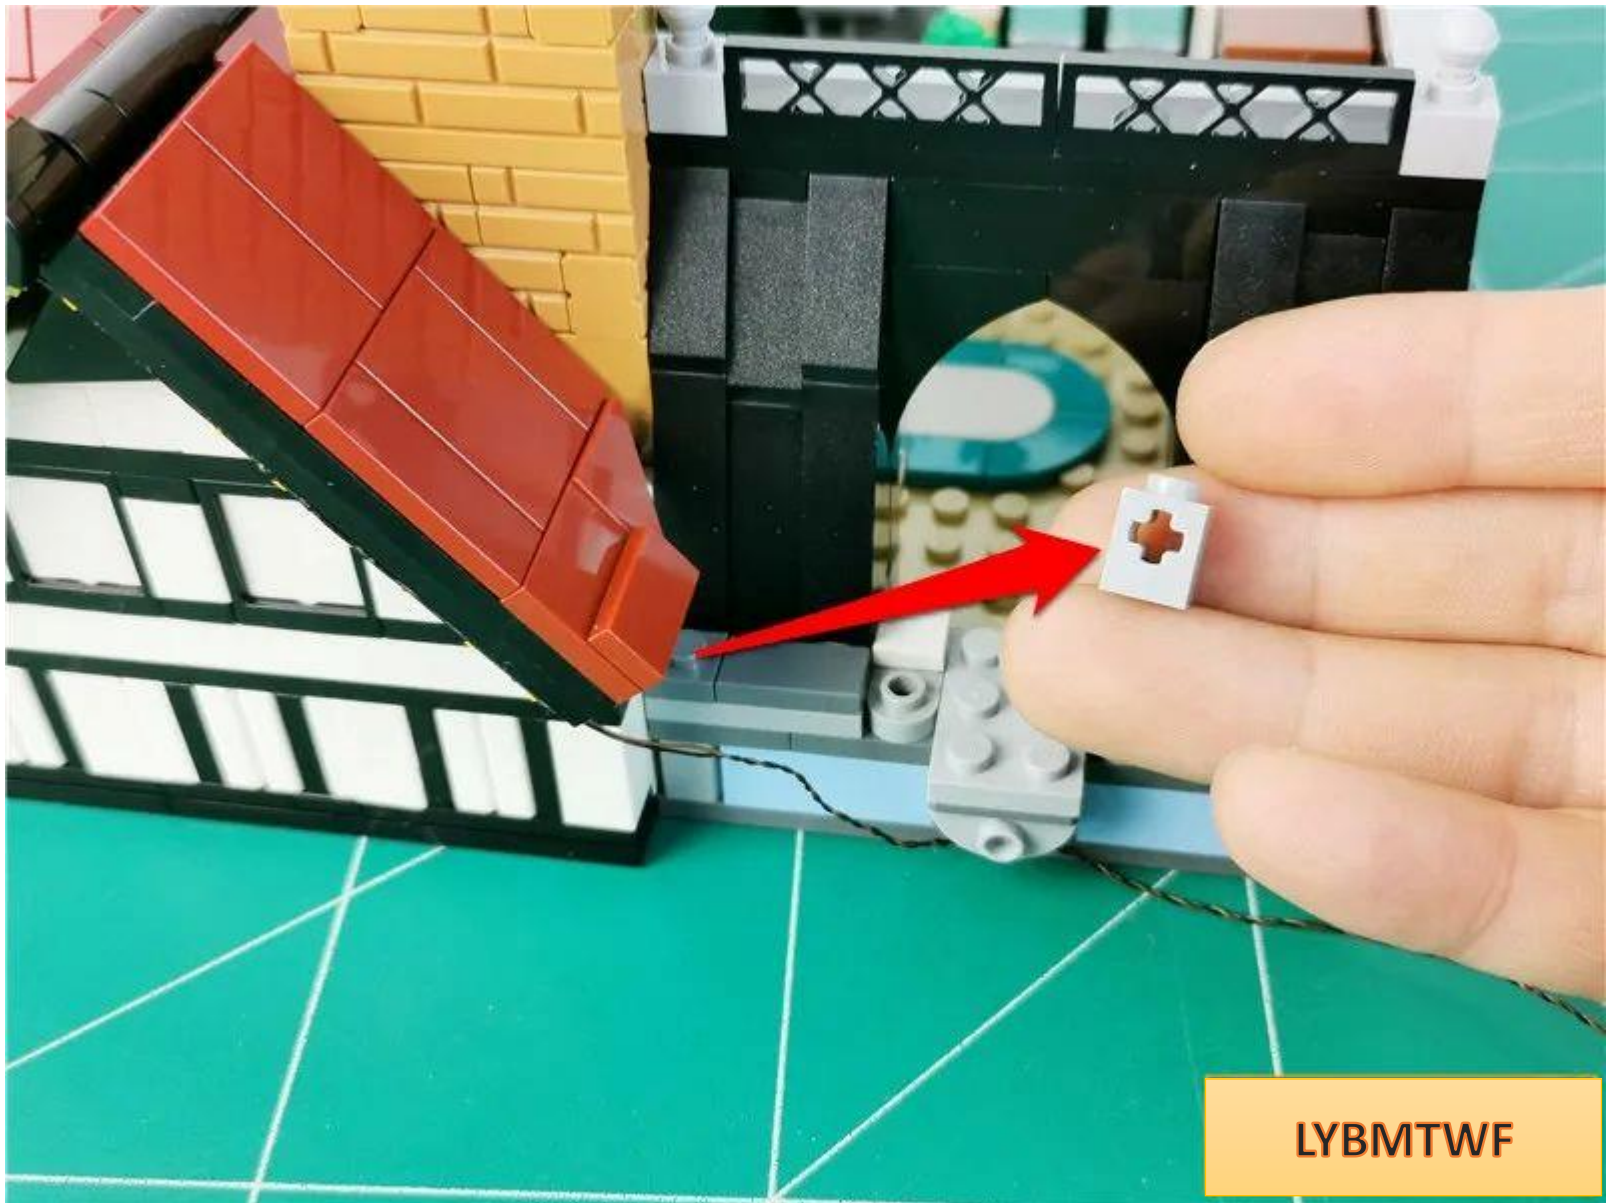

LYBMTWF


Pull the light strip wire to the right side, in line with the angle

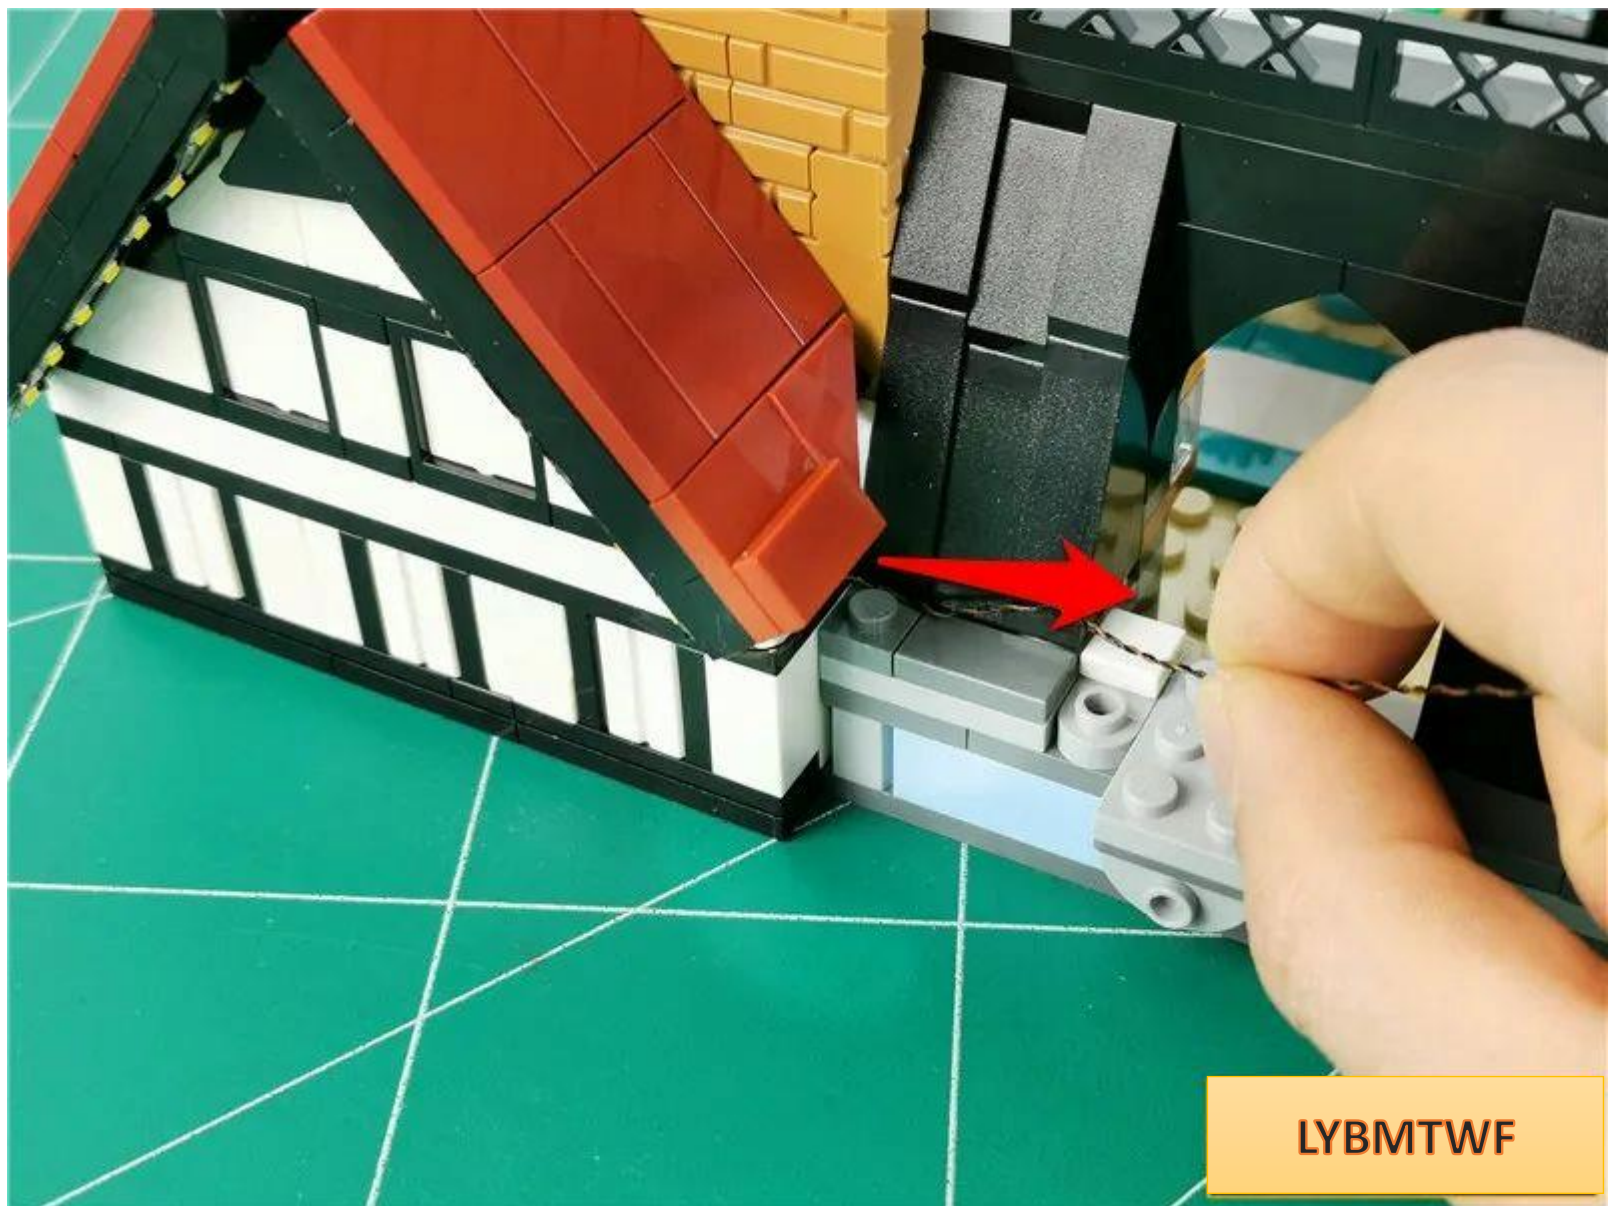

LYBMTWF




Restore parts and fix wires

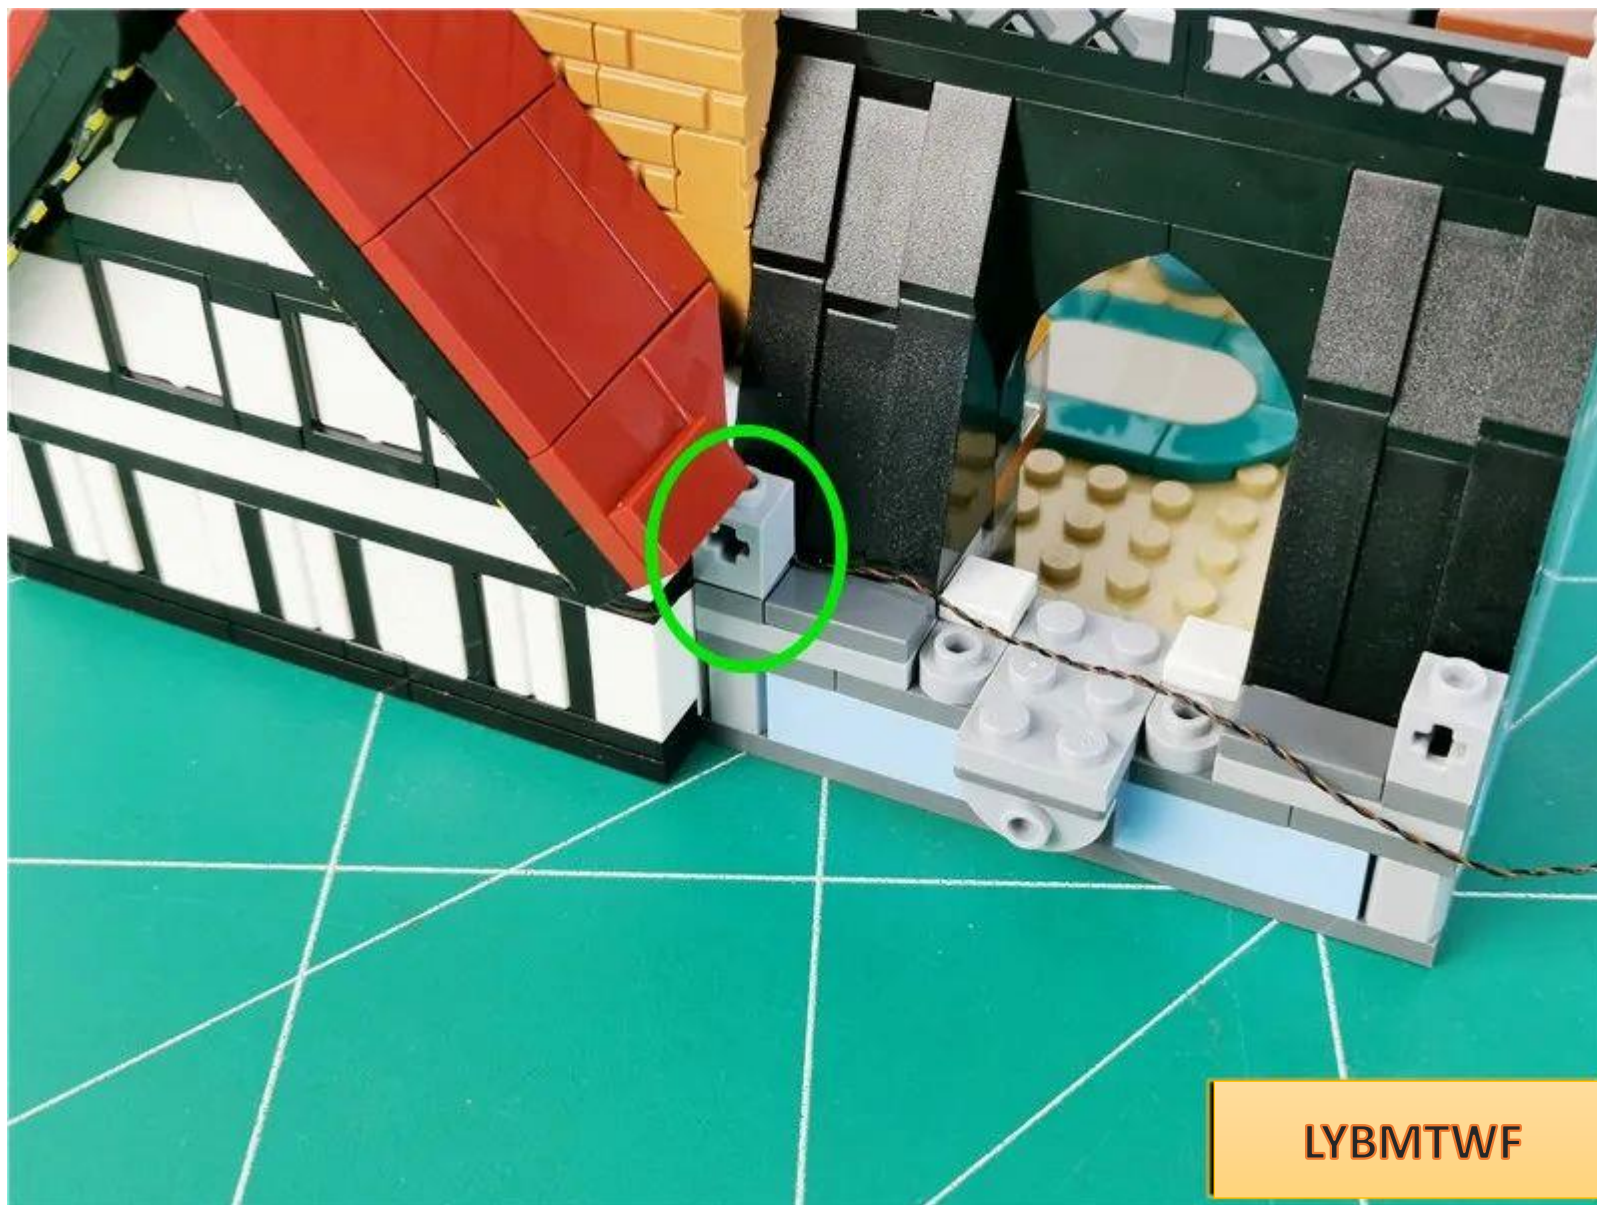

LYBMTWF




Remove the parts indicated by the arrows.

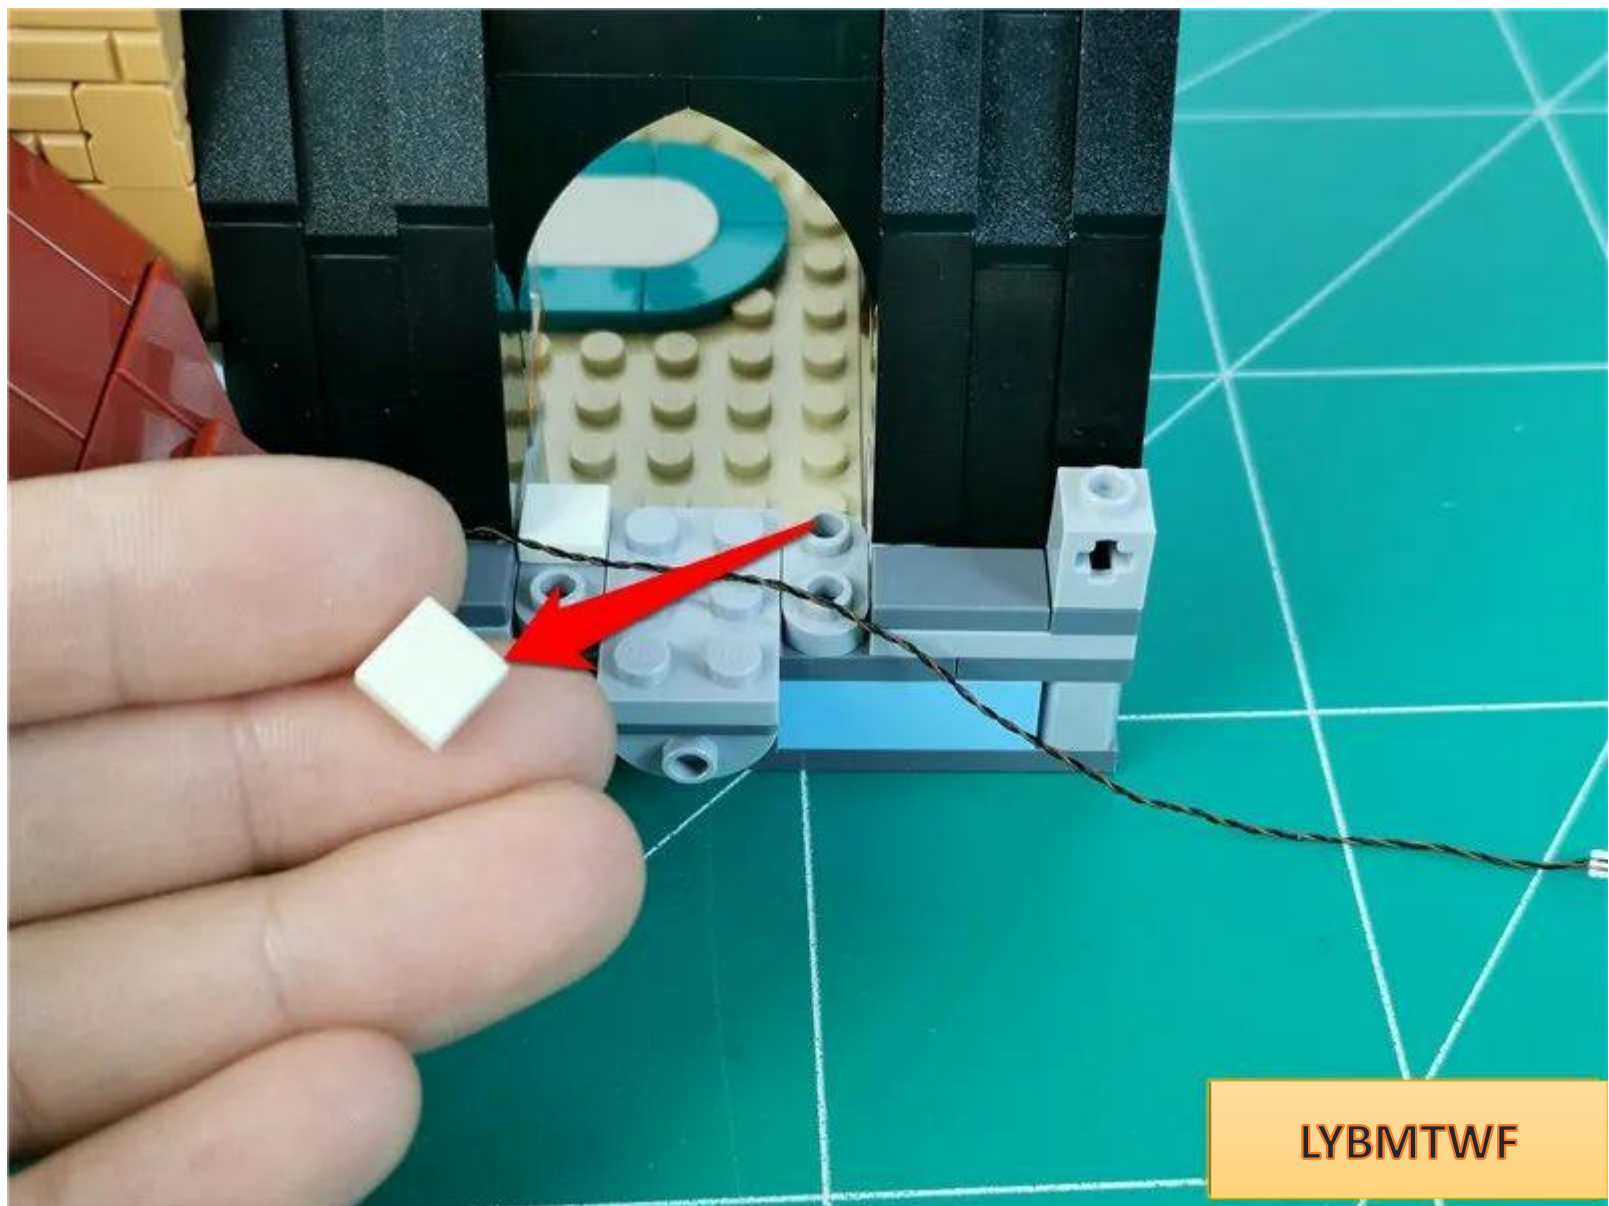


LYBMTWF

Pass the wire around the raised particles and pull it into the room

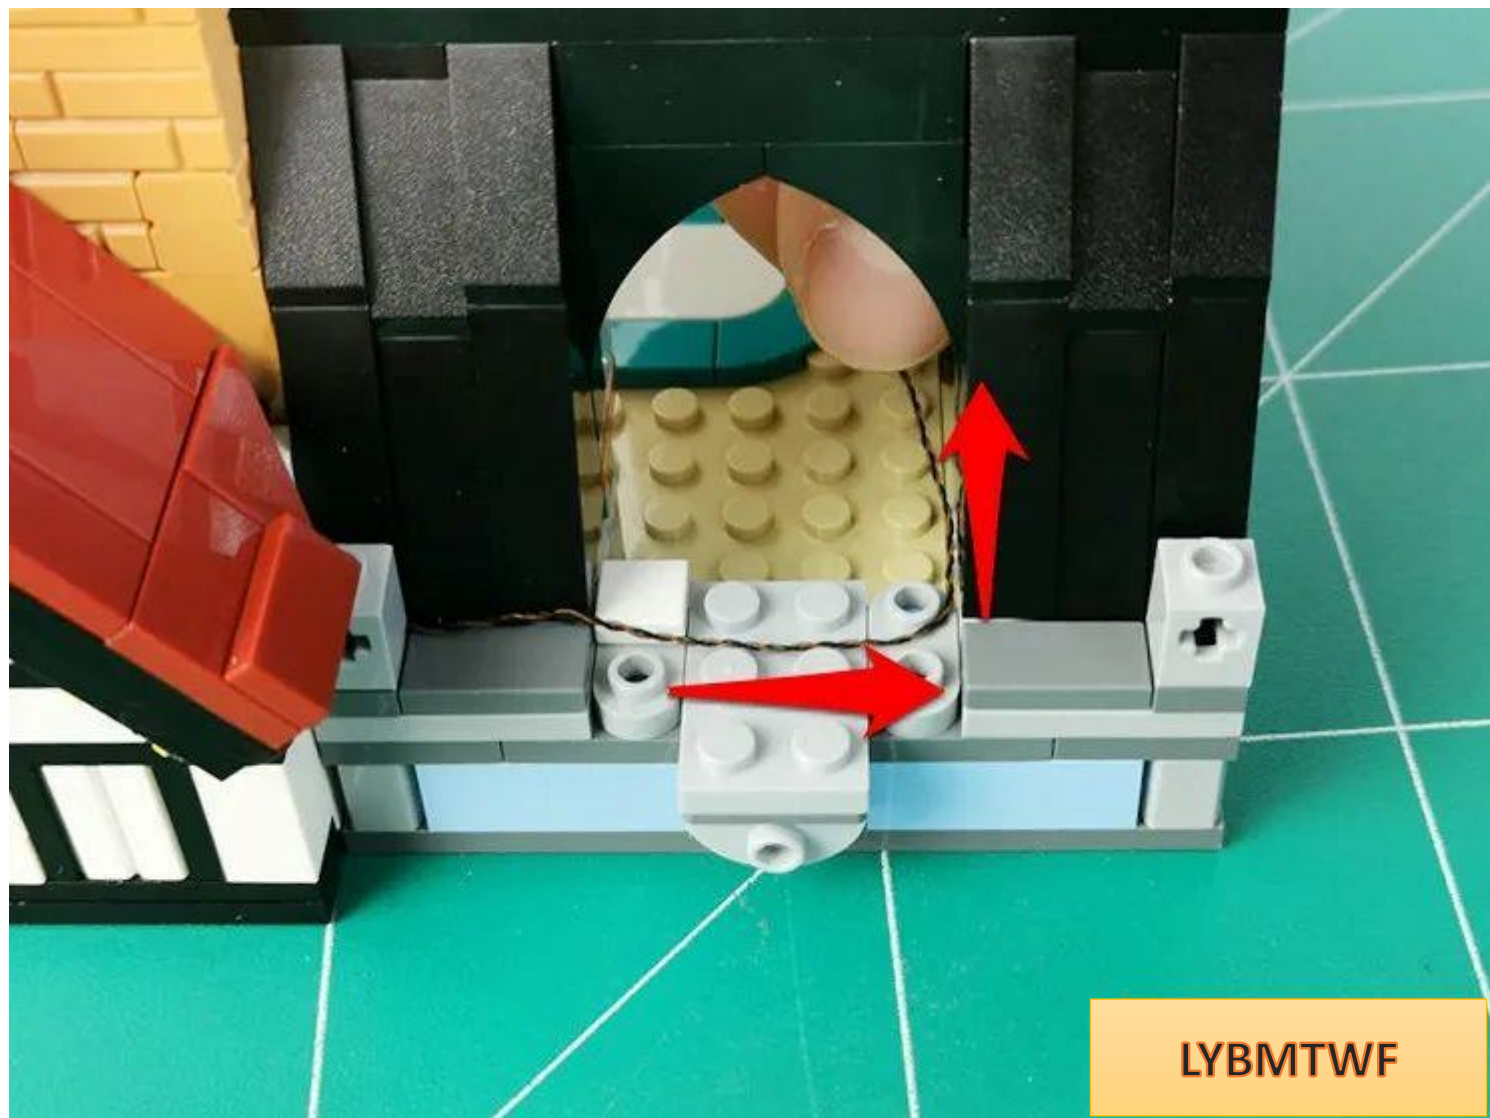

Restore the disassembled parts one by one

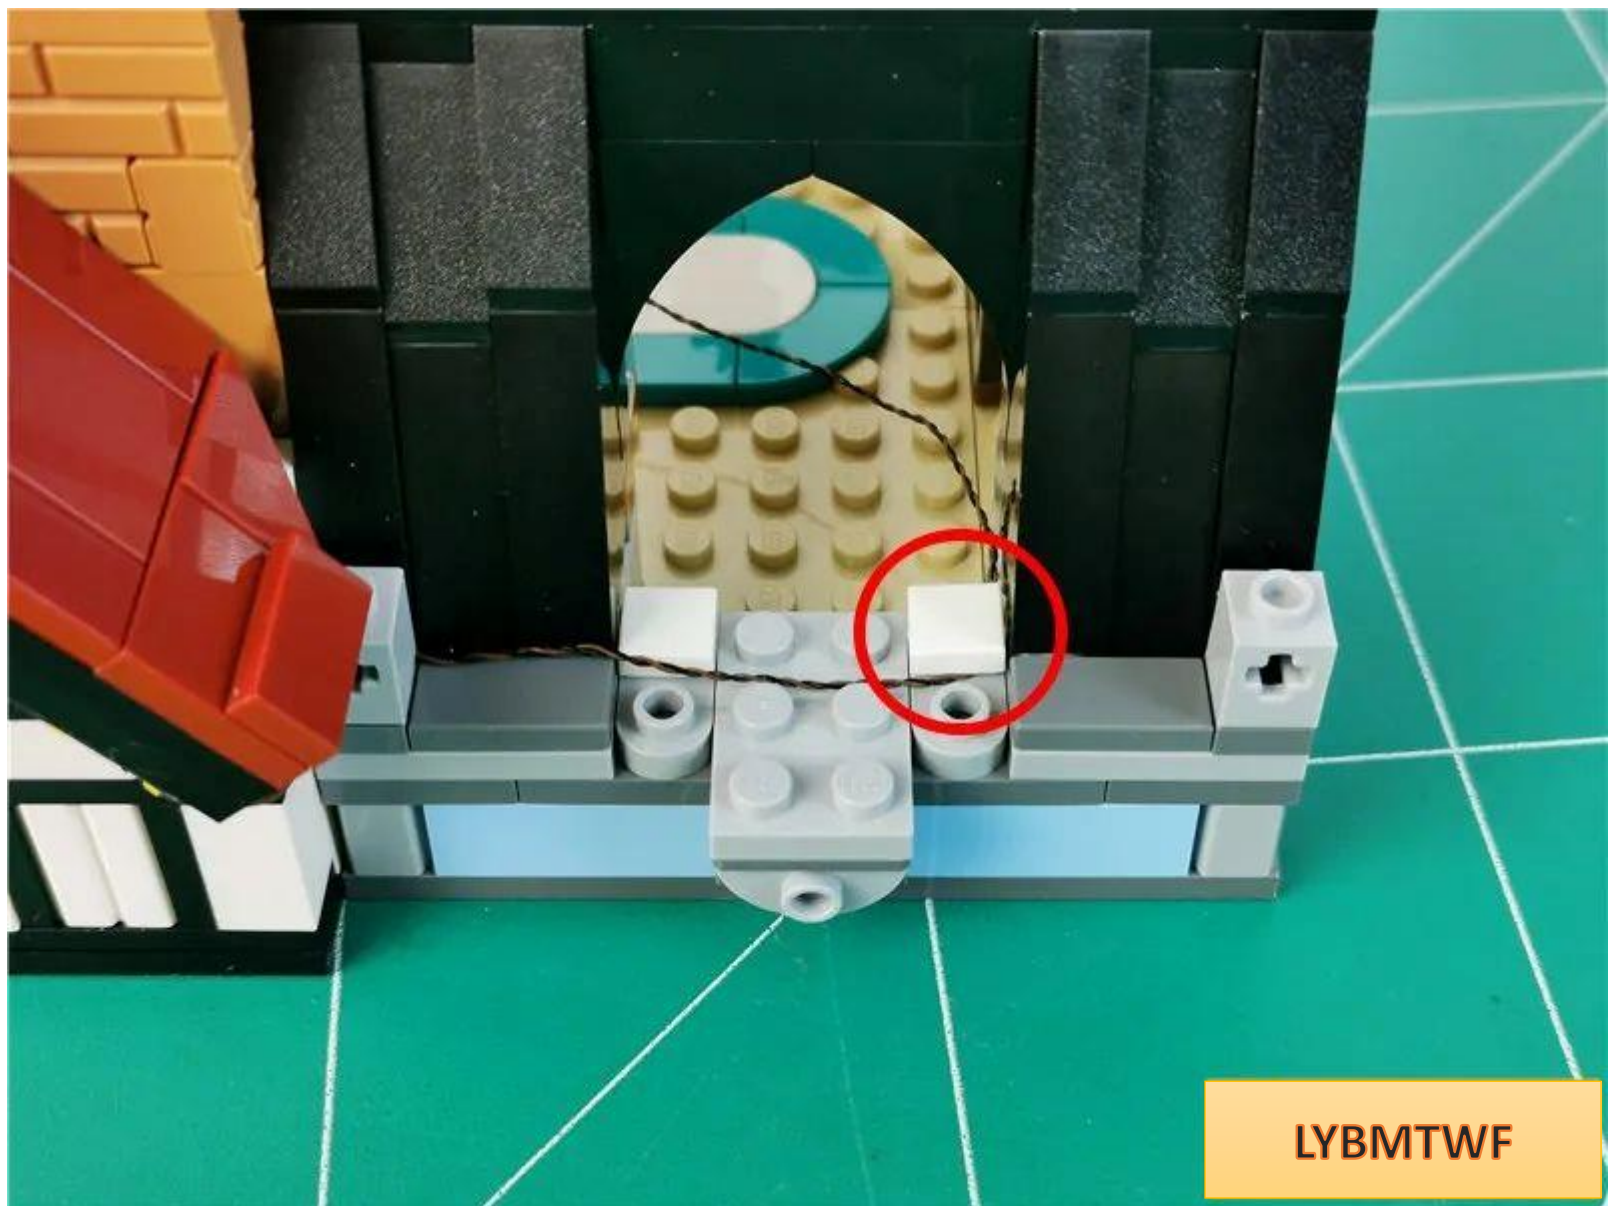


LYBMTWF






LYBMTWF

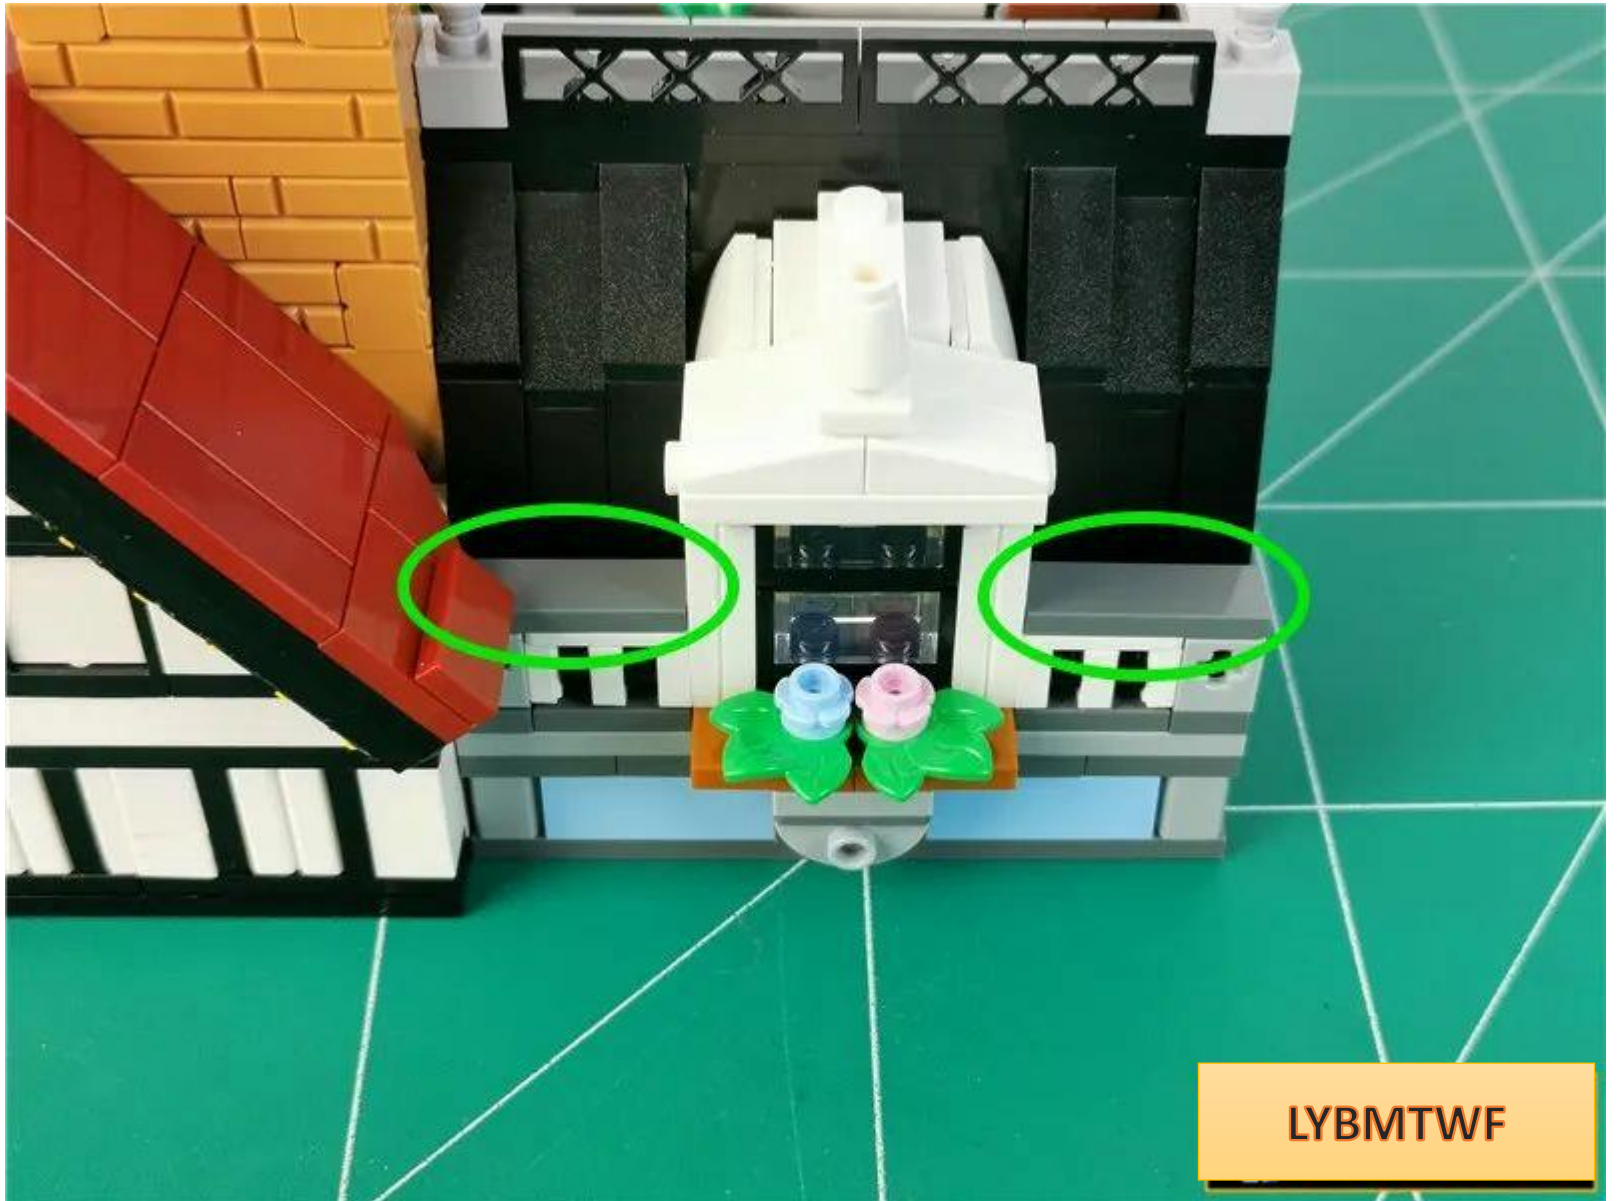


LYBMTWF

Take 1 warm light strip and 1 15cm connecting wire and connect them together

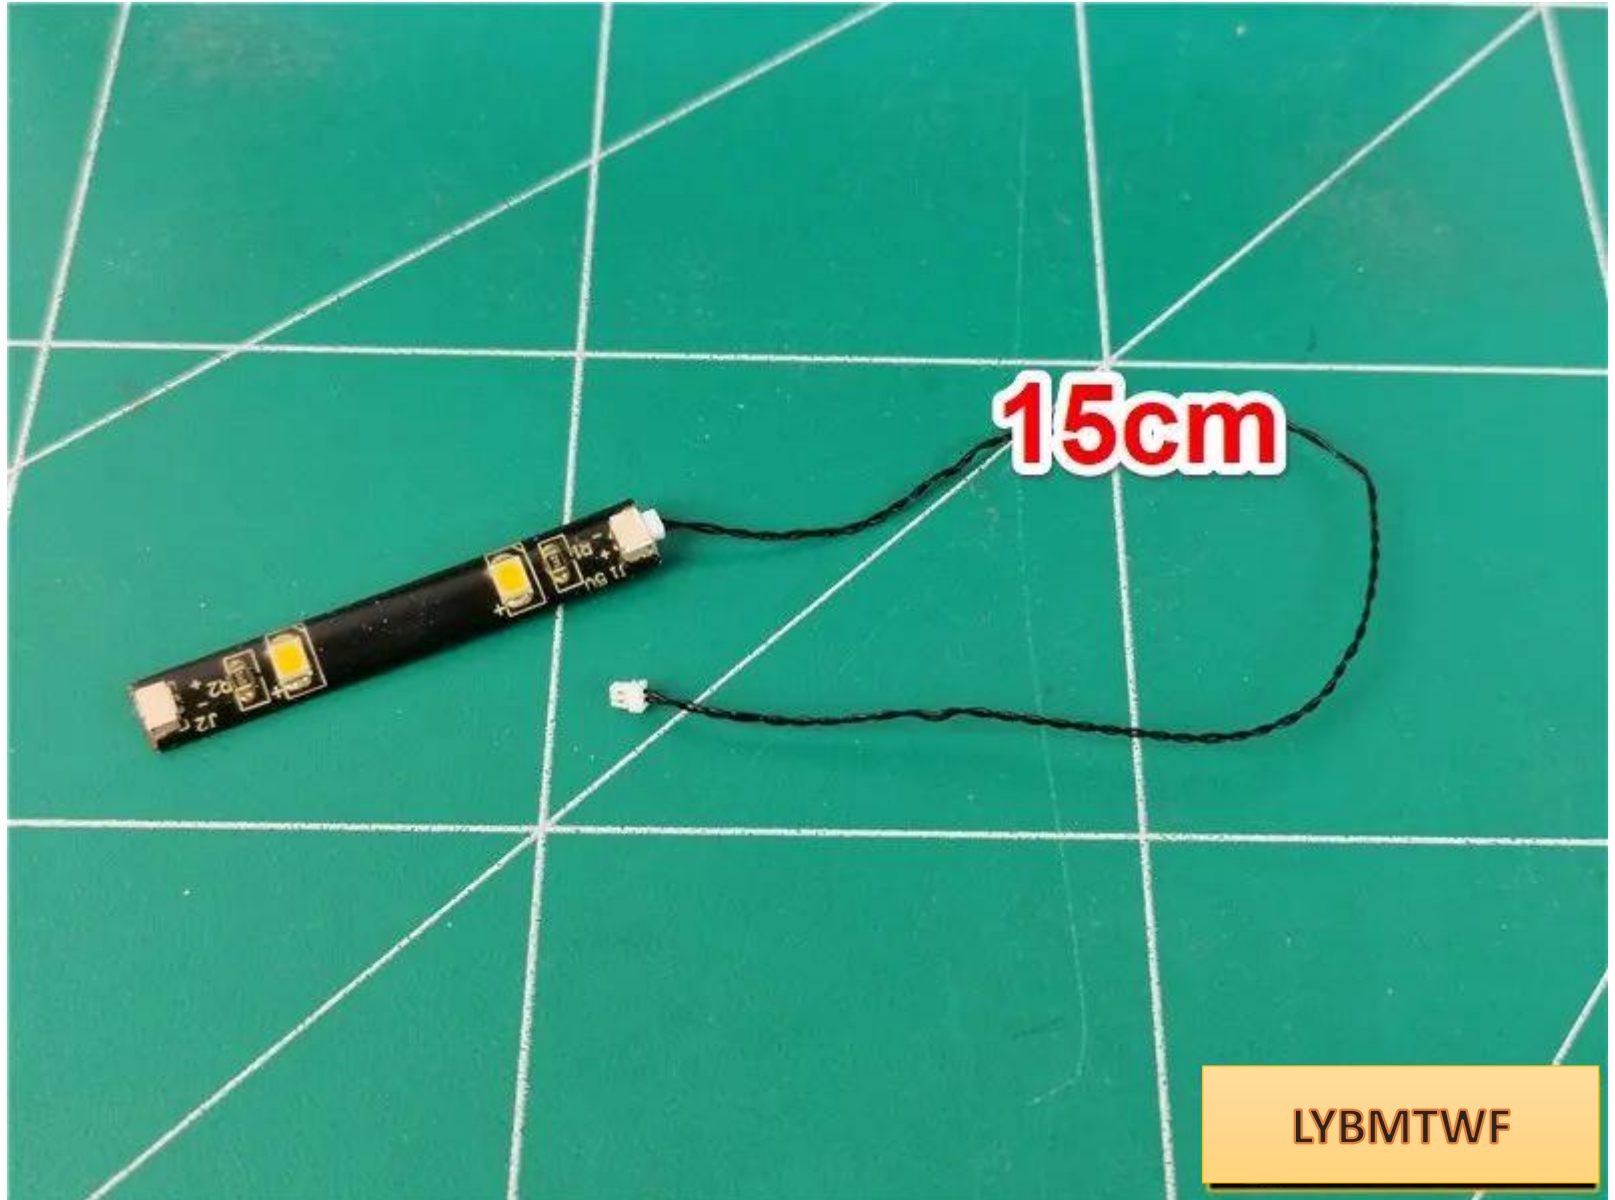




Insert the light strip wire into the empty socket of the light bar

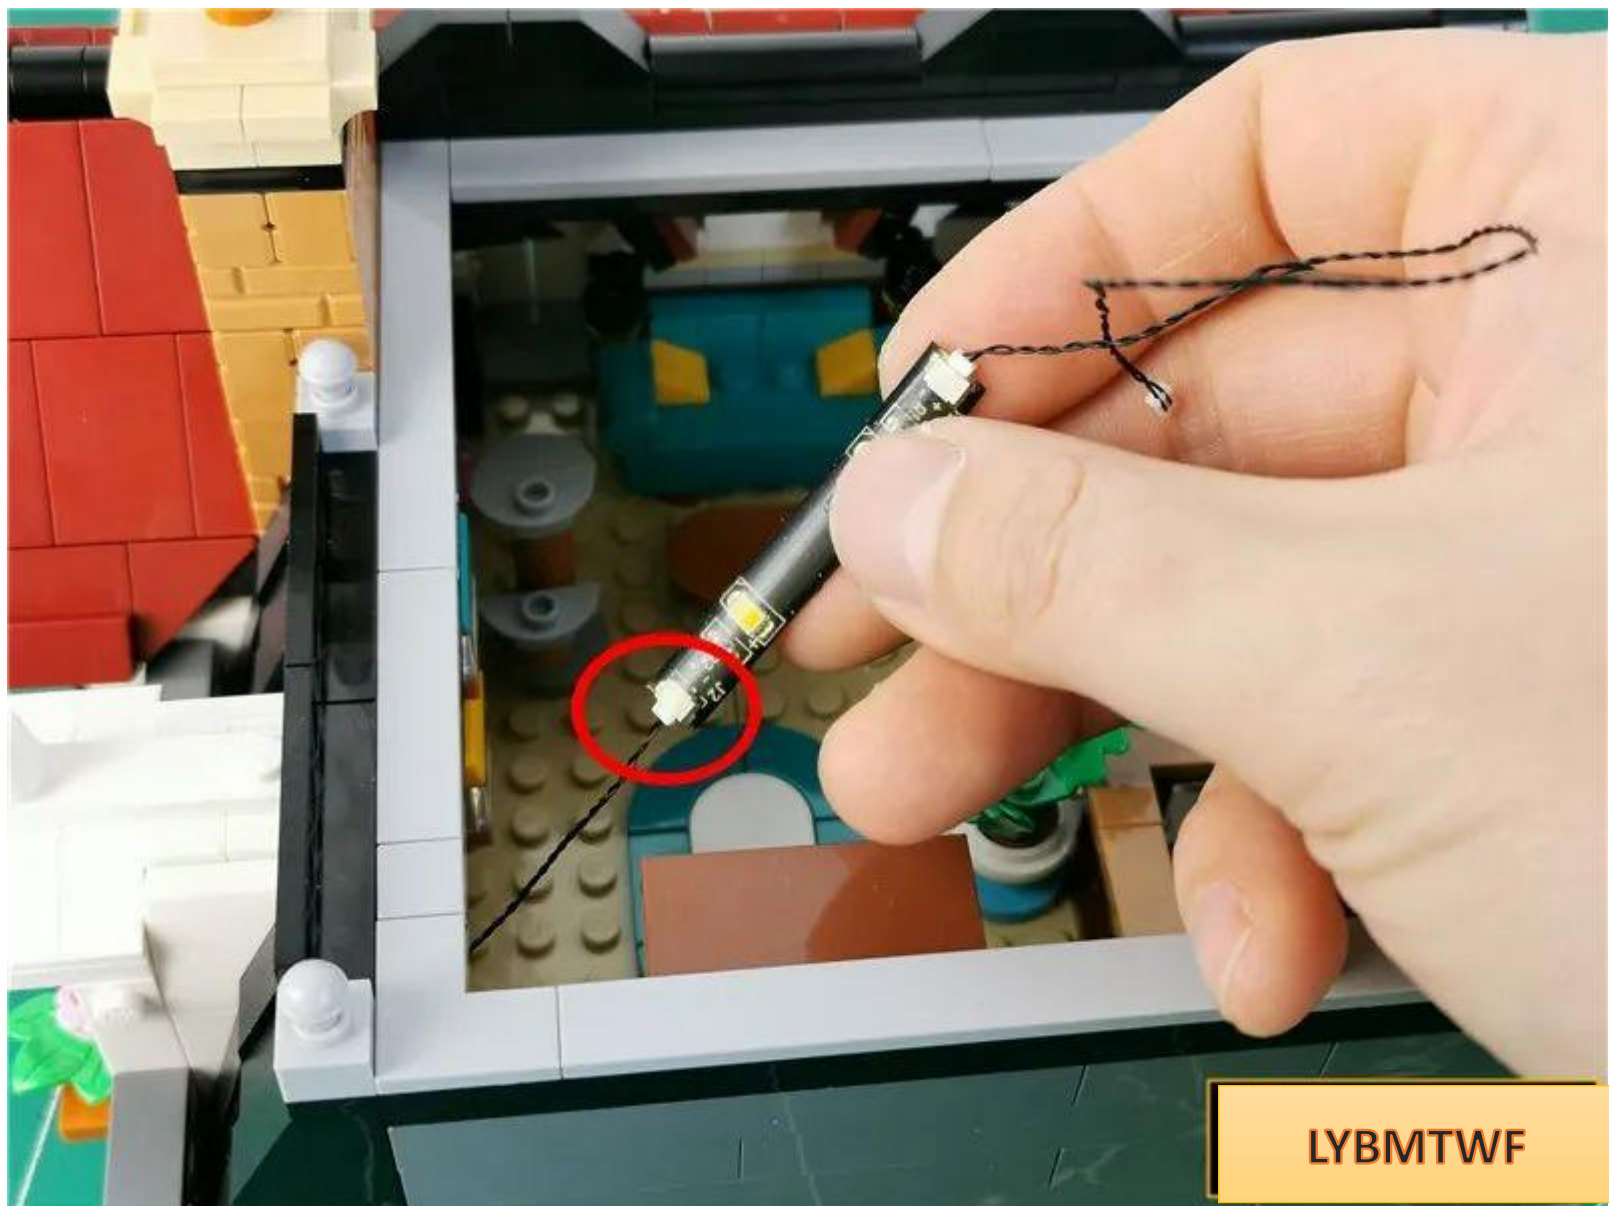

Go to the other side



Paste the light strip to the position shown in the figure, with the connecting wire on the right

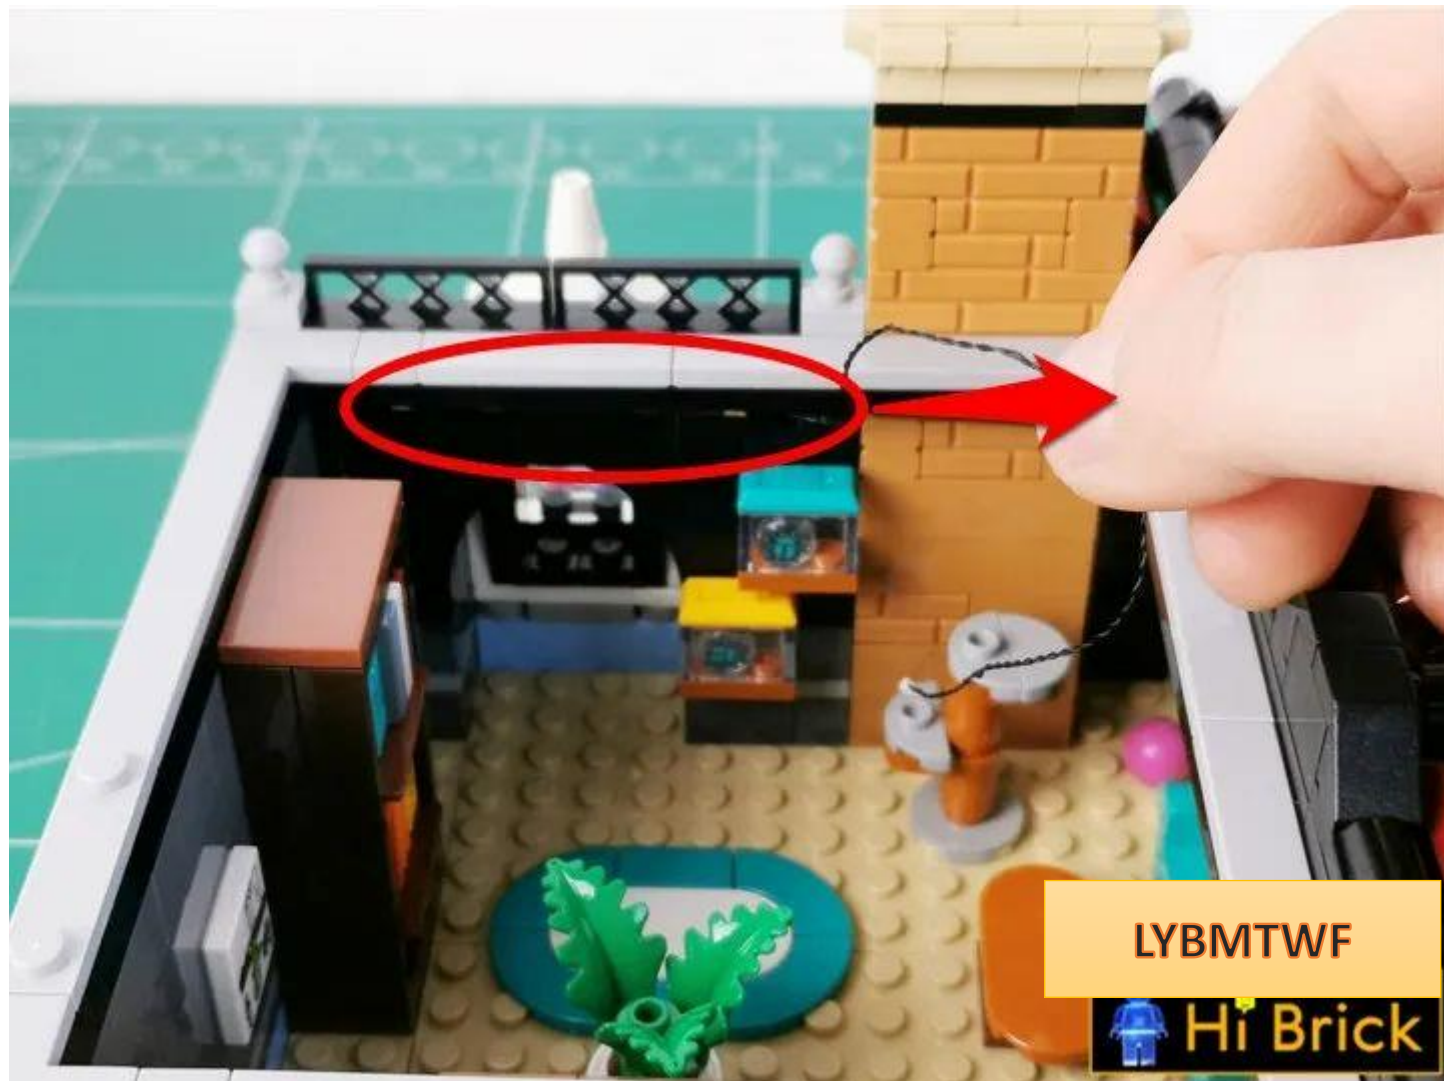





The specific location is as follows



Remove the parts indicated by the arrows.

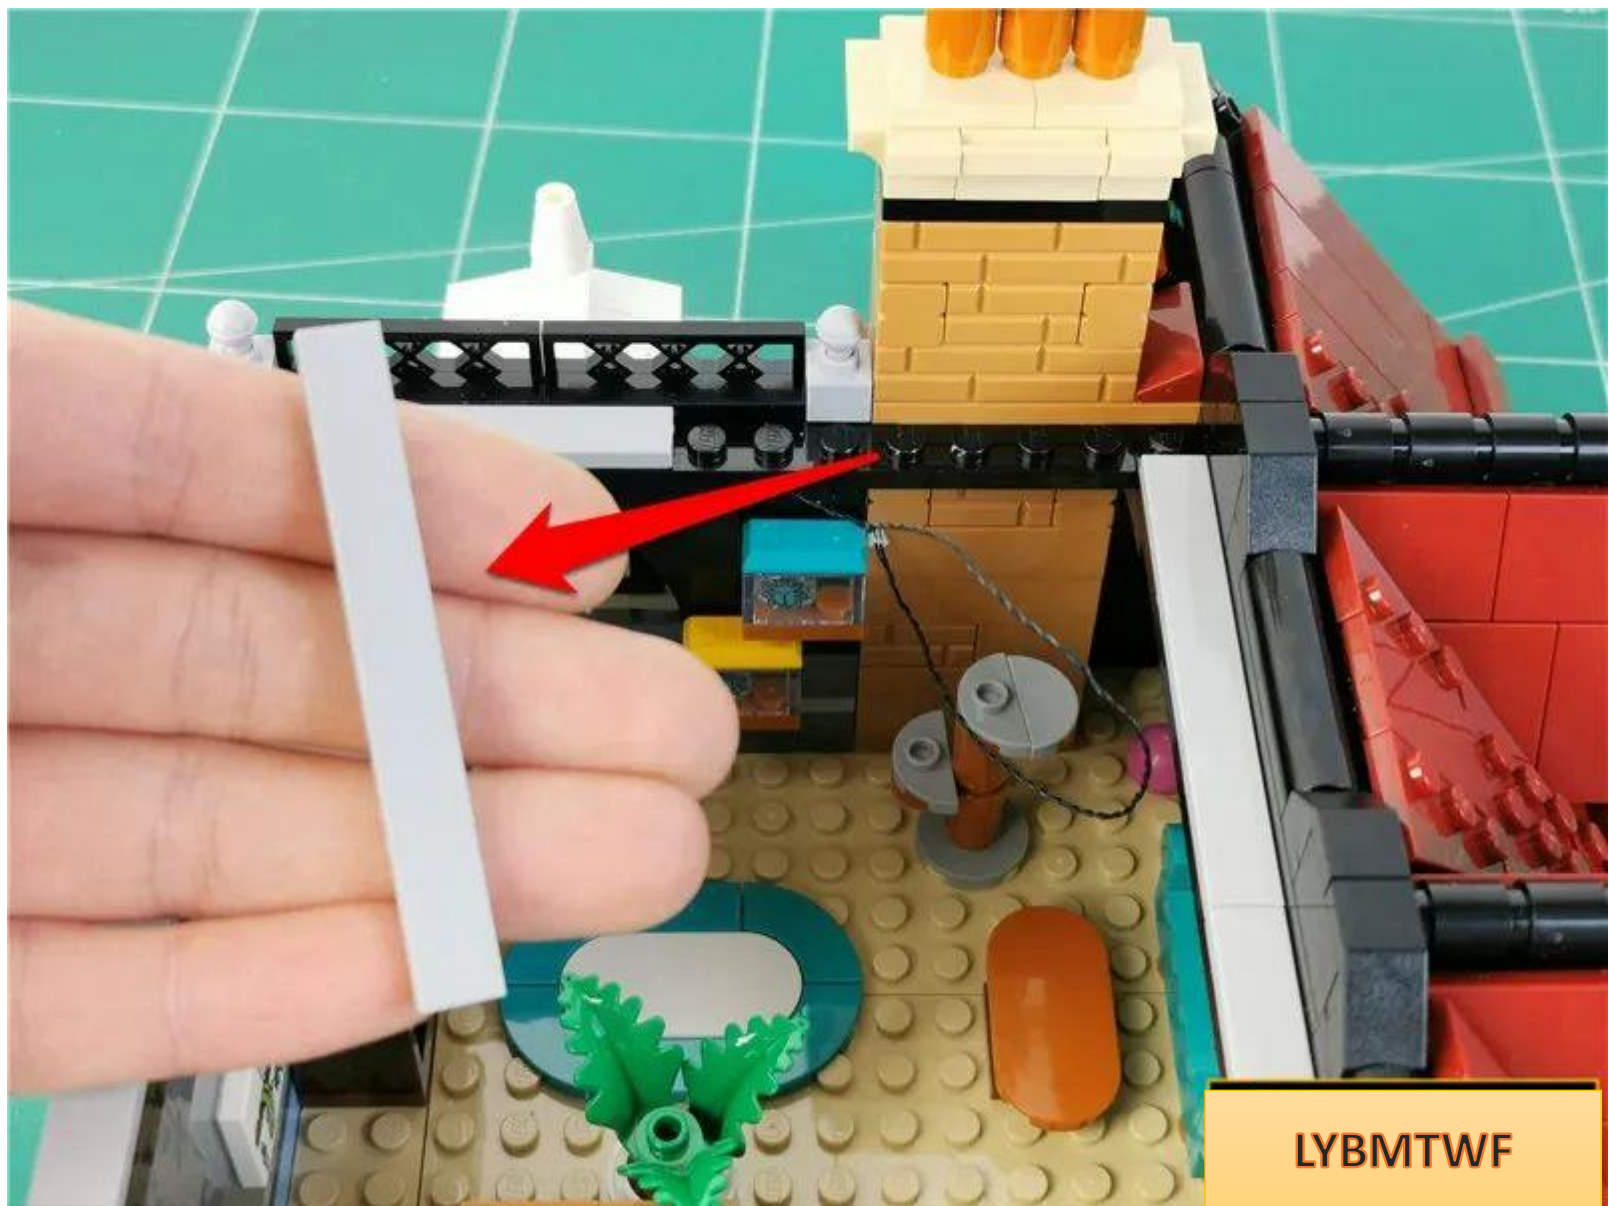


Wrap the connecting wire around the raised particles

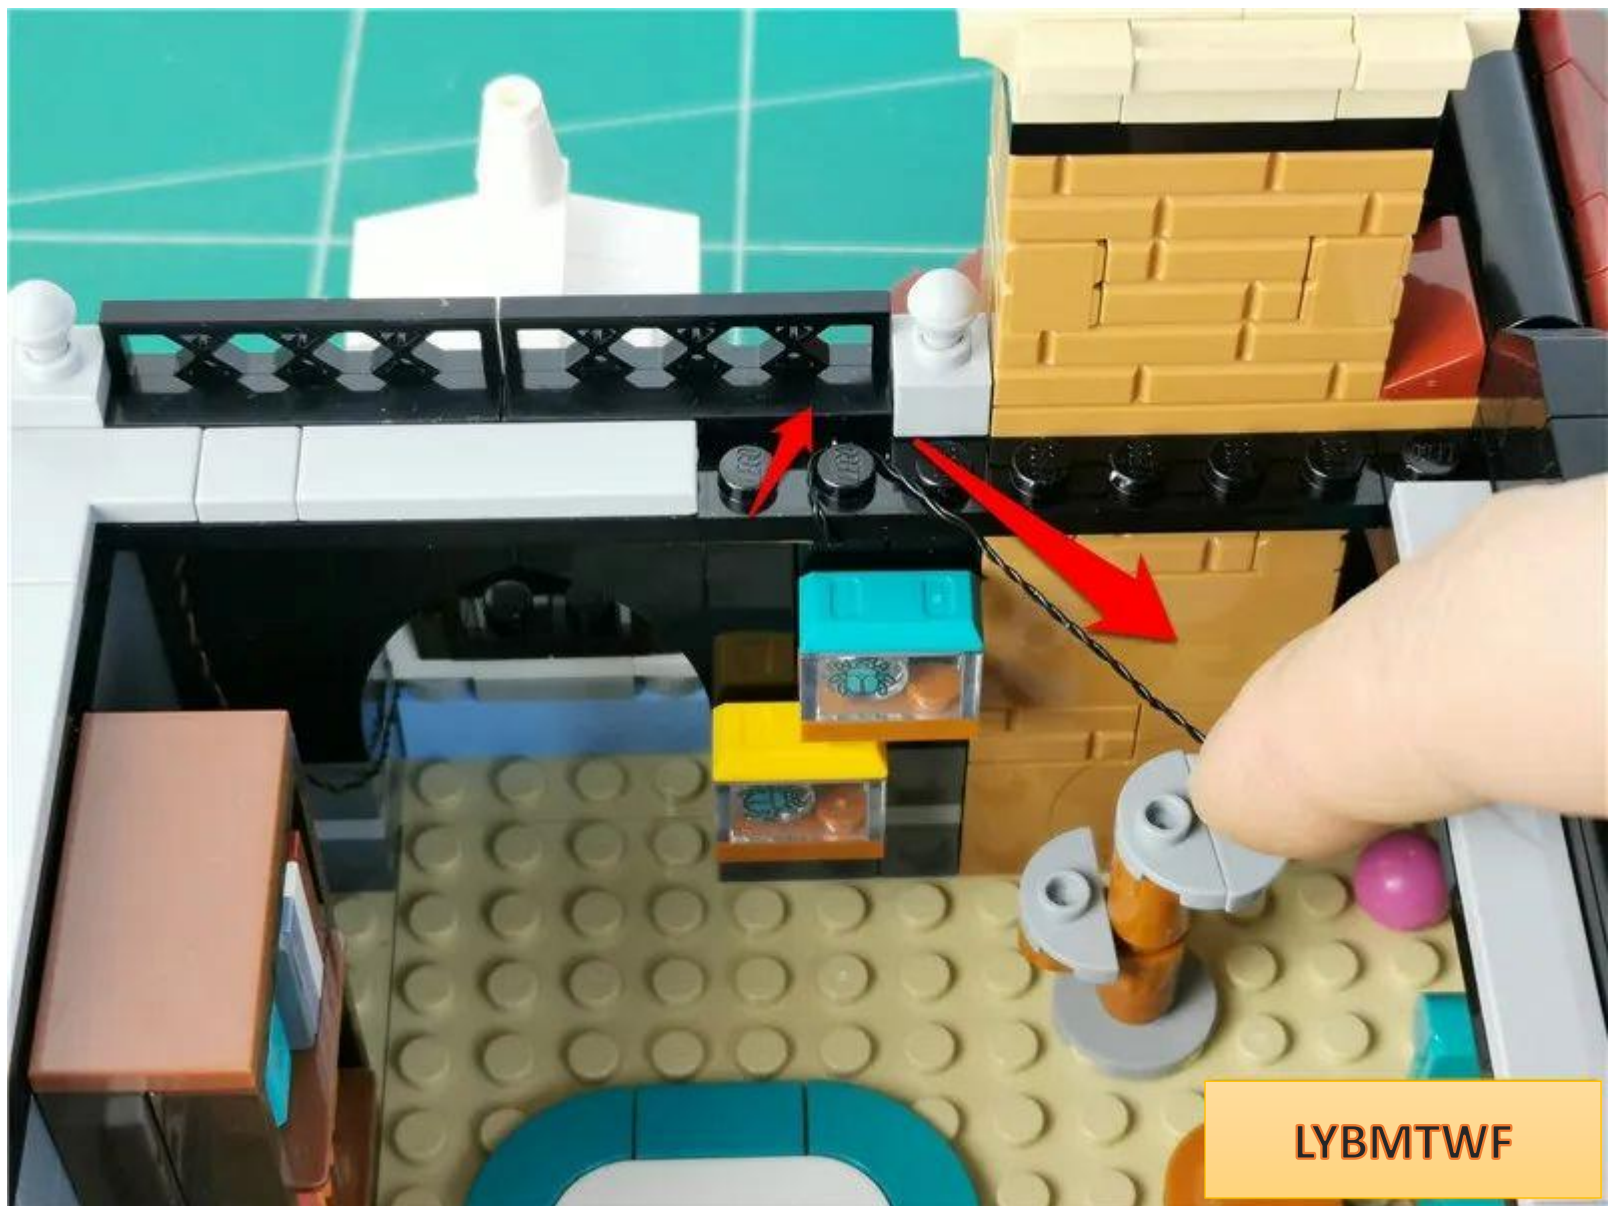



Restore parts and fix connecting wires

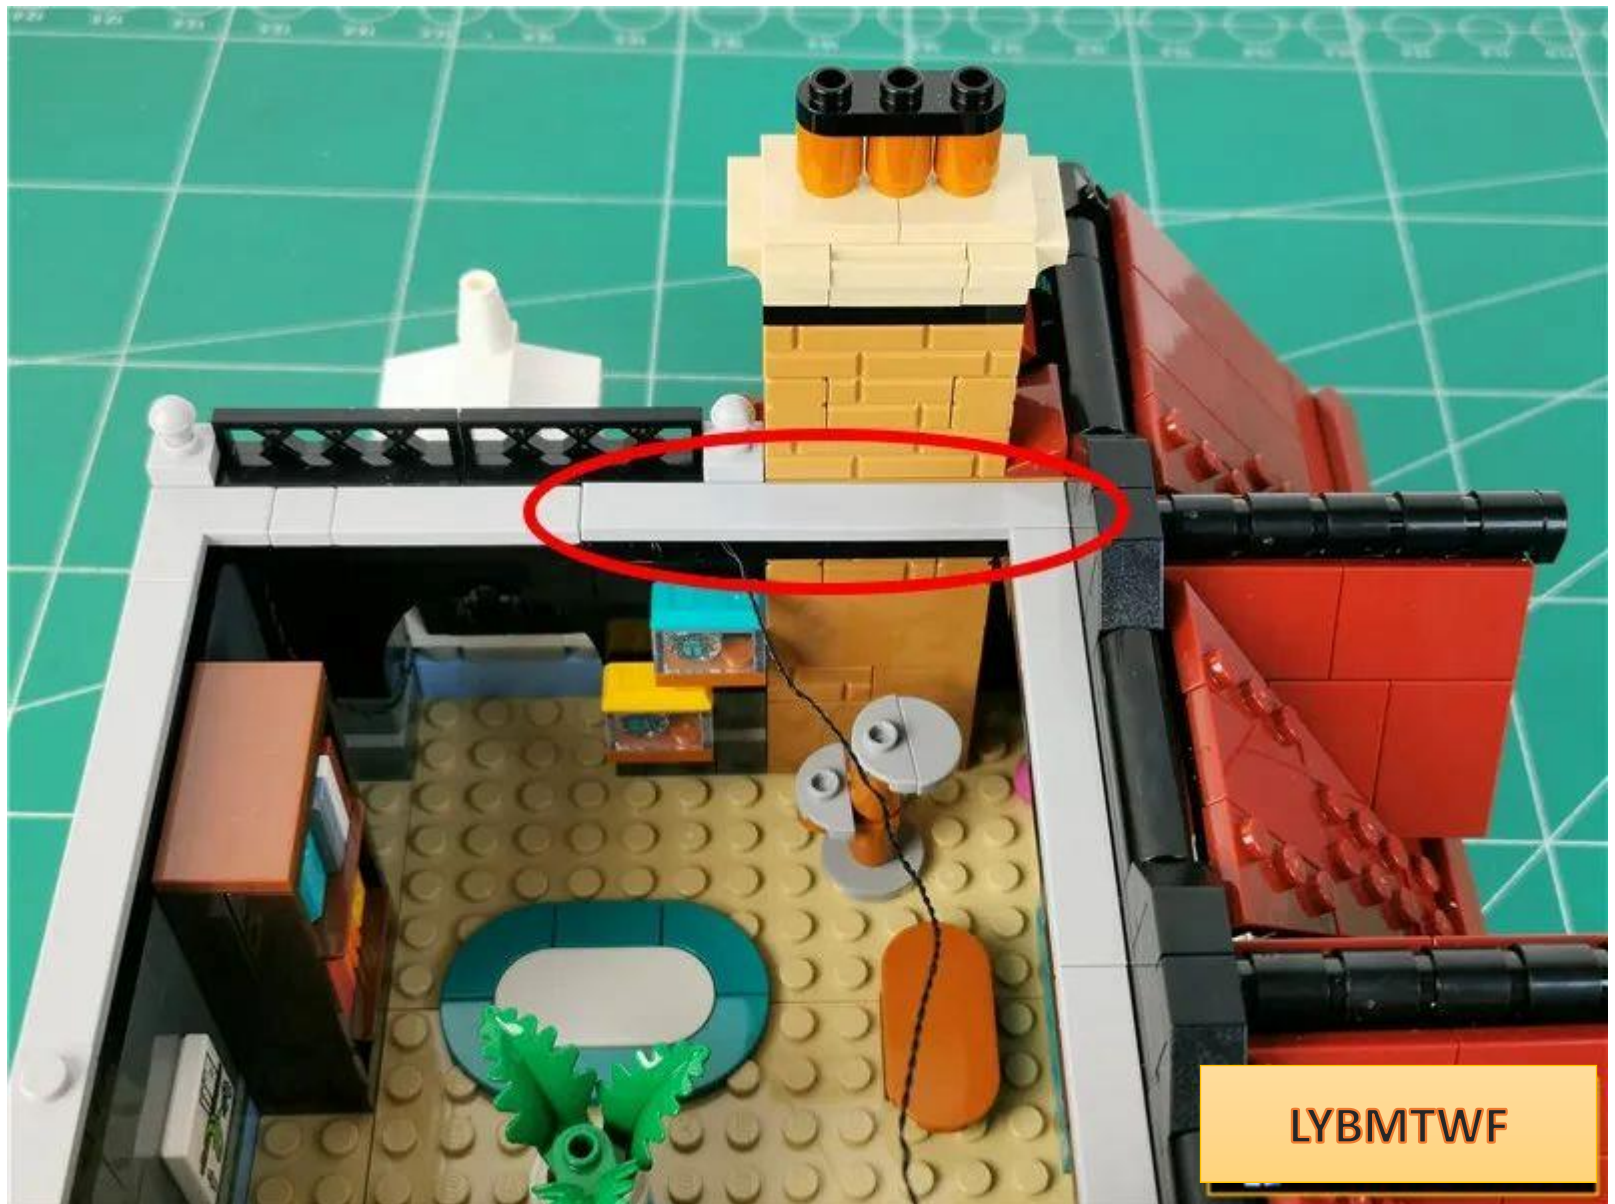


Go to the other side





Take 1 warm light strip and 1 30cm connecting wire and connect them together

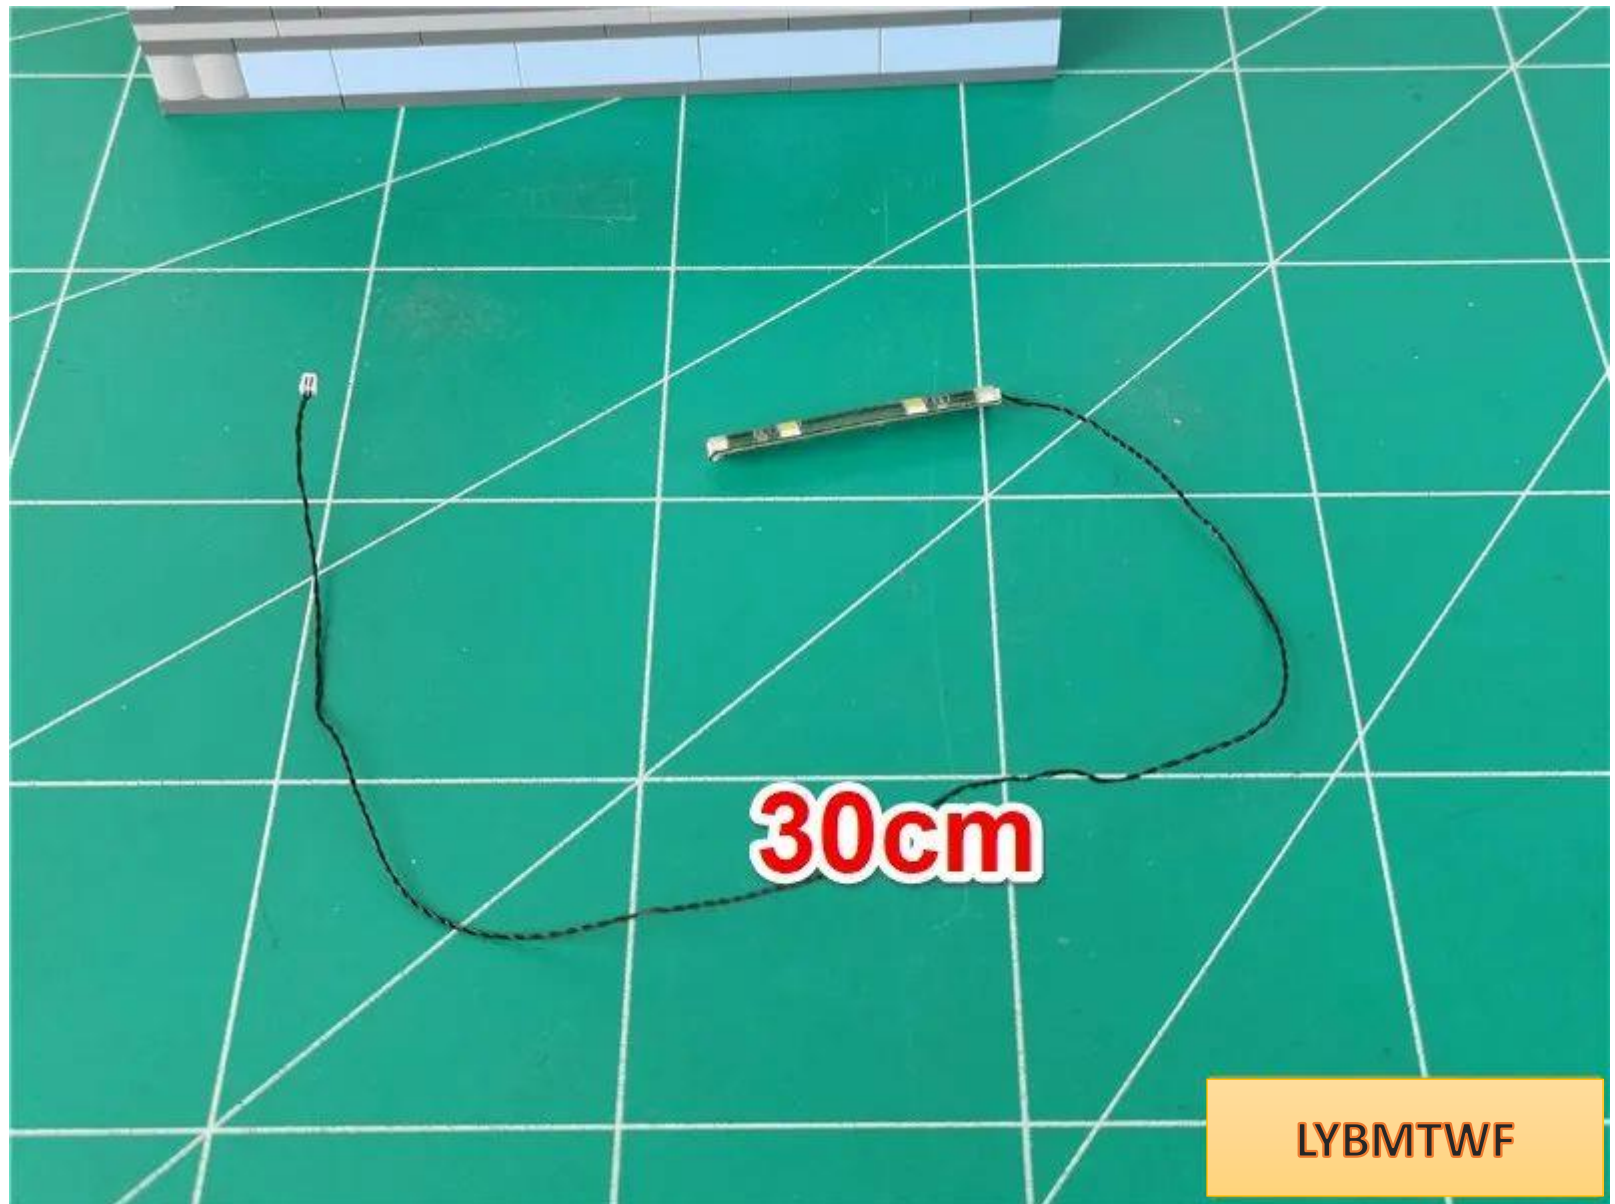




Insert the connecting wire on the building into the empty socket of the light strip



Paste the light strip to the position shown in the figure, with the remaining connecting wire on the right



The specific location is as follows

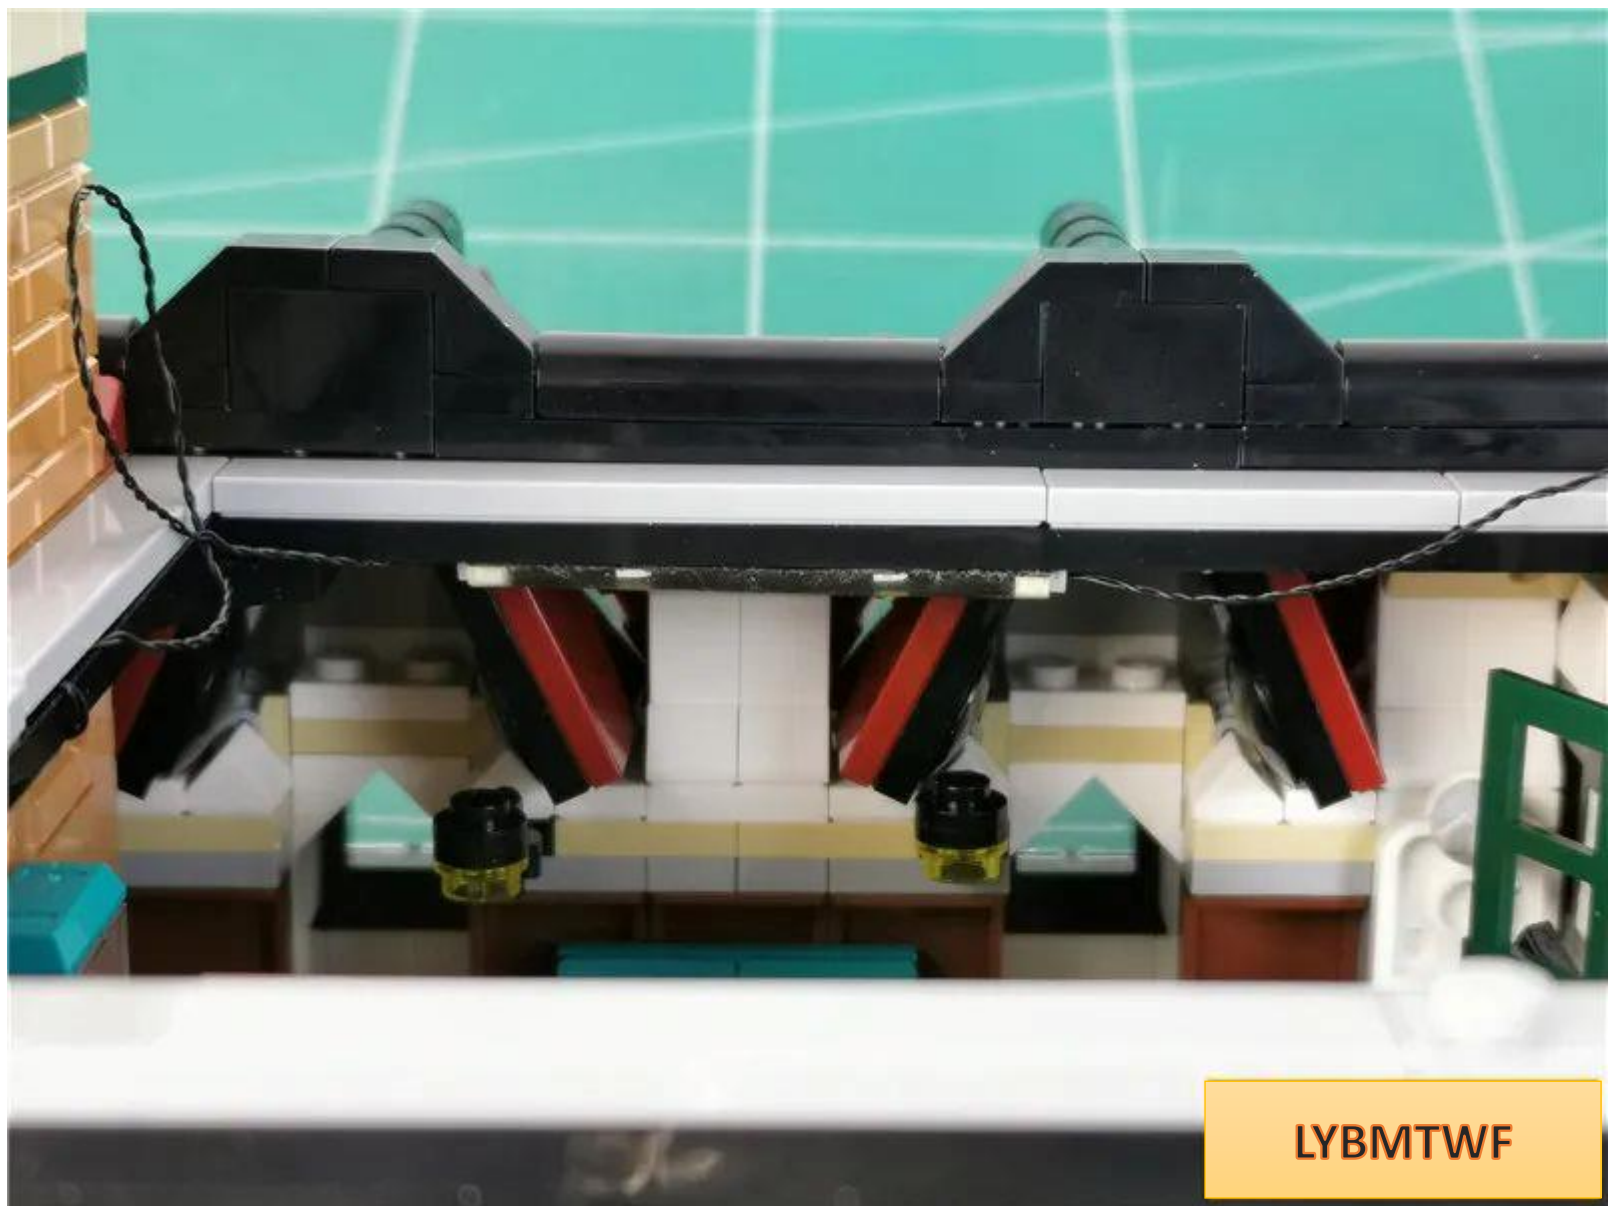

LYBMTWF



Remove the parts indicated by the arrows.



Use parts to fix the connecting wires between the



light strips







LYBMTWF




Remove the parts indicated by the arrows.

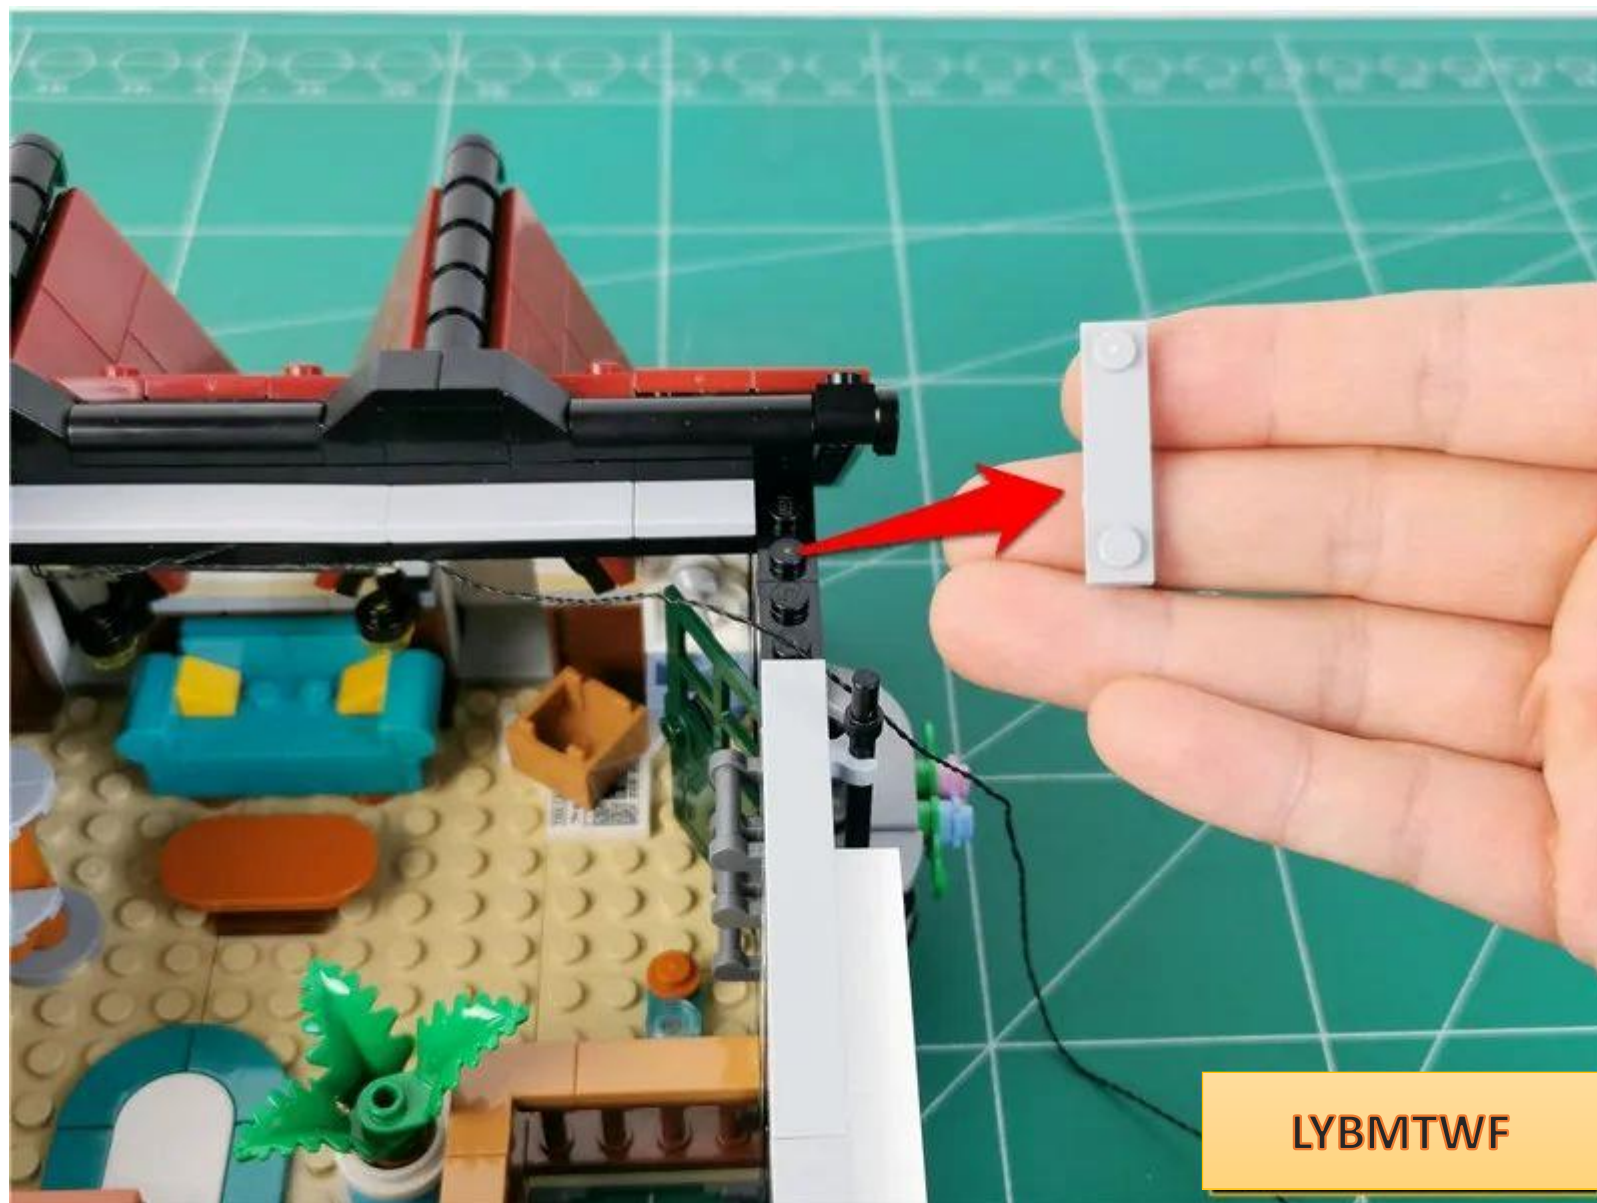

Route the remaining connecting wire around the raised particles

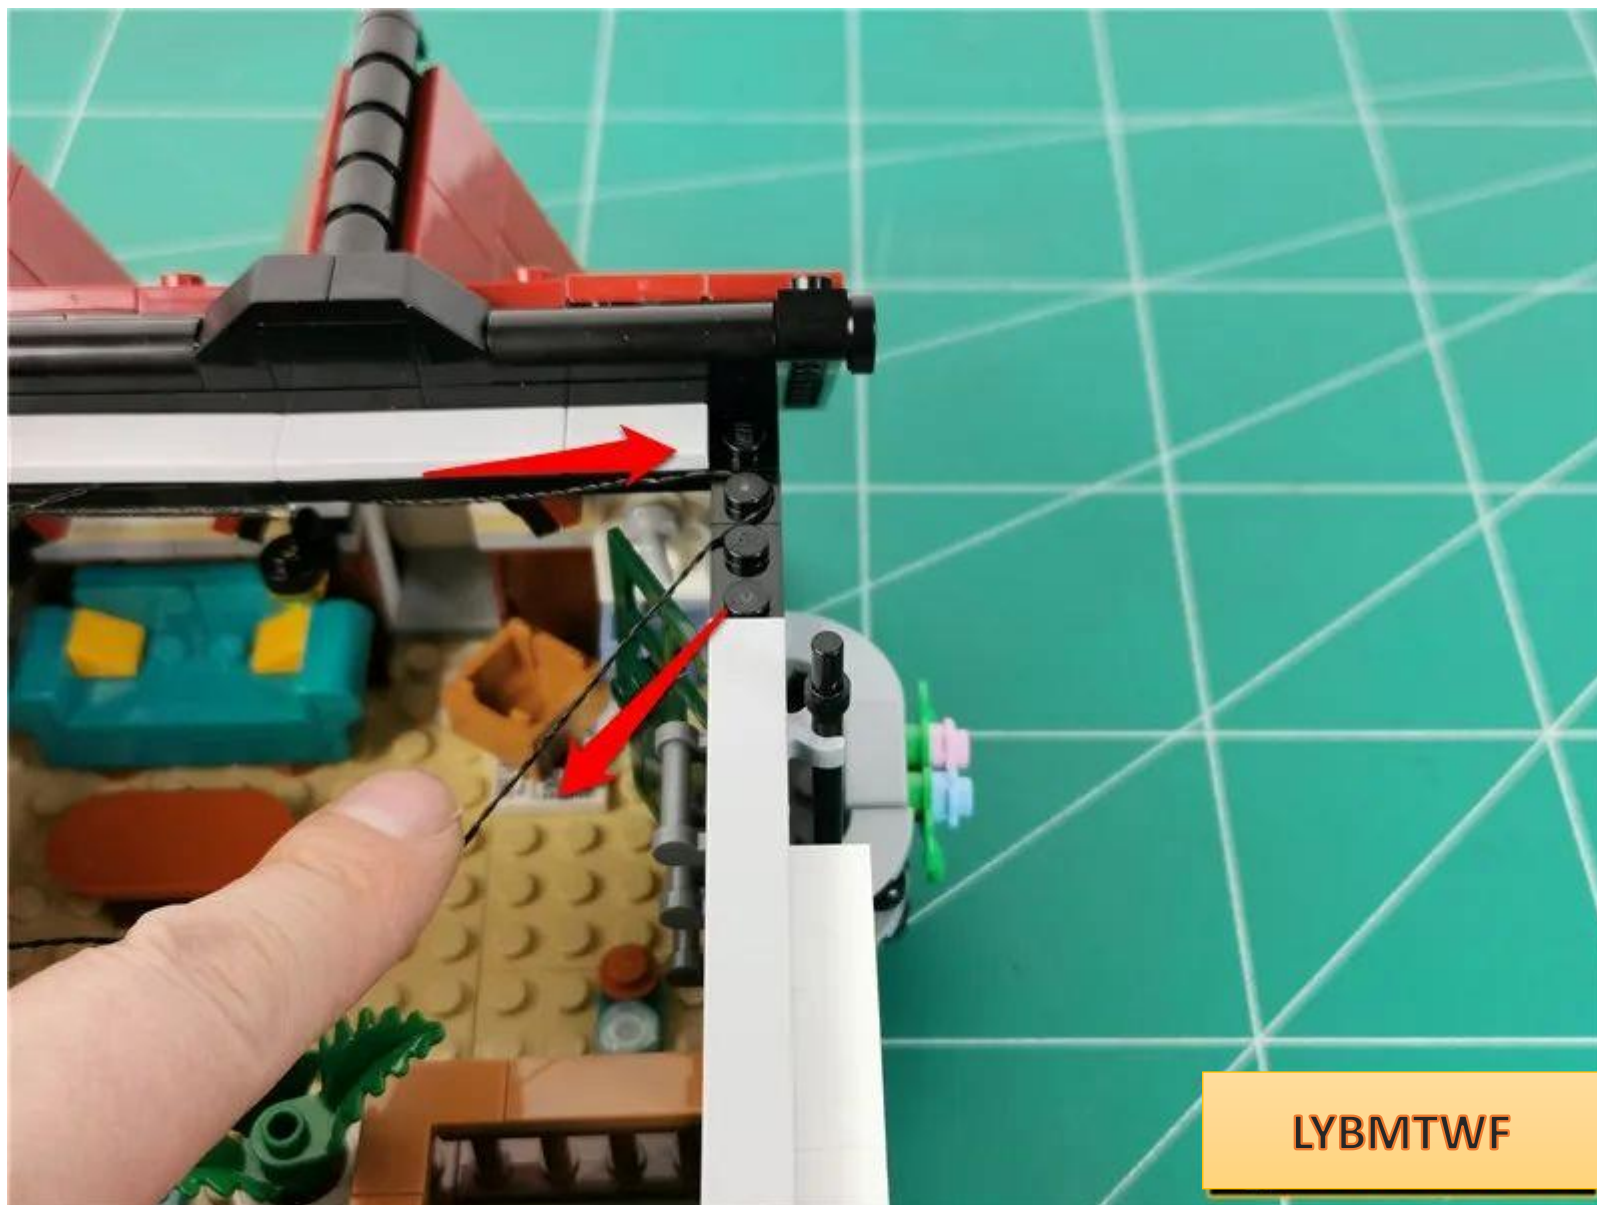


Restore parts and fix connecting wires

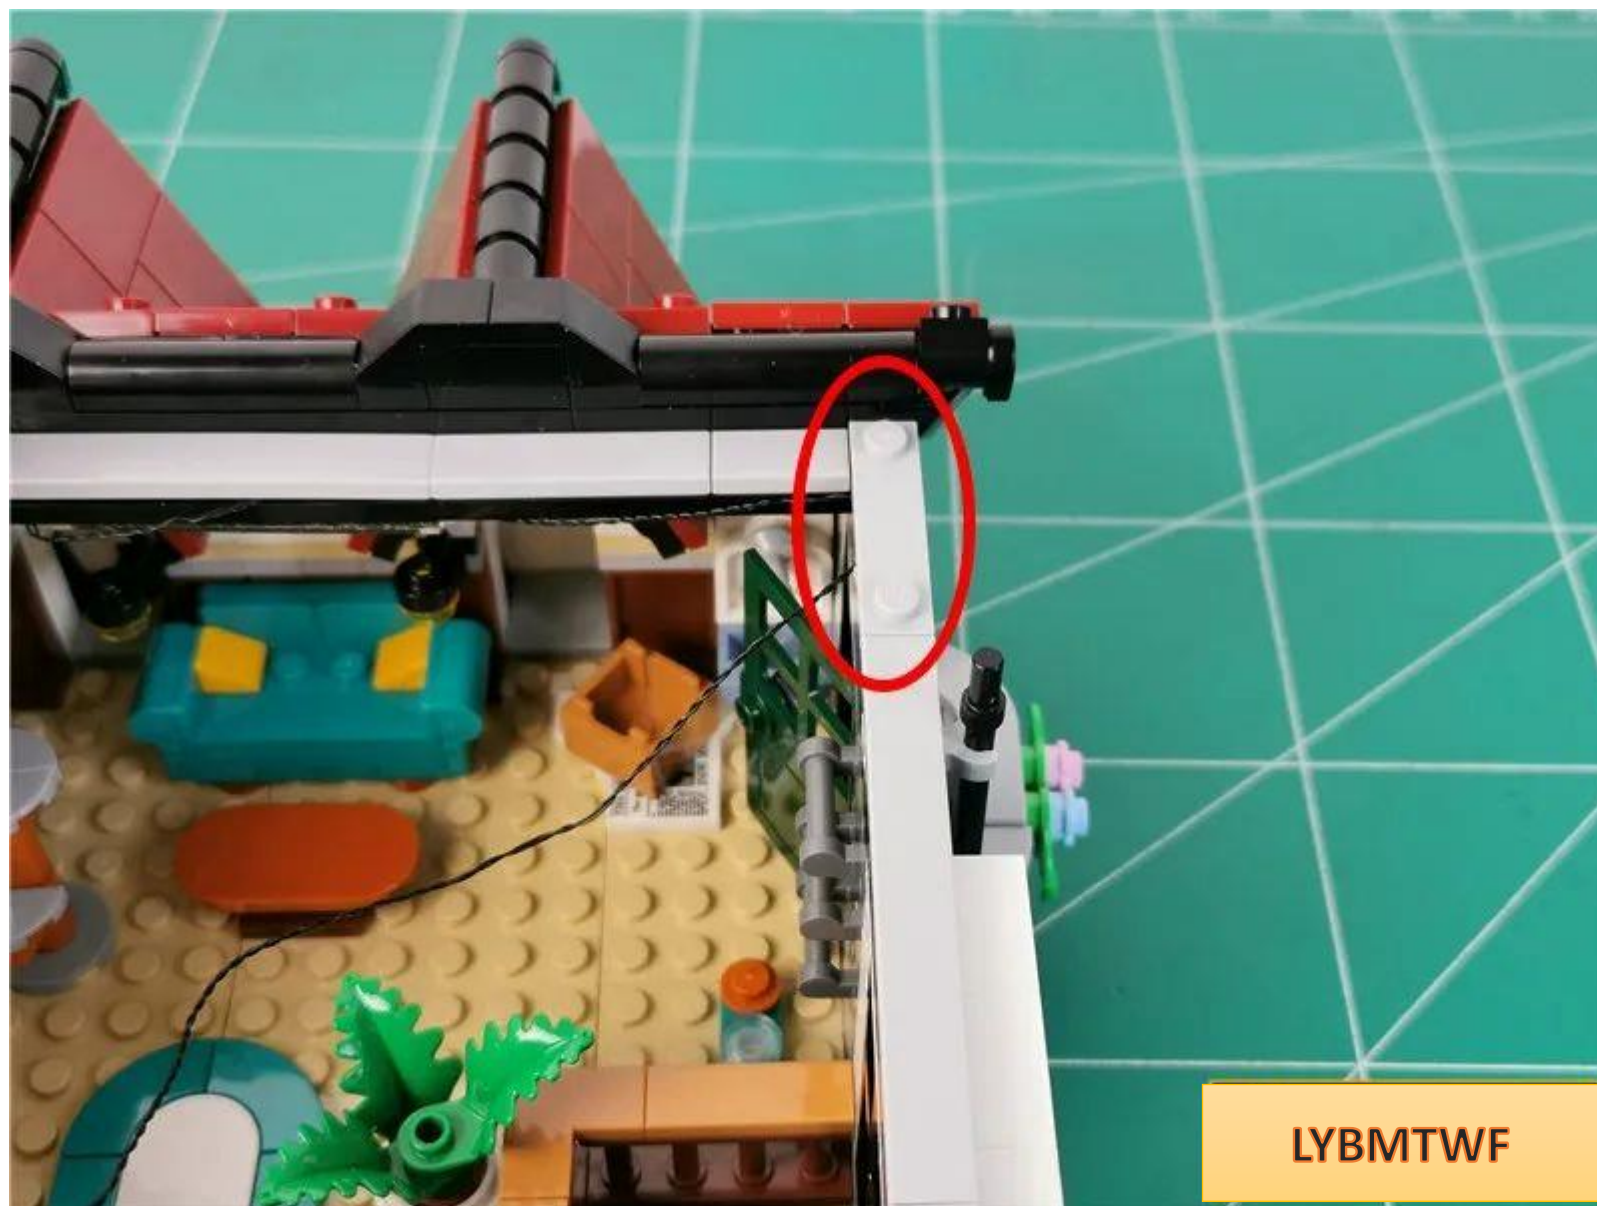


LYBMTWF



Place the building on its side, **paying attention to the direction**

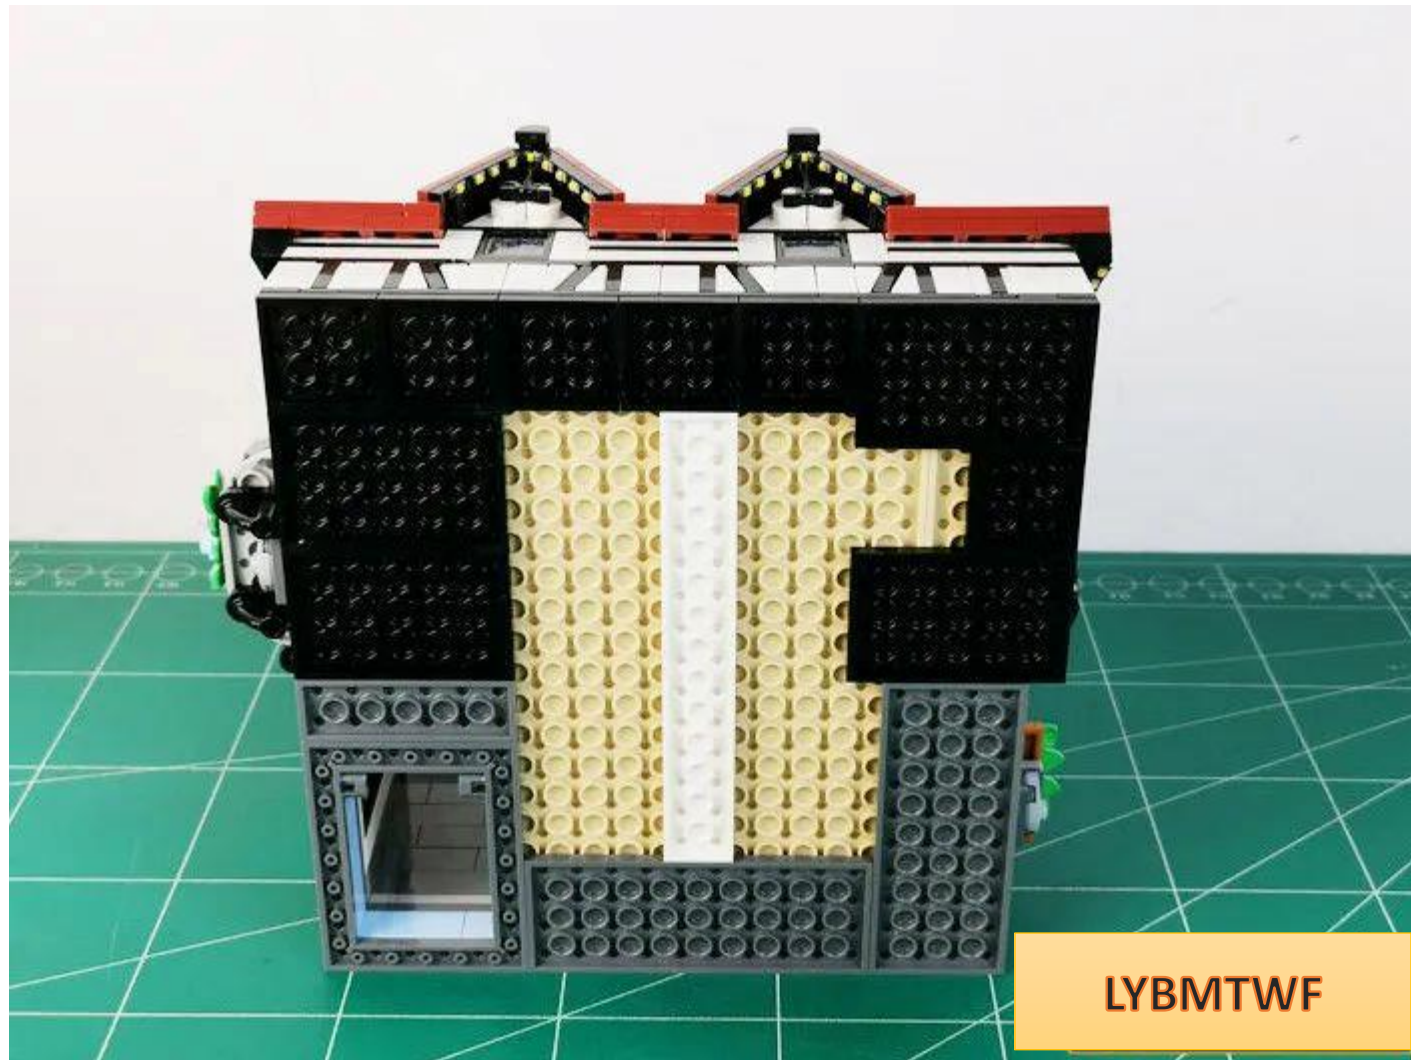


Pass the indoor connection line through the gap to the bottom

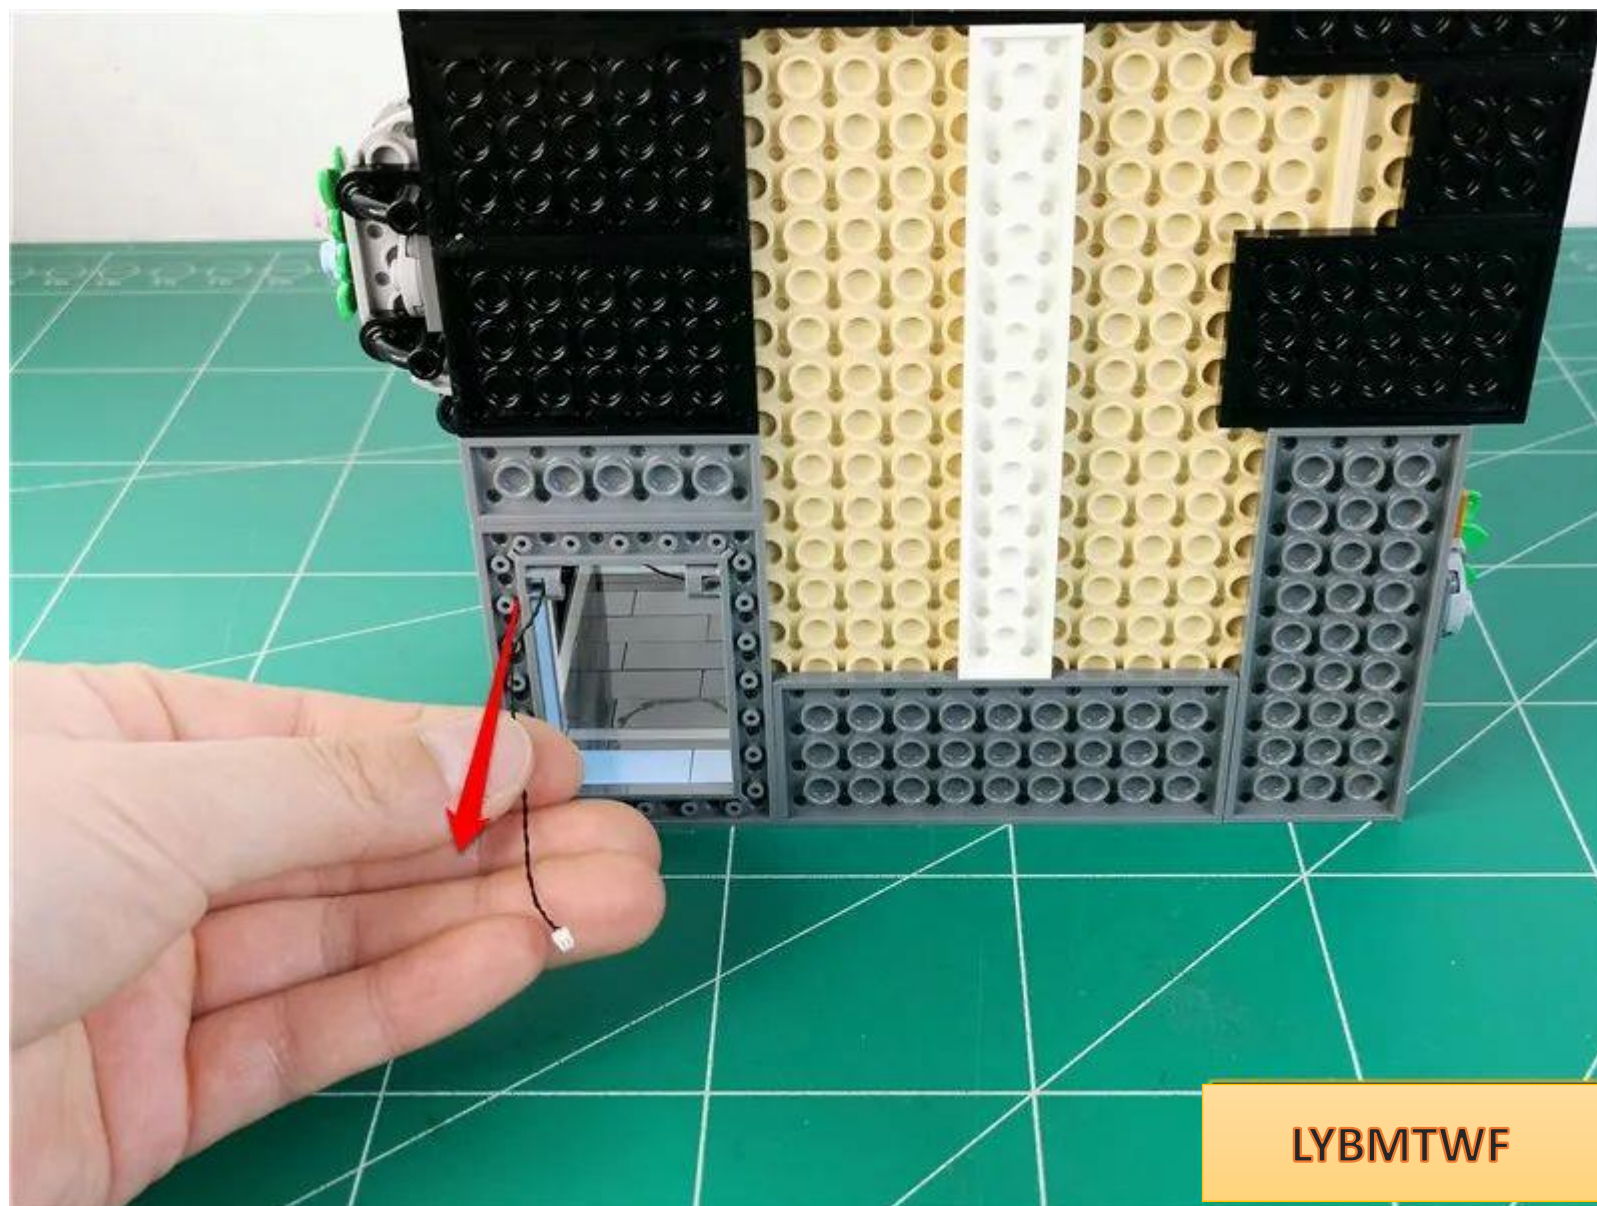

LYBMTWF




The specific location is as follows

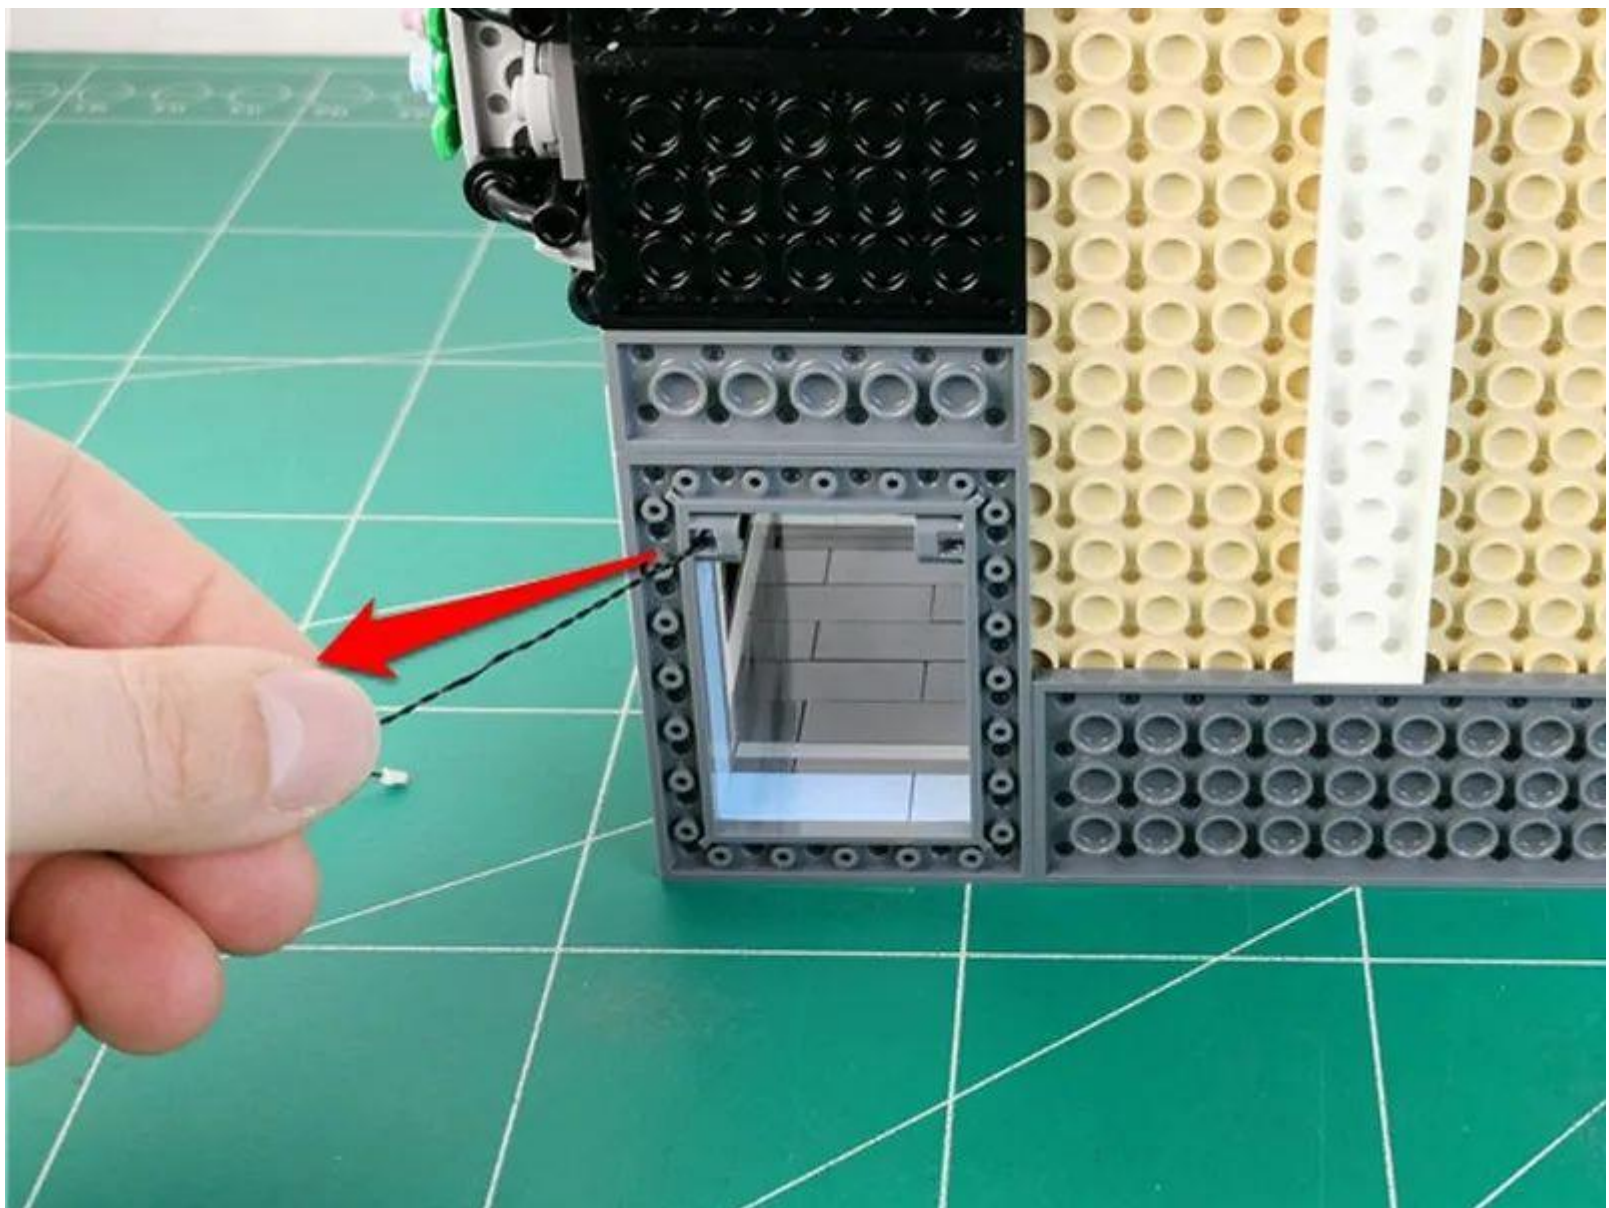




Take 3 warm light strips, 2 5cm connecting wires, 1 50cm connecting wire, and 4 hollow transparent circles

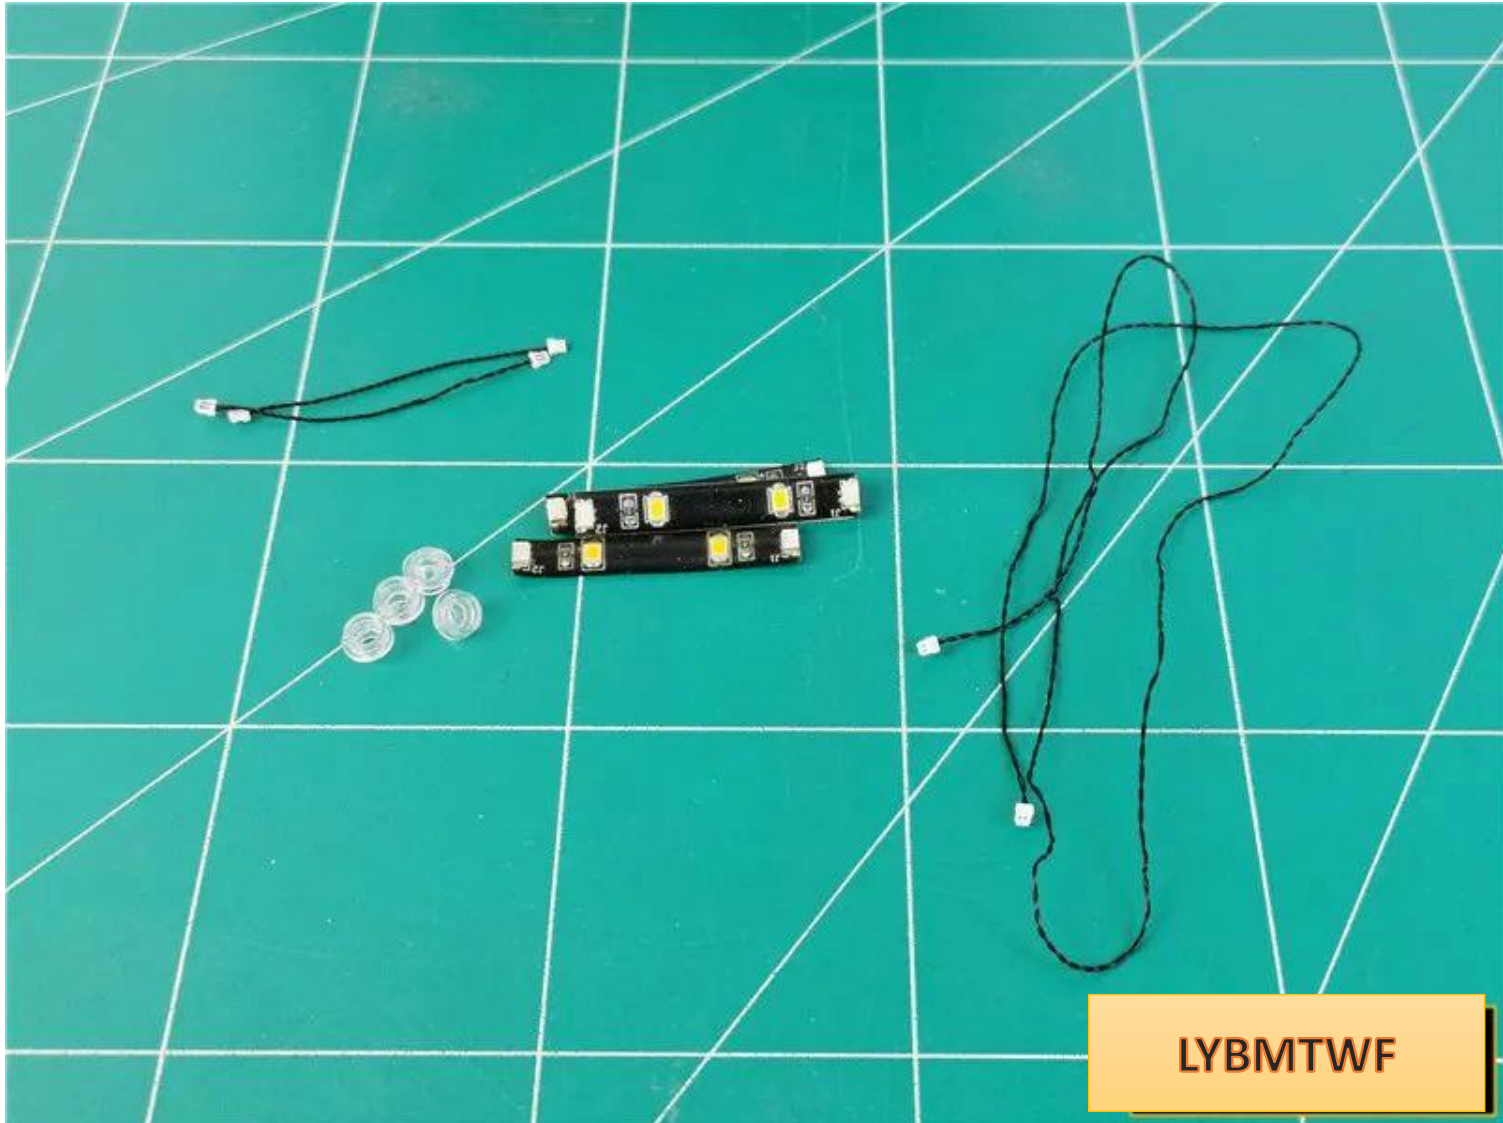


As shown in the figure, connect the light strip in the same way as before

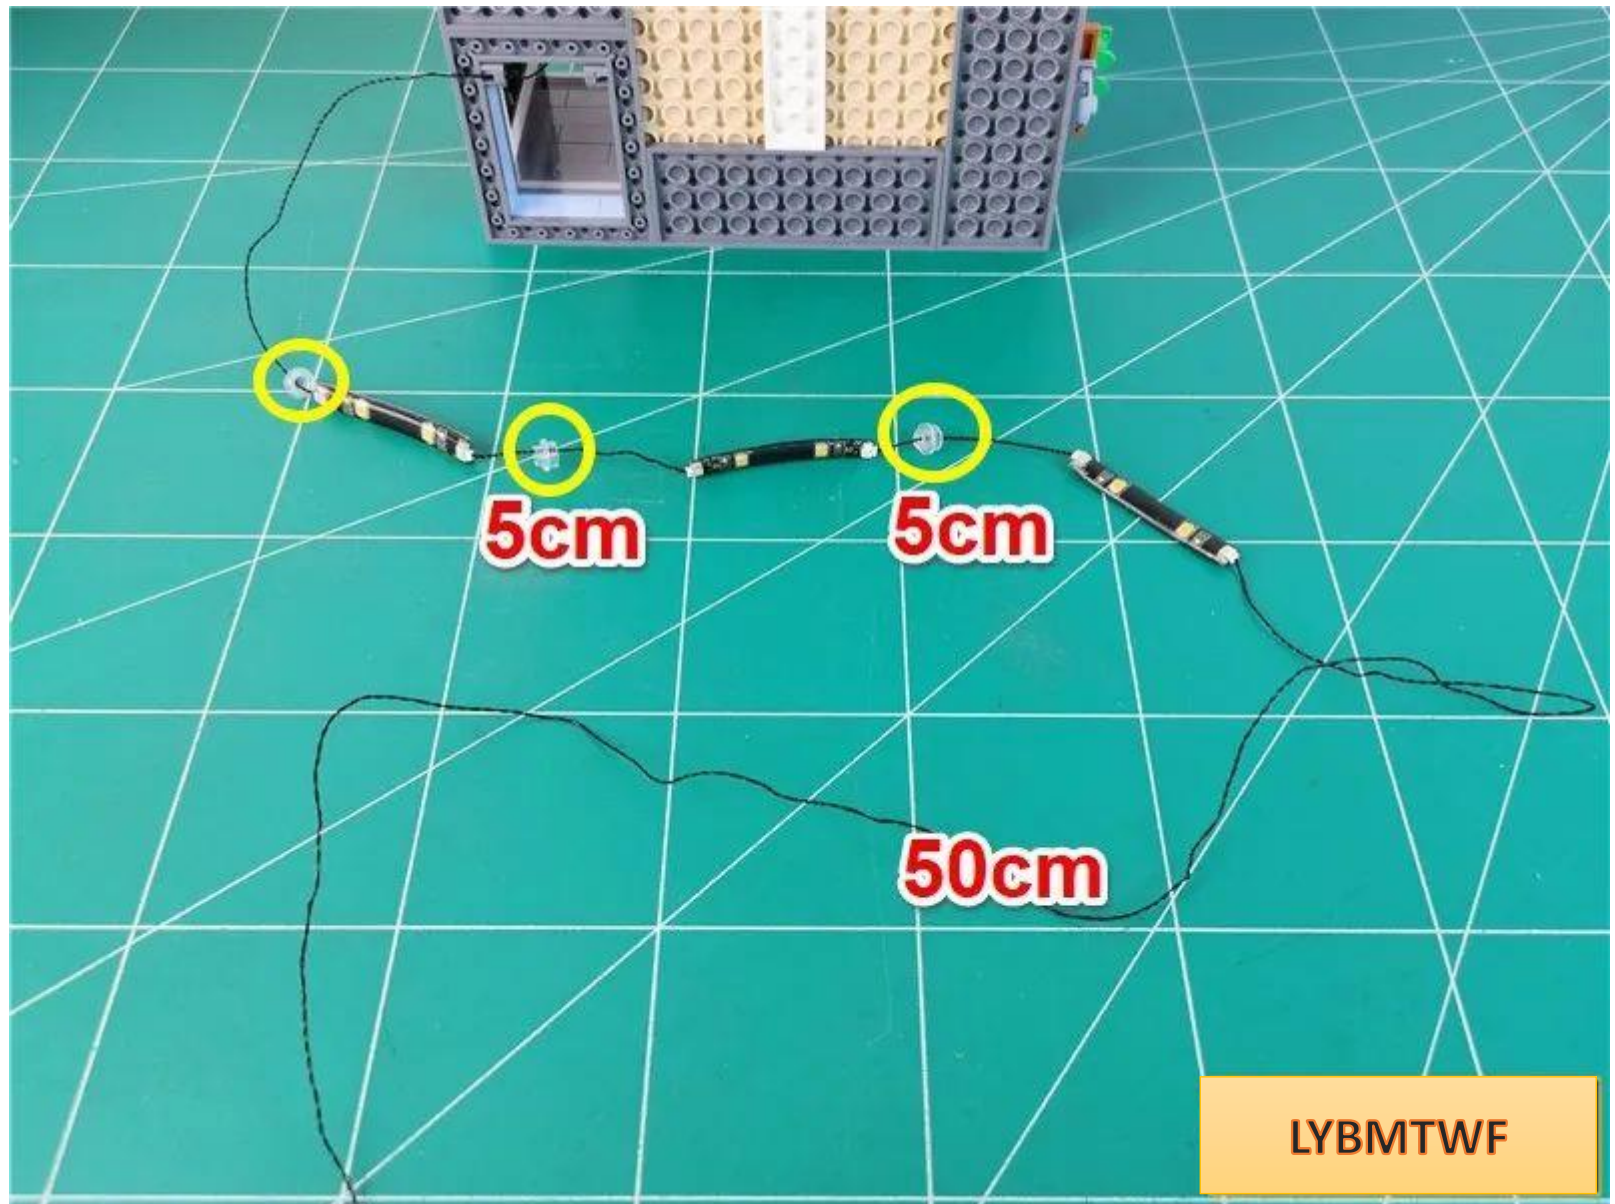




Paste the light strip to the position shown in the figure, and the remaining light strips are on the top

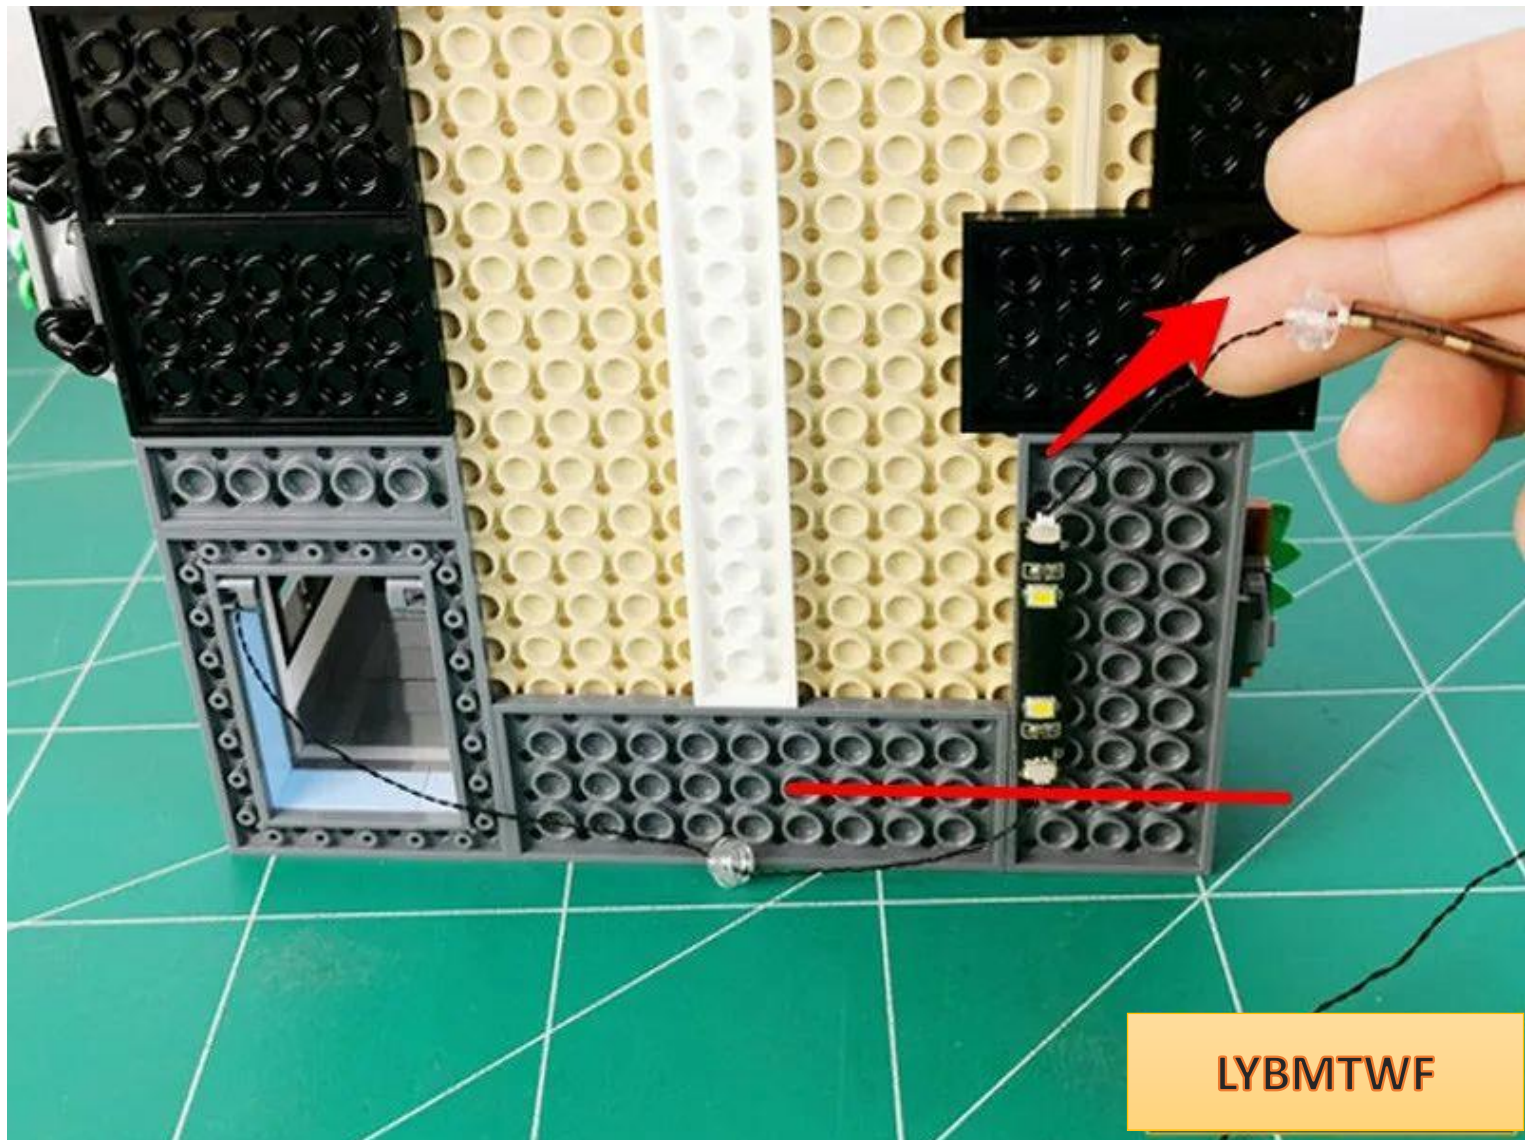


LYBMTWF




Paste the remaining light strips one by one

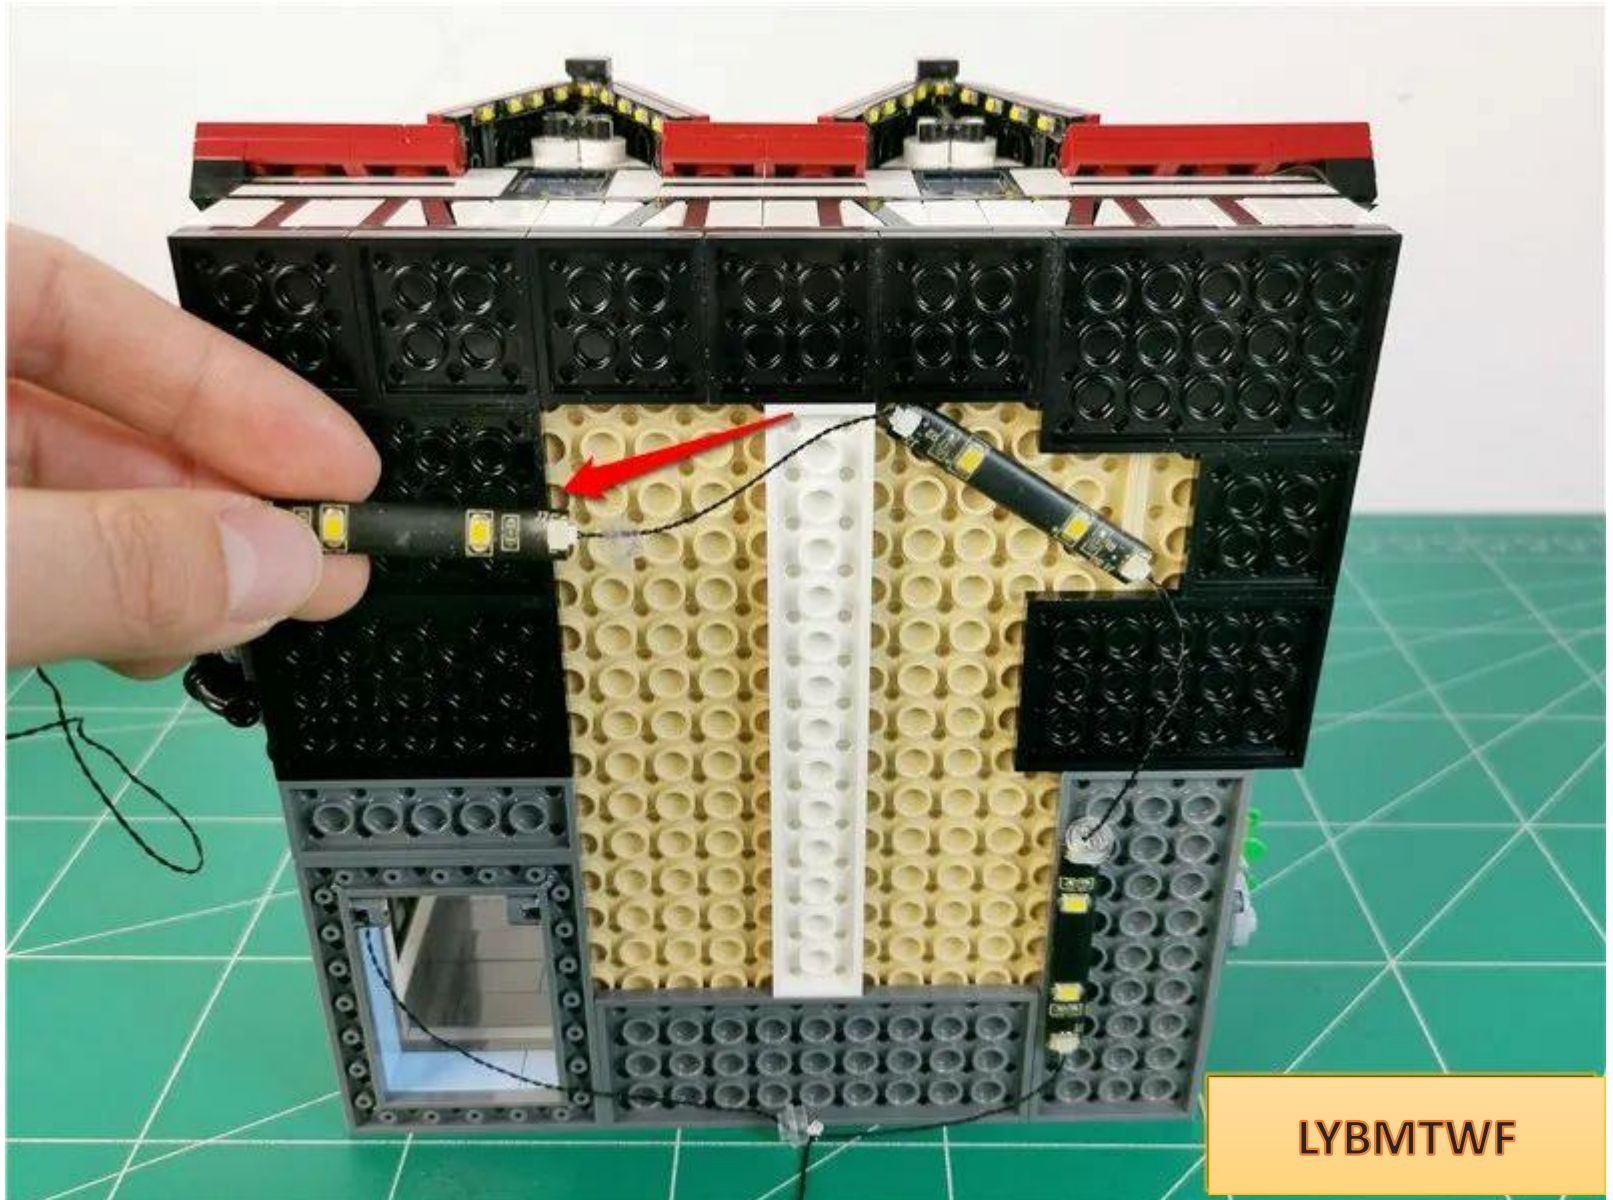

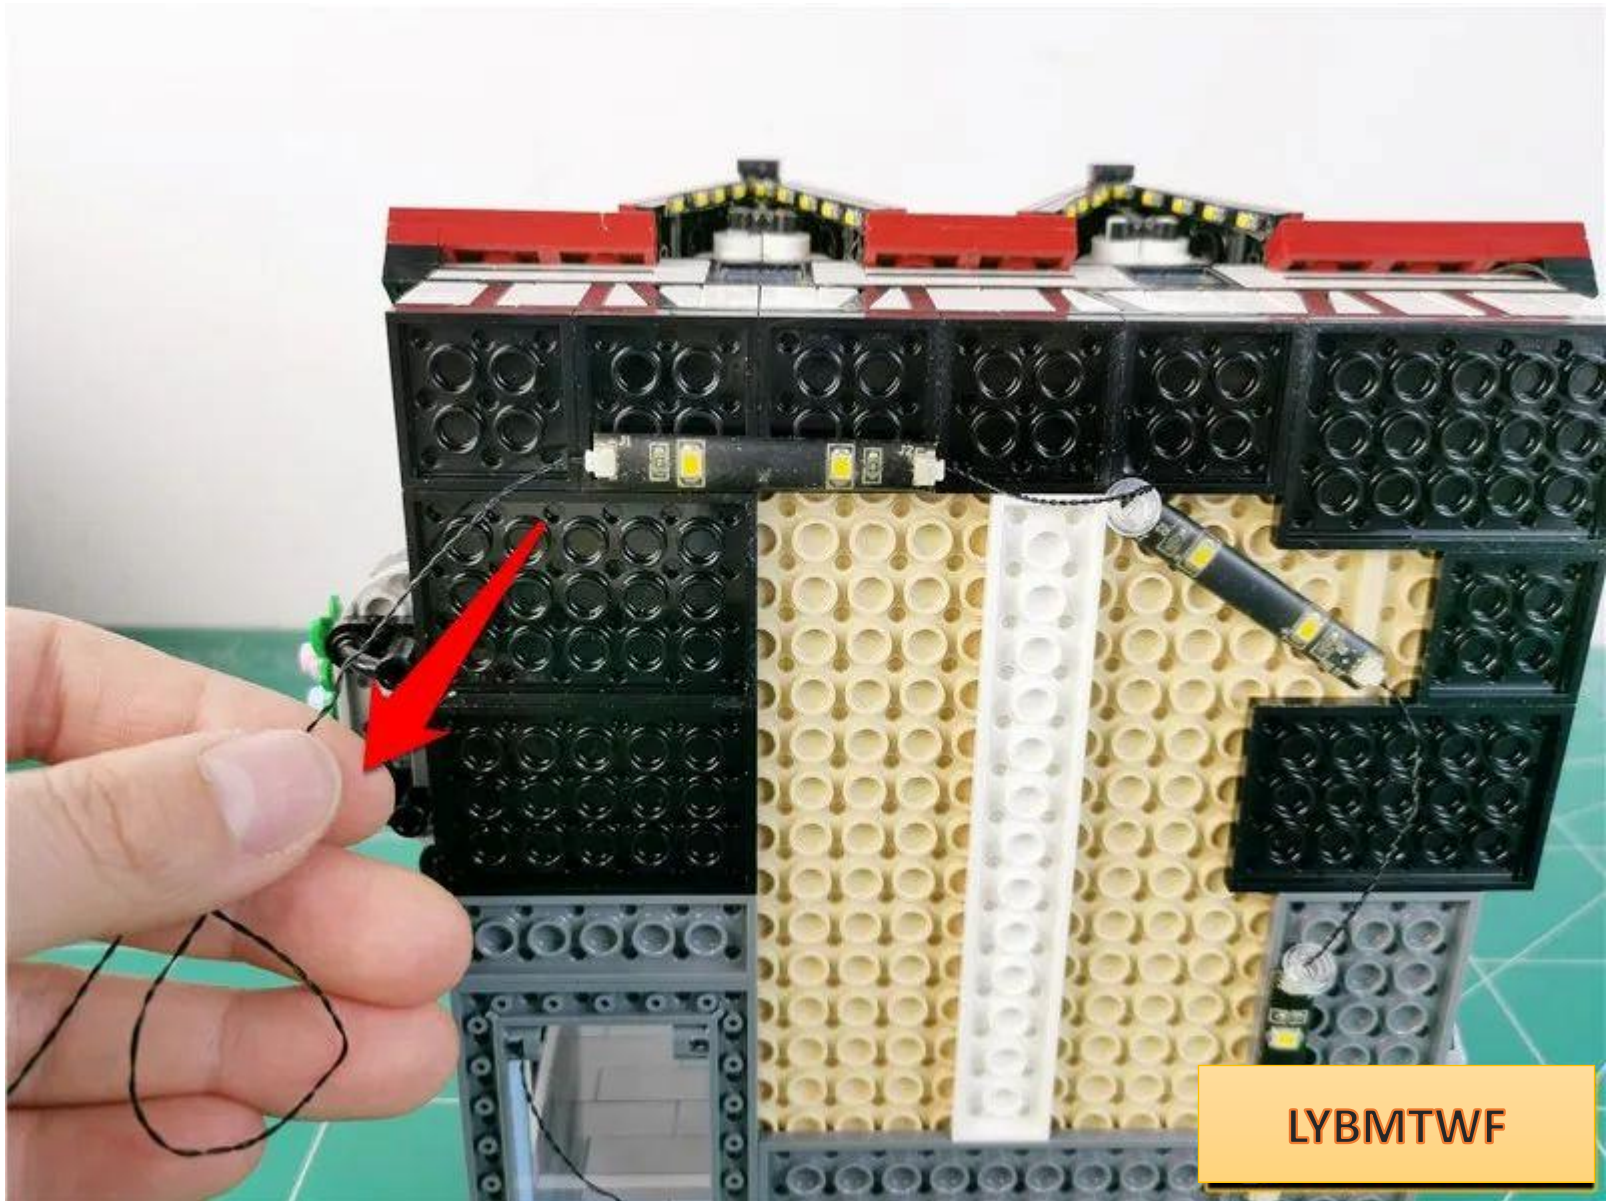




Install the transparent circle and fix the connecting wire

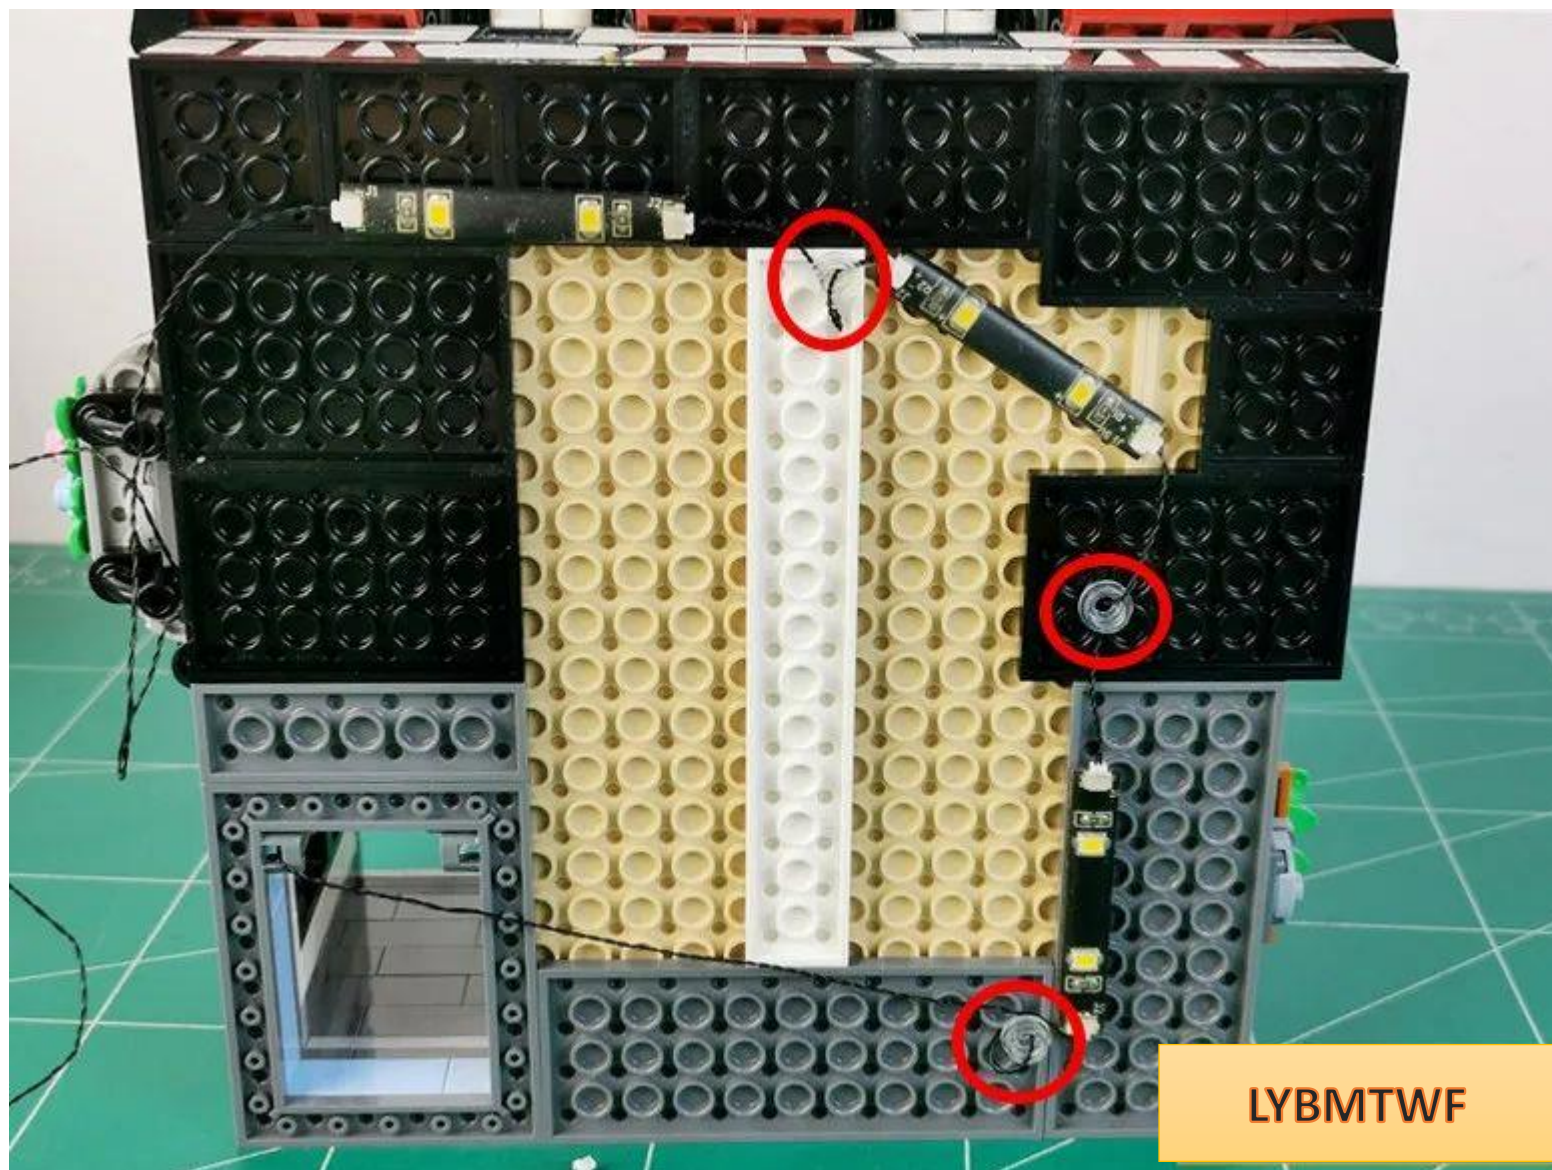




Pass the remaining connecting line through the remaining transparent circle

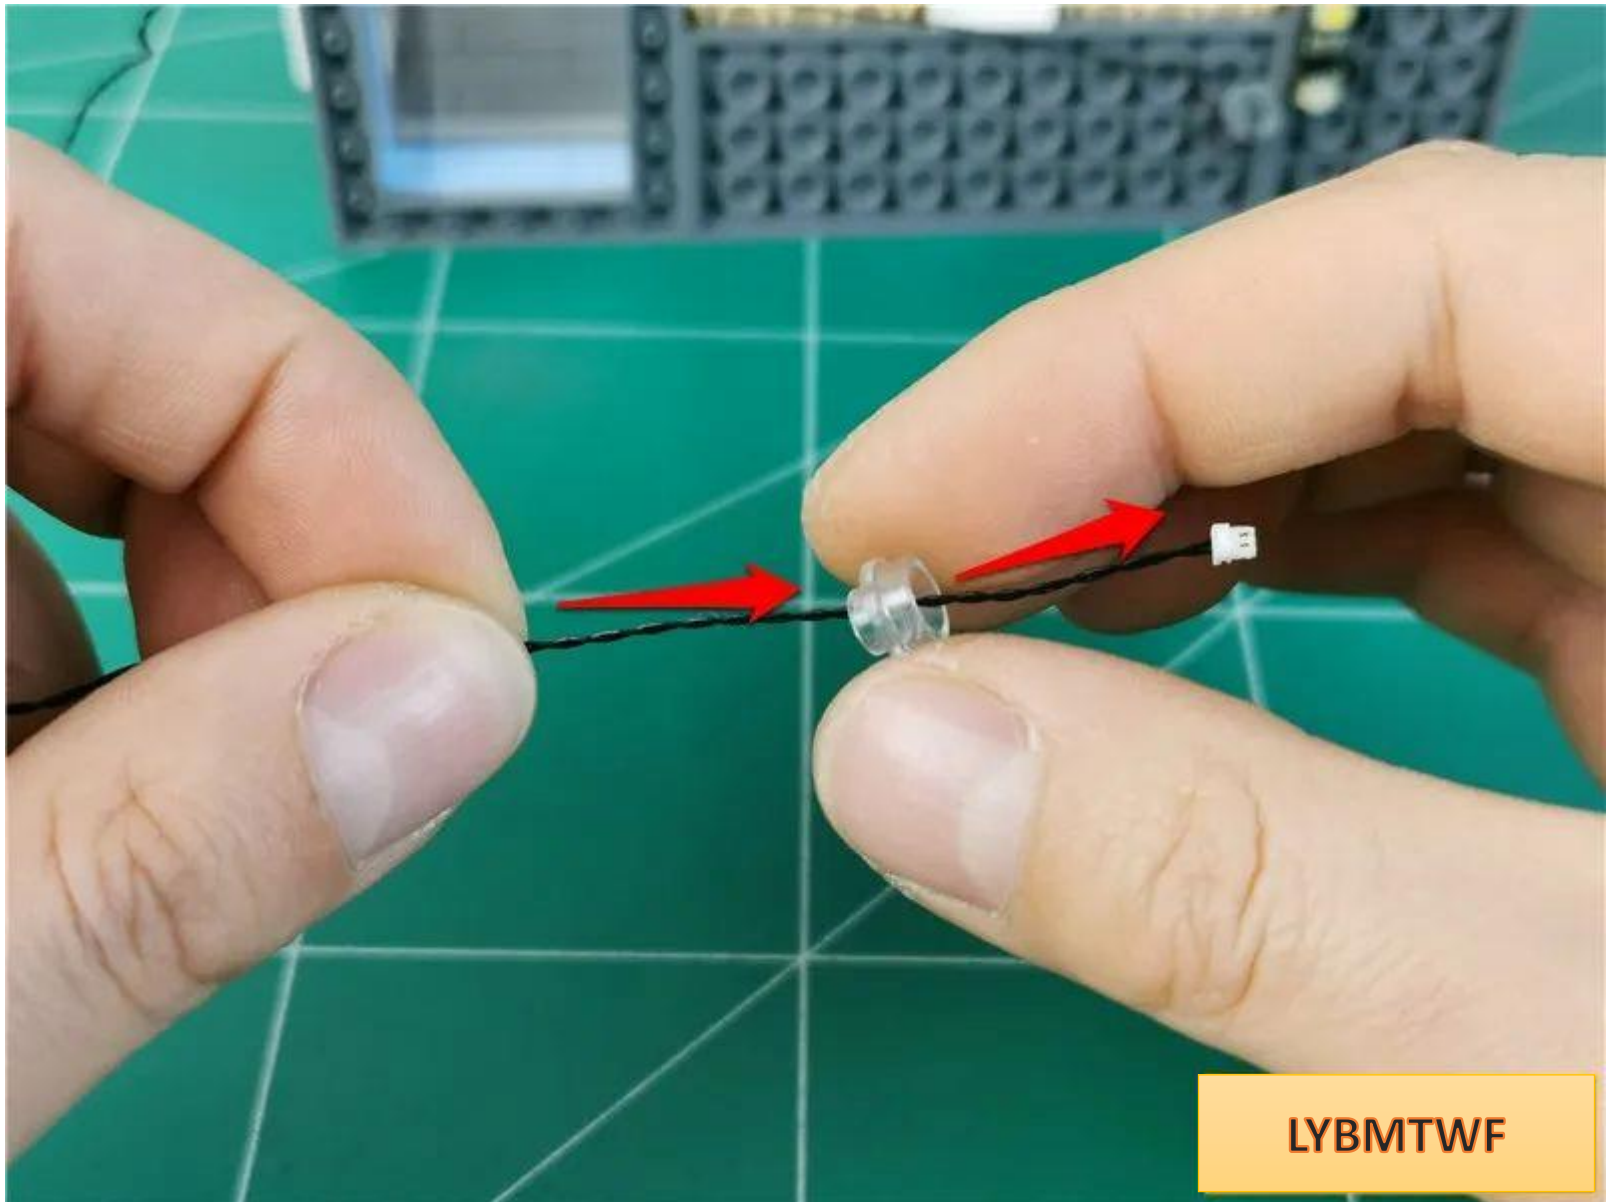

LYBMTWF

Install the transparent circle and fix the connecting wire

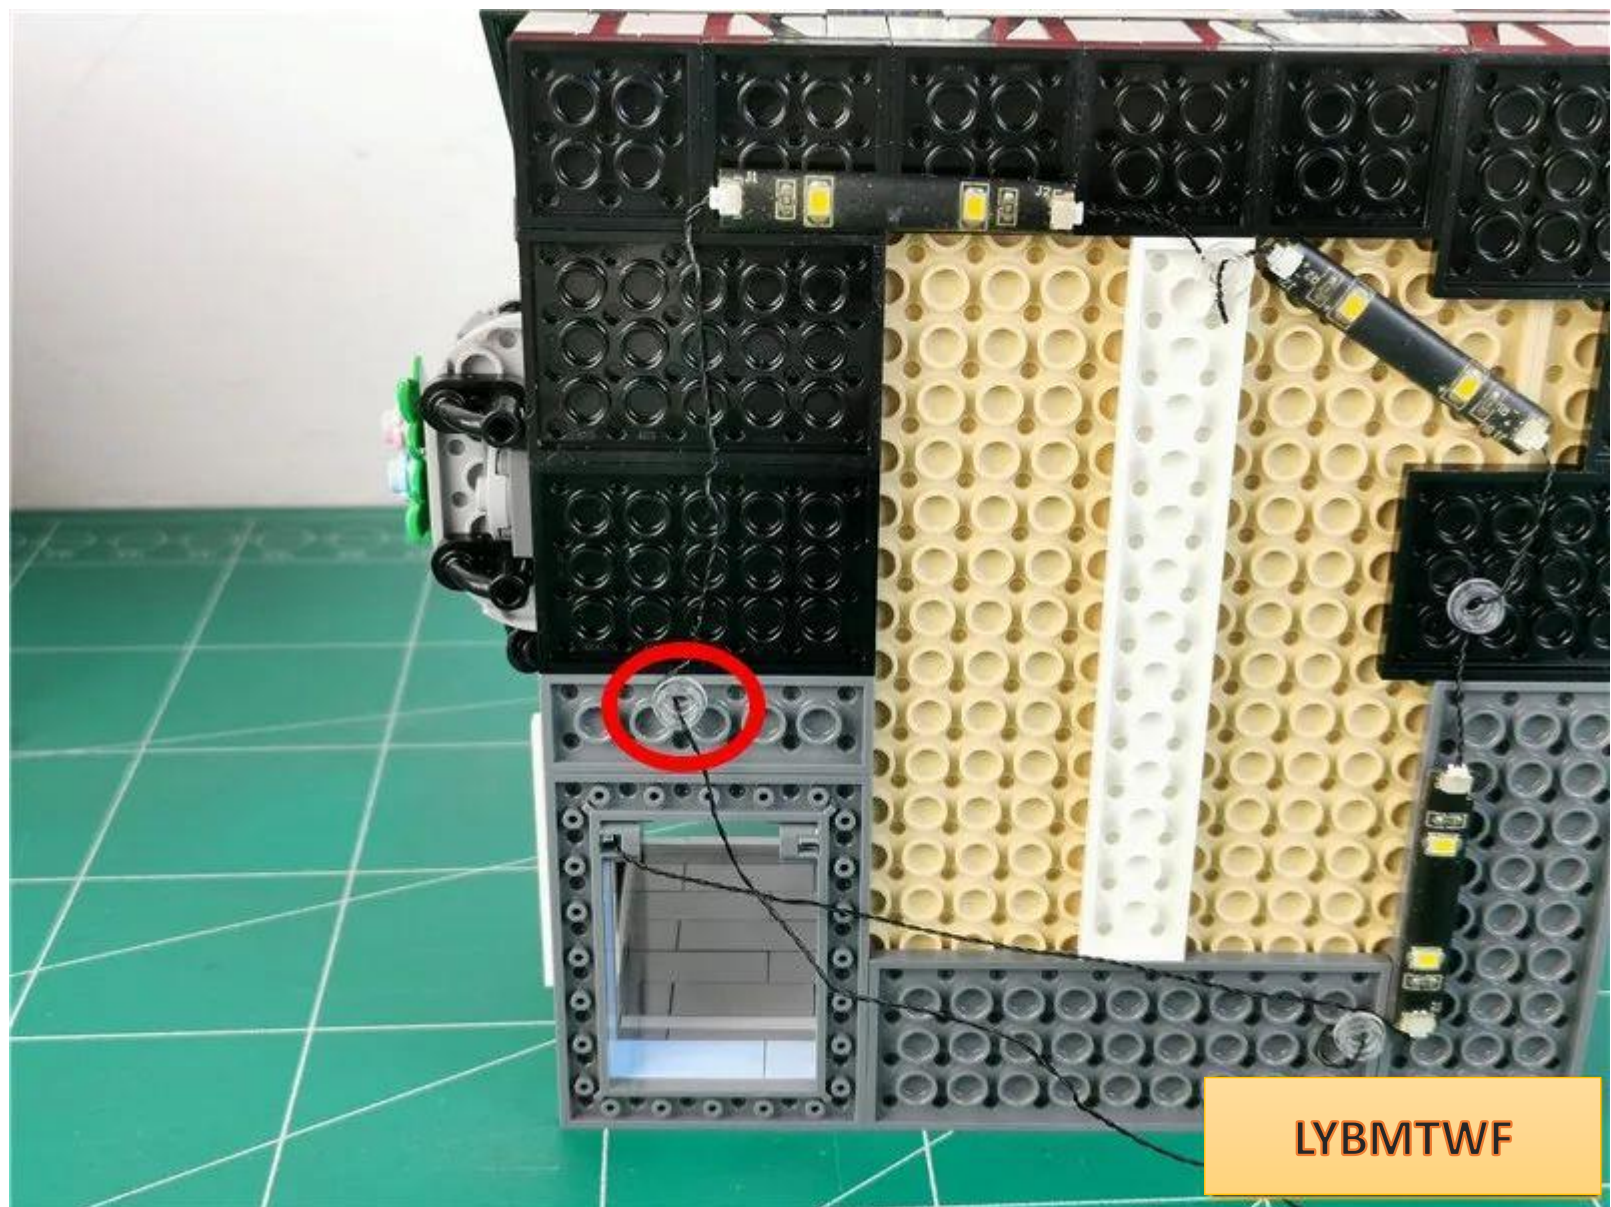




Restore the roof with the **connecting lines on the outside**





Restore the top cover

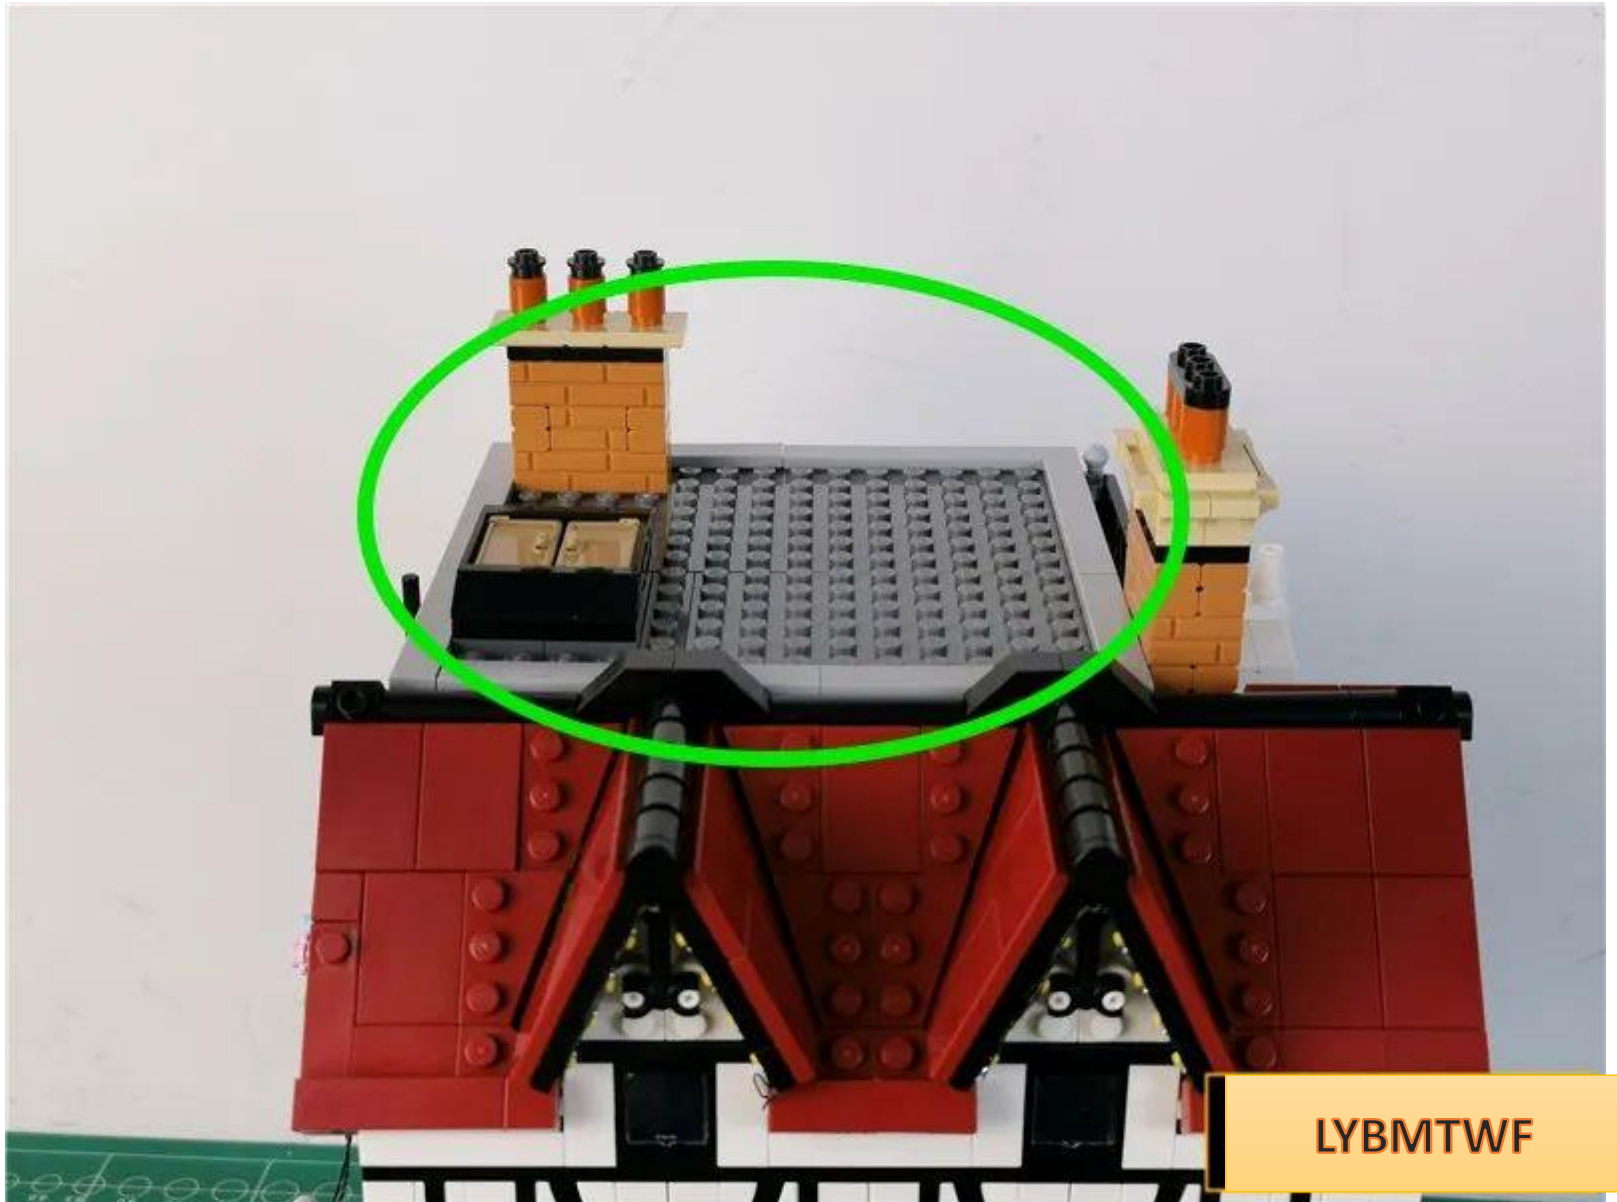


Go to the back



LYBMTWF

Plug all 4 connecting cables into all 6 seats

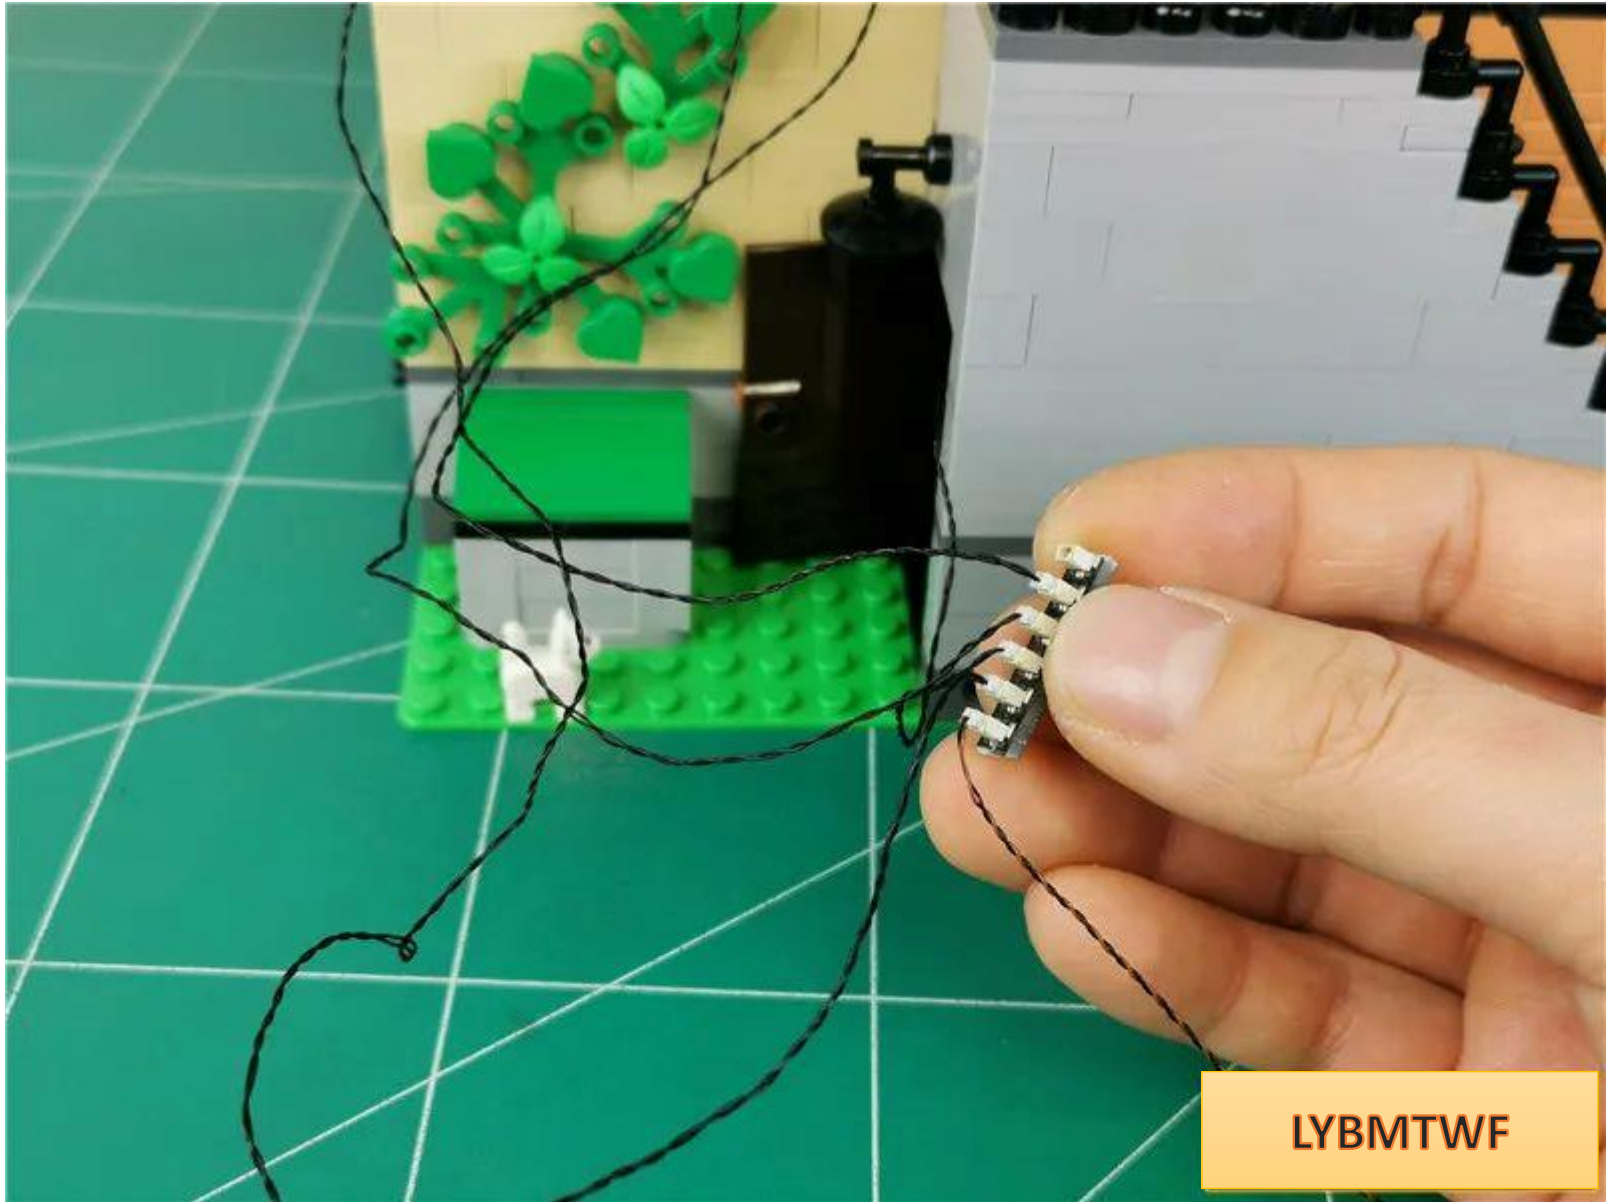

LYBMTWF




Turn on the power to test the light to light up normally, and turn off the power after the test



LYBMTWF


Remove the part shown in the arrow

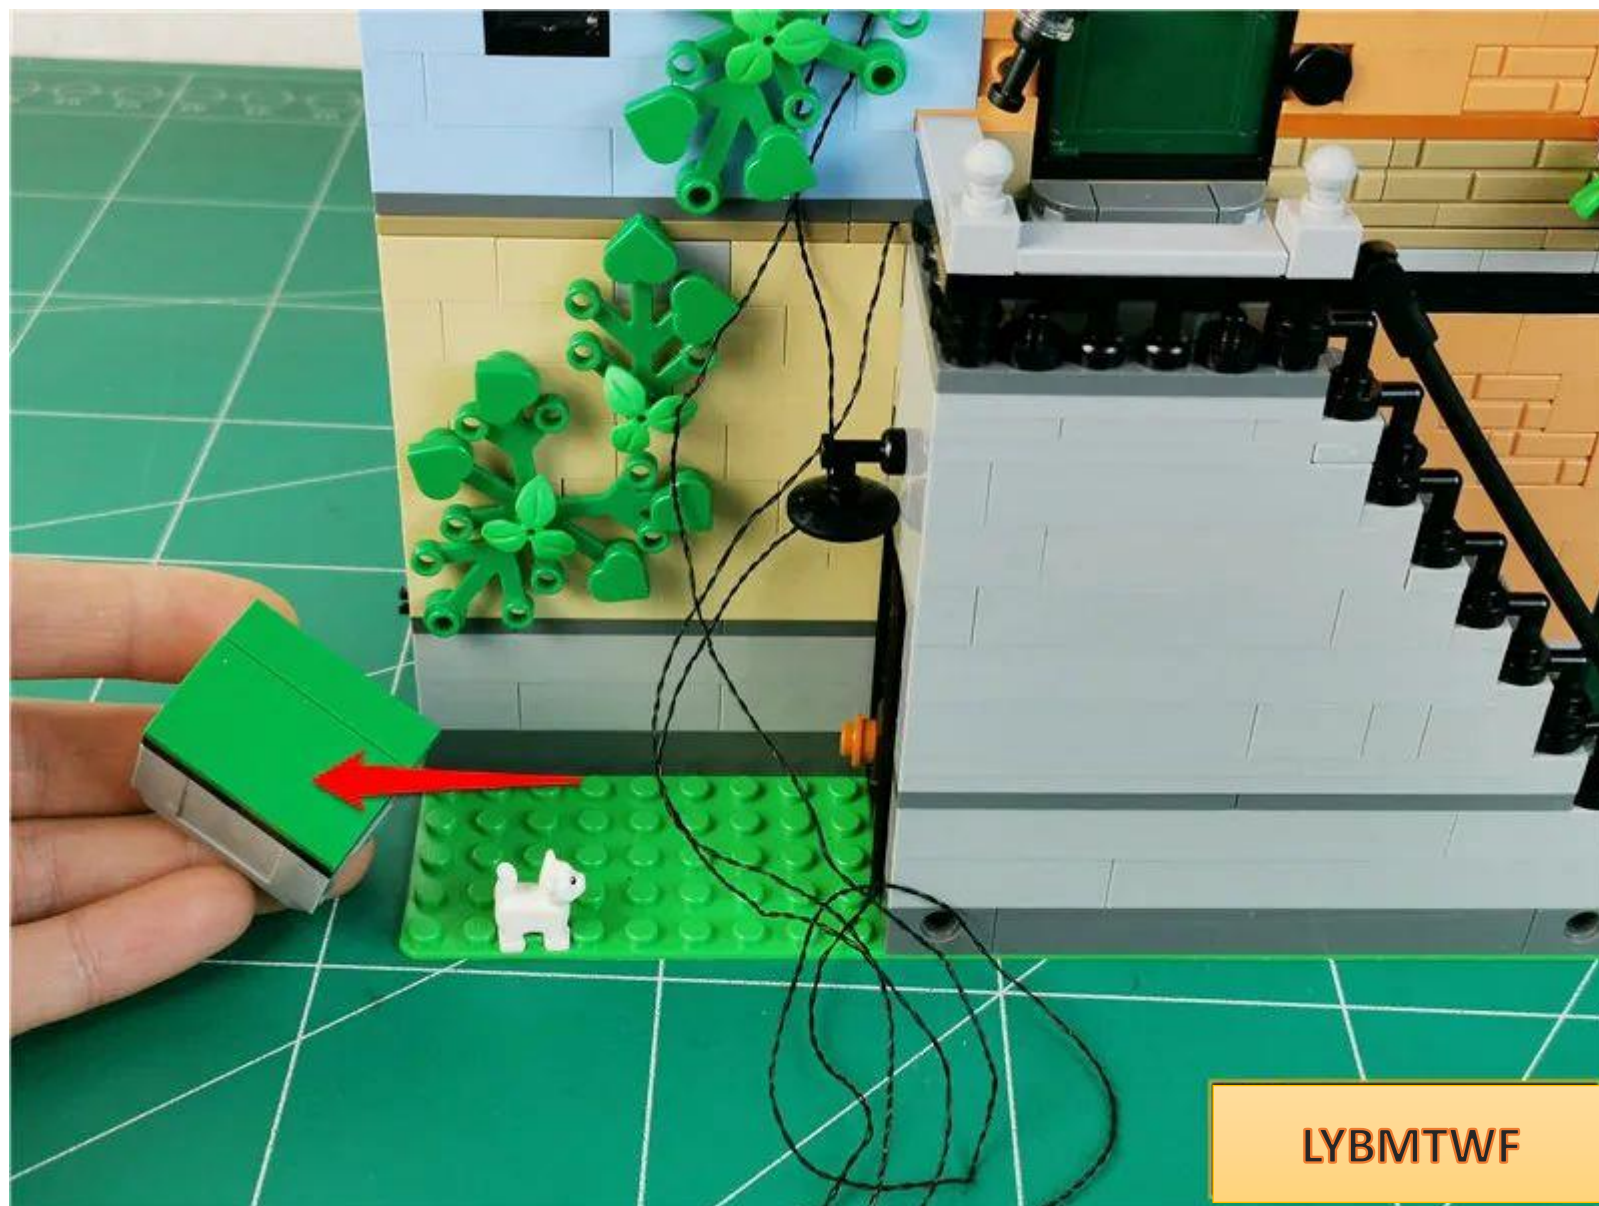

LYBMTWF




With the help of parts, the connecting wires are fixed

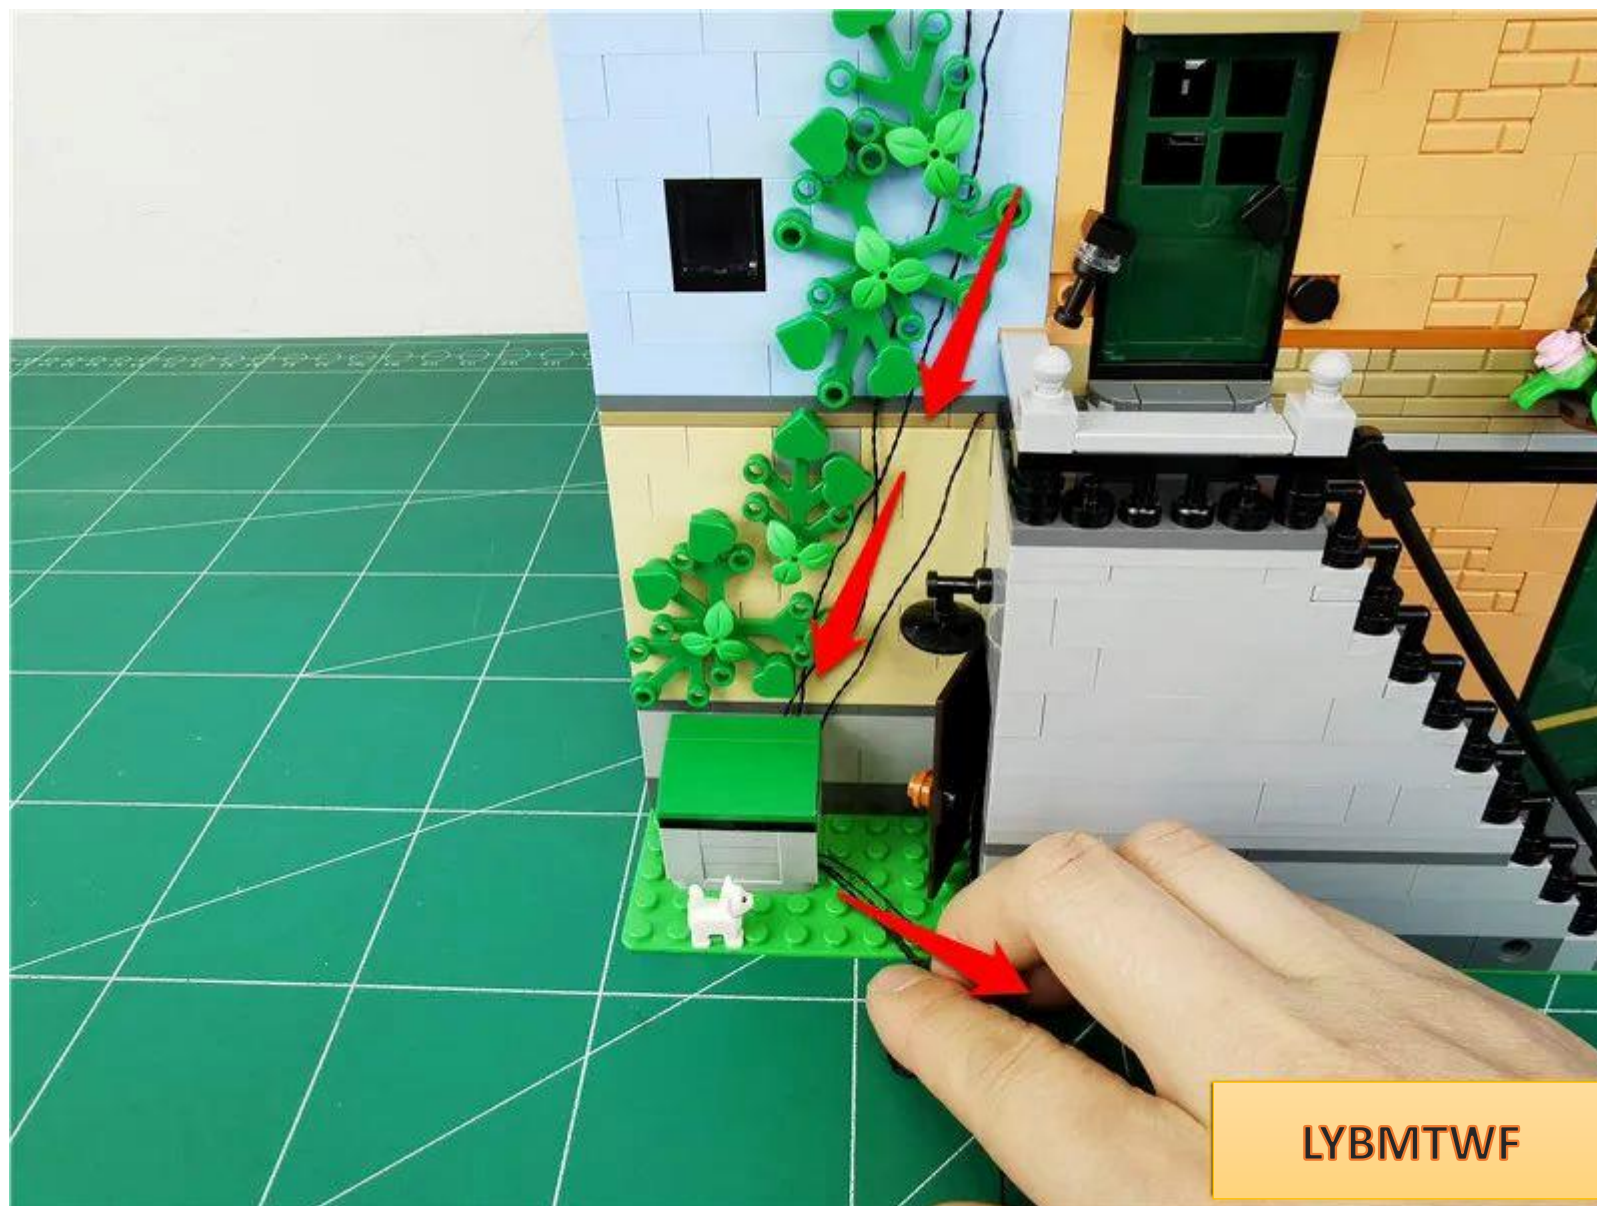




Stuff 6 seats indoors

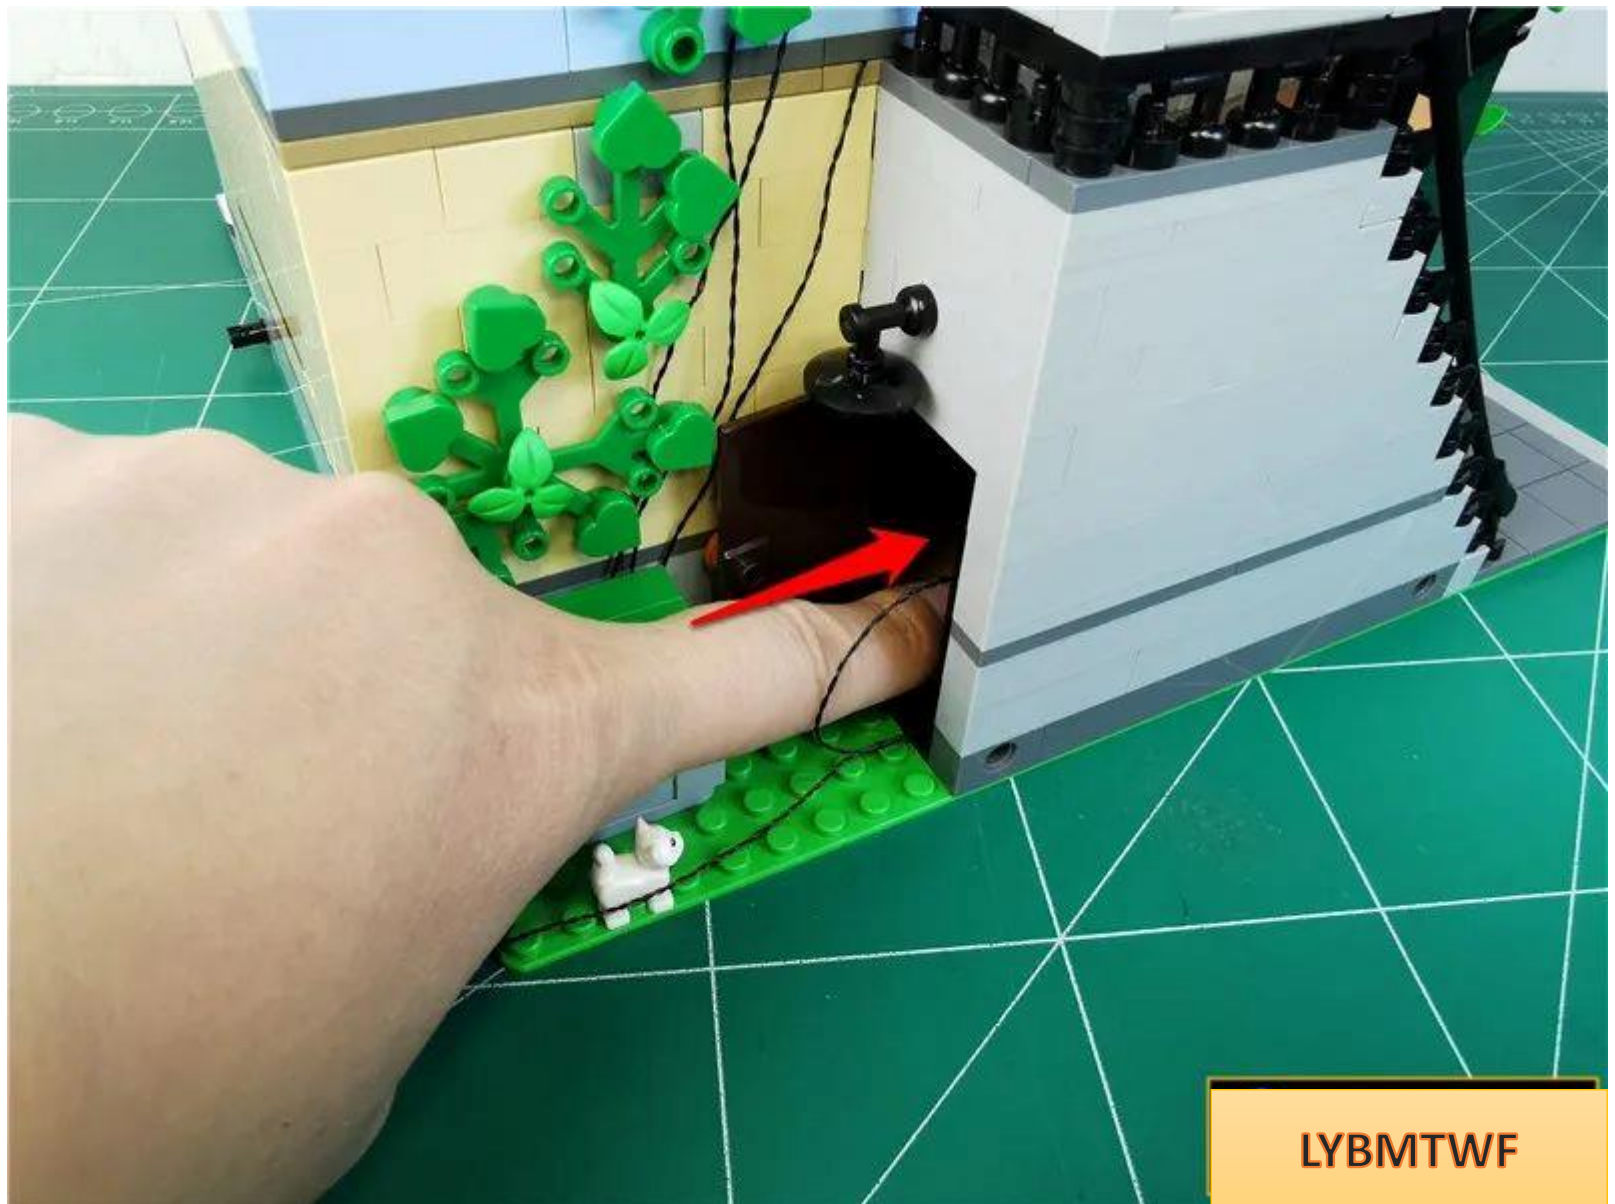

Wrap the power cord properly around the root of the USB port

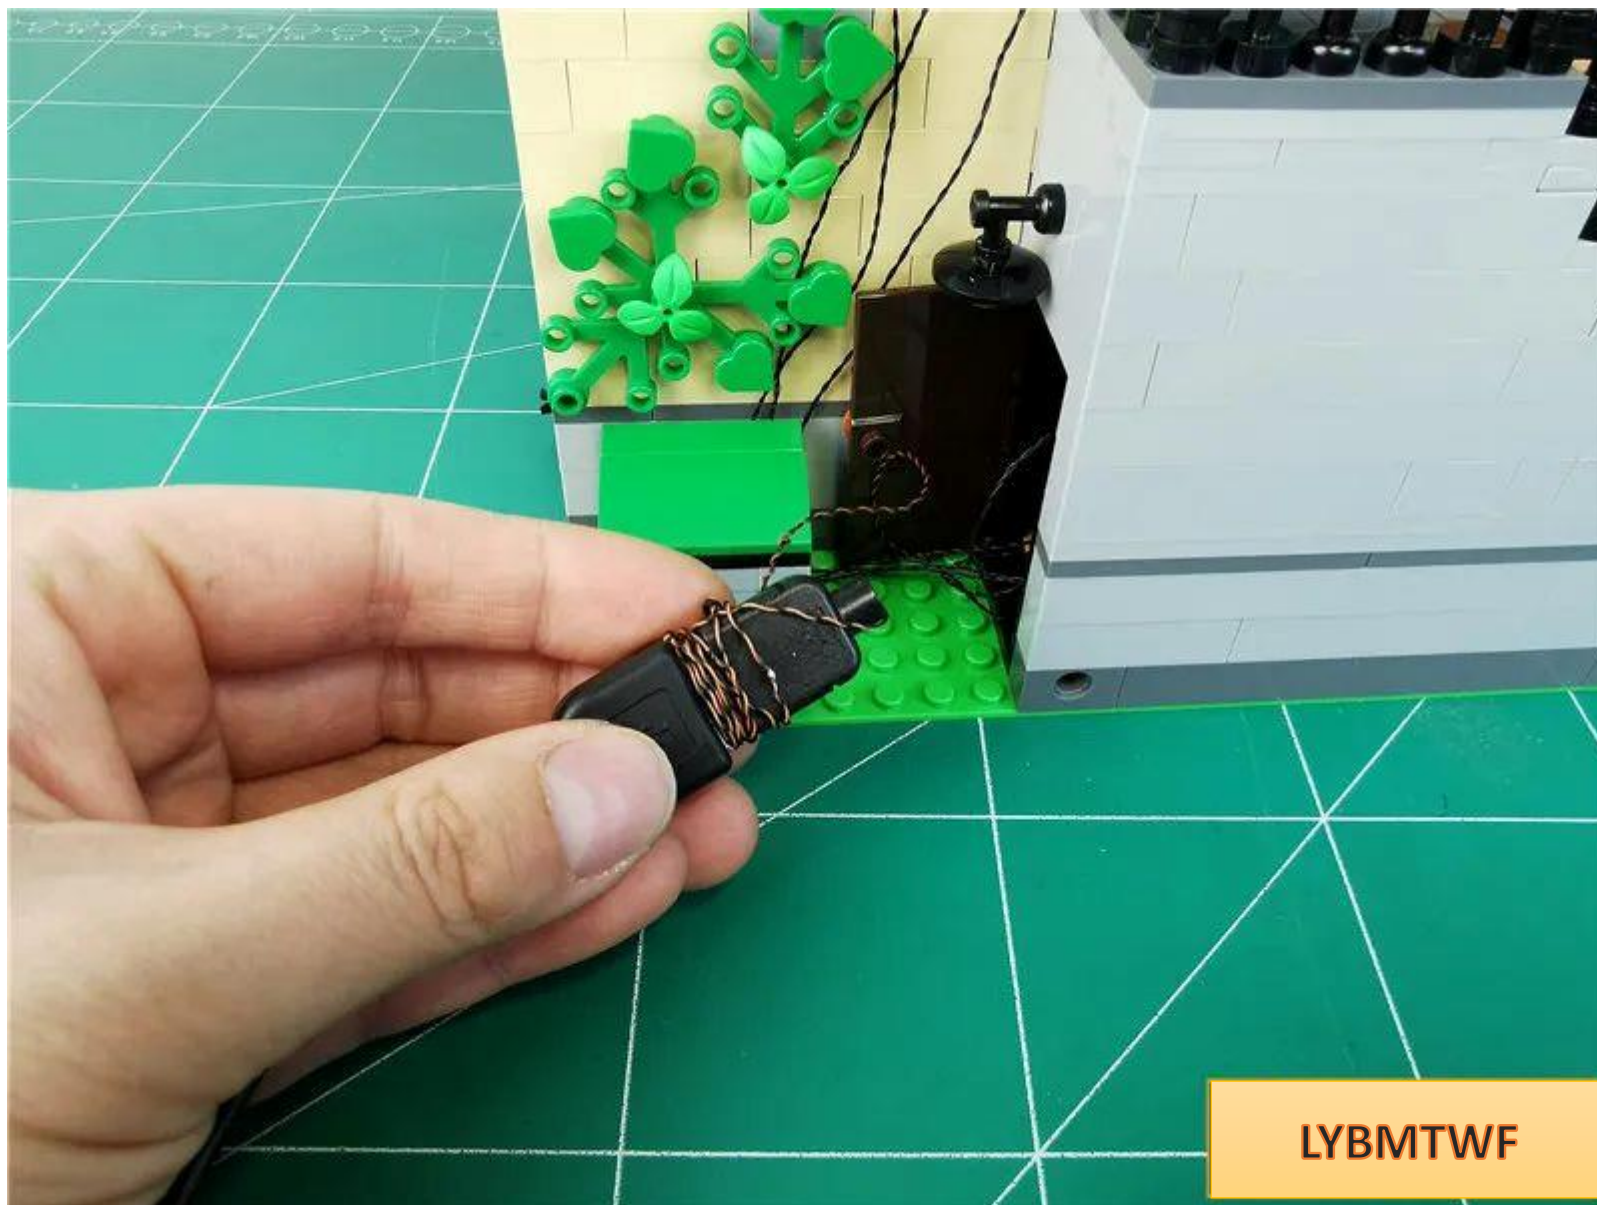

LYBMTWF

Tuck the battery compartment indoors with the **switch facing outward**





At this point, this set of lighting has been installed, turn on the power and enjoy it!



If you want the lights to stay on, you can plug the USB port into a USB power supply

