

Set contents:

Socket 6 x 2

Socket 8 x 2

Lamp grain warm light 15CM X 1

Lamp grain warm light 30CM X 13

Lamp grain white light 30CM X 1

Warm light headlight lamp grain 15CM X 1

Warm light headlight lamp grain 30CM X 2

Warm light strip (1 section) X 2

30CM connecting cable

USB interface 50CM x 1


Battery box AA (USB port) x 1

Several building block parts

Notes (the pictures in this paragraph are demonstration content and not parts of this set) :

Routing wires on and under building boards


Wires can be routed between the building blocks and boards or underneath the boards, but they need to be properly placed between the studs

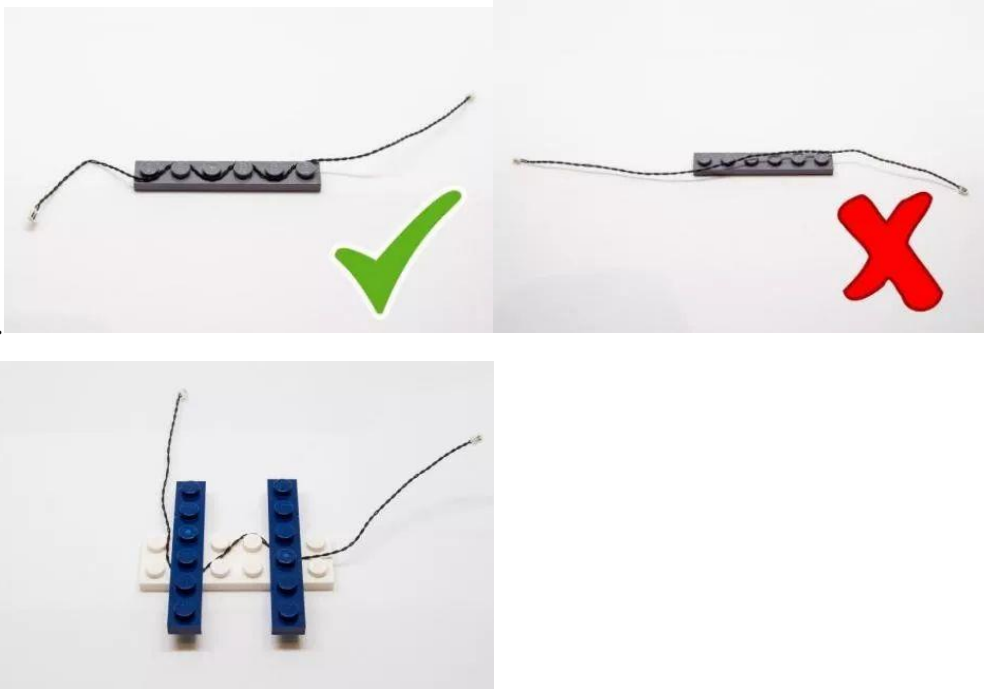




Link the cord jack to the outlet

Be careful when inserting the cord socket into the socket; the socket can only be inserted one way. With the socket facing up, look for the soldered "=" symbol on the left side of the port. When you plug into the port, the side of the socket with the exposed wires should be facing the soldered "=" symbol. If the plug does not fit easily into the port, do not force it in.

Inserting the socket incorrectly may cause the pins within the port to bend or may cause the socket to overheat when connected.

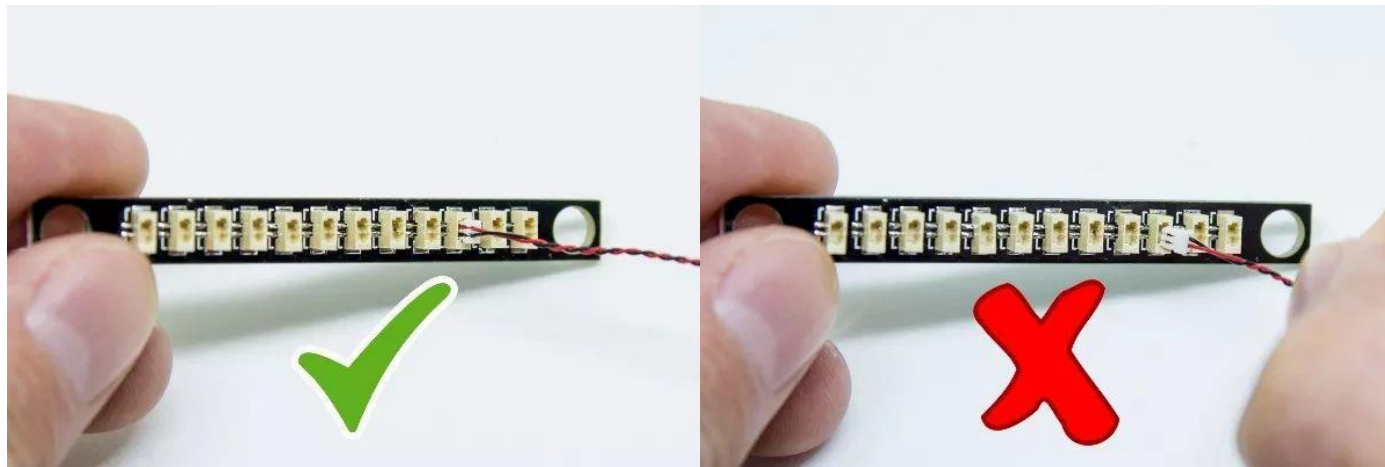


When installing the light chips on the building blocks , make sure they are placed correctly (yellow LED components are exposed). You can place them directly on top of the block studs or in between.

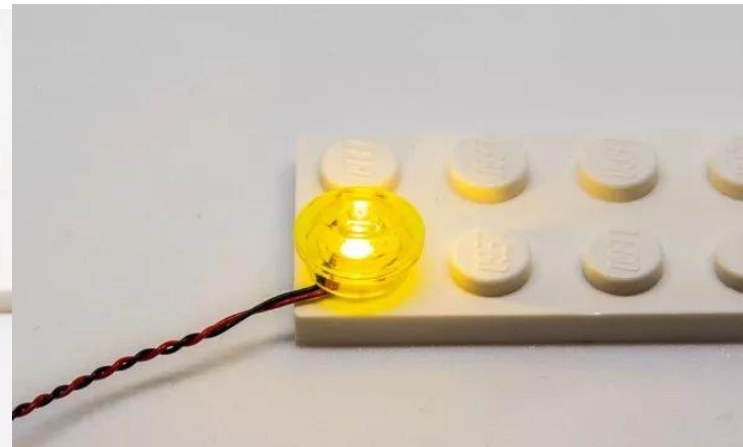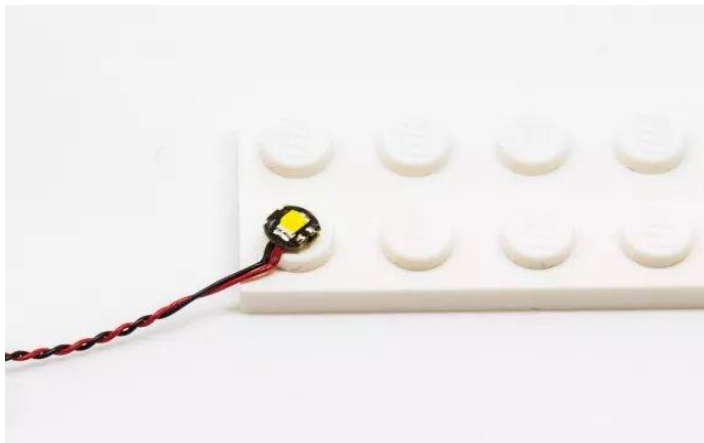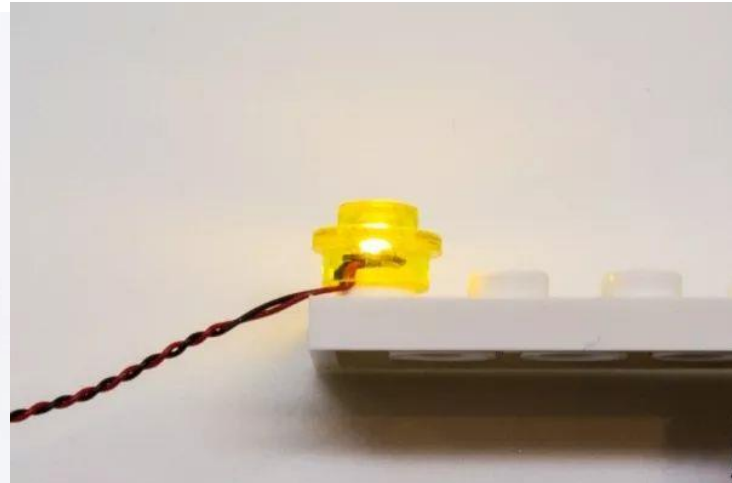


Install the battery into the battery box

Several battery boxes have different specifications, please pay attention to the positive and negative poles of the battery.


AA battery box Correct battery installation

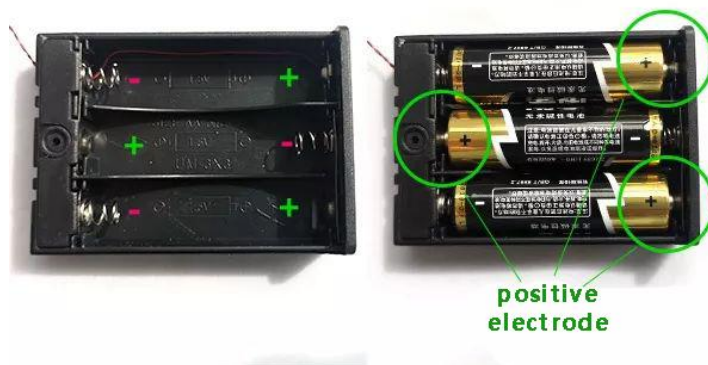

Button battery box (flat) battery correct installation method

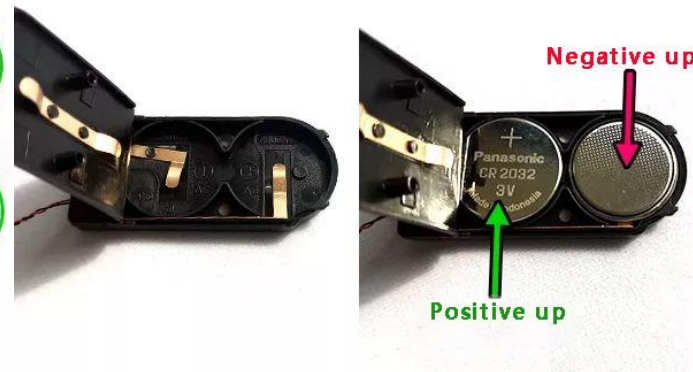

Button battery box (round) battery correct installation

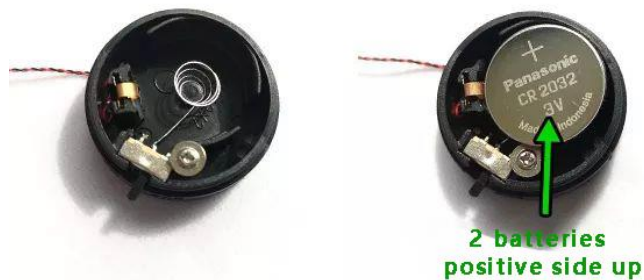

Installation Notes


Take out the AA battery box and insert 3 AA batteries correctly (it is recommended to use brand new batteries)



Take out the USB power cord and insert it into the battery box




Take out the 6-seat and insert the power cord into the 6-seat

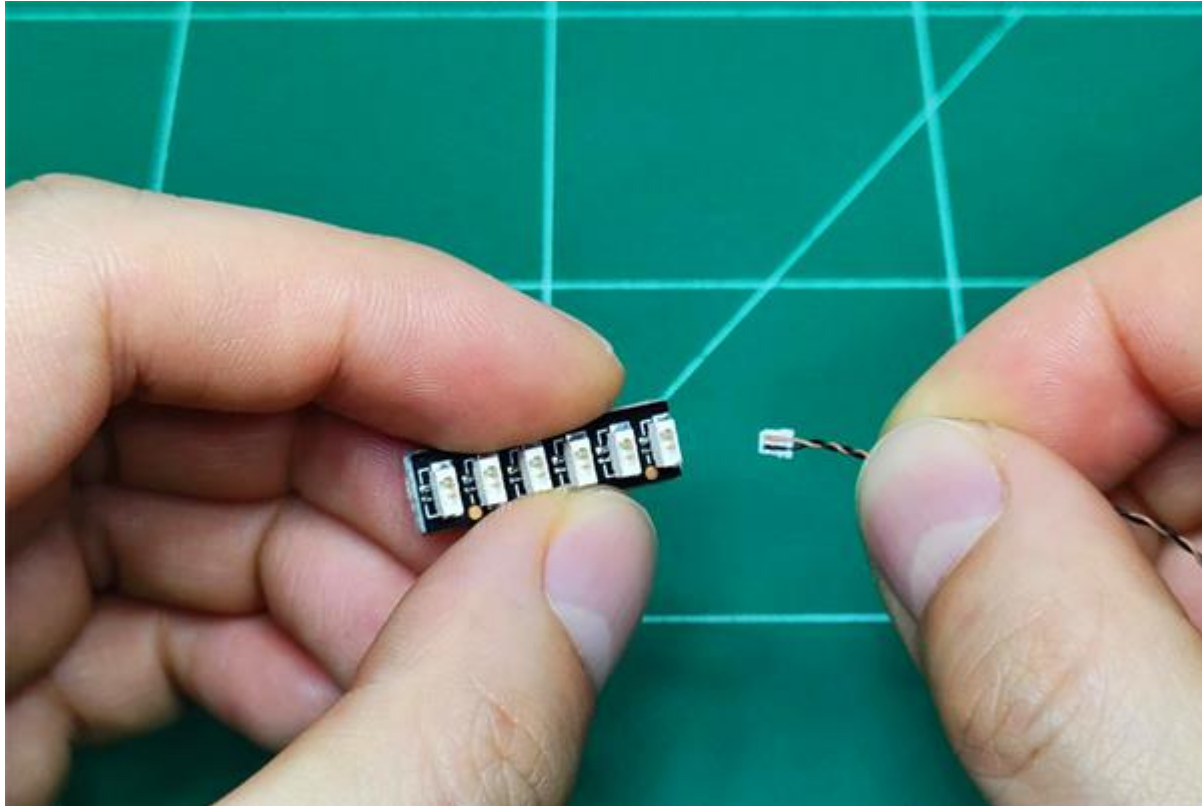


Do not use tweezers when inserting or removing, and do not pinch the roots with your nails.

Plug and socket connection method


Align the "=" on the plug with the "=" side on the receptacle

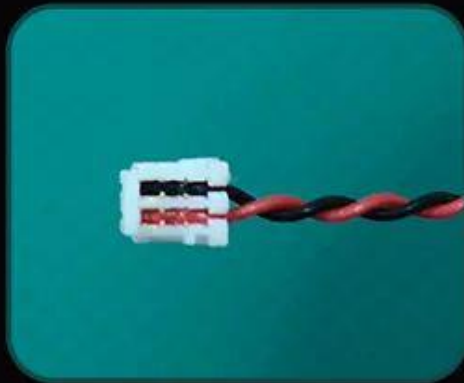

The "=" on the plug
can clearly see one
side of the line

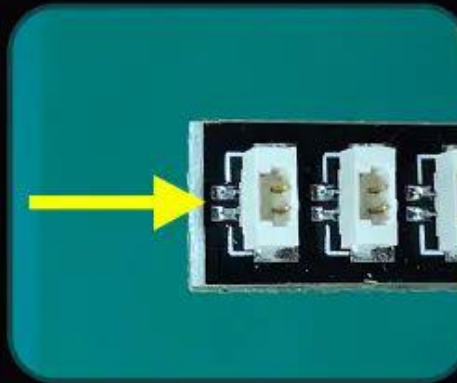

There are two silver
dots next to the "="
socket on the socket

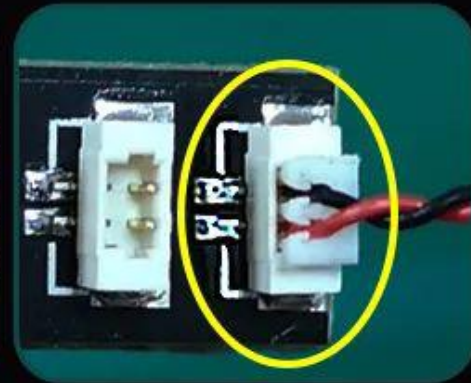

equal sign equal sign



Take out 2 warm light strips and insert the light strip plugs into the 6 sockets



Turn on the battery box switch and test that the light lights up normally



After the test is completed, turn off the power, pull out the light strip, and **leave the socket on the power supply**



Take out the building blocks and remove the trees on both sides






Prepare to install the tree lighting on the left, remove the parts indicated by the arrows



Pull the parts apart

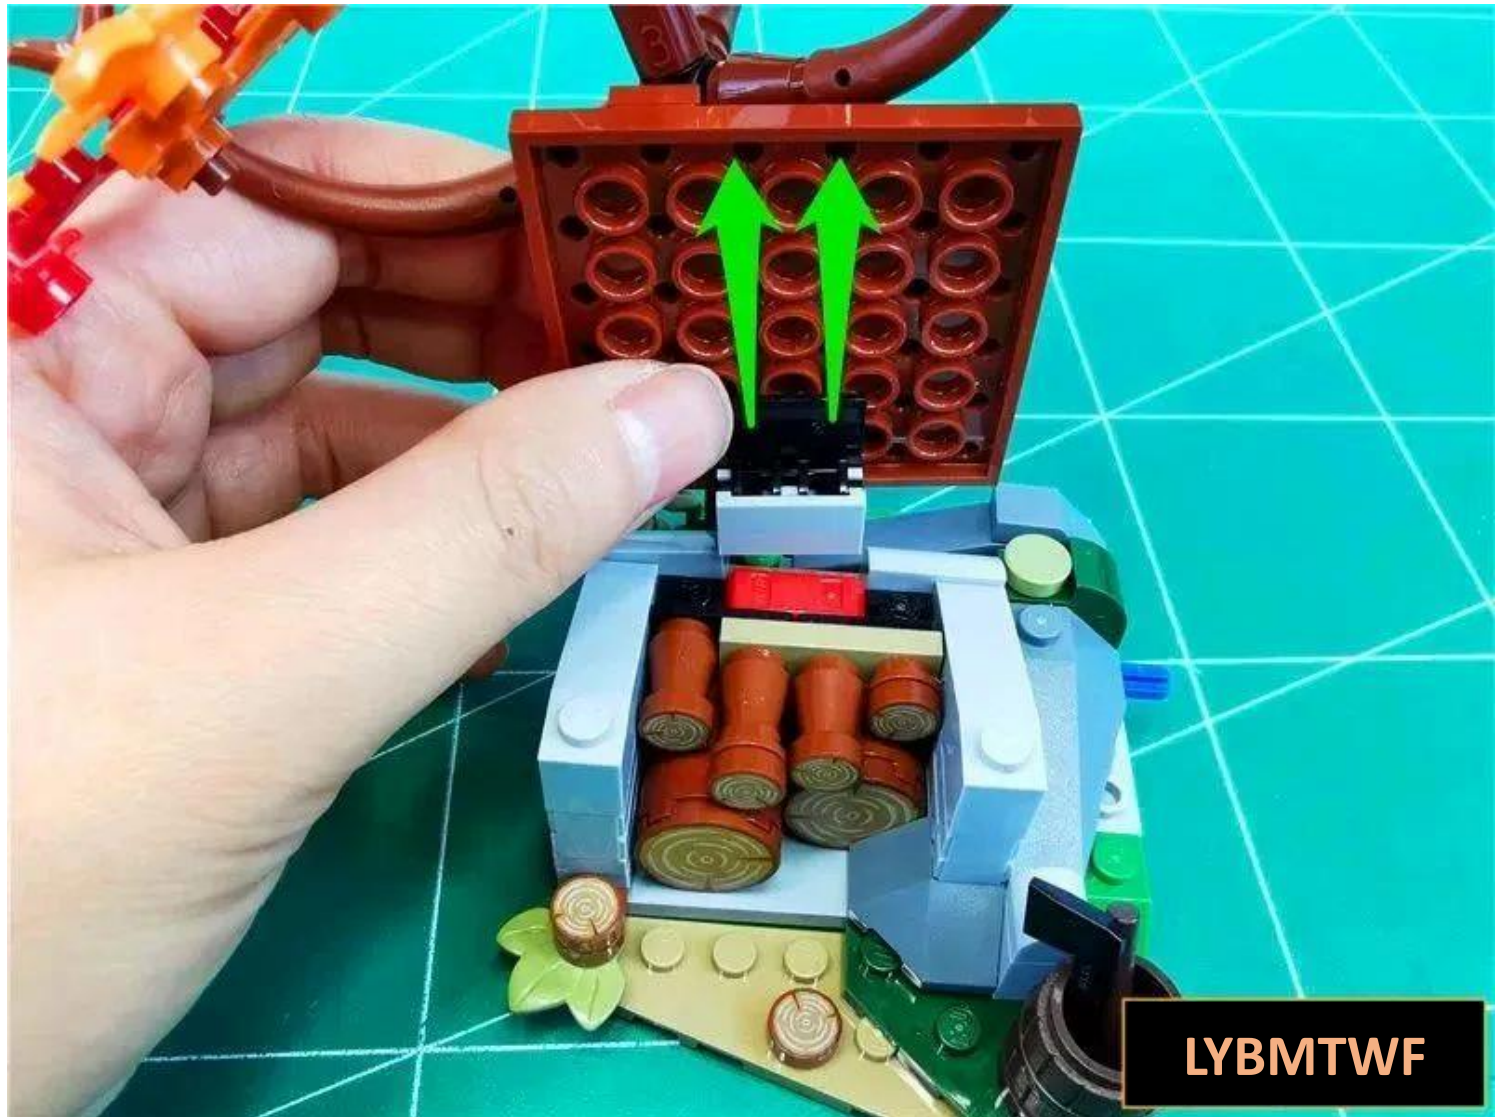



LYBMTWF

Continue to break down the parts




LYBMTWF

Take 1 15CM warm light ordinary lamp grain




LYBMTWF


Place the light emitting surface facing up on the back of the part, **paying attention to the direction.**

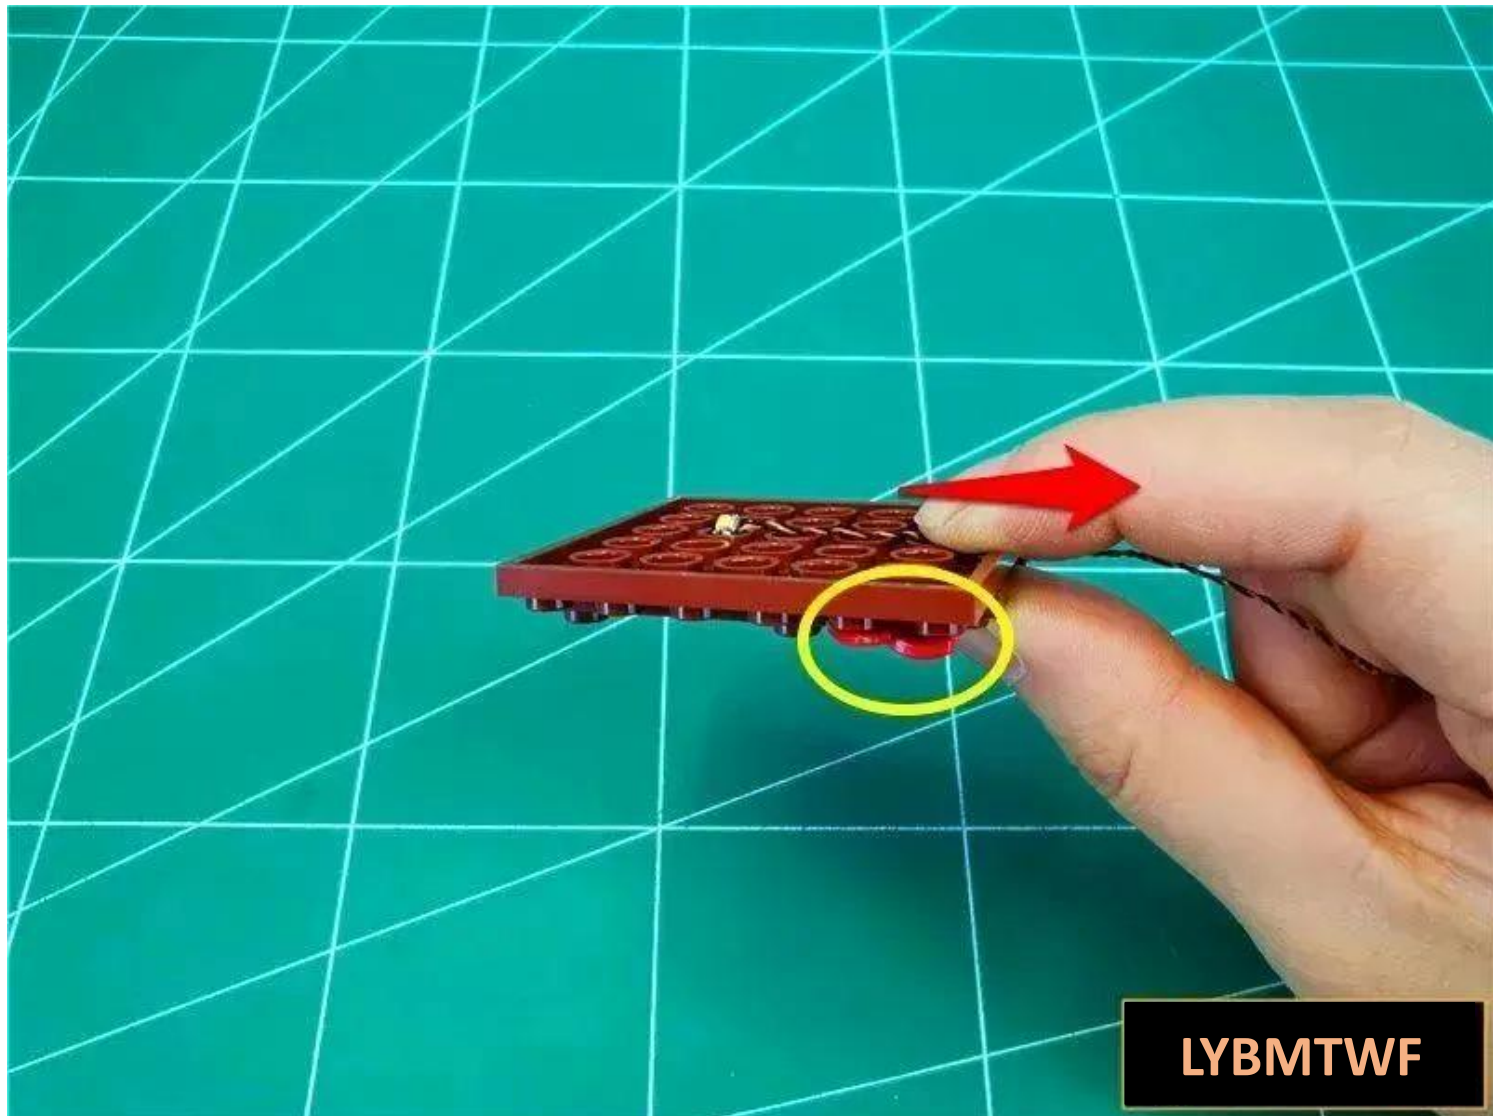

The effect from the front is as follows

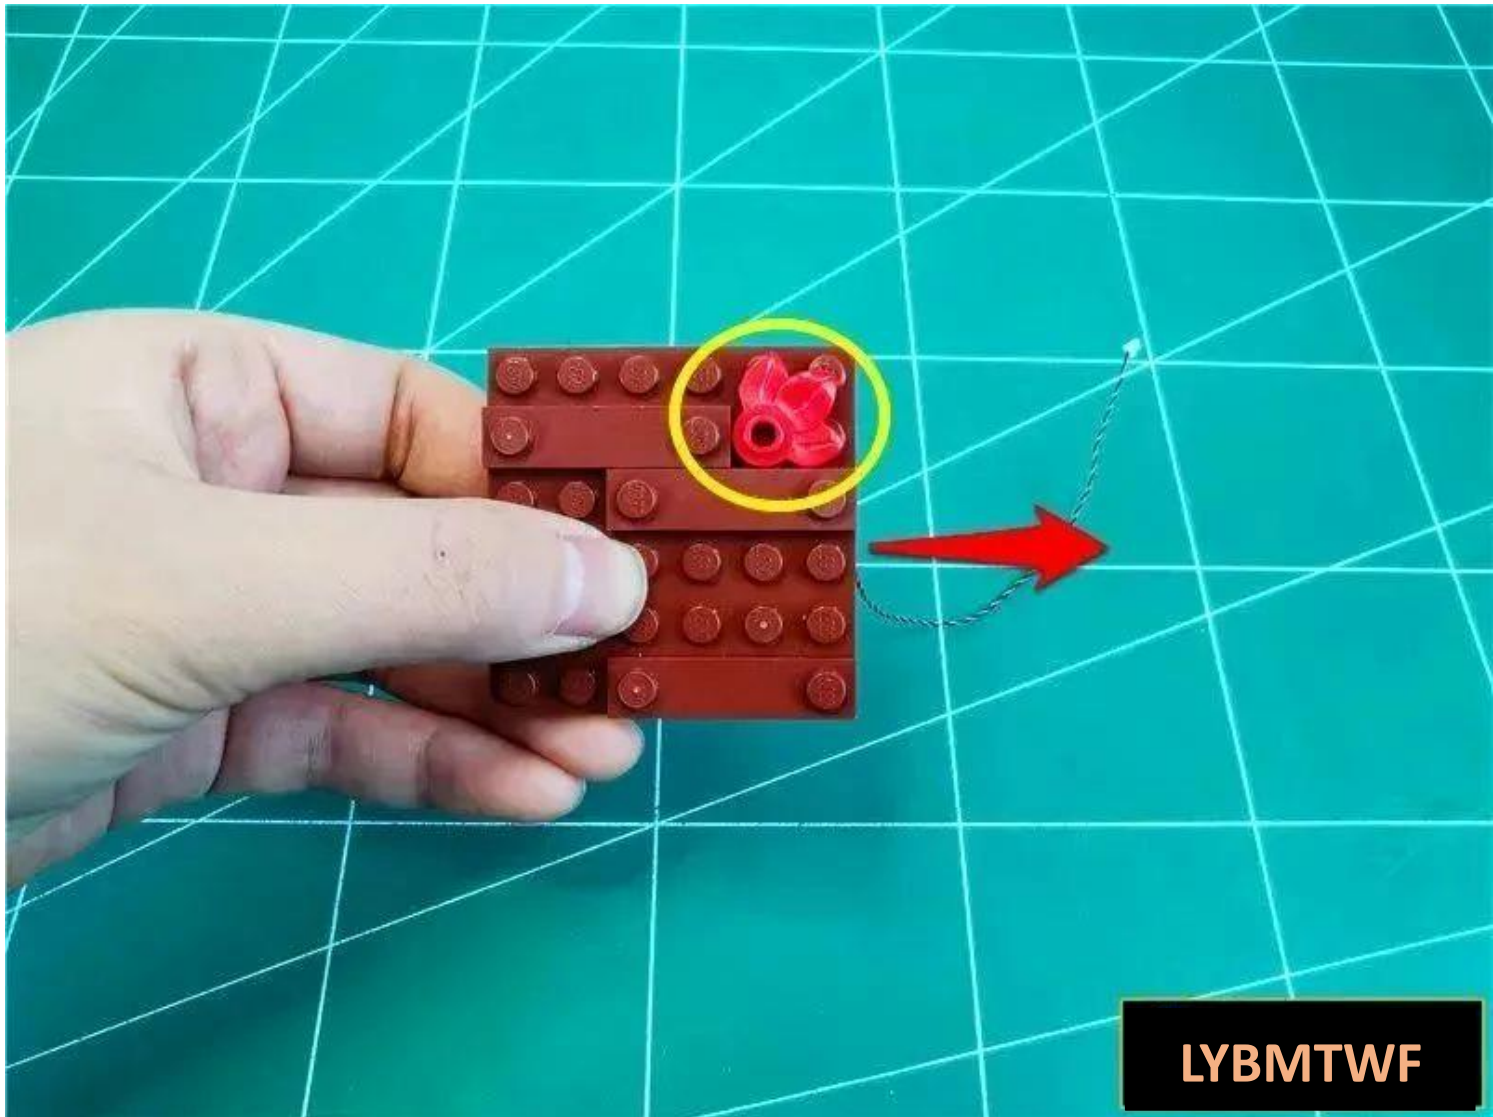


location

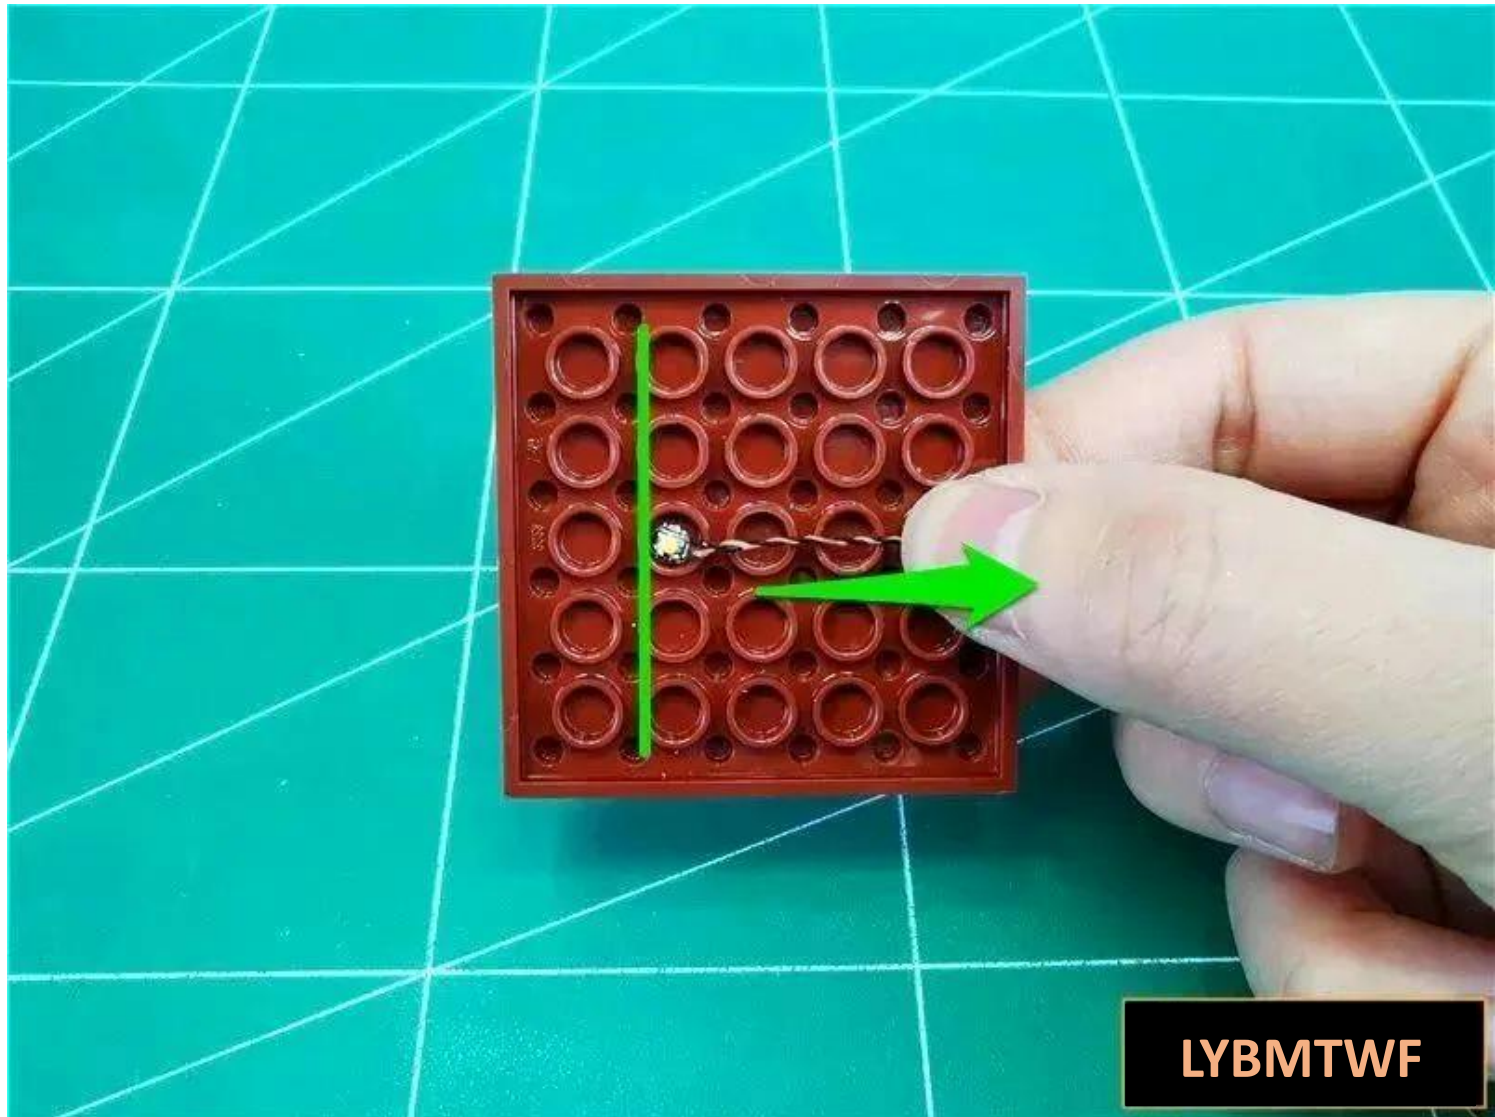

of the lamp particles is as follows

Restore the parts shown in the picture and fix the wires

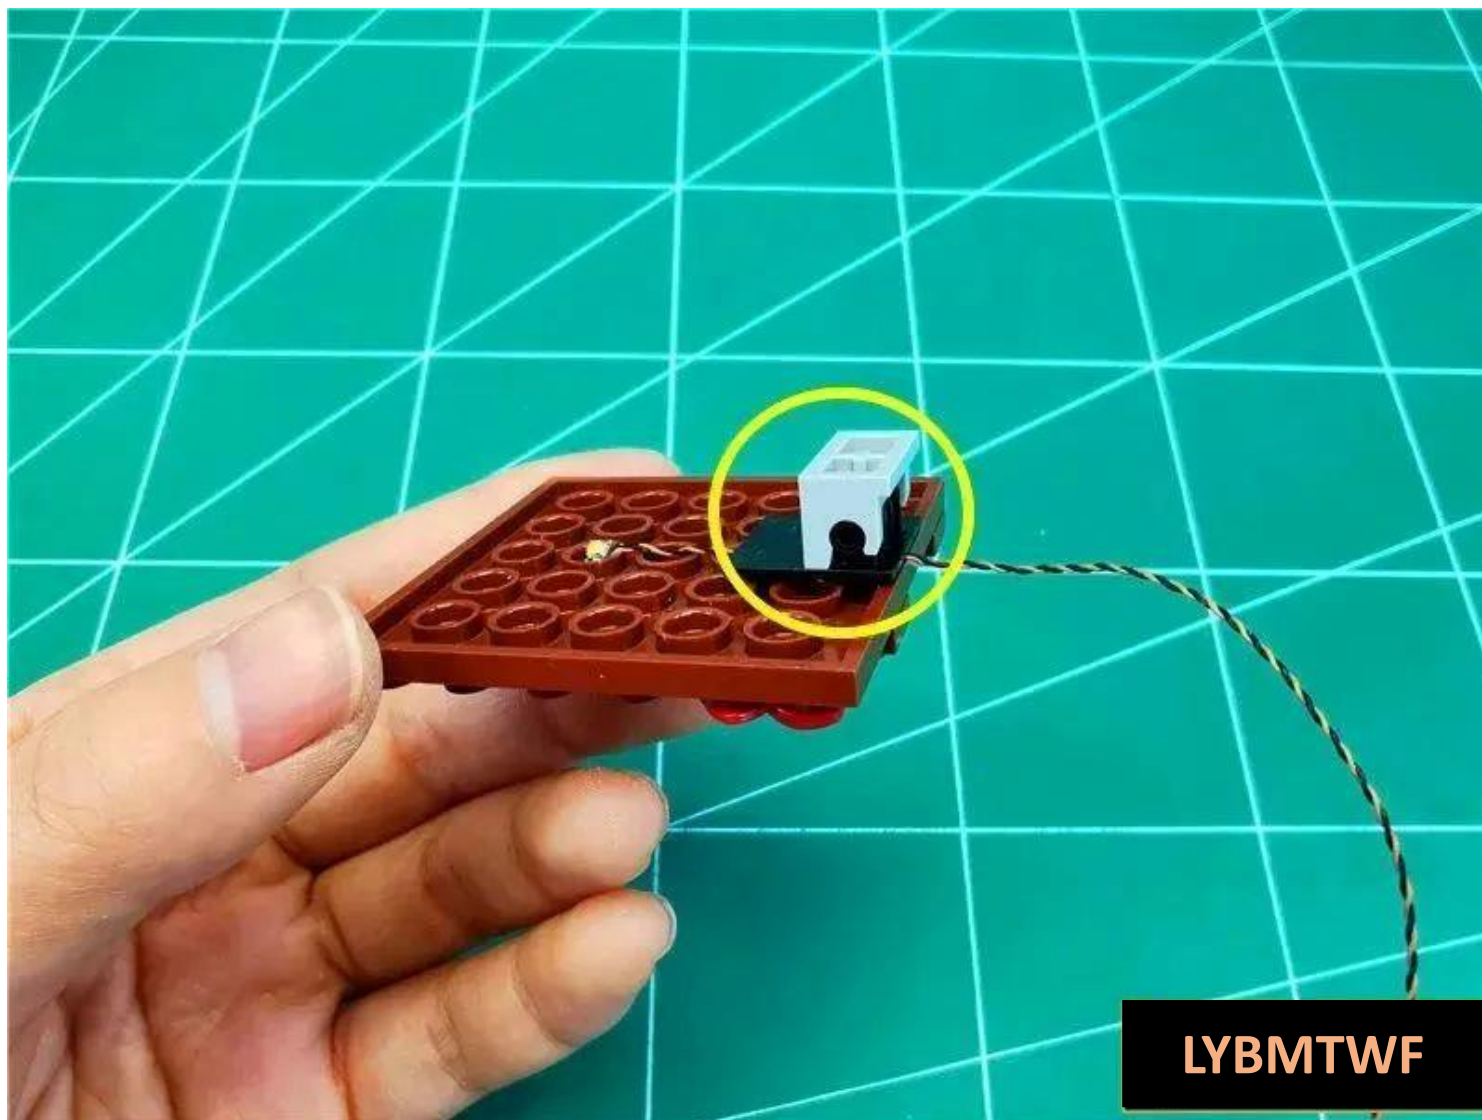

LYBMTWF

Restore the parts, paying attention to compacting the gaps



Take 4 30cm warm light ordinary lamp particles and 4 hollow transparent circles



Remove the leaves indicated by arrows





LYBMTWF

Take any 30cm warm light ordinary lamp, with the light-emitting side facing up, and place it in the position shown in the picture, with the wire facing the branch of the tree.



Install the hollow transparent circle and fix the lamp particles



Restore the leaves and pull the wire to the back of the tree



Continue to pull the wire down along the trunk



Remove the branch on the right as shown by the arrow





LYBMTWF

Take a 30cm warm ordinary light bulb and install it to the position shown in the picture




in the same way as before .

Install the hollow transparent circle and fix the lamp particles



LYBMTWF

Pass the wire around the branches below

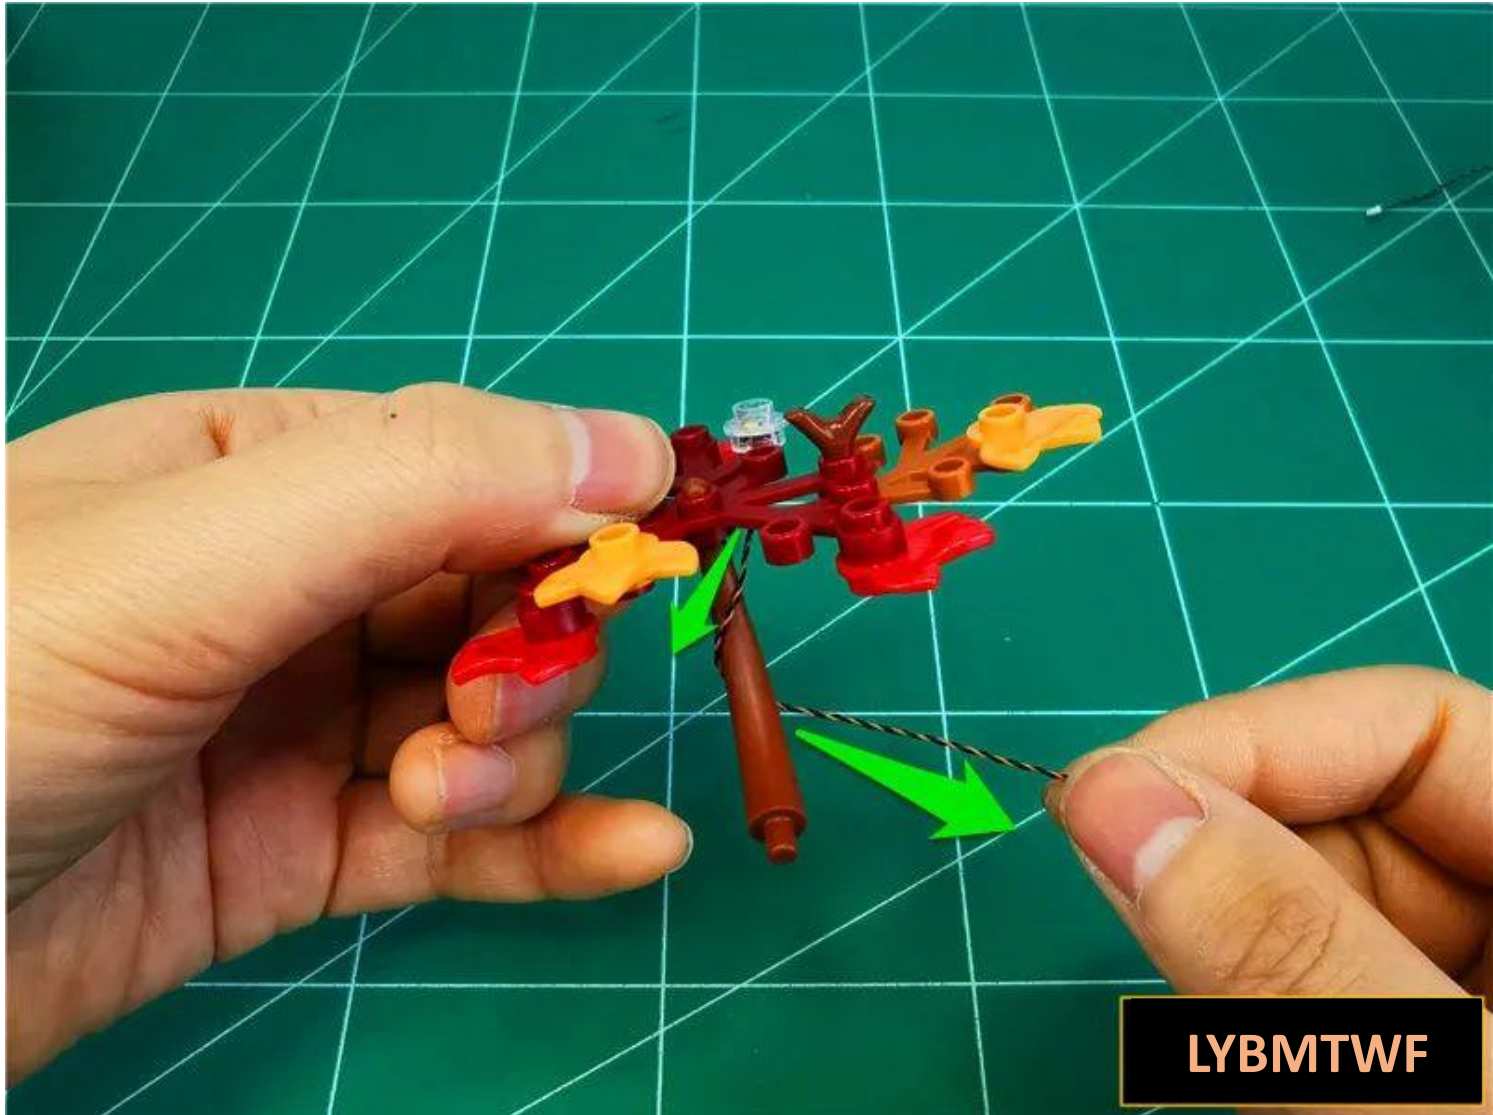

Restore branches



Pull the wire down along the trunk




Continue to remove the branches indicated by the arrows






Then take 1 30cm warm light ordinary lamp particle and 1 hollow transparent round, and put

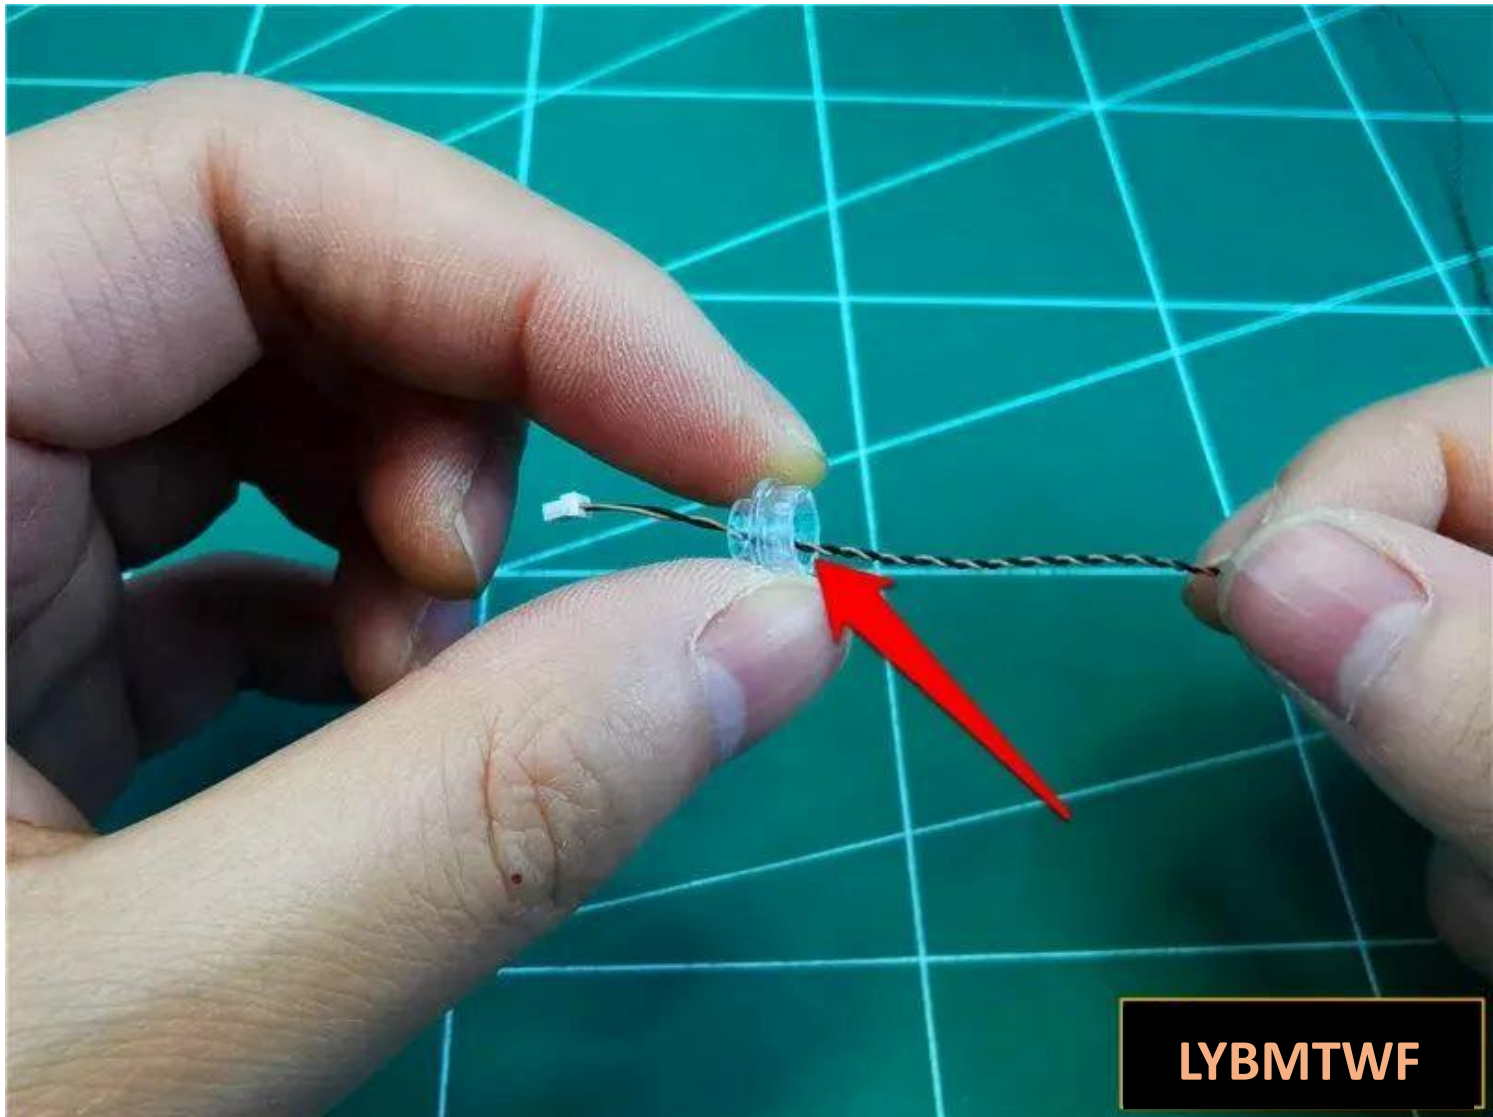


the lamp particle plug through **the big hole side**

Bend the lamp 90 degrees, with the luminous side facing outwards

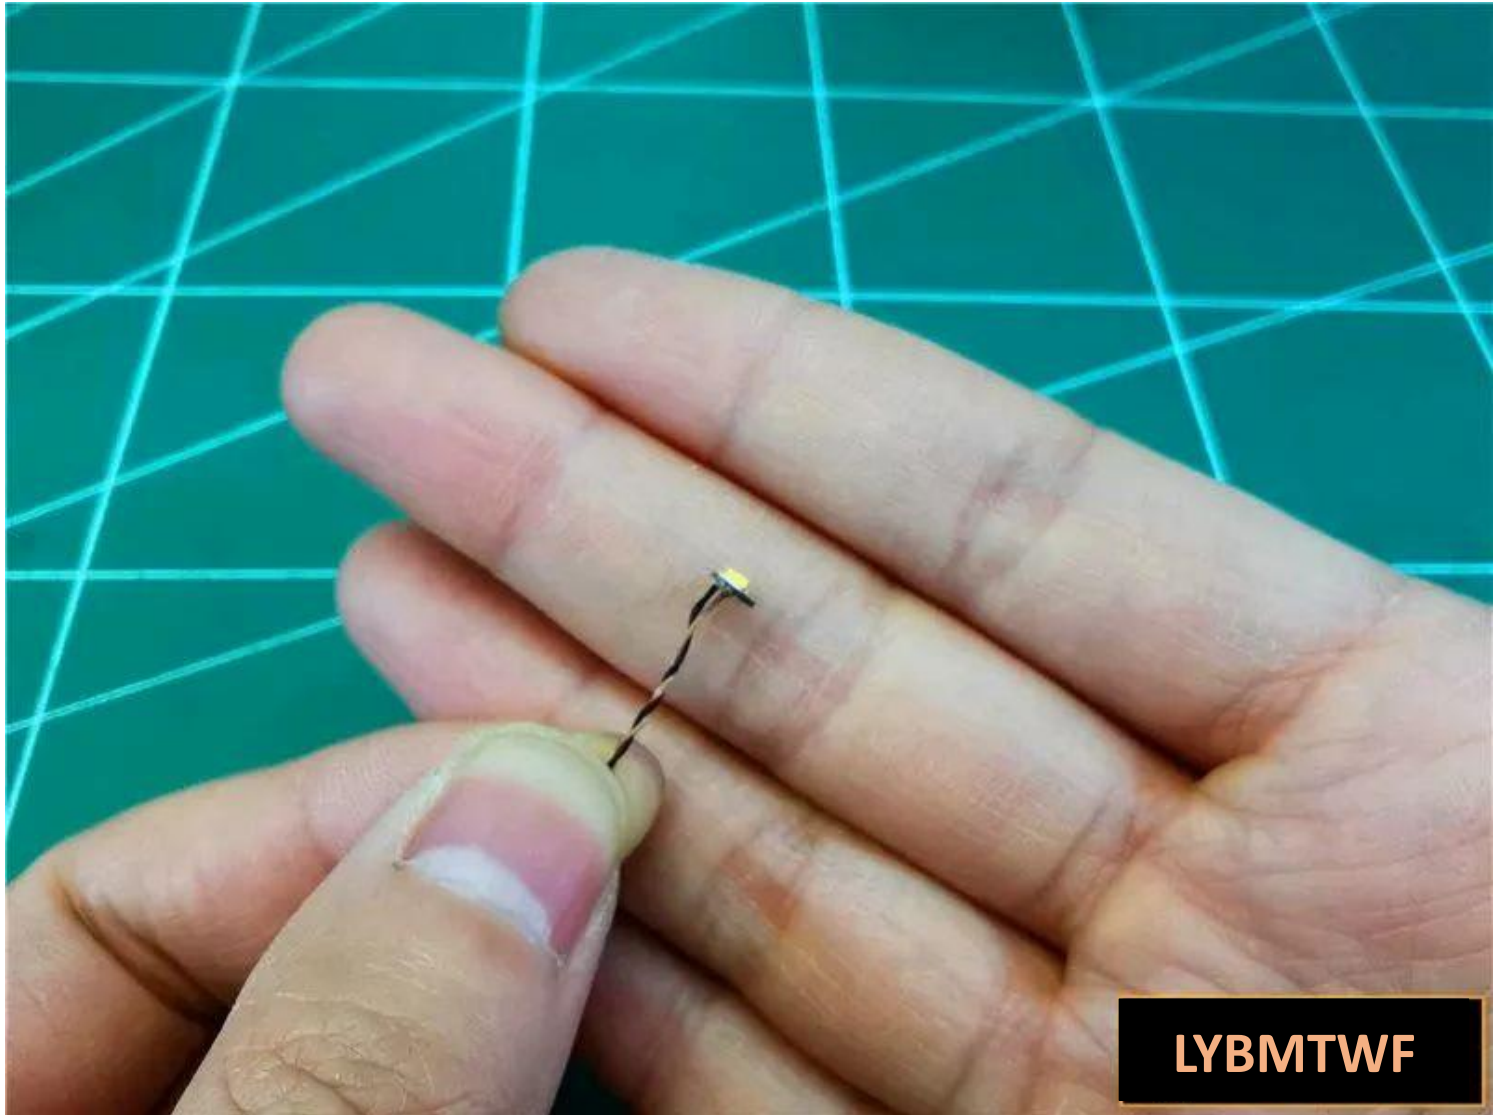


Tighten the wires so that the lamp particles are exactly placed in the center of the transparent circle

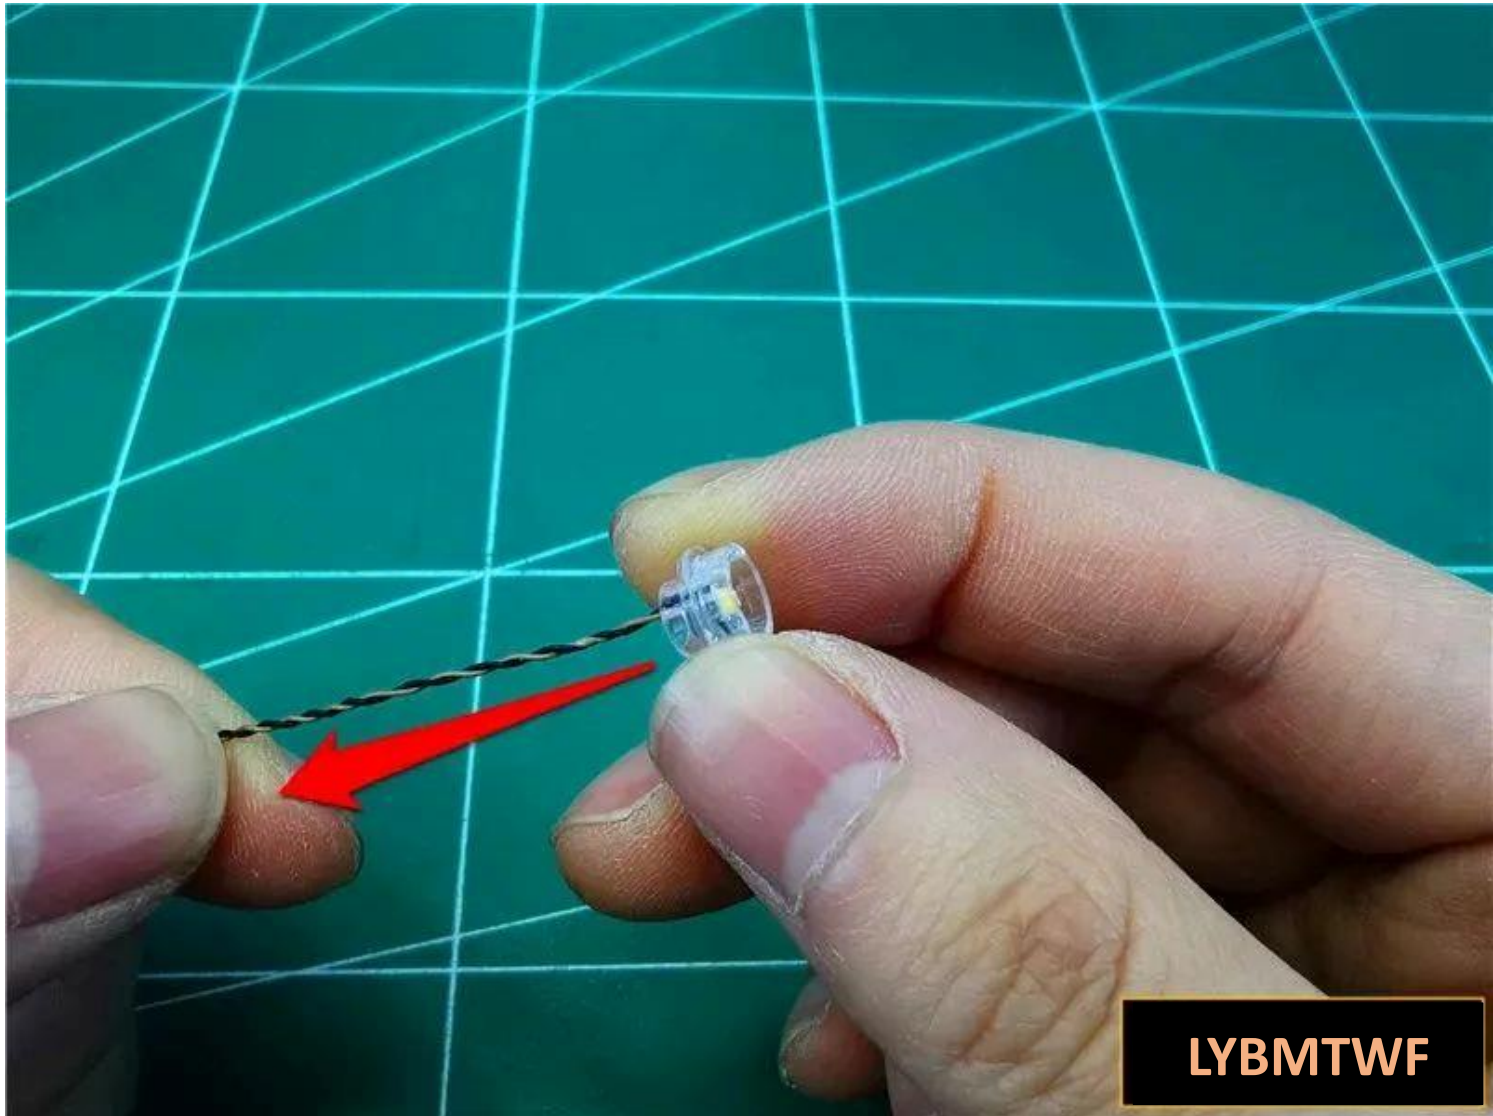

LYBMTWF

Snap wires to edge of part

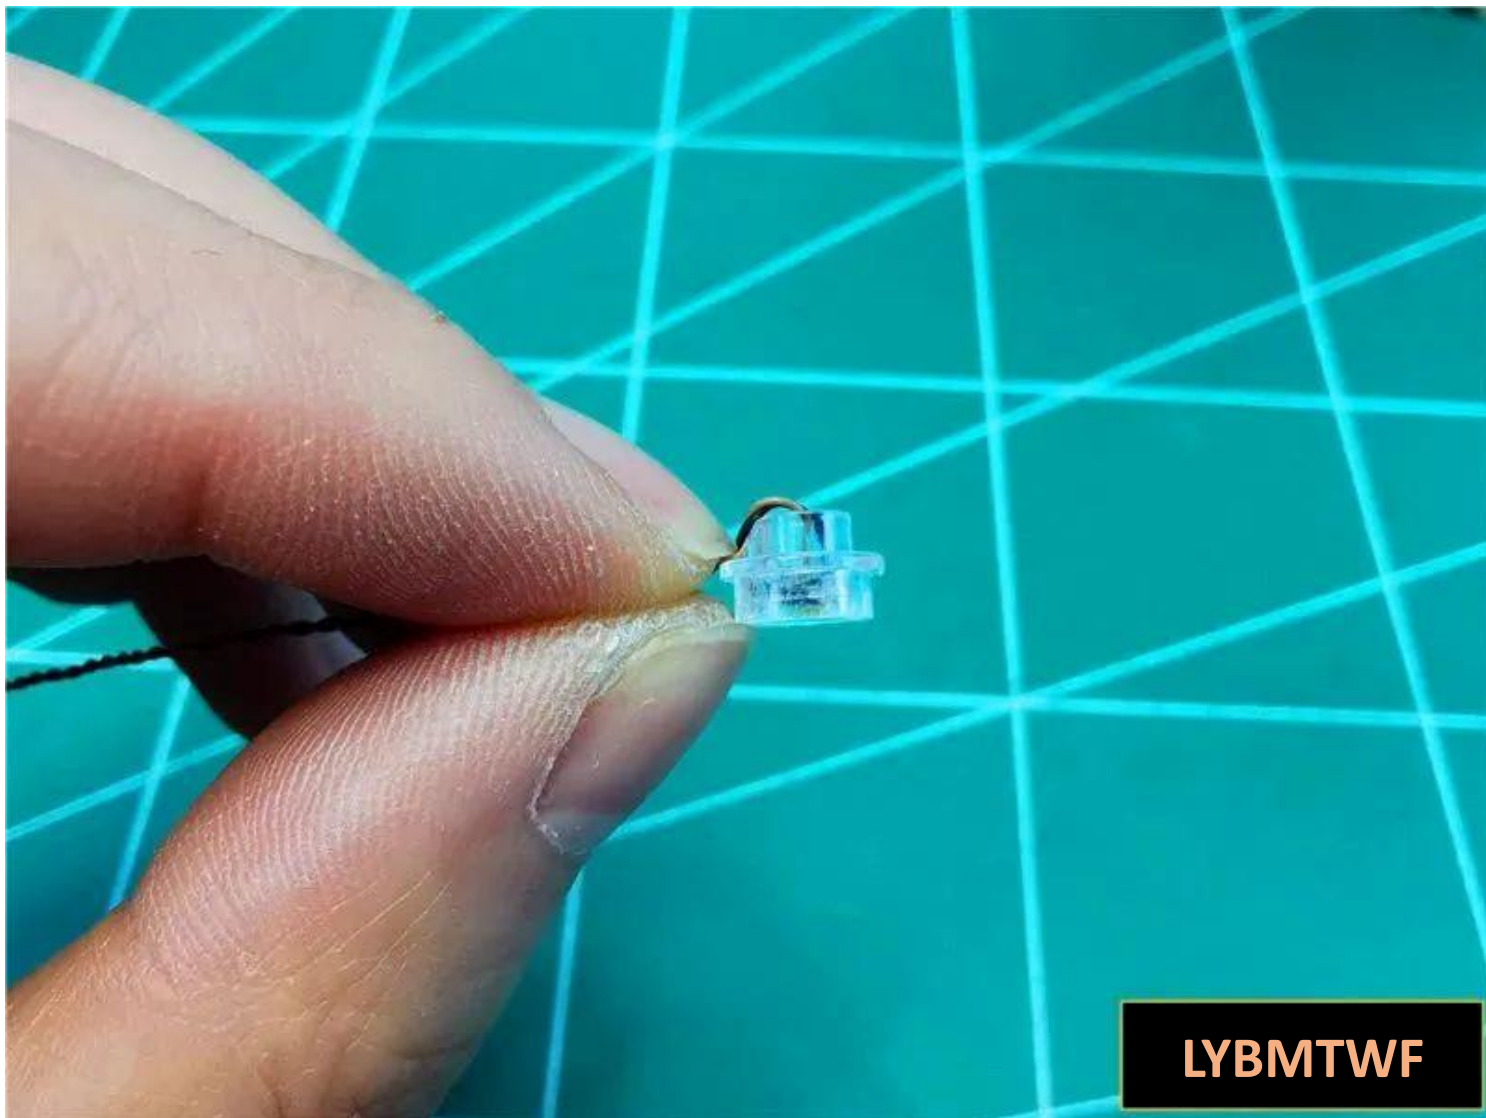

Install the lamp particles under **the leaves** , in the position shown in the picture, with the wires facing the branches.



LYBMTWF

Thread the wire around the branches



LYBMTWF

Restore the branch and pull the wire down along the trunk



LYBMTWF

Continue to remove the branch on the left as shown by the arrow





LYBMTWF

Take 1 30cm warm light ordinary lamp particle, with the luminous side facing up, and place it in the position shown in the picture




Install the transparent circle and fix the lamp particles




LYBMTWF

Thread the wire around the branches

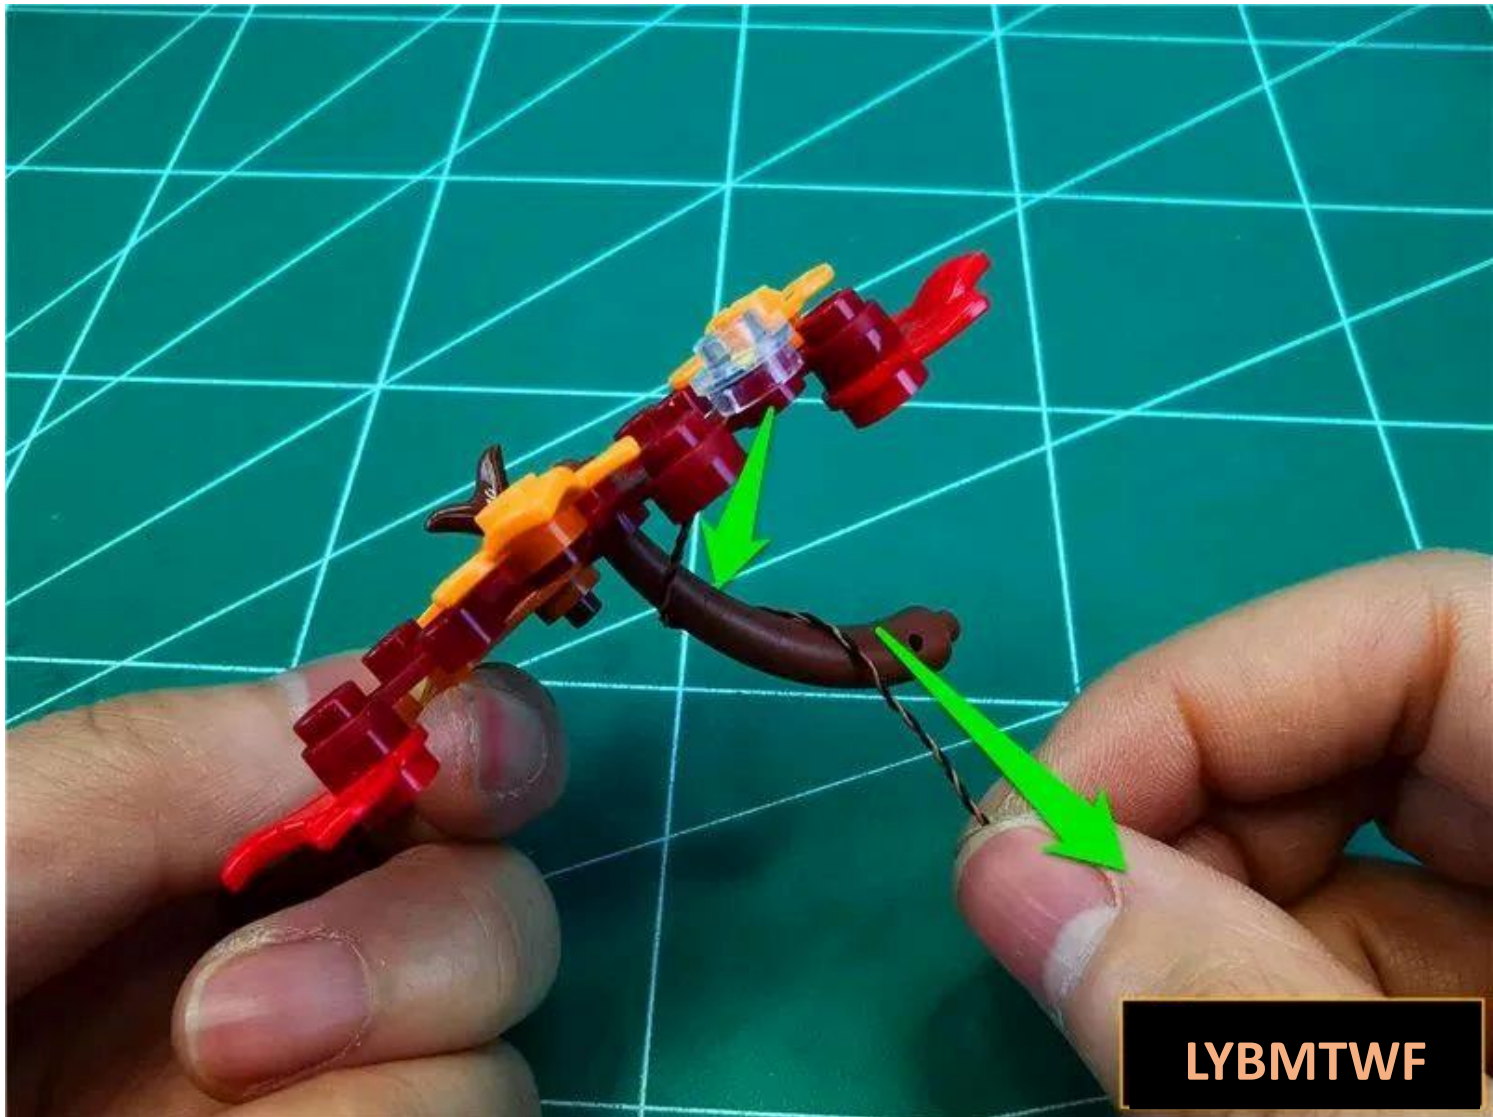

Restore the branch and pull the wire down along the trunk

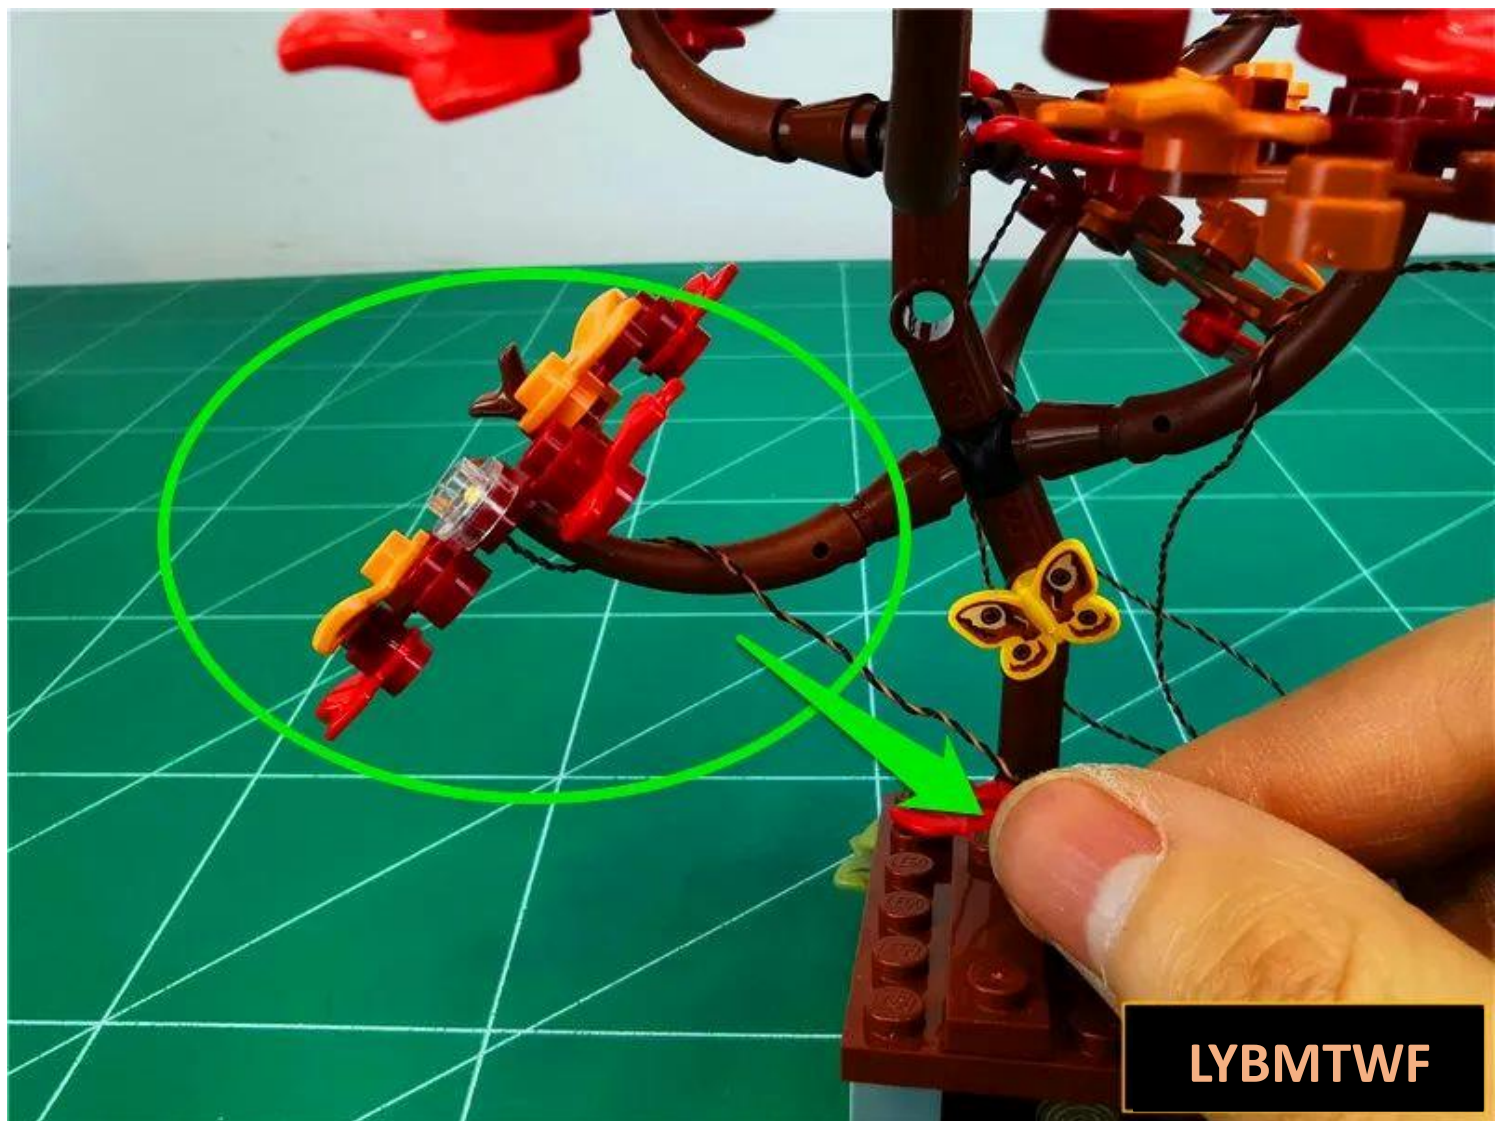

Go to the back of the tree and twist the 4 wires on the tree together appropriately




Loop the wire around the tree trunk




LYBMTWF


Twist the 5 wires together appropriately

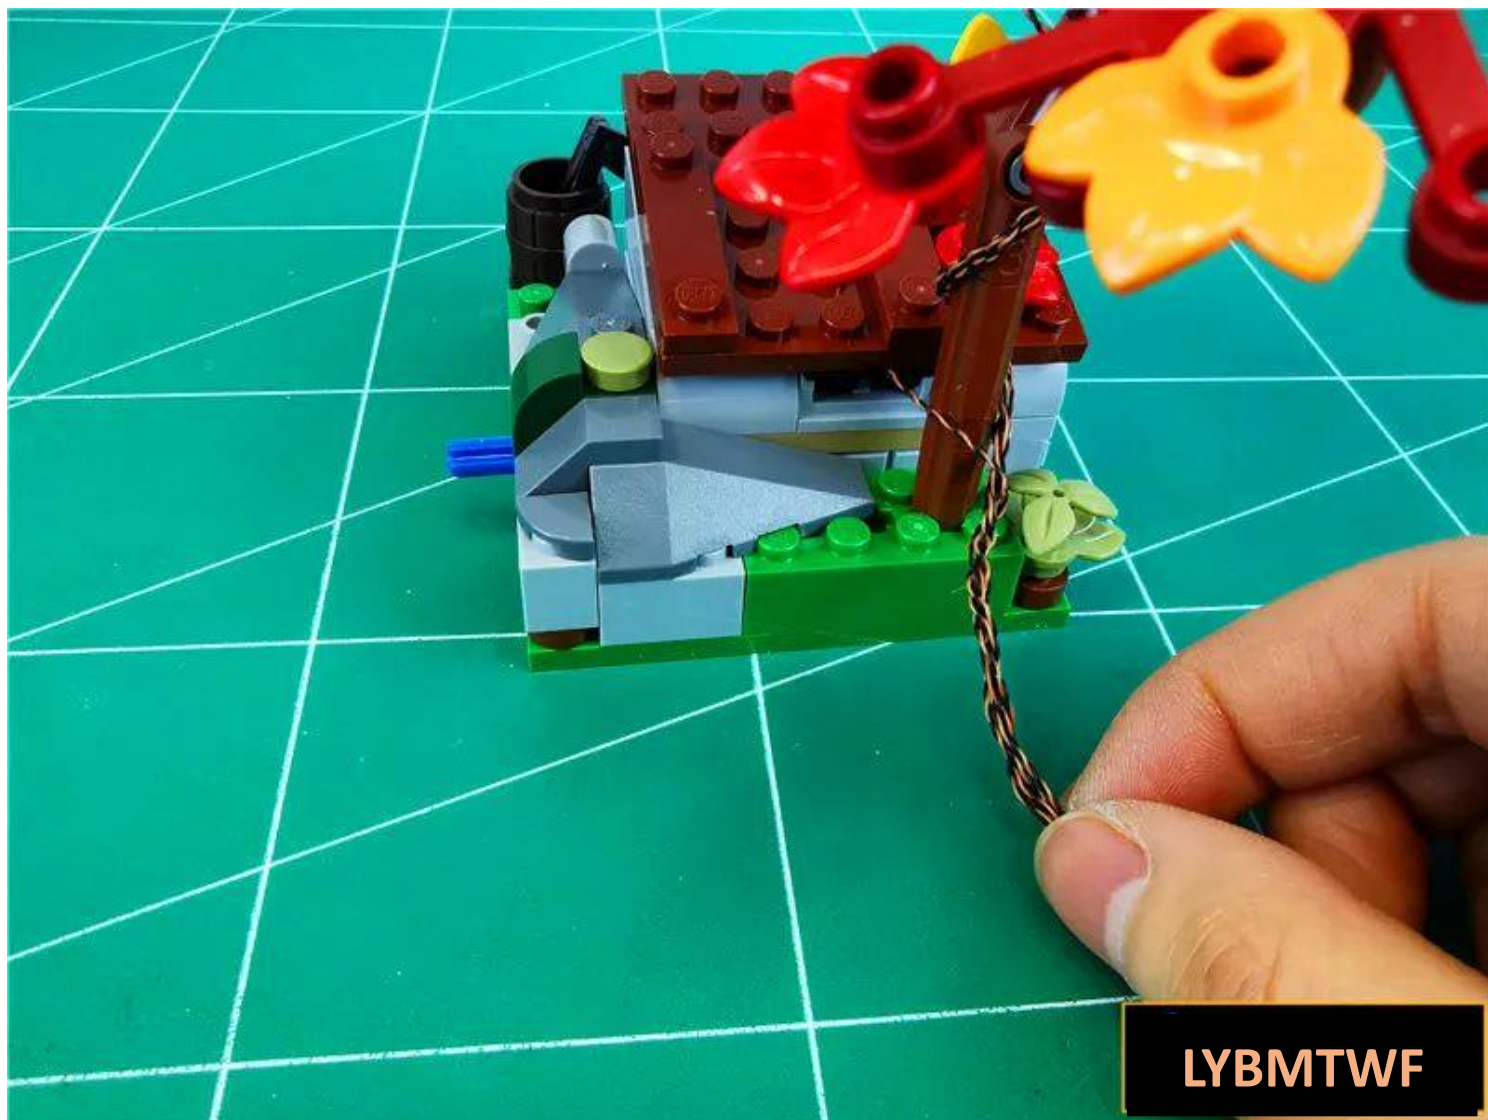

Take a 6-seater and a 30CM cable and connect them together

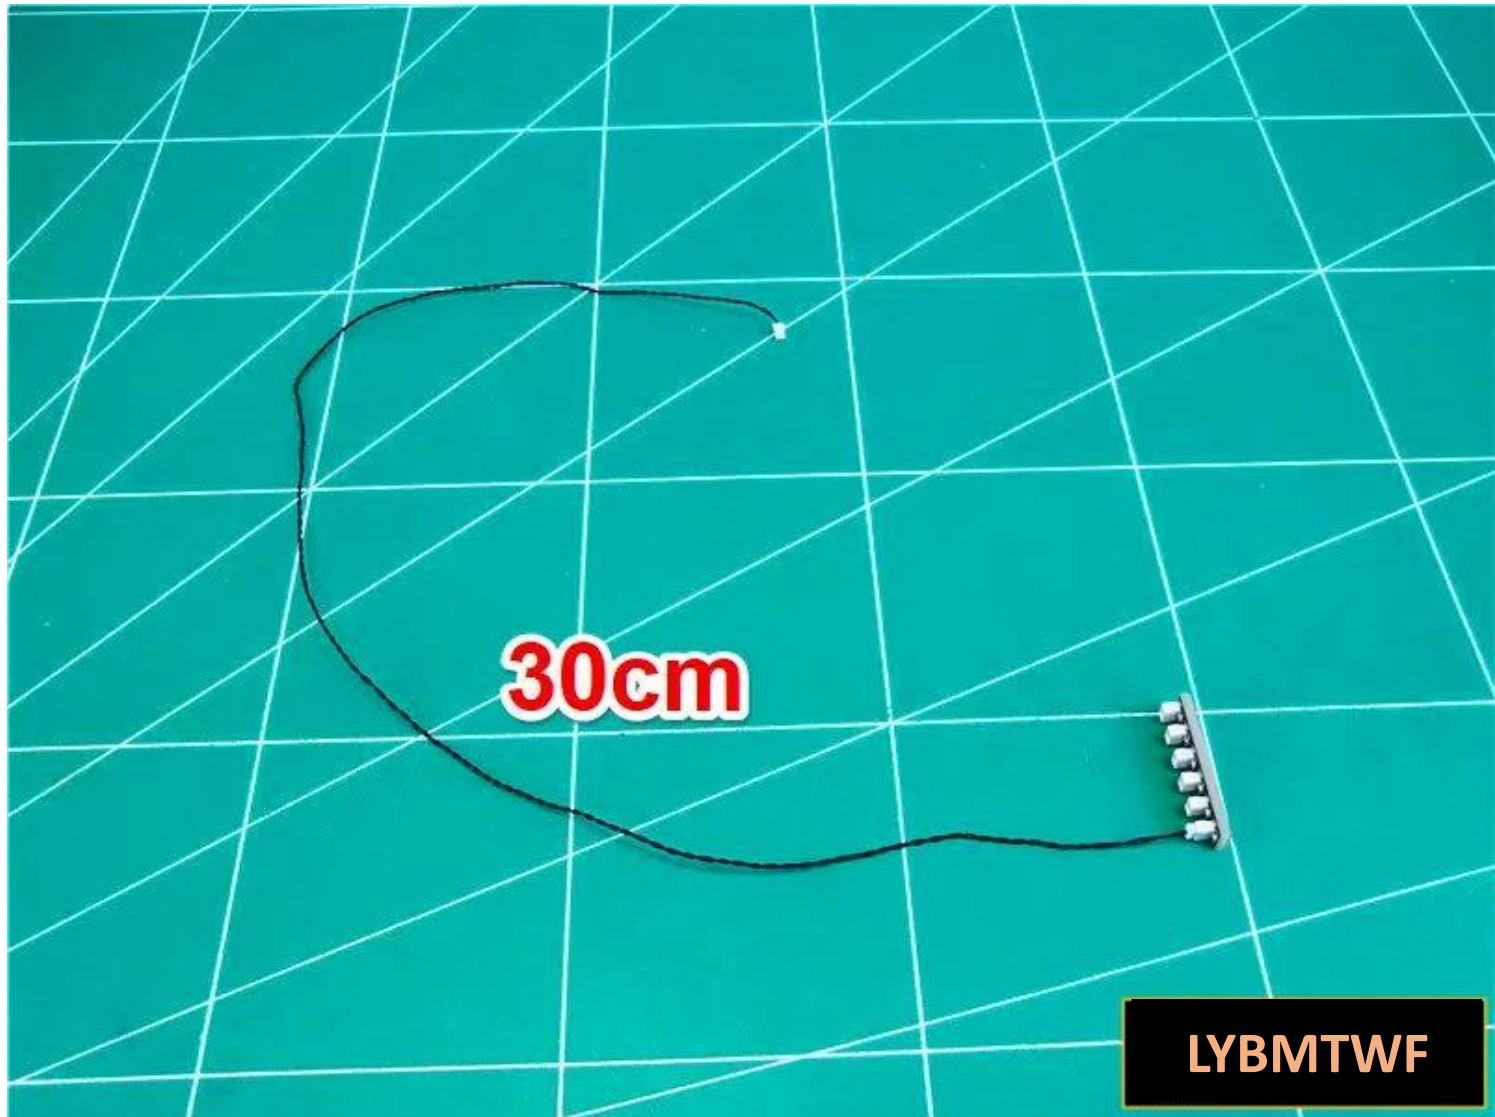

Insert all 5 lamp plugs into 6 sockets

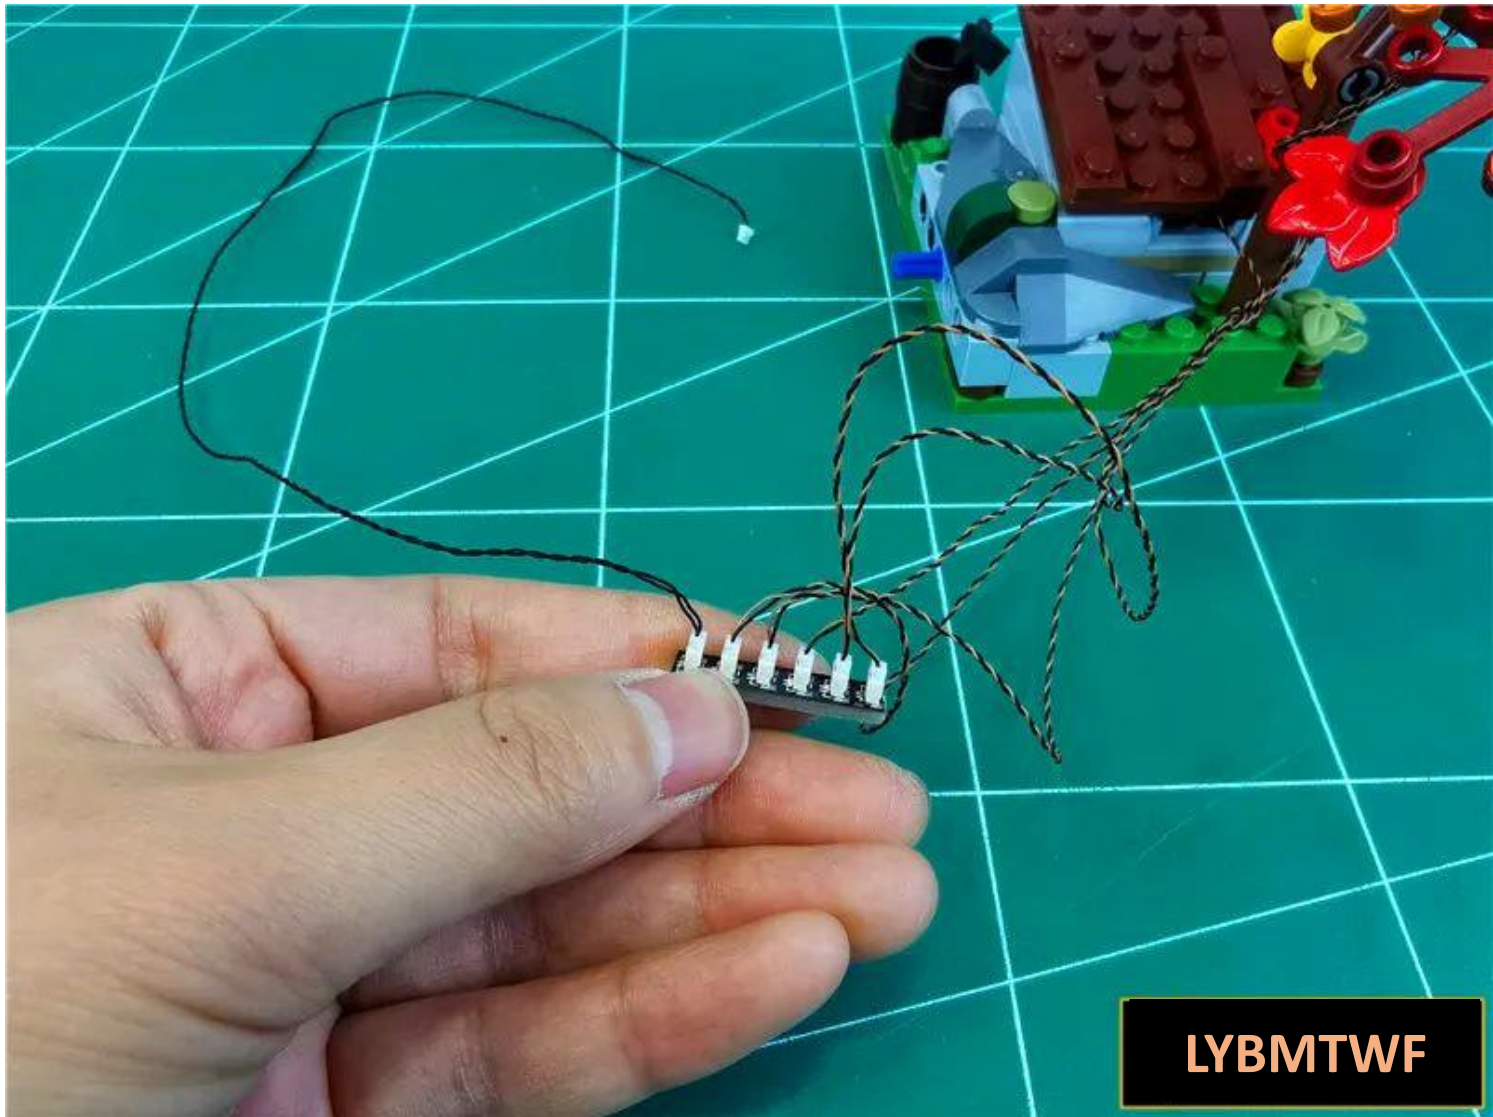

Plug the cable into the 6 sockets connected to the power supply



Turn on the power and test that the light lights up normally




After the test is completed, unplug the connection cable and **leave the 6 sockets on the power supply**




Remove the adhesive from the socket



Glue the socket to the location shown in the picture

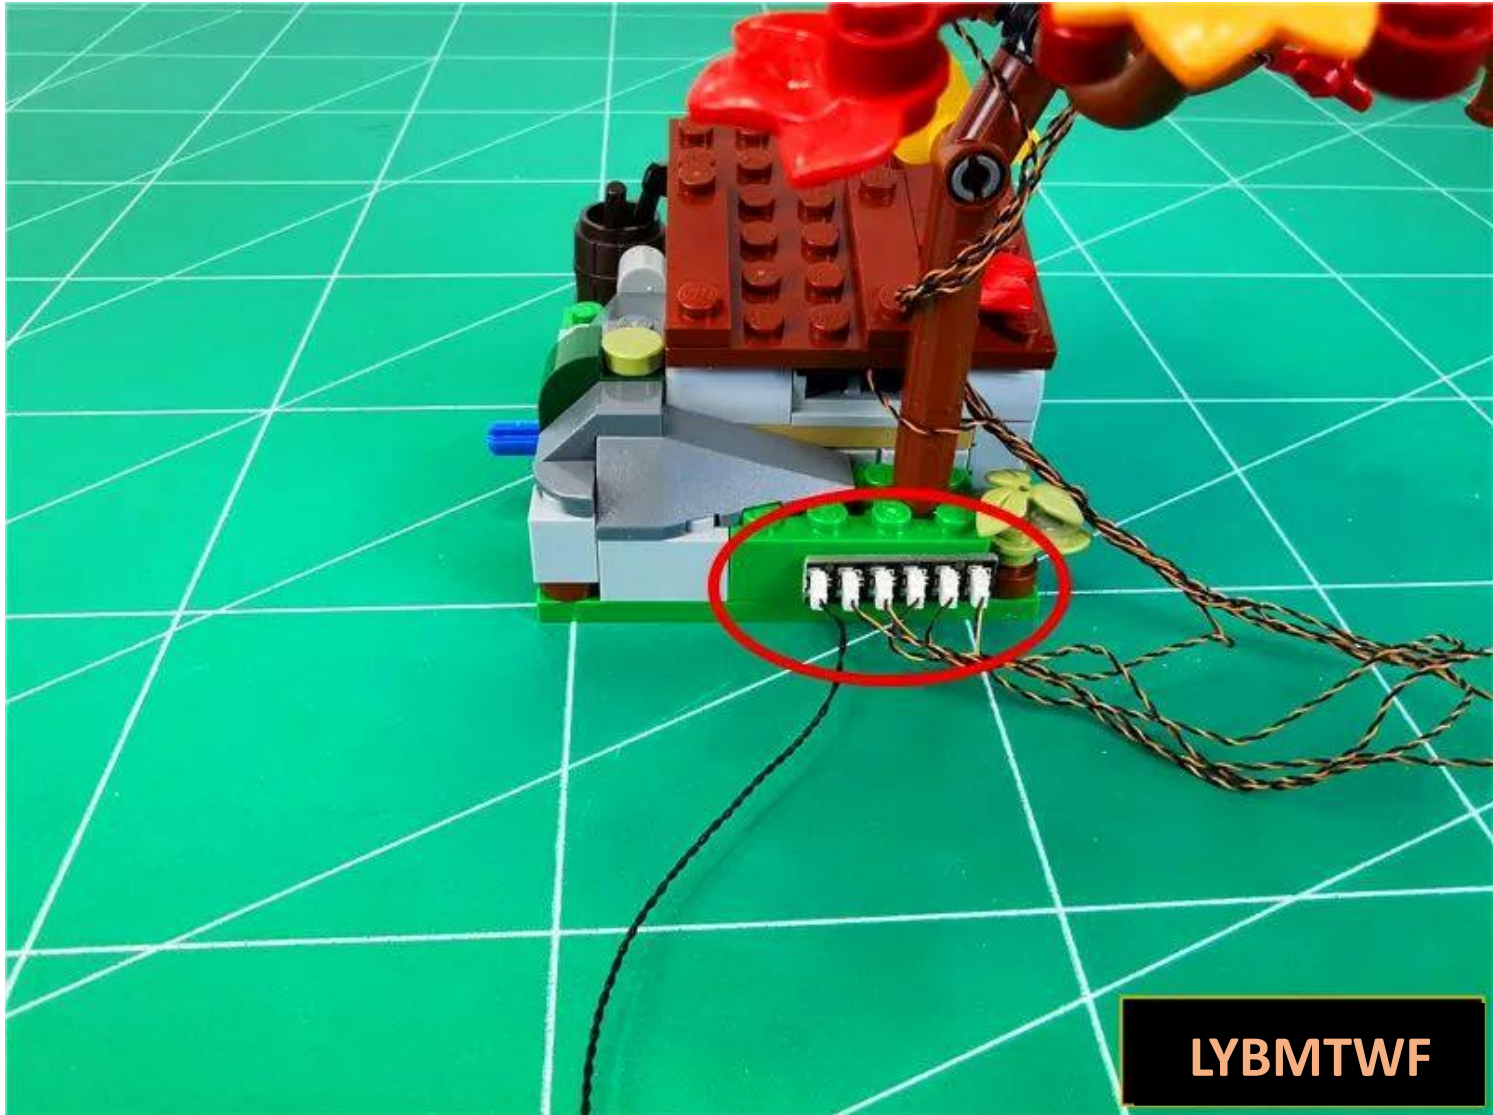


Twist the excess wires (**except connecting wires**) together appropriately

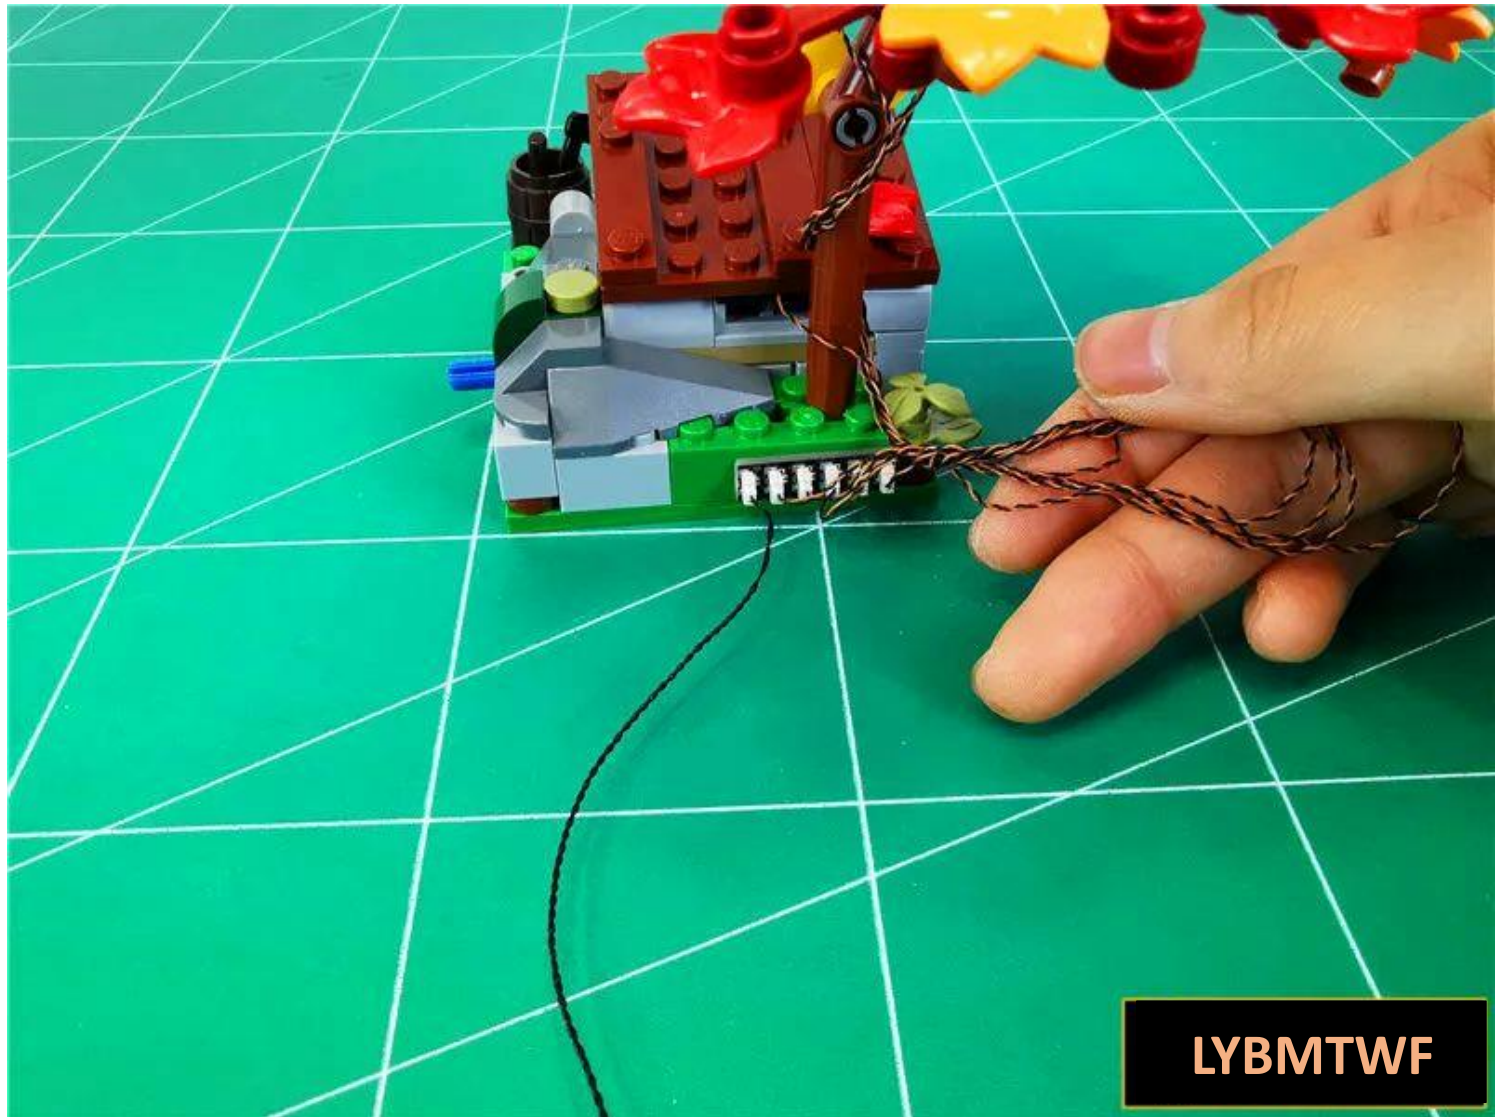


Fit the excess wires to the positions shown in the picture




Remove the sector-shaped parts indicated by arrows

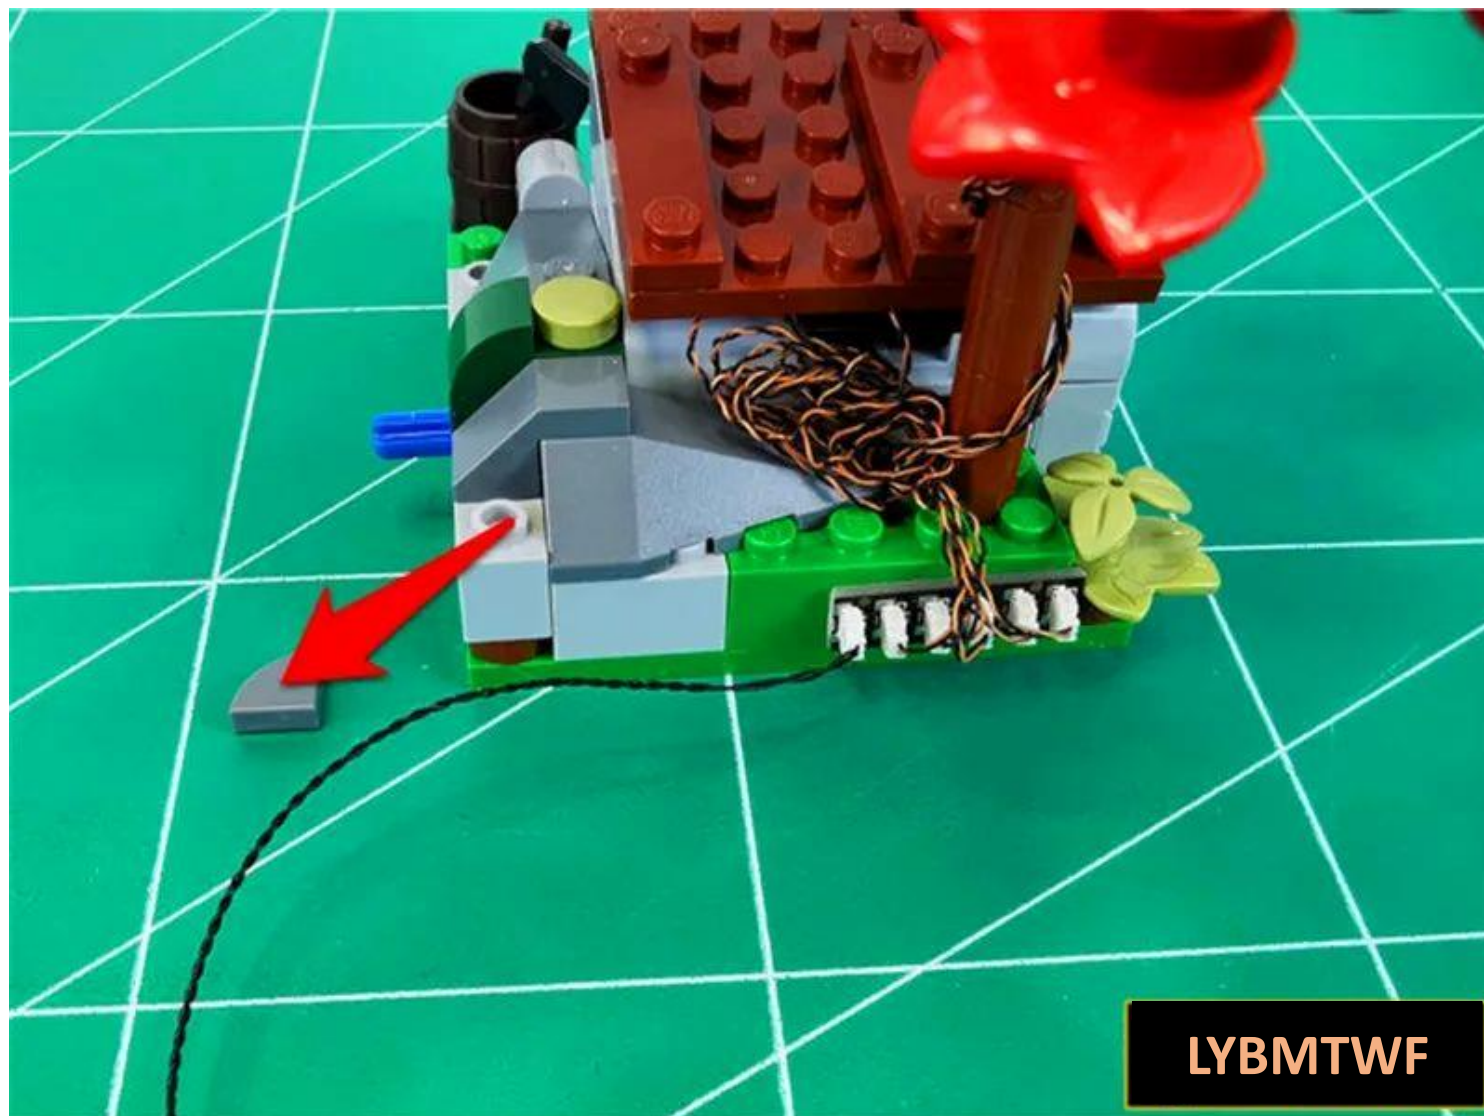

Pass the connecting wire around the raised particles as shown in the figure

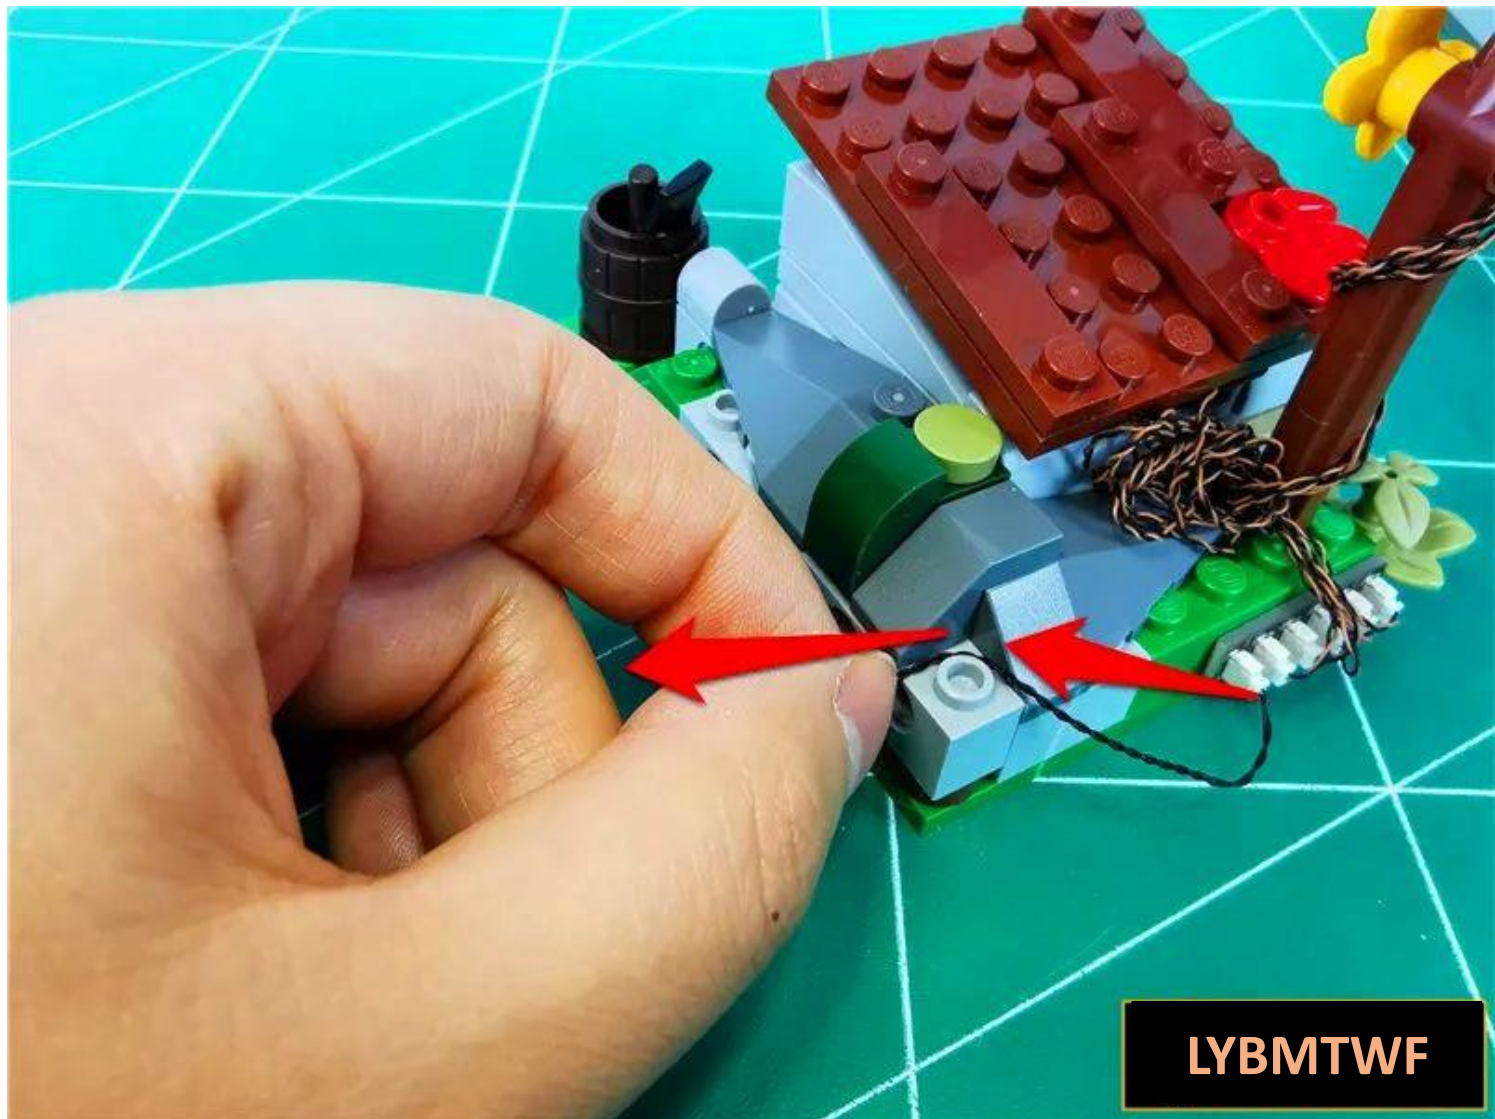

Restore the sector-shaped parts, fix the wires, and temporarily place the tree on the left next to it

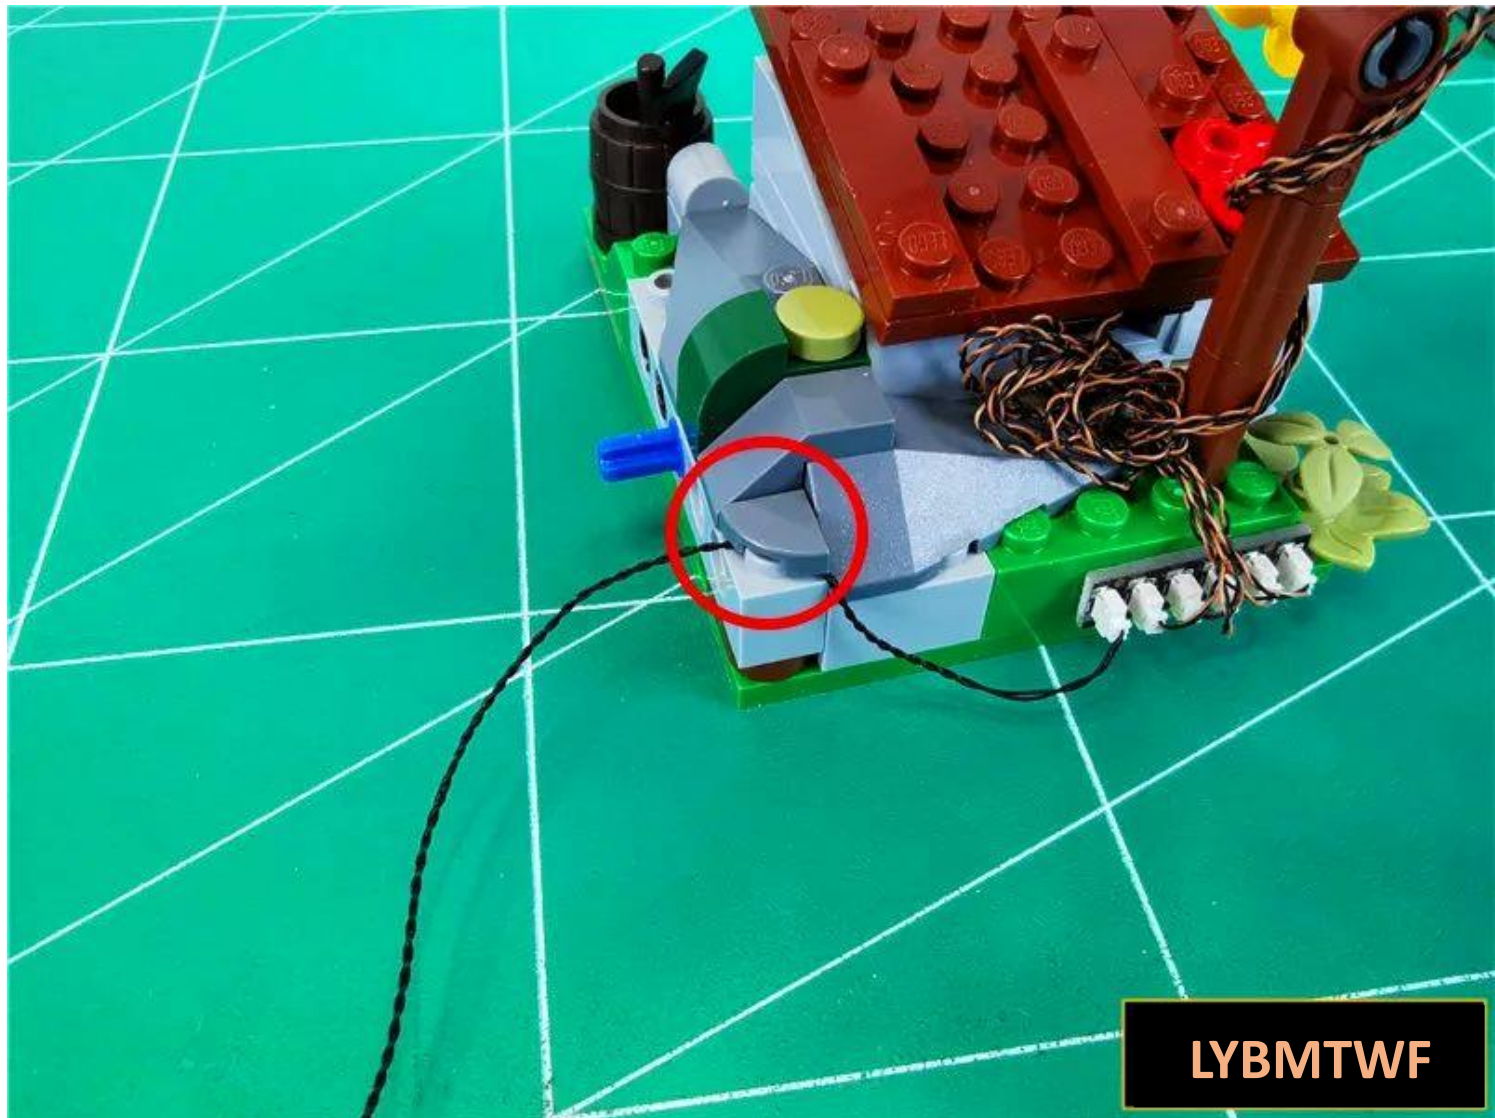

Take out the tree on the right



Remove the green branch as shown by the arrow





LYBMTWF

Take 3 30cm warm light ordinary lamp particles and 3 hollow transparent circles



Take any 30cm warm light ordinary lamp grain, with the luminous side facing up, and place it in the position shown in the picture



Install the transparent circle, fix the light particles, and wrap the wires around the branches



Restore the branch and pull the wire down along the trunk



Continue to remove the branches indicated by the arrows





Take a 30cm warm light ordinary lamp particle and install the lamp particle to the position shown in the picture in the same way.




Install the transparent circle and fix the lamp particles



LYBMTWF

Thread the wire around the branches

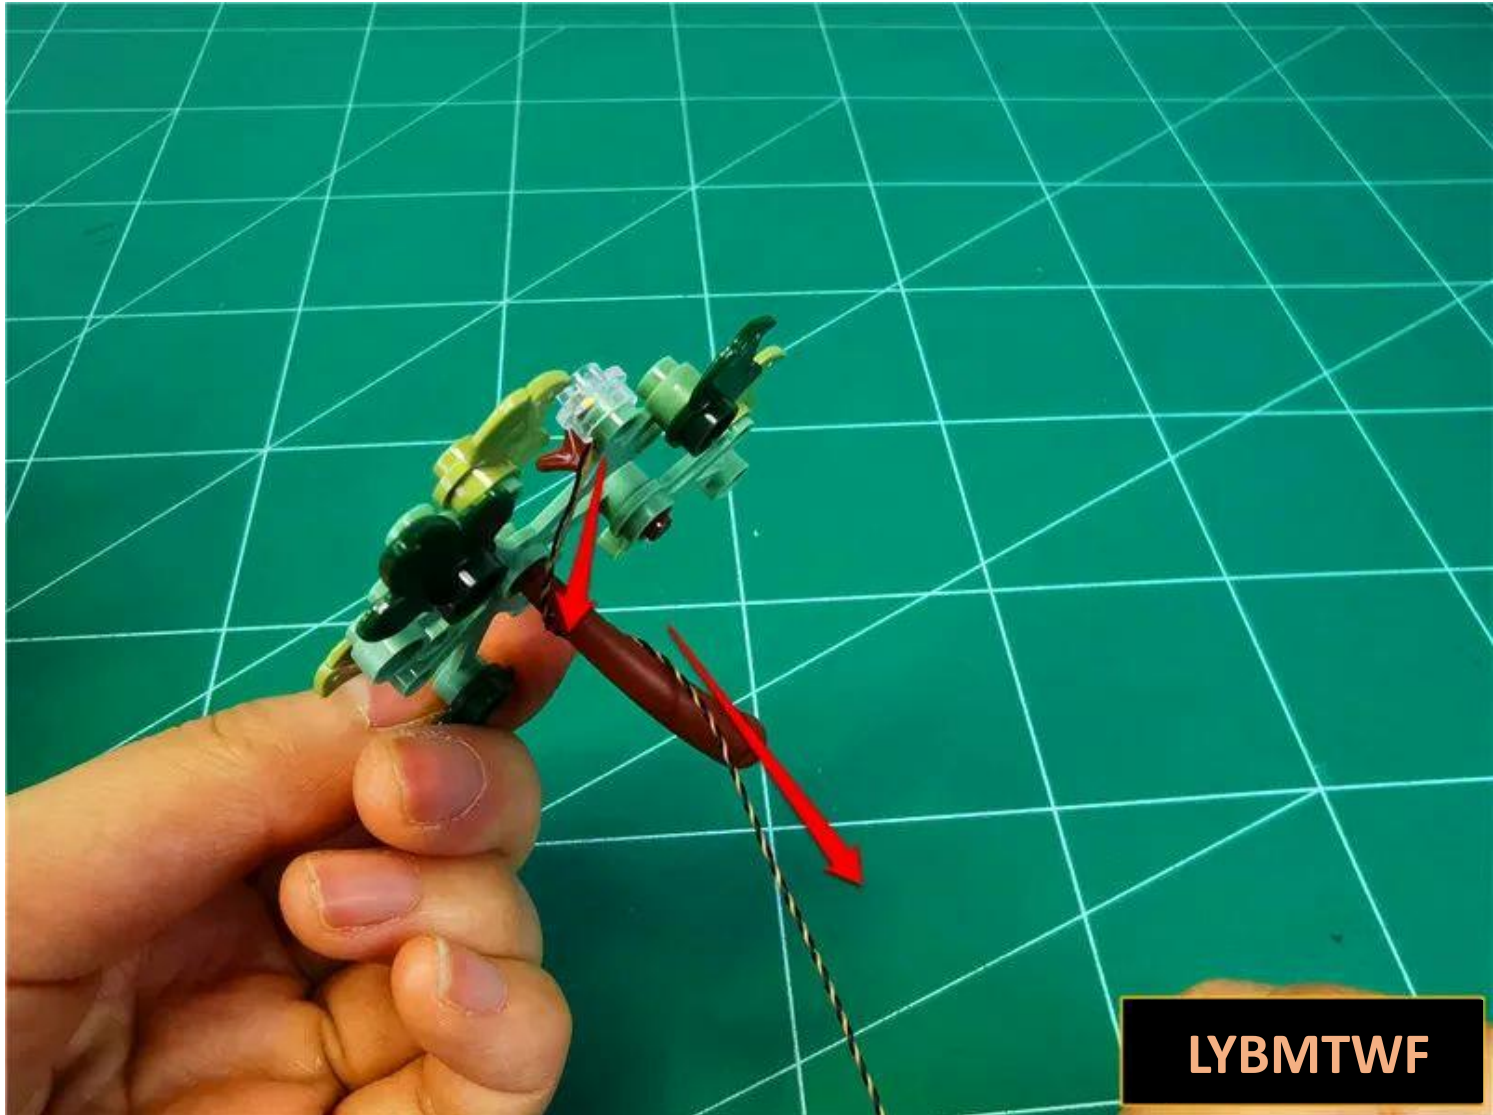

Restore branches



Pull the wire down along the trunk



LYBMTWF

Remove the branch indicated by the arrow





LYBMTWF

Take a 30cm warm light ordinary lamp particle and install the lamp particle to the position shown in the picture in the same way.



Install the transparent circle, fix the light particles, and wrap the wires around the branches



LYBMTWF

Restore branches



Pull the wire down along the trunk



LYBMTWF


Continue to remove the branches indicated by the arrows






LYBMTWF

Take 1 30CM warm light headlight grain and 1 hollow transparent round

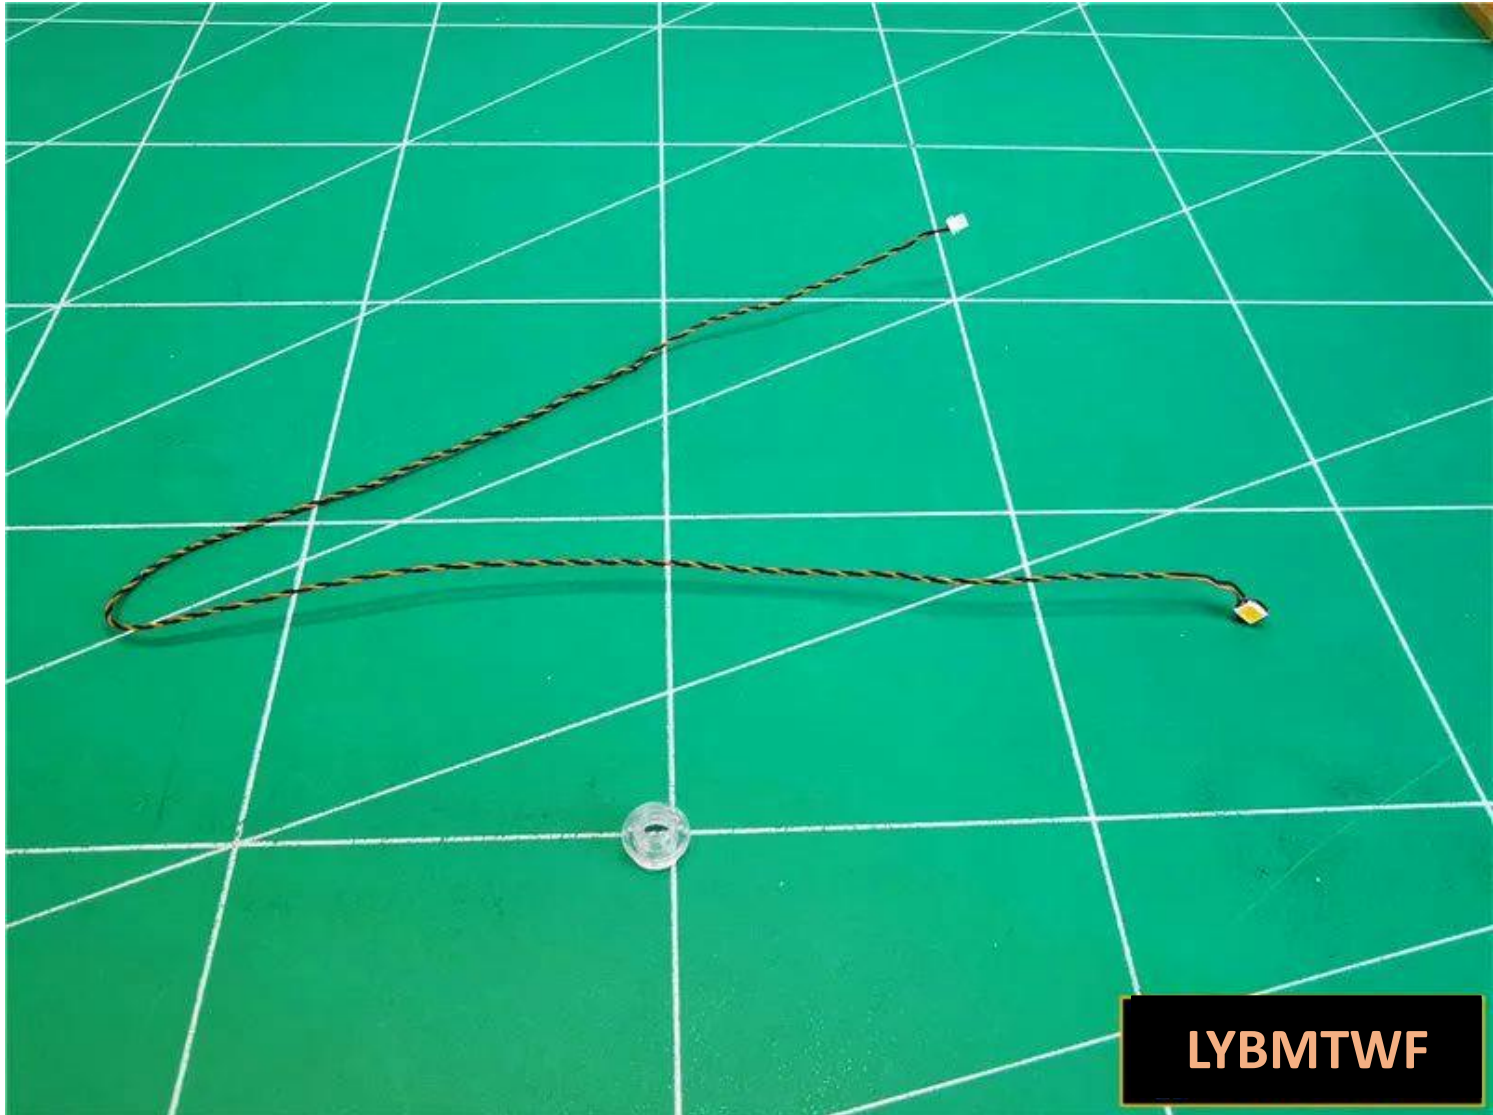

Pass

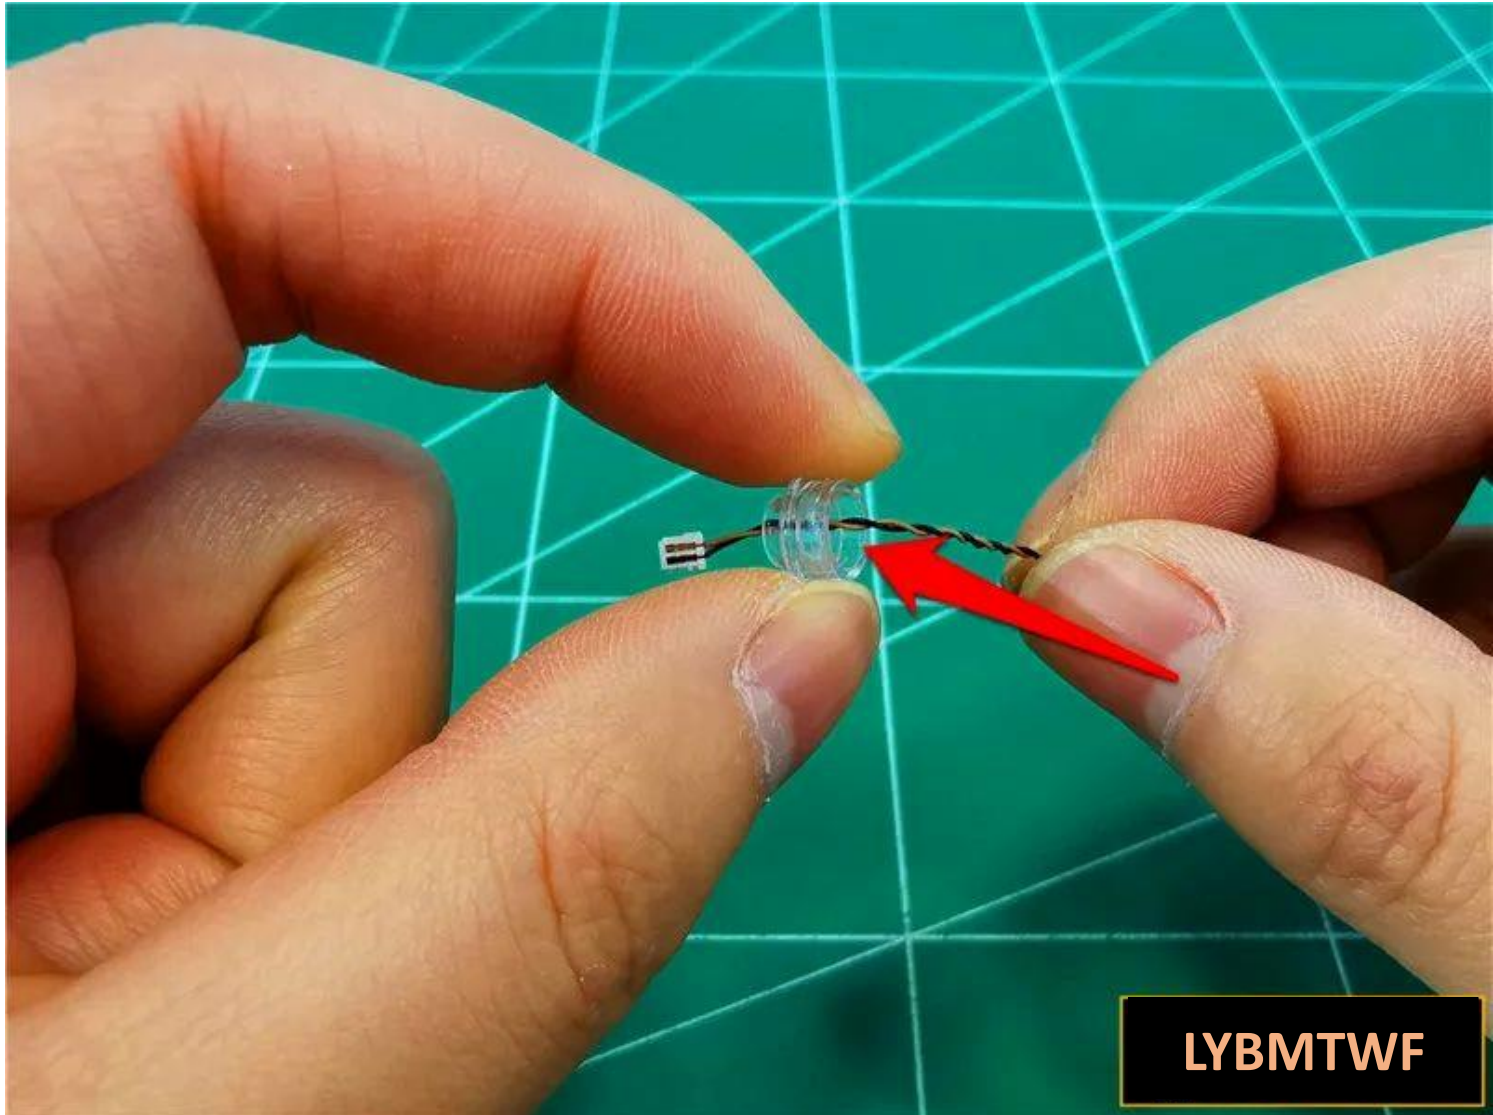


the lamp plug through the hollow **round hole**.

Bend the lamp grain 90 degrees, with the luminous side facing outwards




Tighten the wires so that the lamp particles are exactly placed in the center of the transparent circle

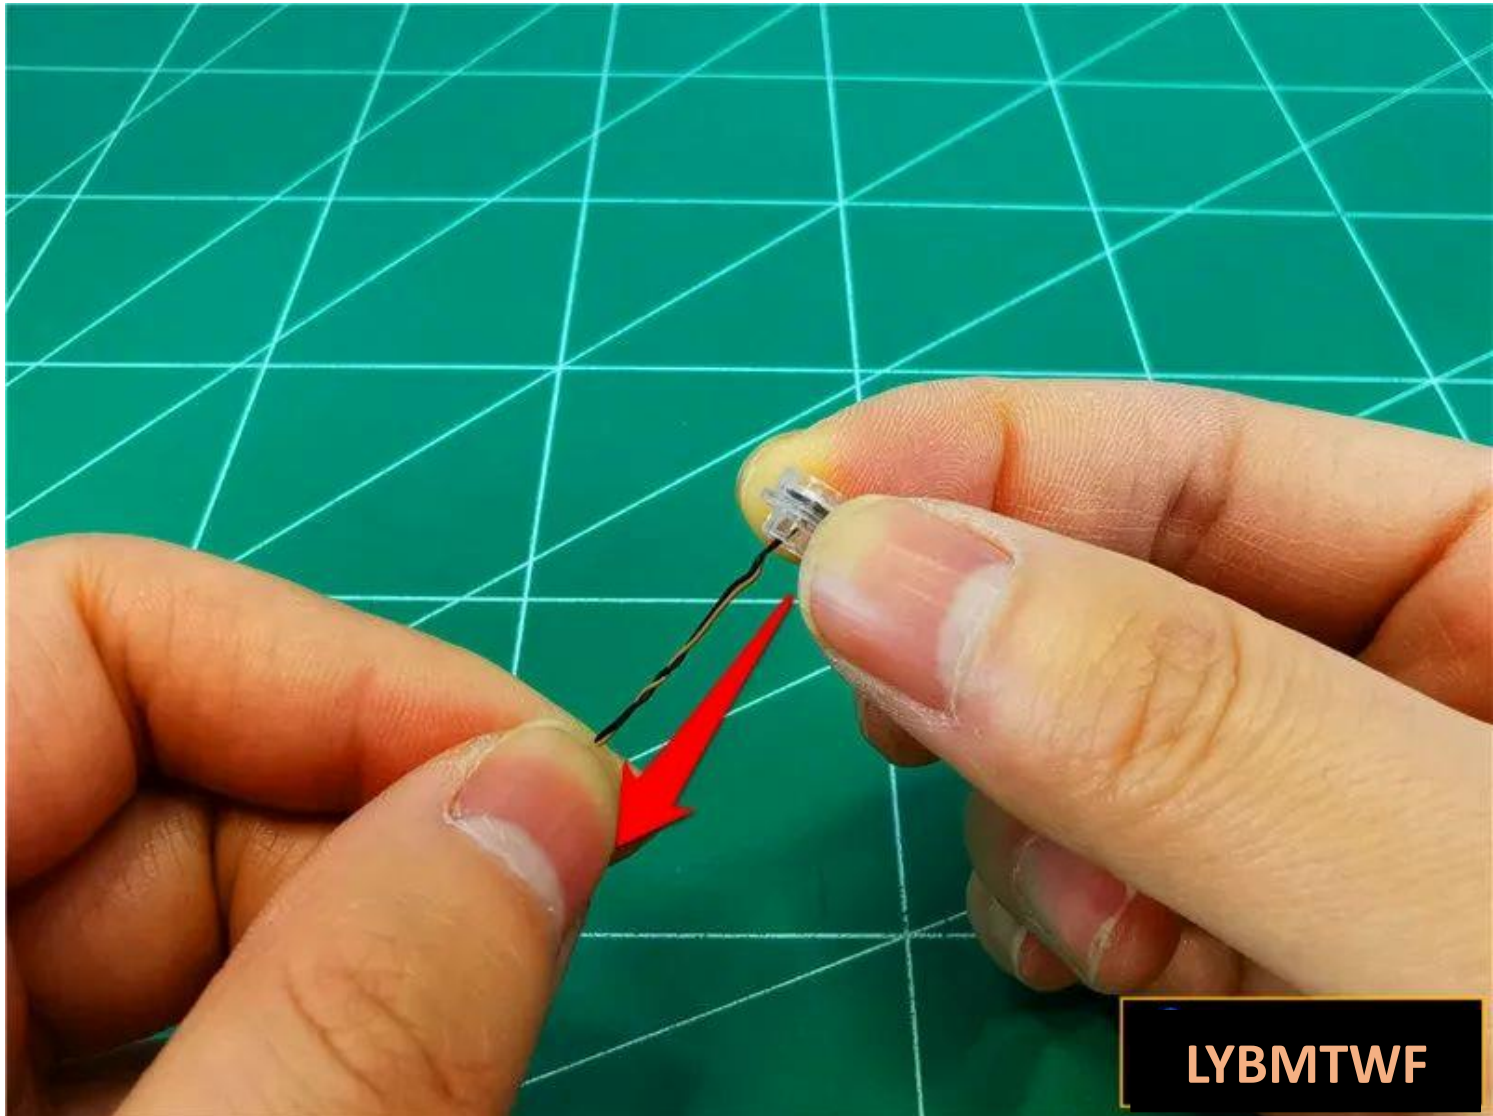


LYBMTWF

Snap wires to edge of part

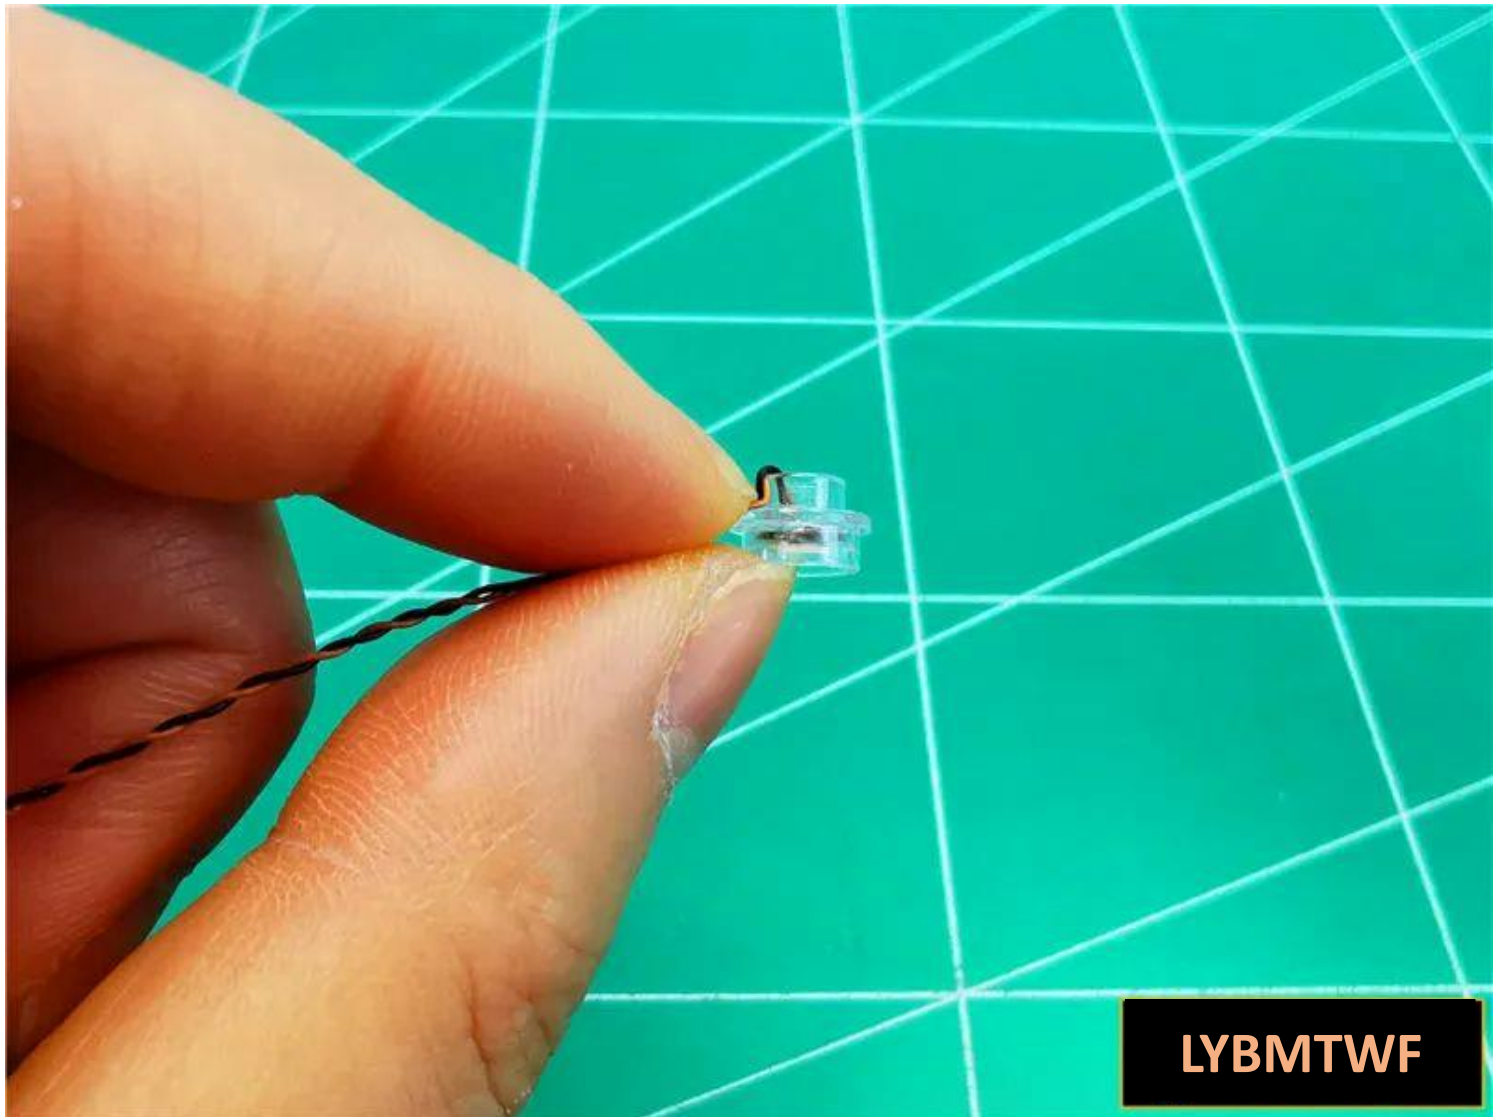


LYBMTWF

Install the lamp particles **under the leaves** , in the position shown in the picture, with the wires facing the branches.

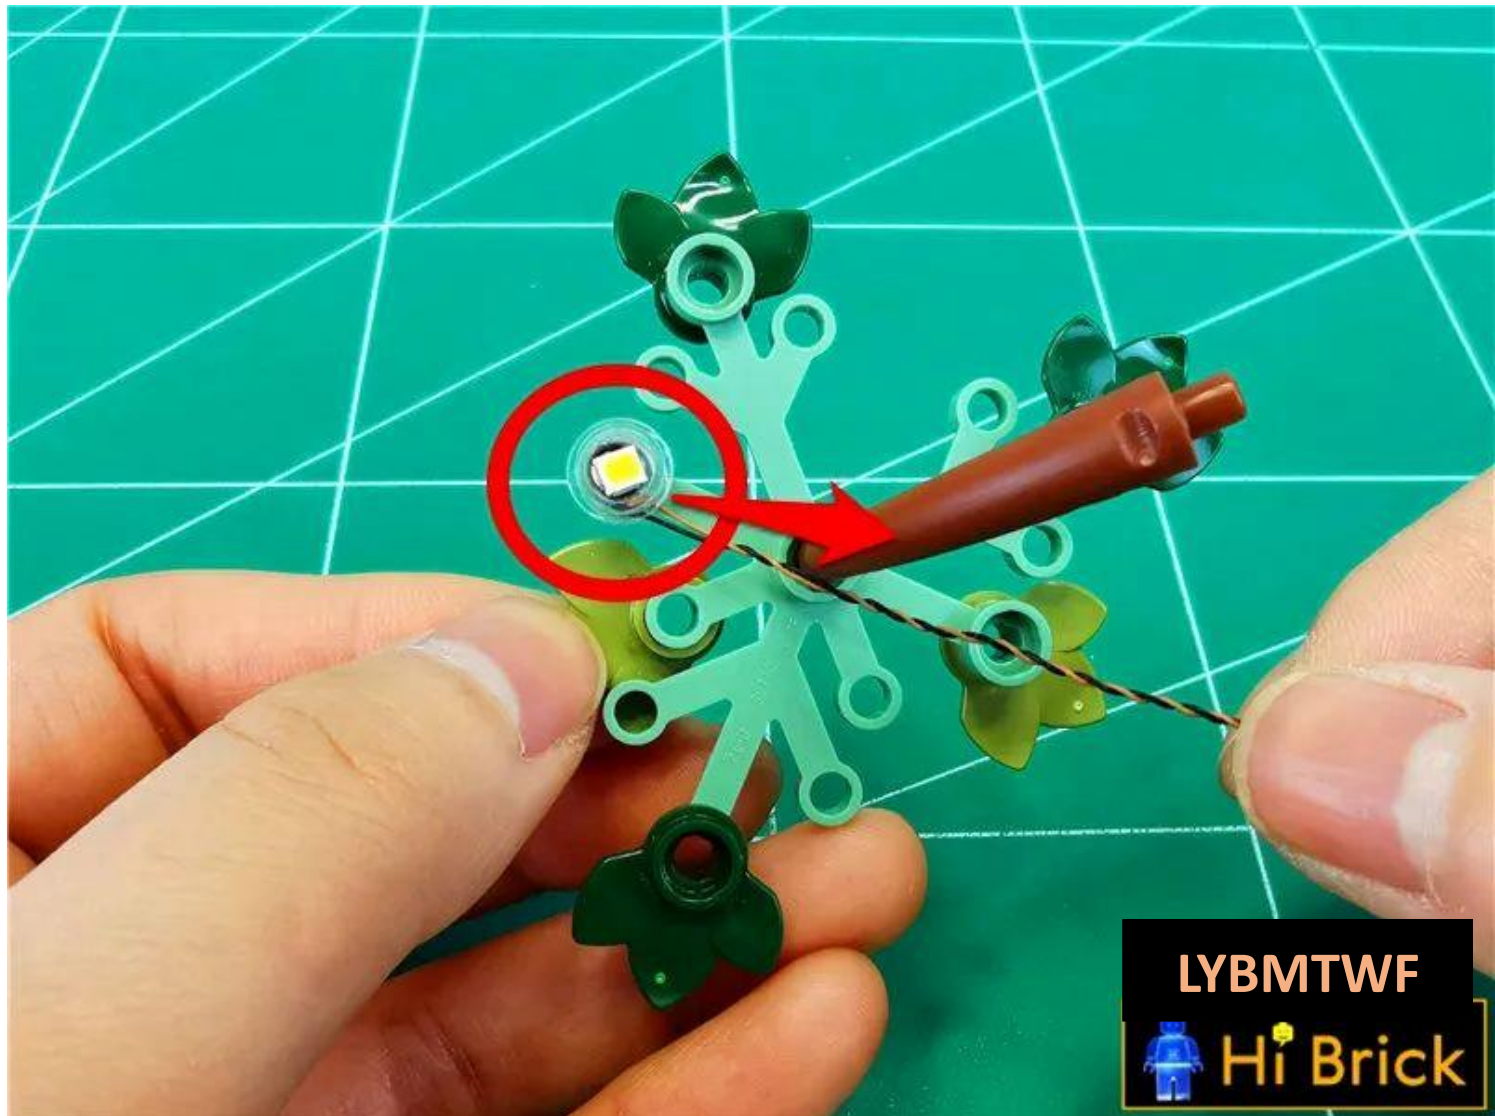

Thread the wire around the branches

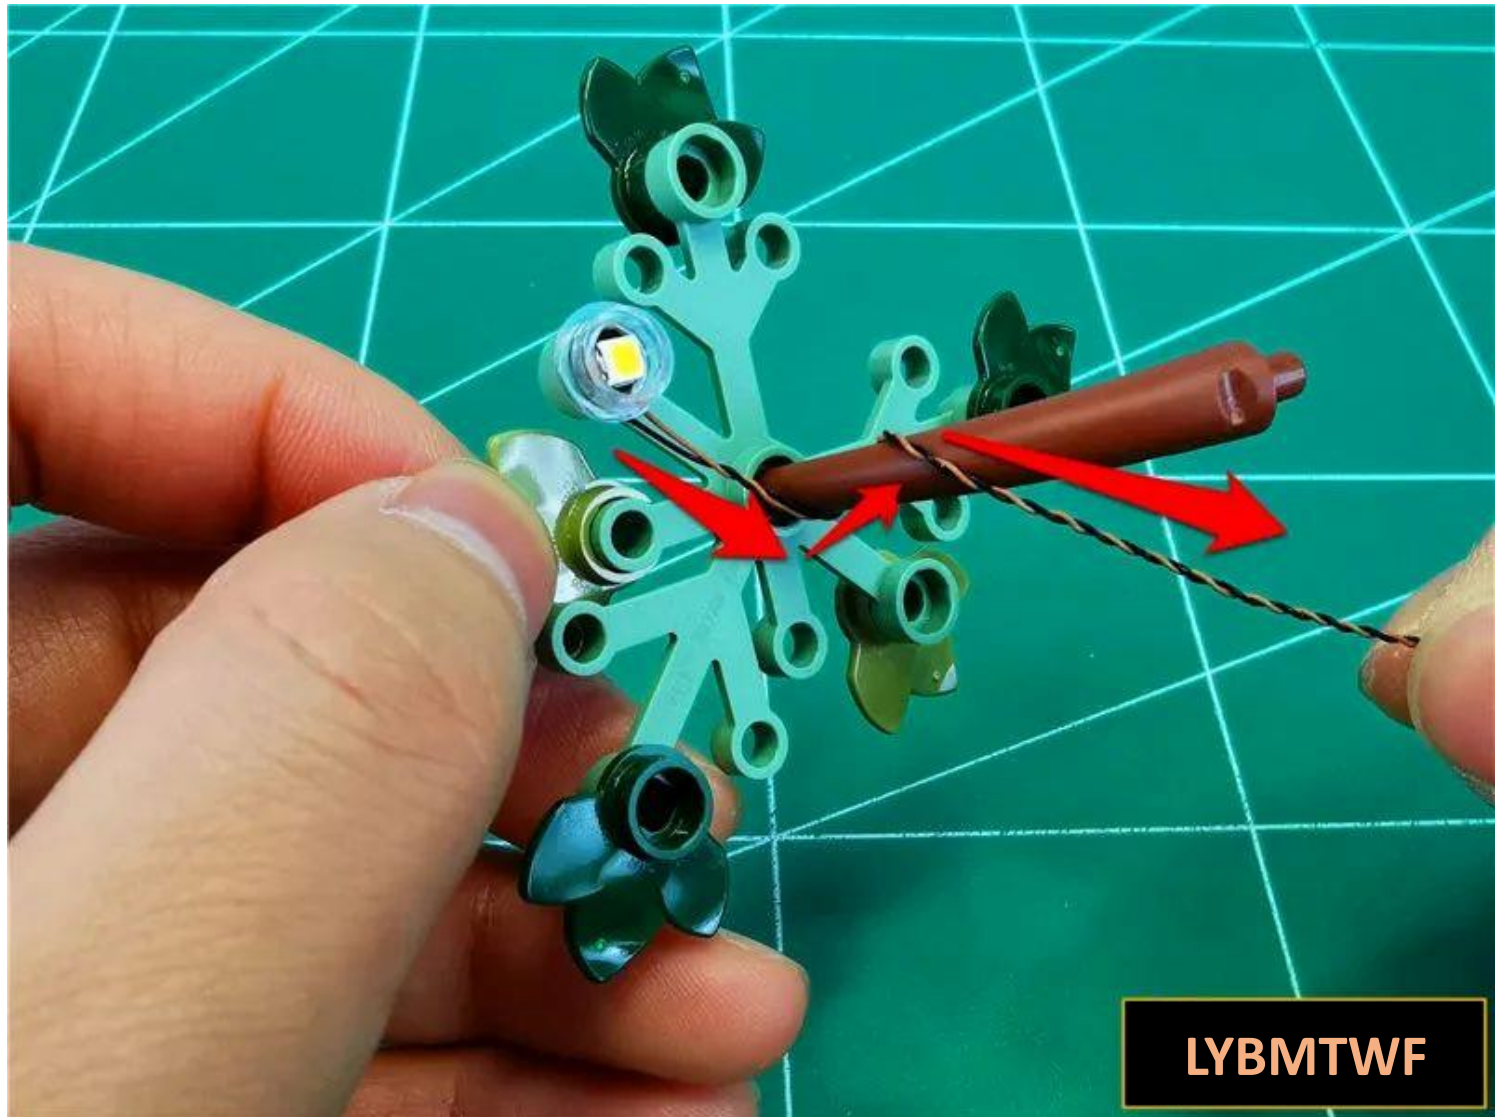

Restore the branches and wrap the wire around the trunk



LYBMTWF

Twist the 4 wires together appropriately



LYBMTWF


Hold the lantern upward



Loop the wire around the tree trunk



Restore the lantern

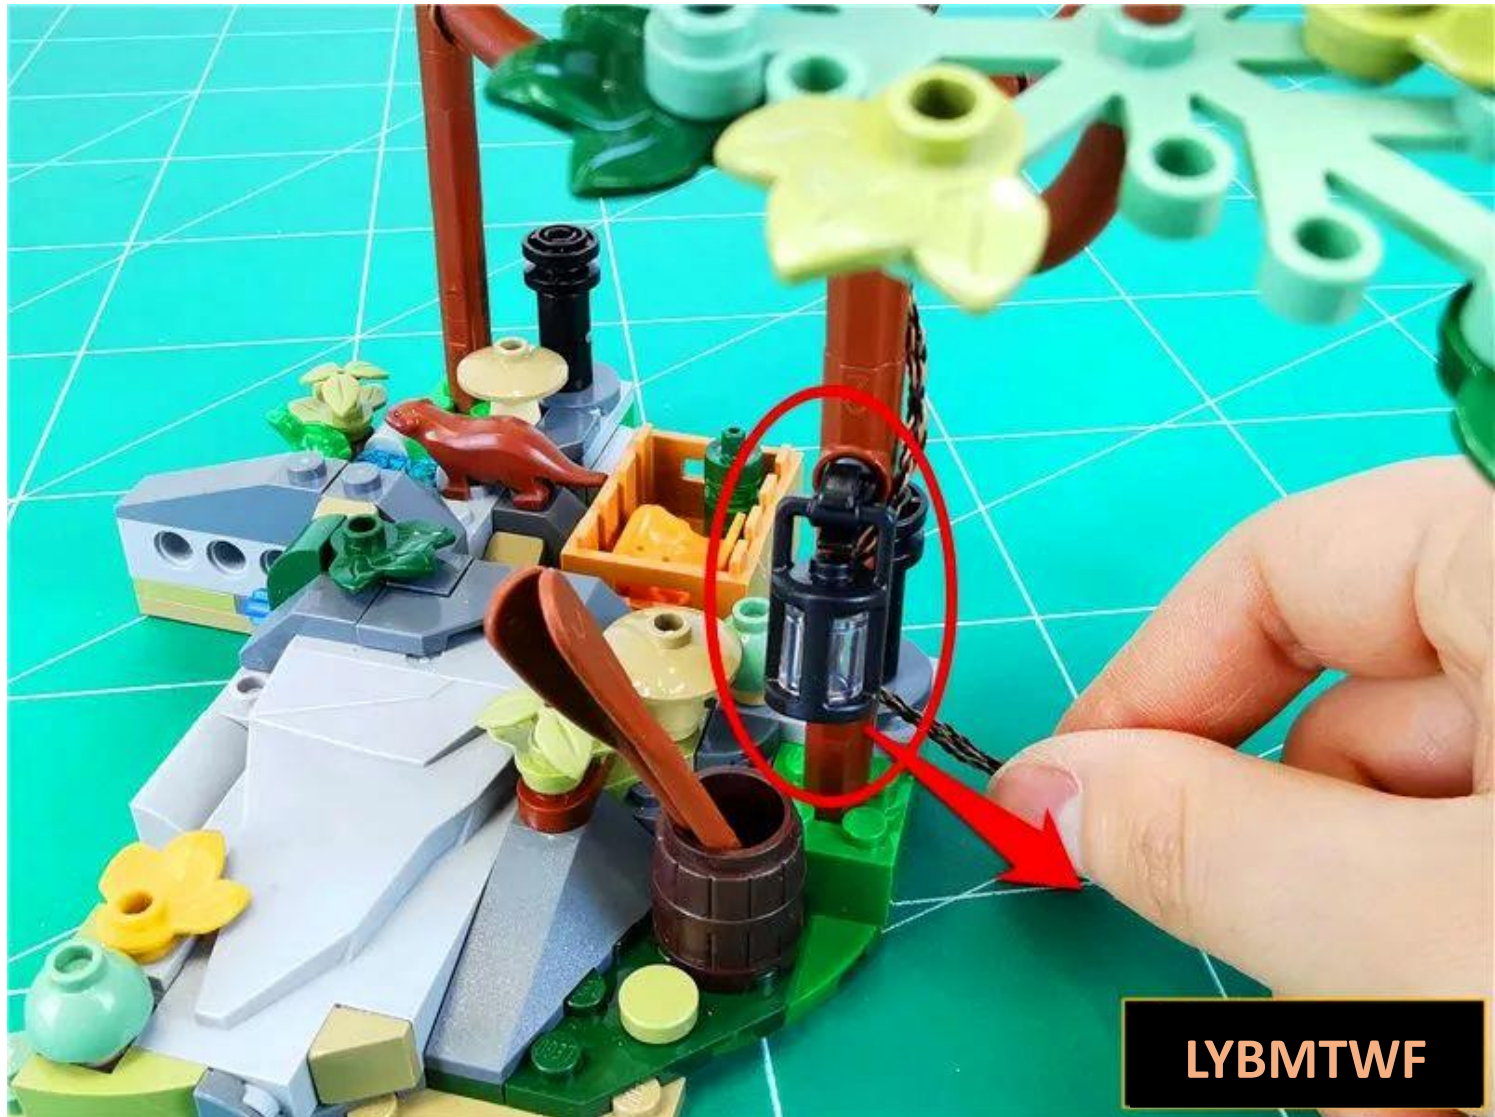

LYBMTWF

Go to the back of the tree and remove the parts indicated by the arrows in sequence










LYBMTWF

Pass the wire through the gaps between the raised particles

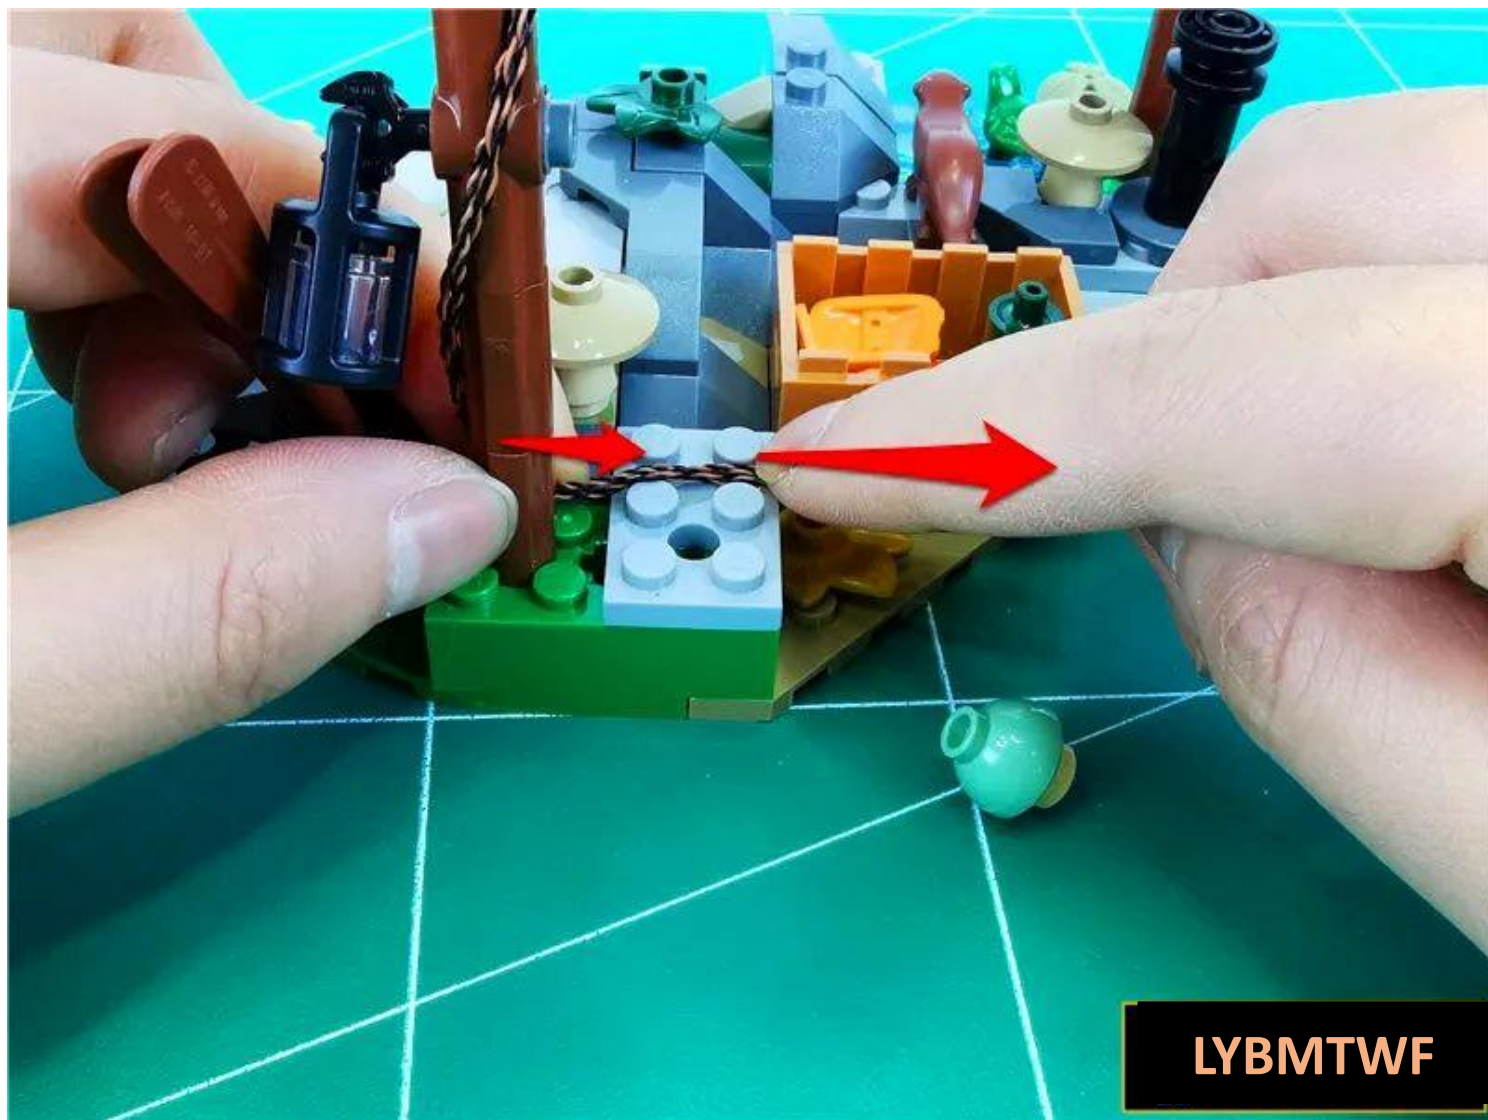

LYBMTWF

Restore parts and fix wires



LYBMTWF

Restore black parts



Go to tree front



Take 3 30cm warm light ordinary lamp particles and 3 hollow transparent yellow circles



Remove the branch indicated by the arrow






LYBMTWF

Take any 30cm warm ordinary light bulb, place the light-emitting side of the bulb upward, and place it in the position shown in the picture



Install the hollow transparent yellow circle, fix the light particles, and wrap the wires around the branches

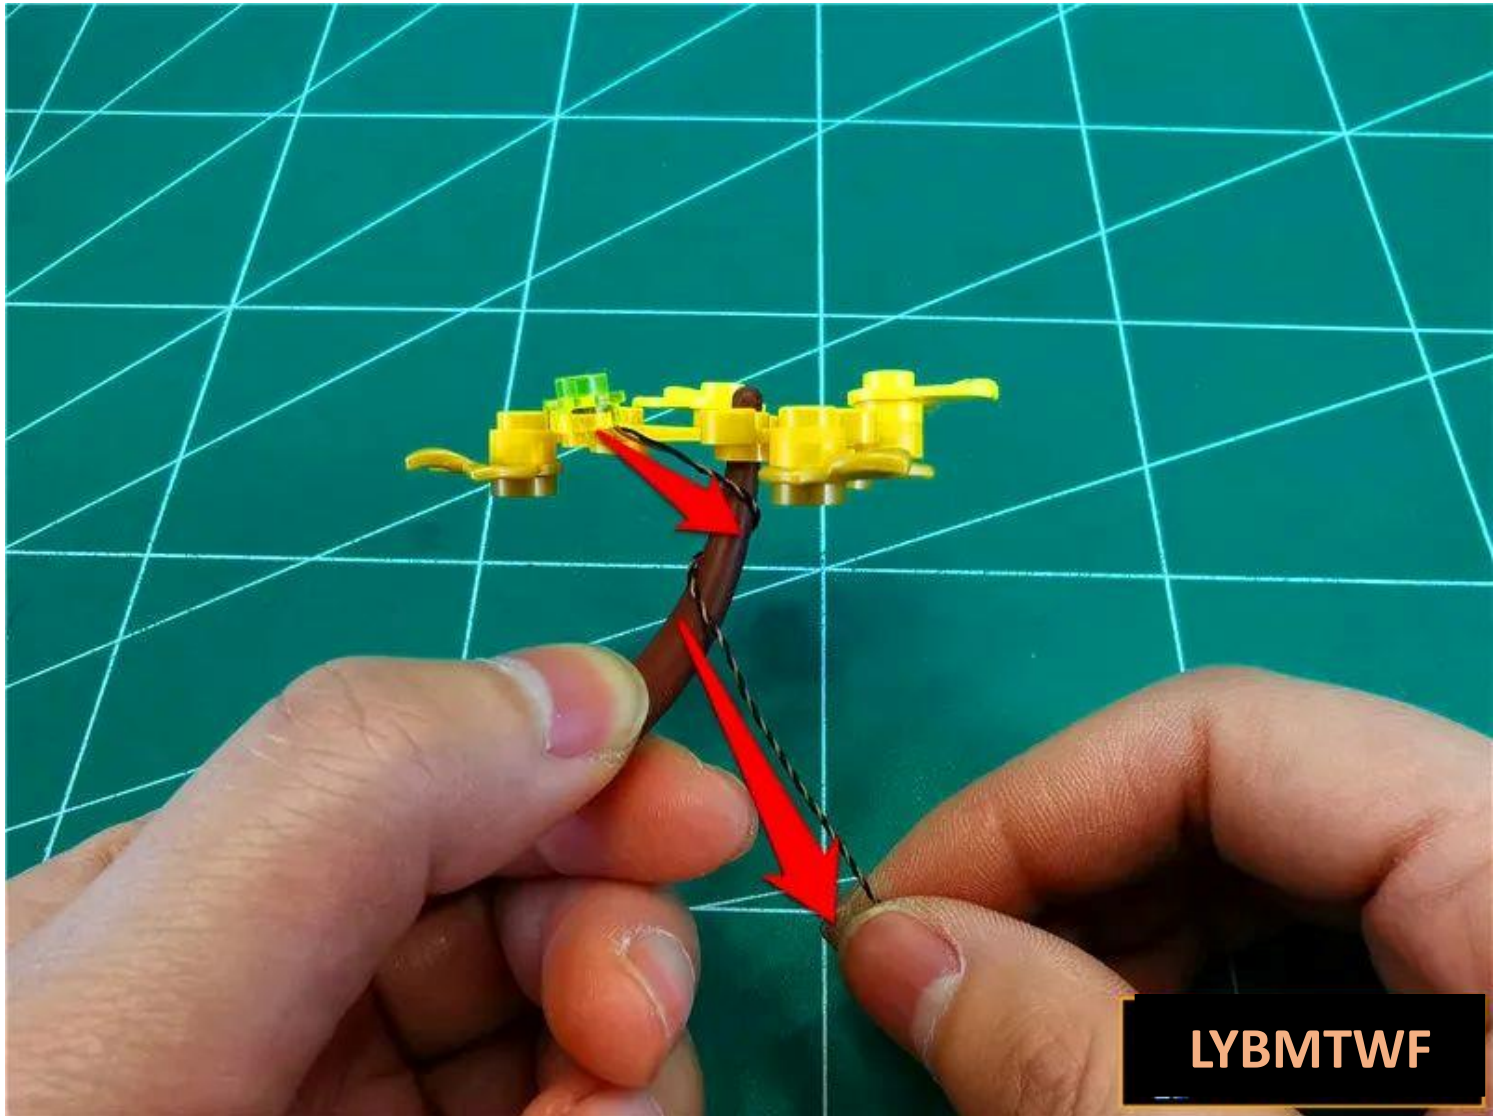

Restore branches



LYBMTWF

Pull the wire down along the trunk



Continue to remove the branches indicated by the arrows






LYBMTWF

Take a 30cm warm light ordinary lamp particle and install the lamp particle in the same way.



Install the transparent yellow circle, fix the light particles, and wrap the wires appropriately around the branches

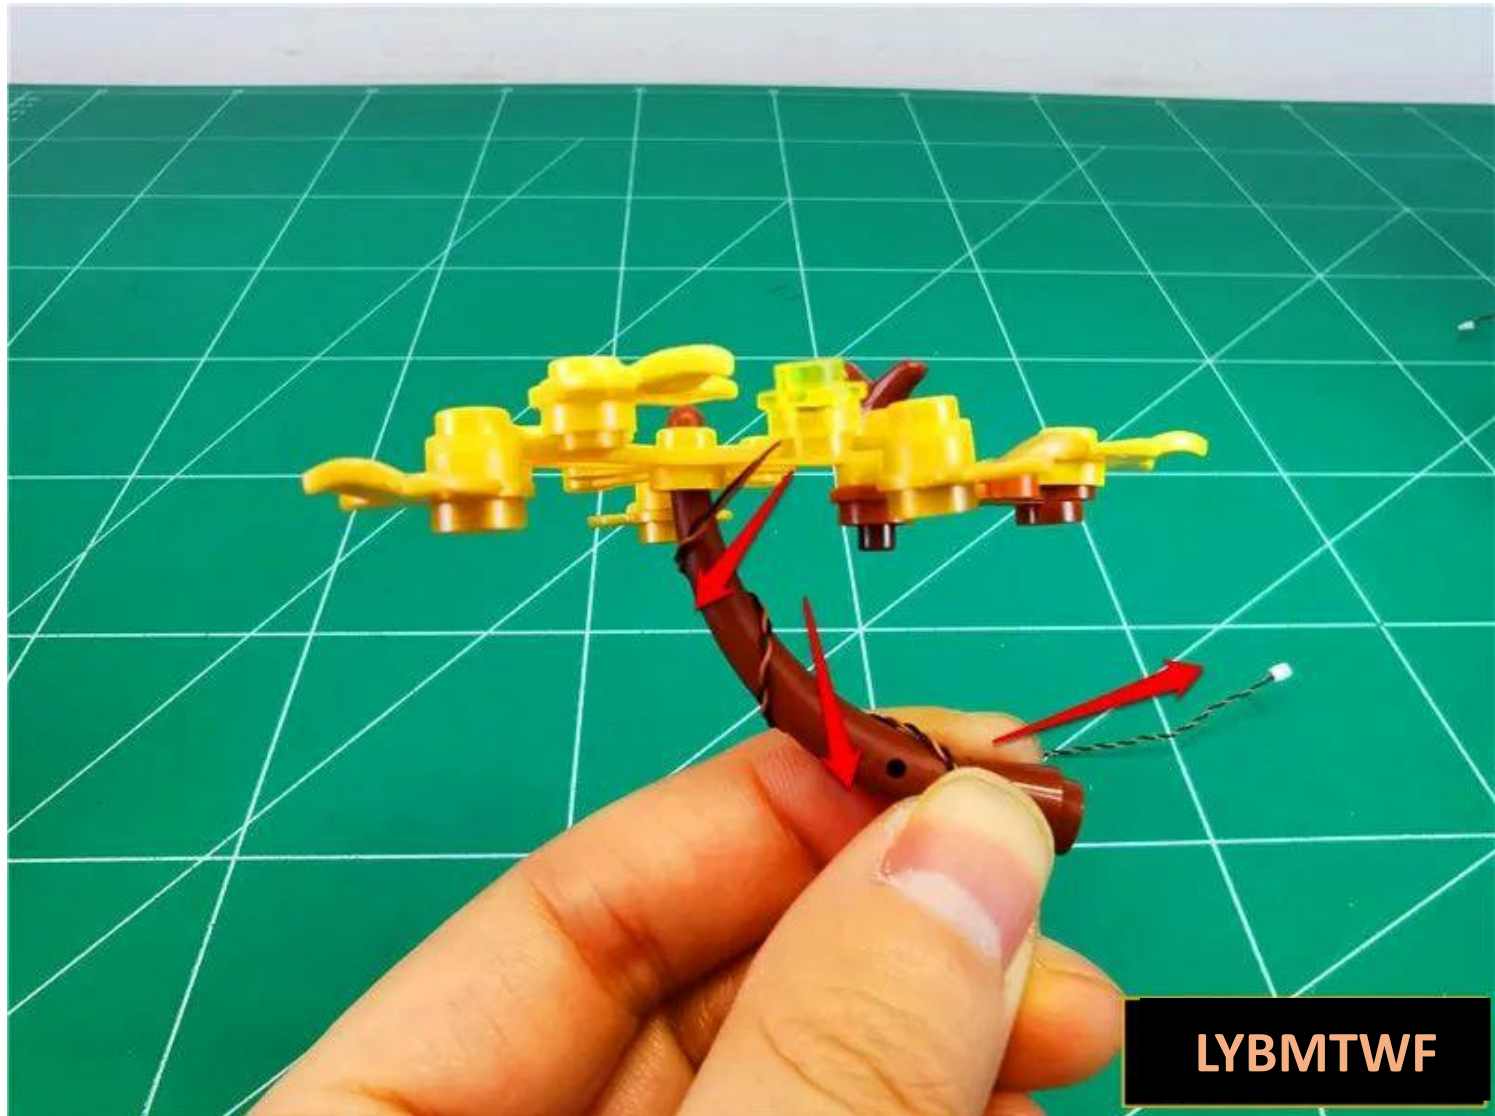

LYBMTWF

Restore branches



LYBMTWF

Pull the wire down along the trunk



Continue to remove the branches as shown in the picture





LYBMTWF

Take a 30cm warm ordinary light bulb and install it to the position shown in the picture in the same way.



Thread the wire around the branches



Restore the branch and pull the wire down along the trunk



Twist the 3 wires together appropriately



Loop the wire around the tree trunk




Go to the **back** and remove the parts indicated by the arrows





LYBMTWF

Place the wire against the trunk and along the edge of the part

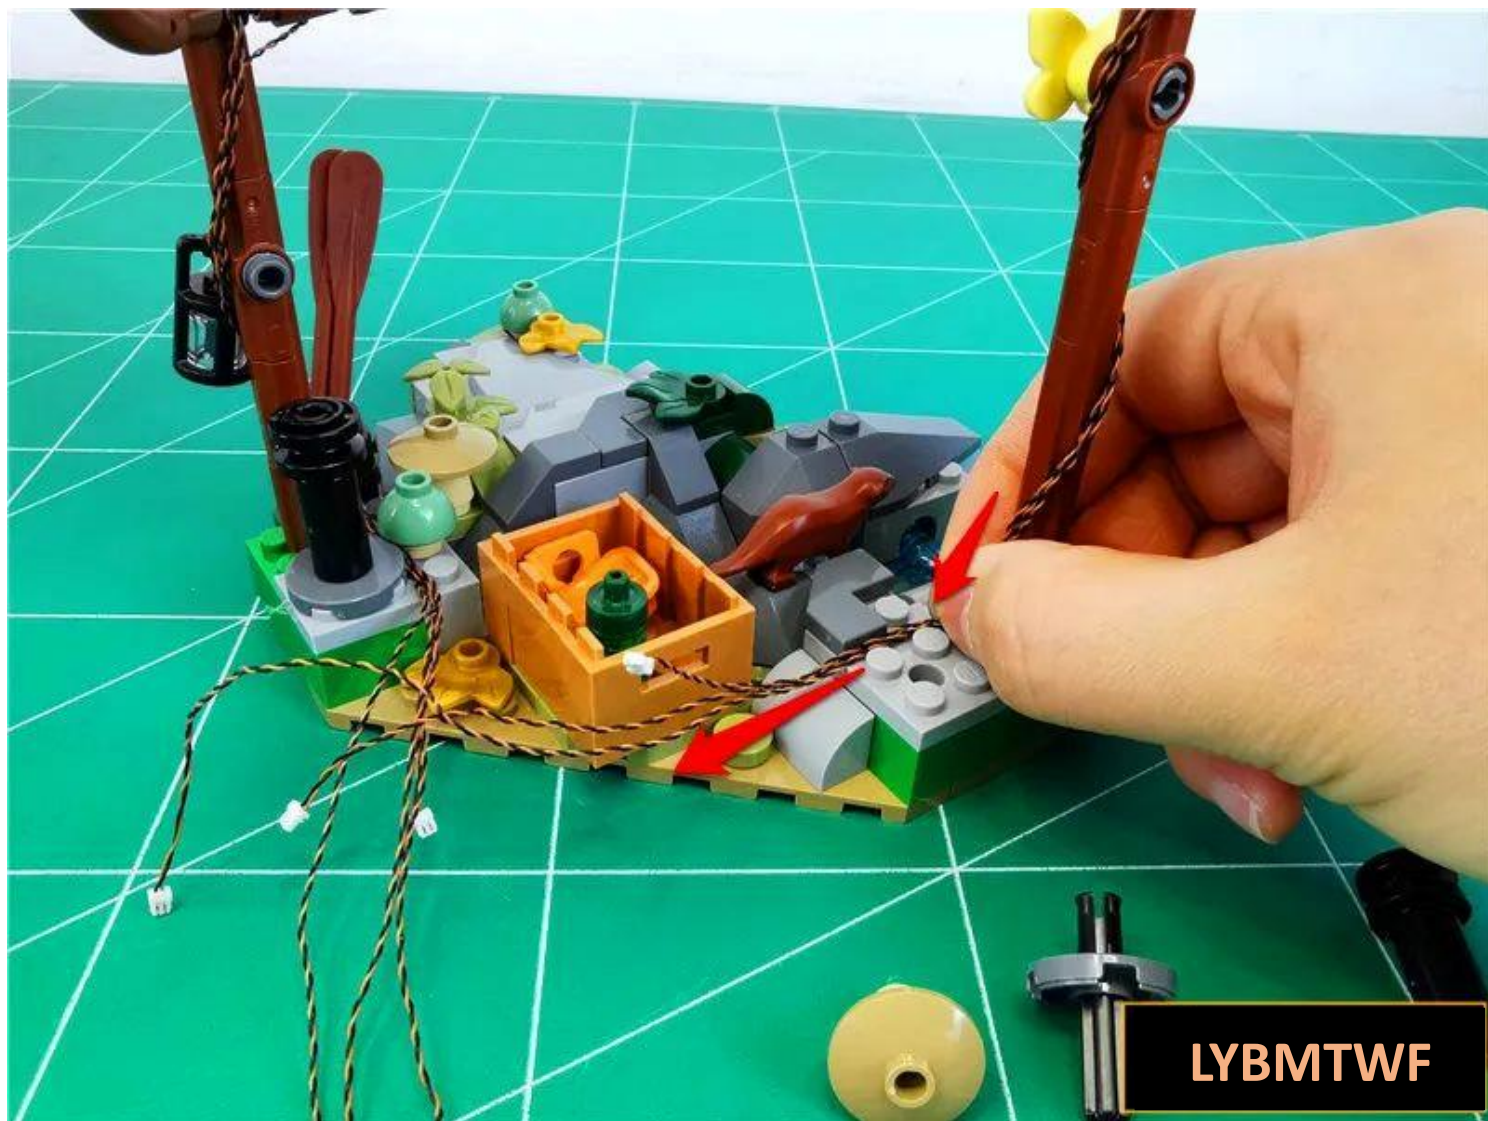


Restore the removed parts and fix the wires



Restore black parts




Take a 30CM cable and an 8-seater cable and connect them together

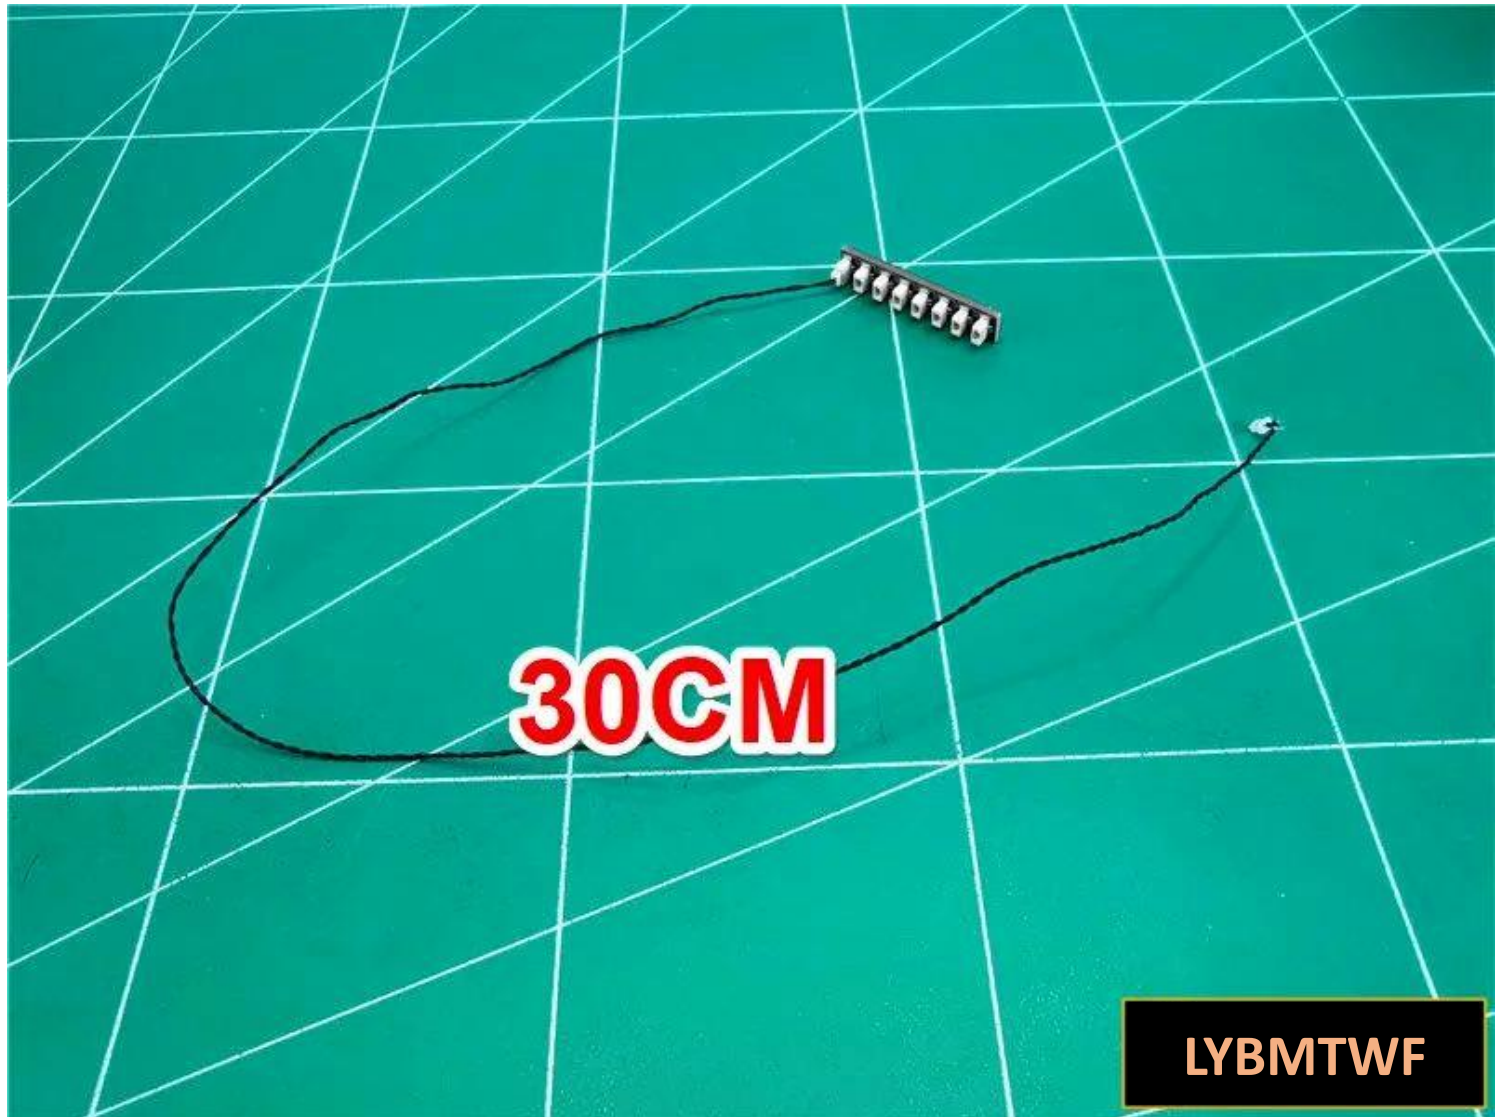

Plug the shorter wire into the 8-seat **side socket**



Insert all the remaining 6 wires into the 8-socket

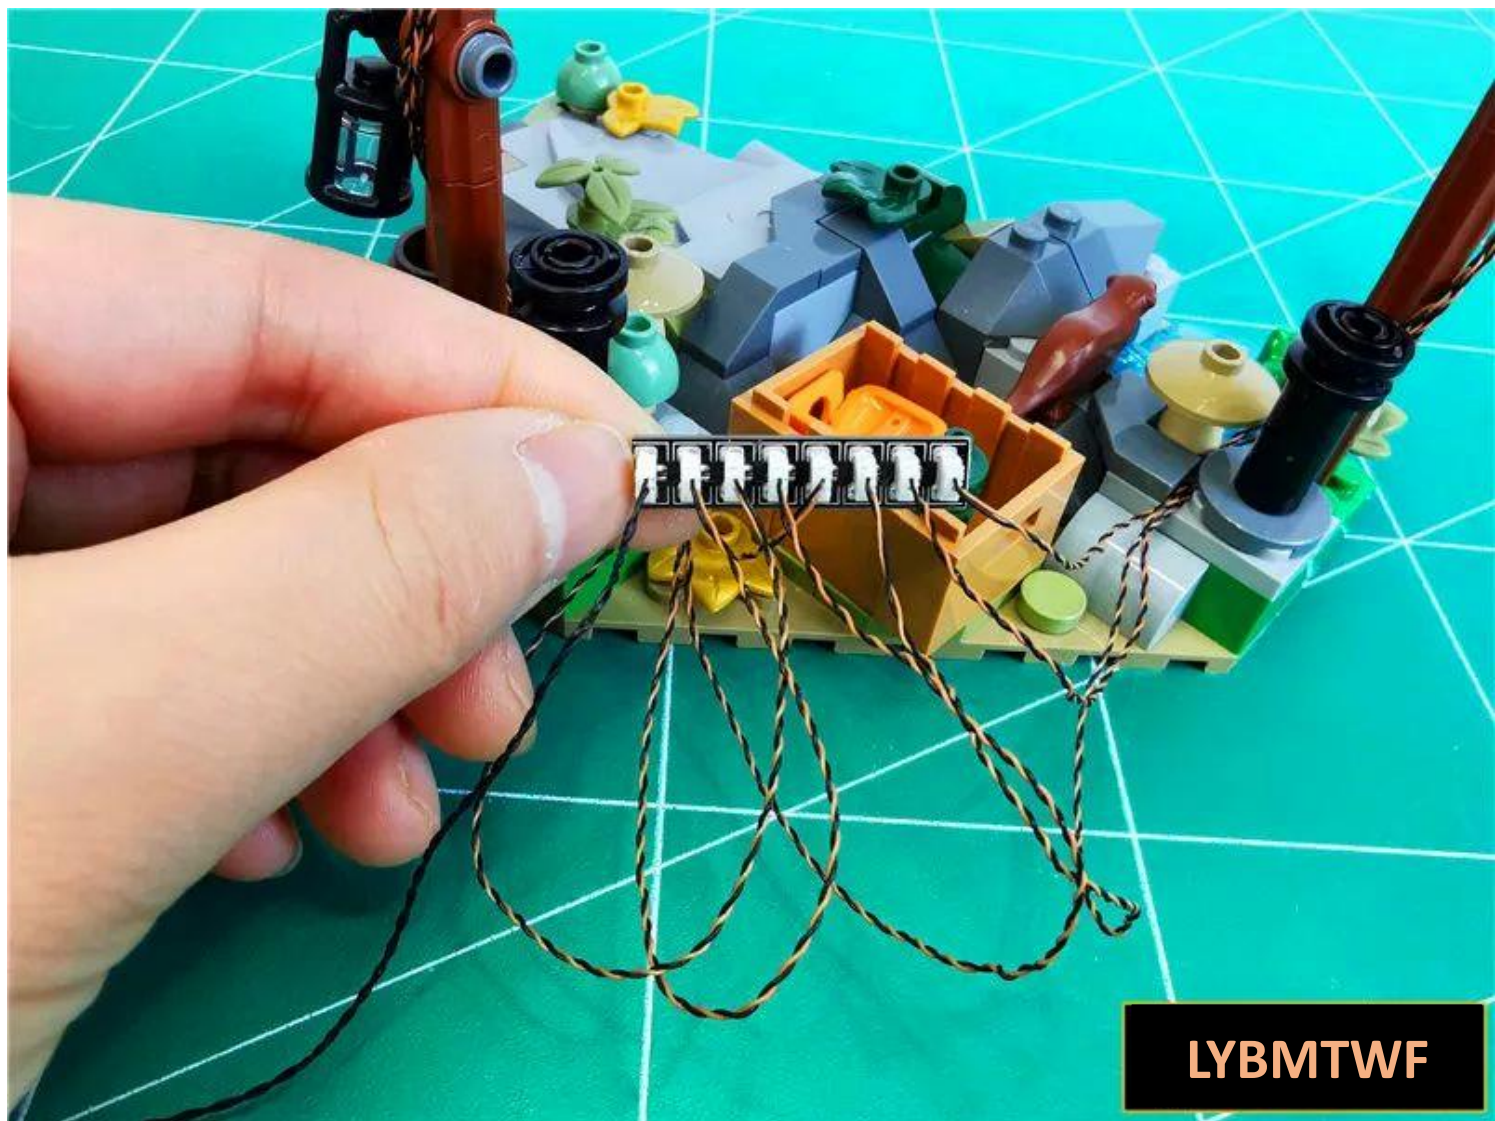

Insert the cable and connect the 6 sockets of the power supply



Turn on the power and test that the light lights up normally



After the test is completed, turn off the power, unplug the connection cable, and leave the 8 sockets on the power supply.



Tear off the 8 seat backing tape



LYBMTWF


Glue the 8-pin to the back of the box, **with the shorter wire on the right side**



Twist the excess wires together appropriately




Fit the excess wires into the gap next to the socket

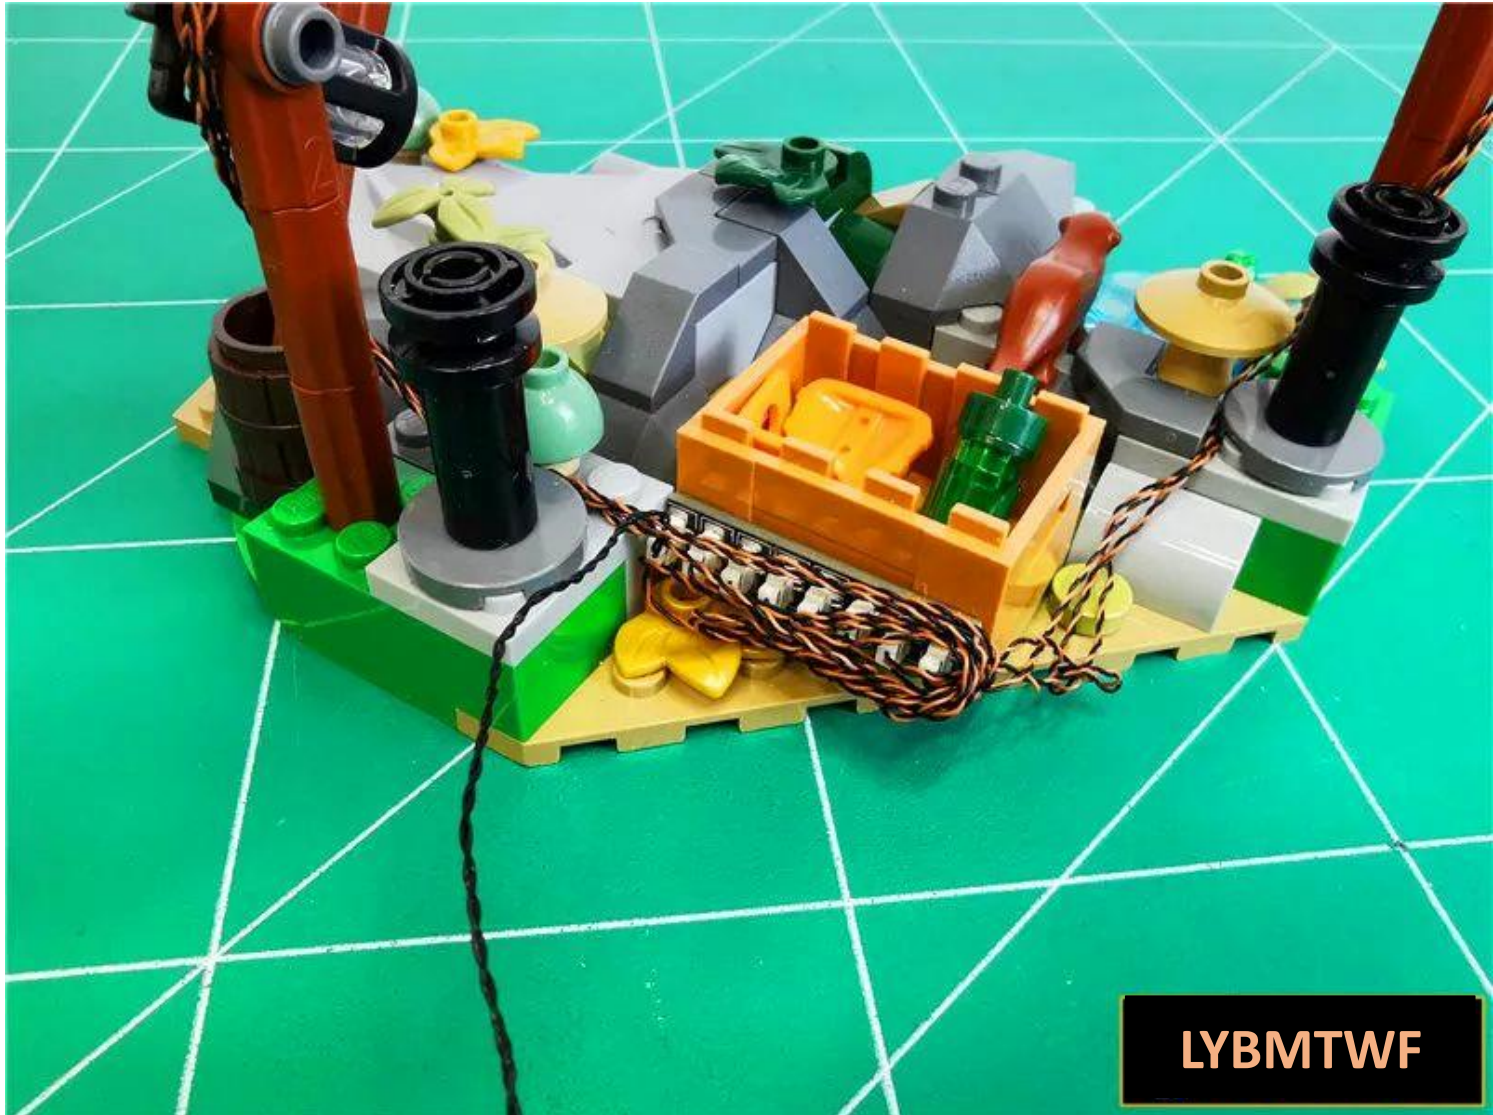


Lift the base slightly and pull the cable from below to the front



Go to the front and remove the parts indicated by the arrows

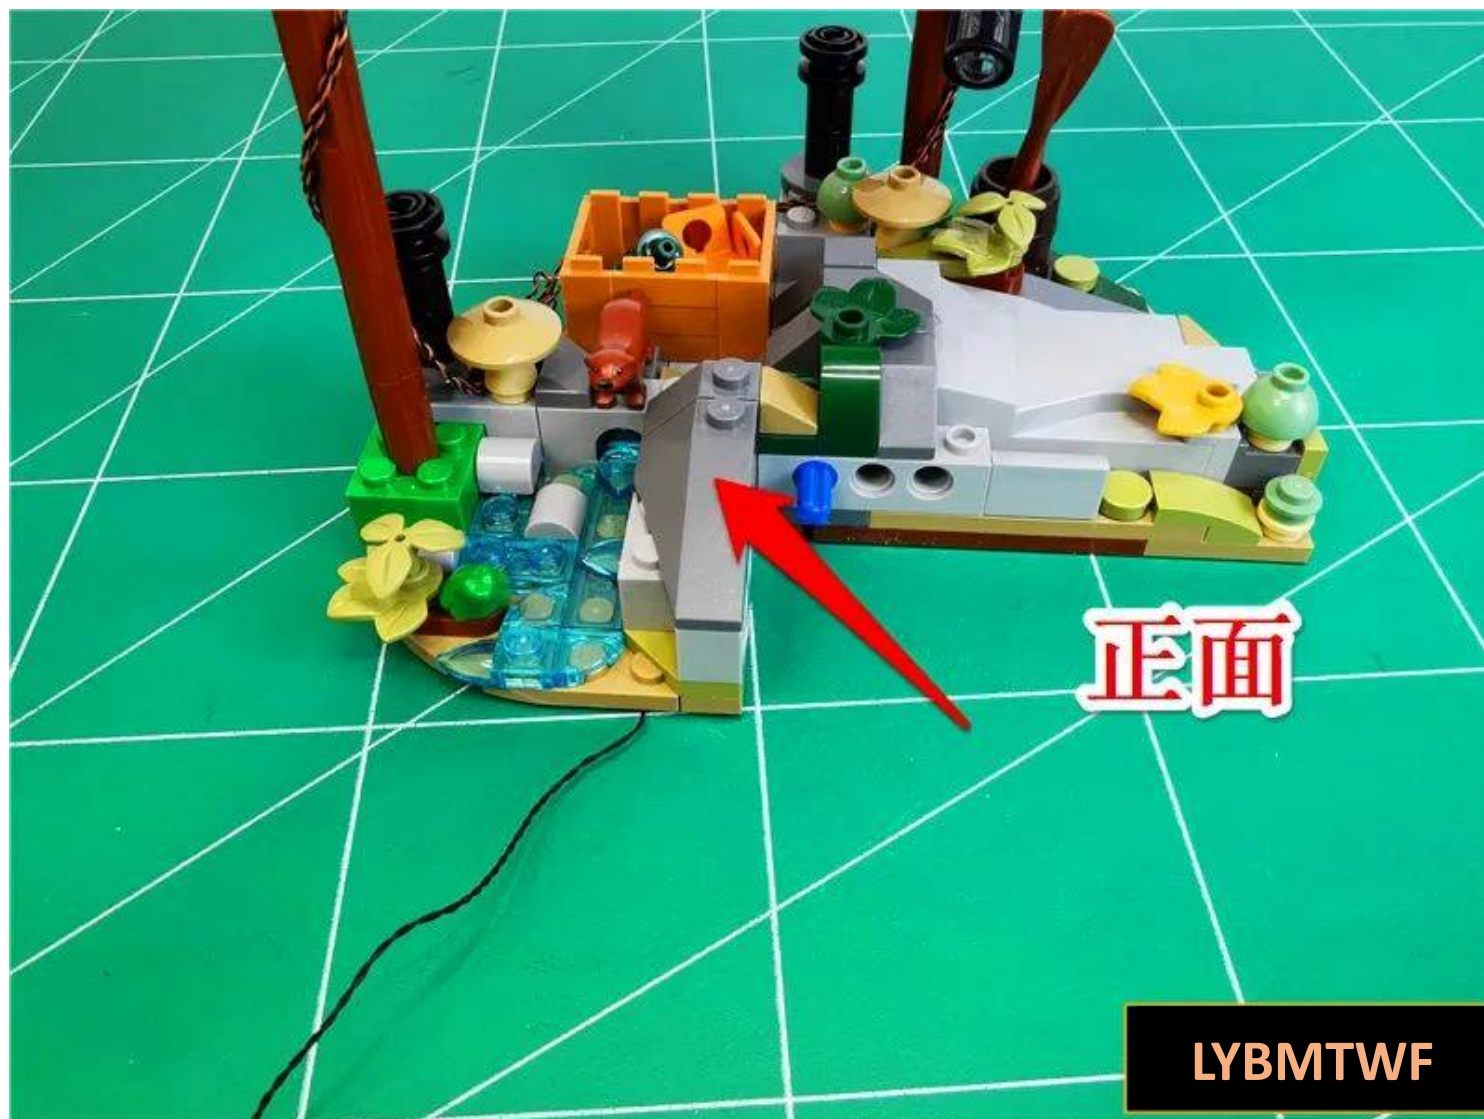

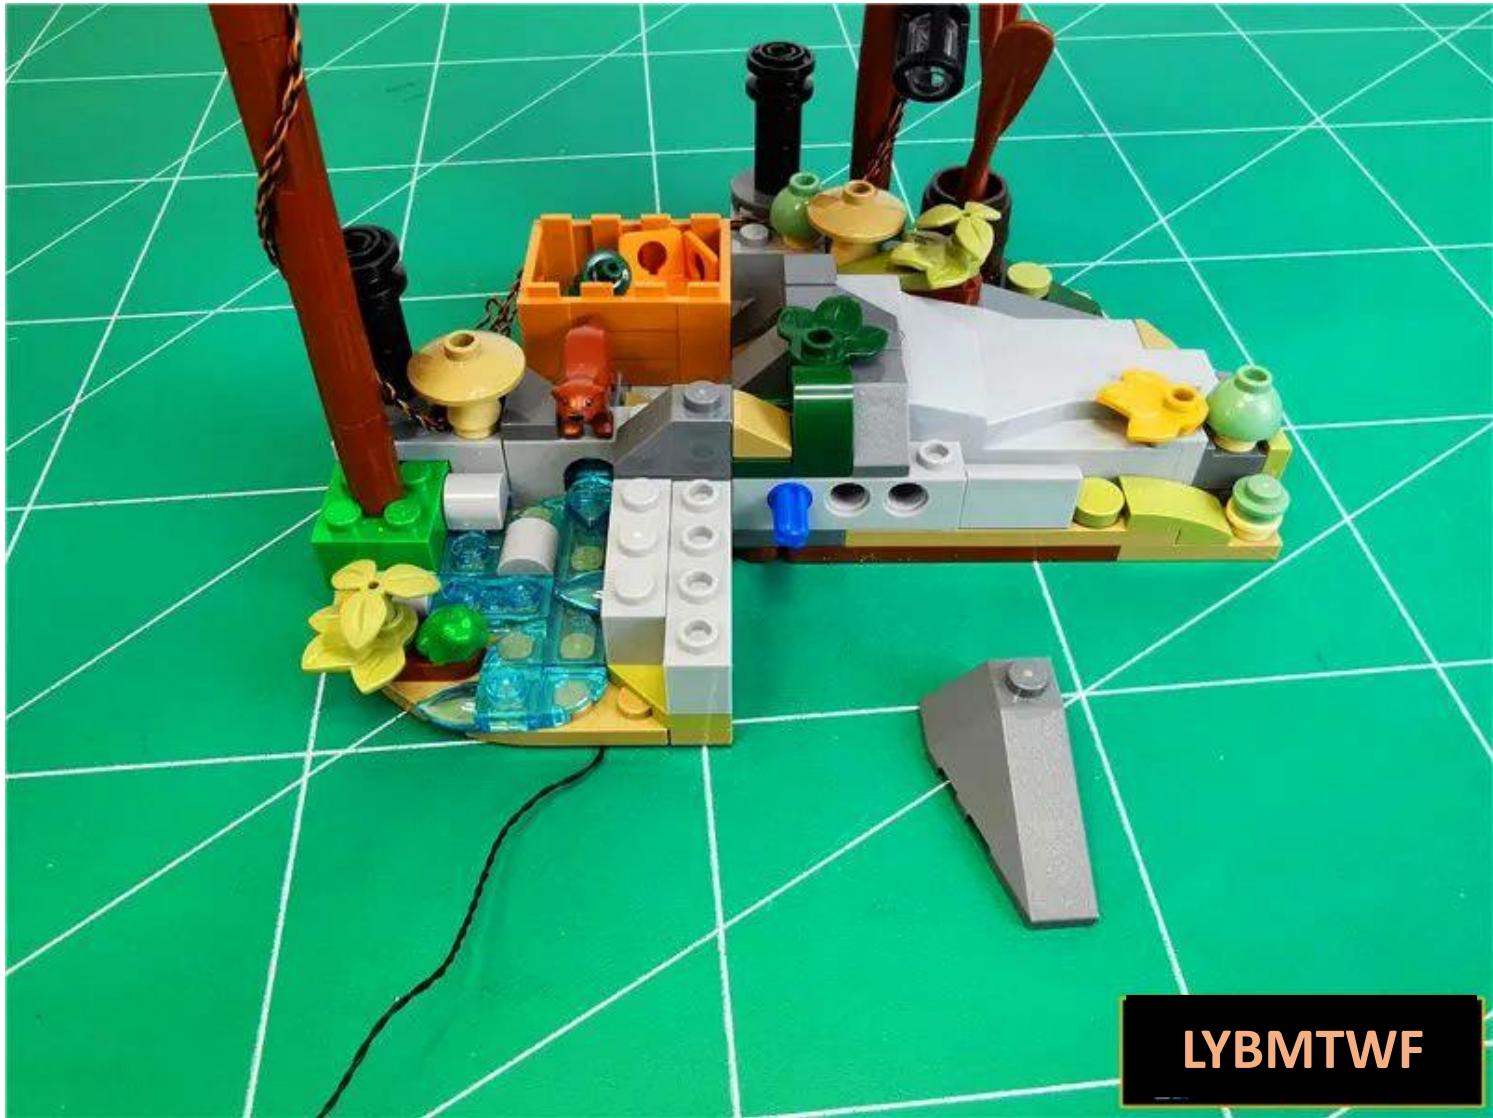


LYBMTWF

Pass the connecting line through the gaps between the raised particles



LYBMTWF

Restore the parts, fix the connecting wires, and temporarily place the tree next to it

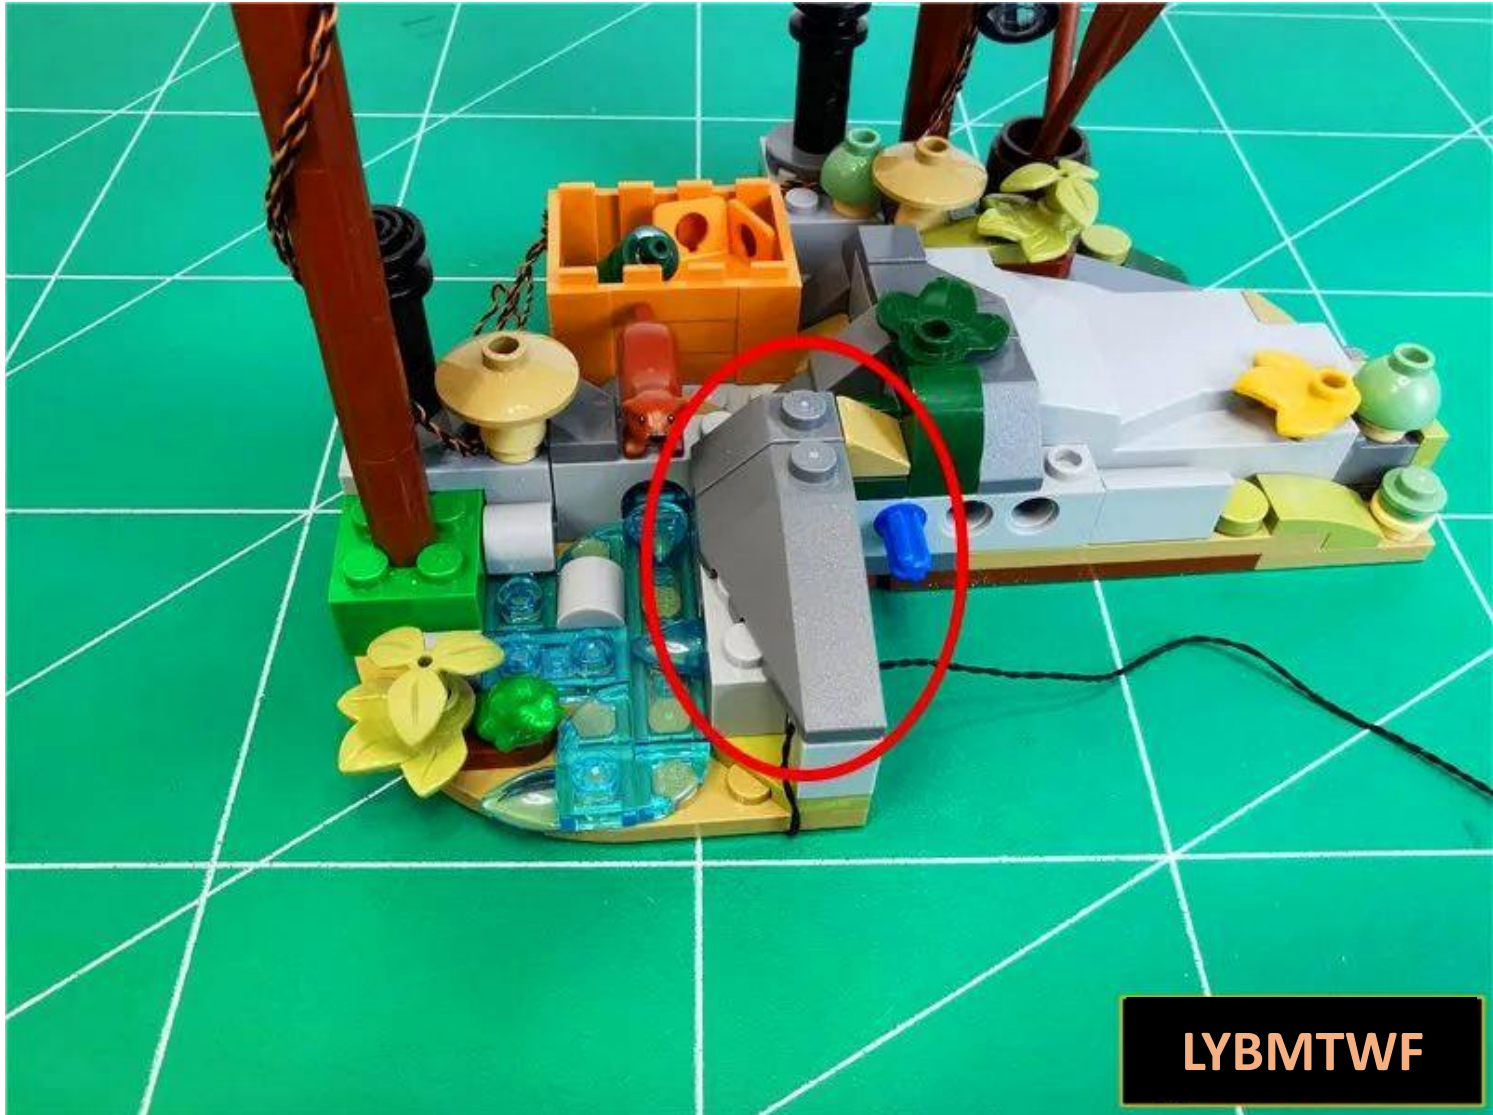

Take out the middle house, face yourself, and remove the roof on the left as shown by the arrow.





LYBMTWF


Get 1 warm light strip




Peel off the adhesive tape from the light strip




Attach the light strip to the eaves, **paying attention to the direction**

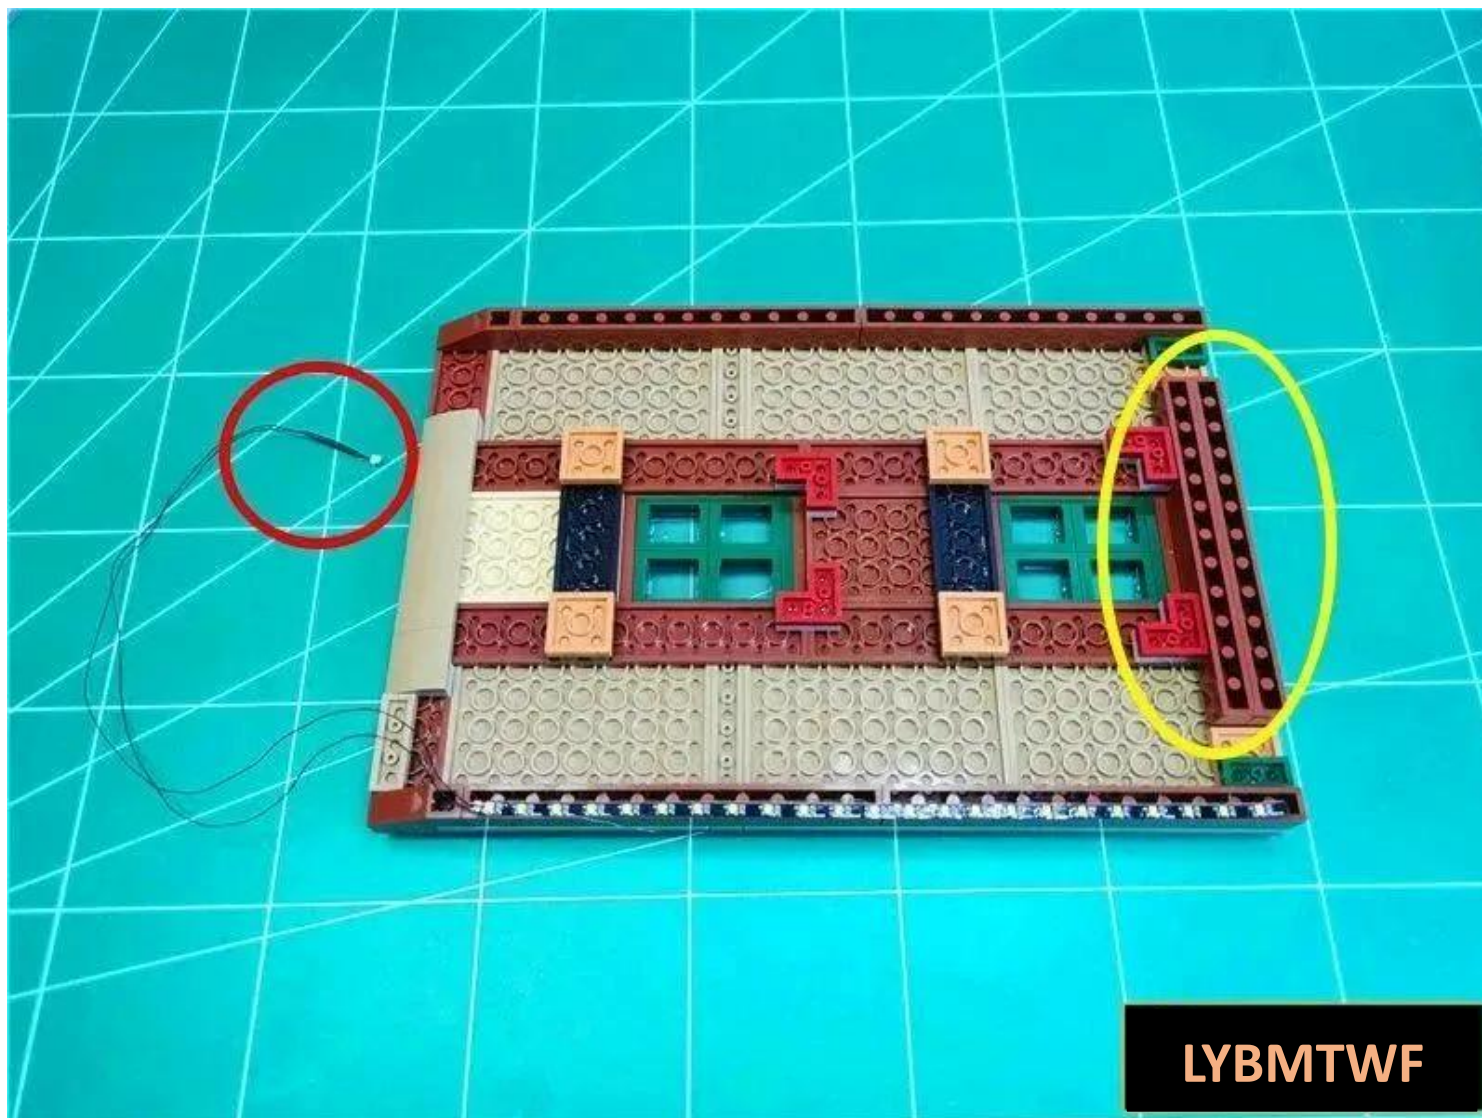

The specific location is as follows

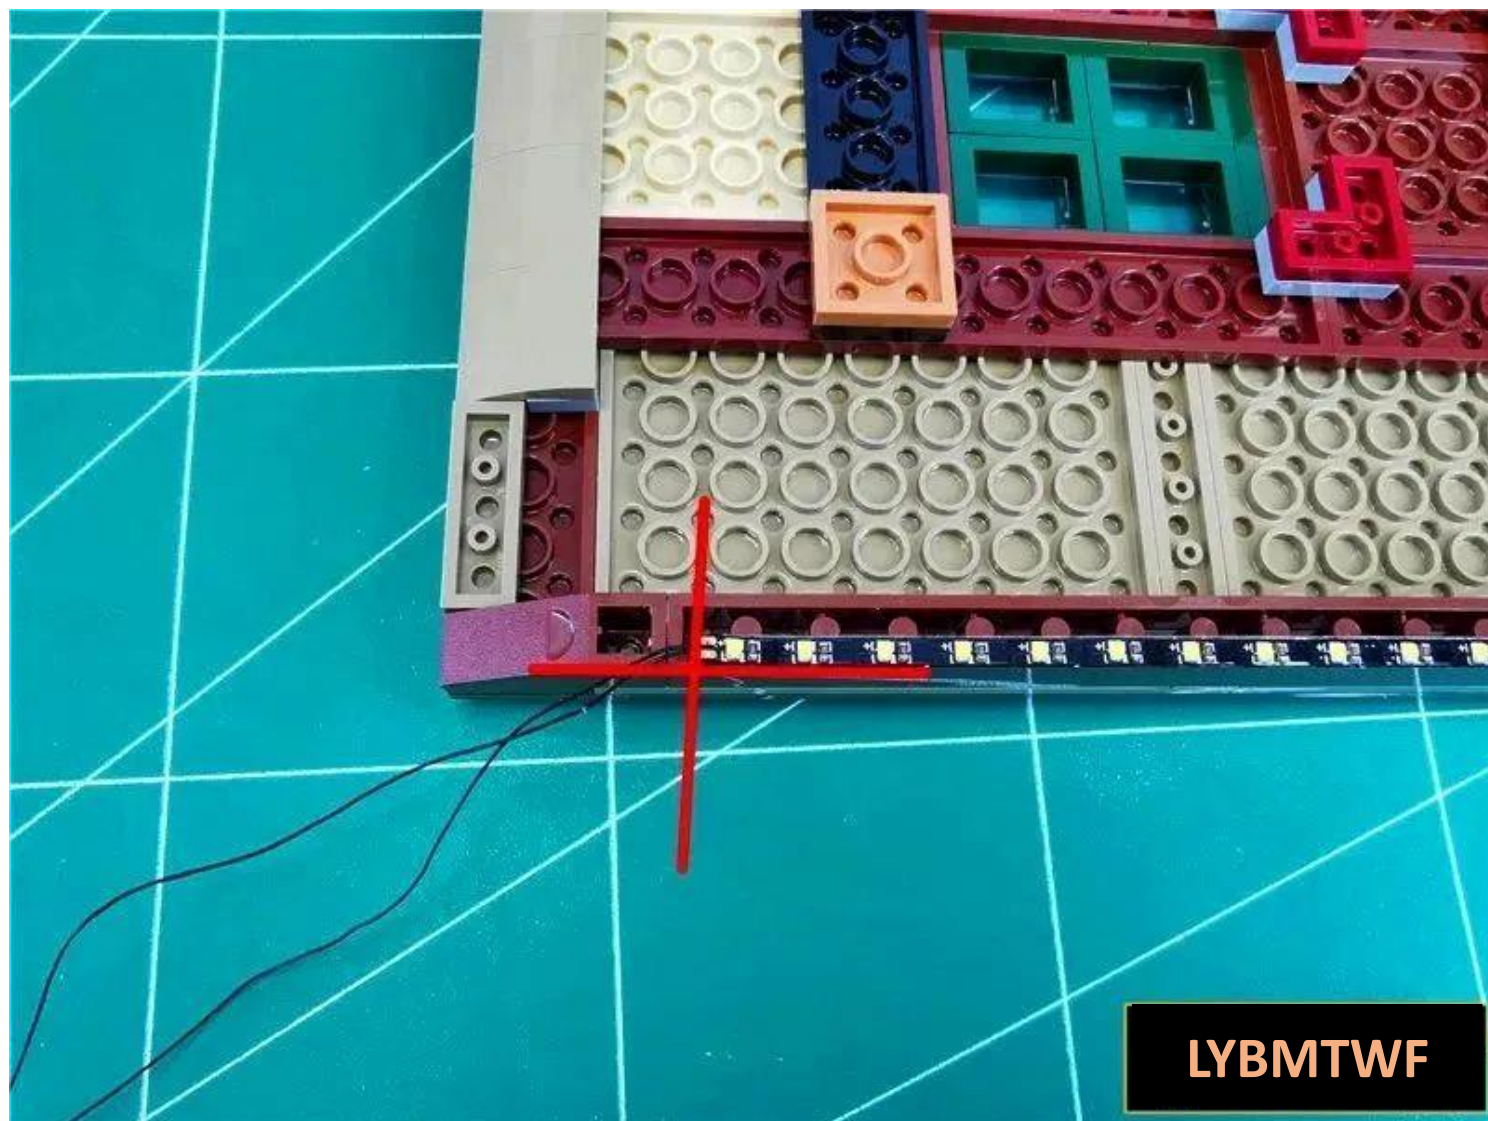

Remove the parts indicated by arrows

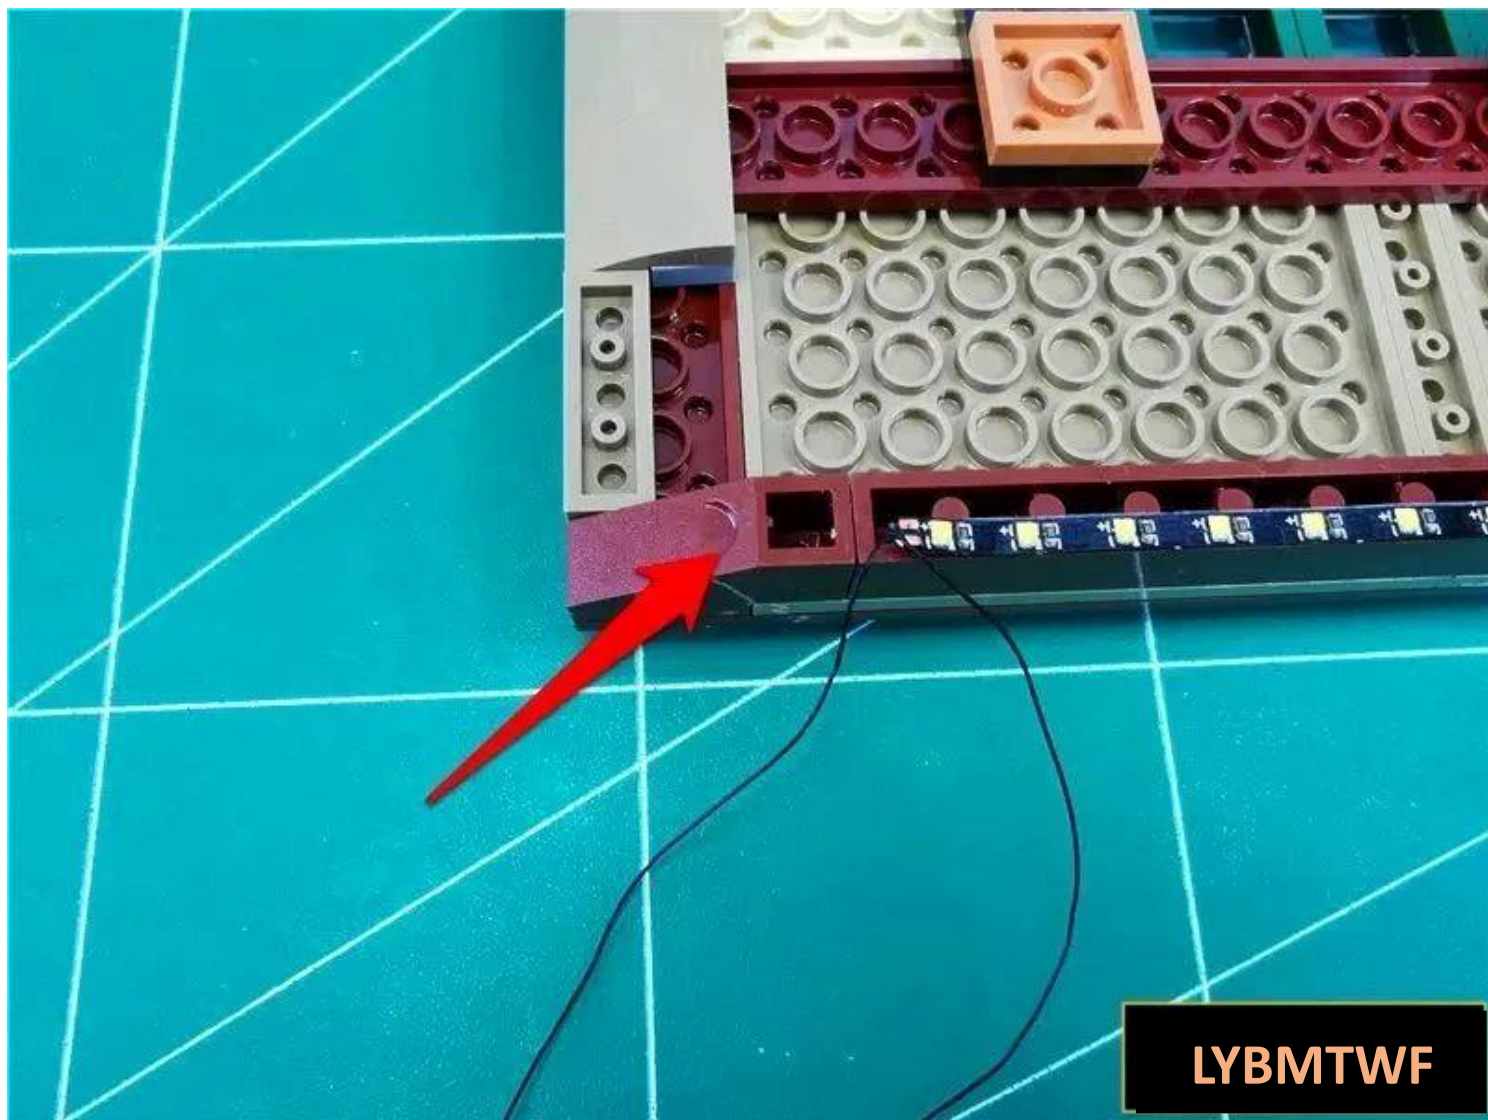


LYBMTWF




LYBMTWF

Fit the light strip wires to the edge of the part

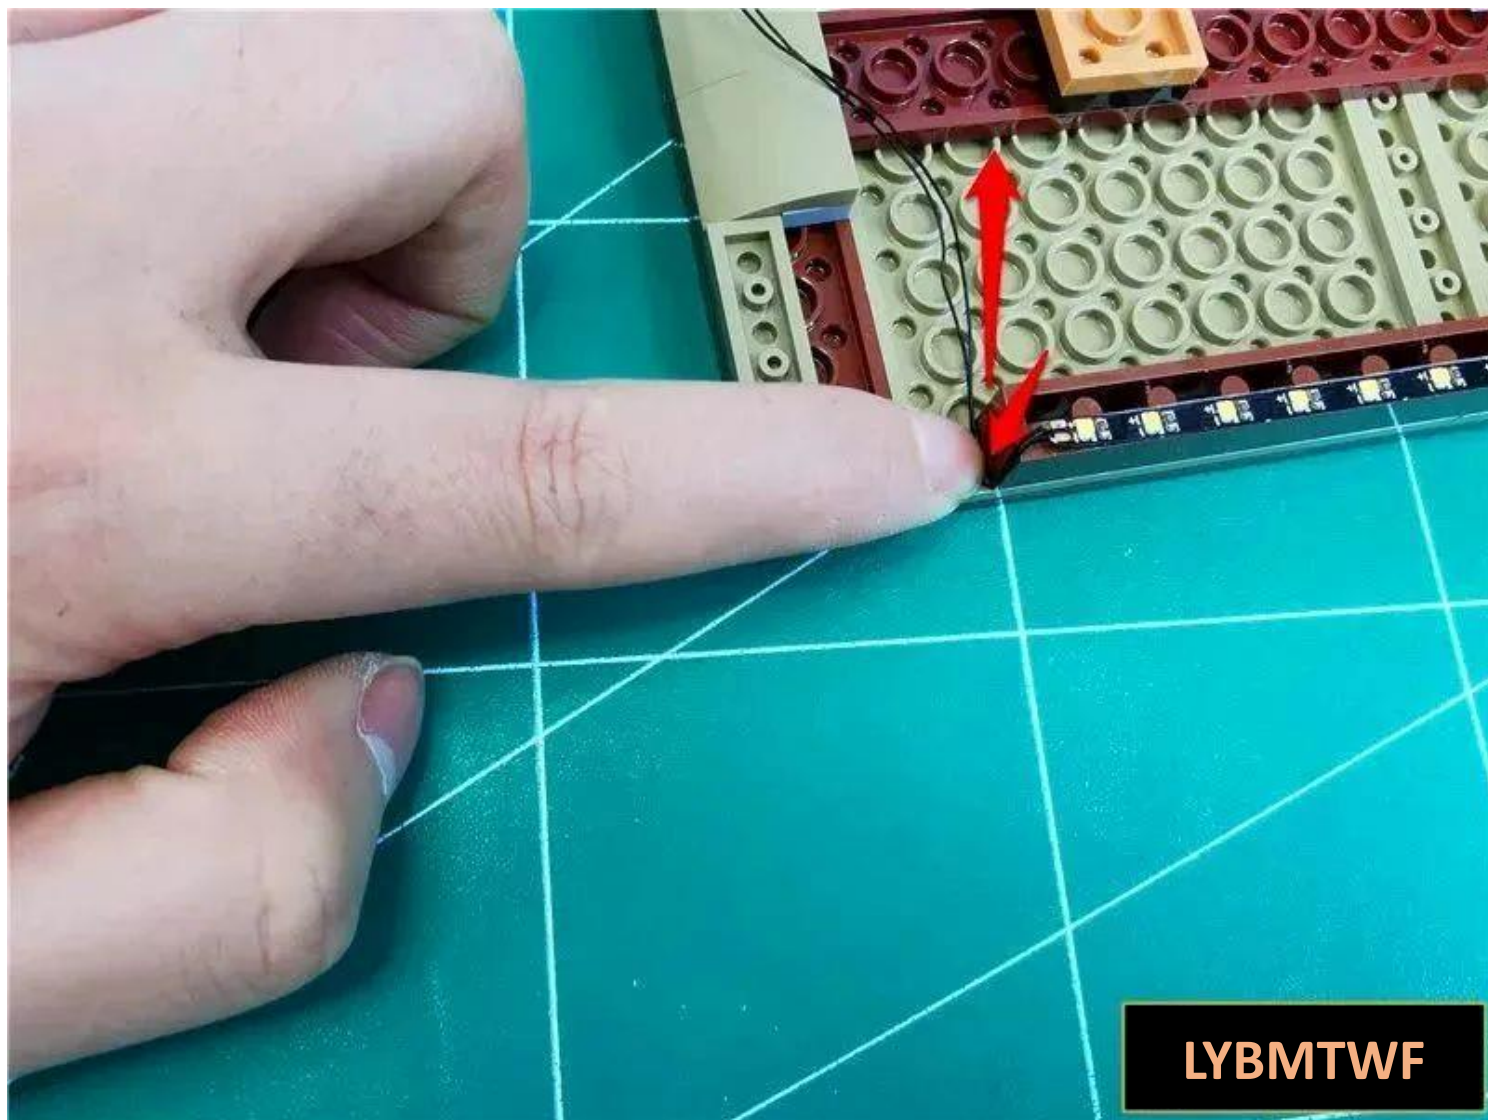

Restore the parts, fix the wires, and temporarily place the left roof next to it

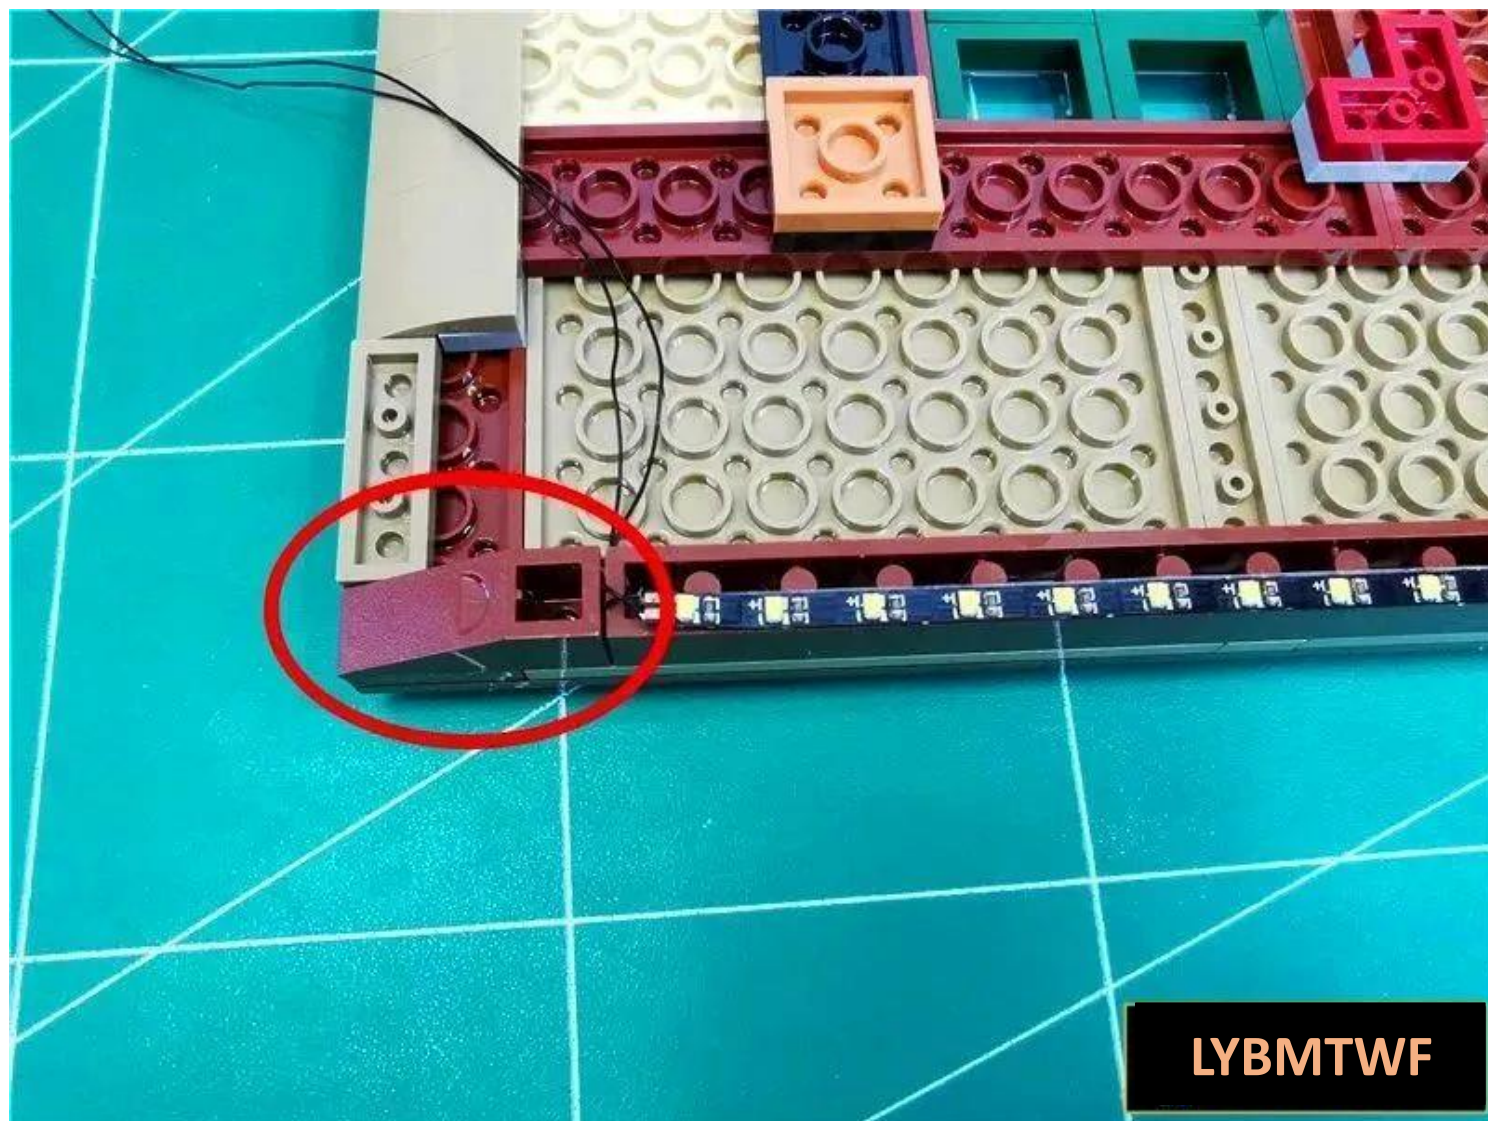

LYBMTWF

Separate the building from top to bottom



LYBMTWF

Take 1 30CM warm light headlight grain and 1 hollow transparent round




LYBMTWF

Pass




the lamp plug through the hollow **round hole**.

Bend the lamp 90 degrees, with the luminous side facing outwards

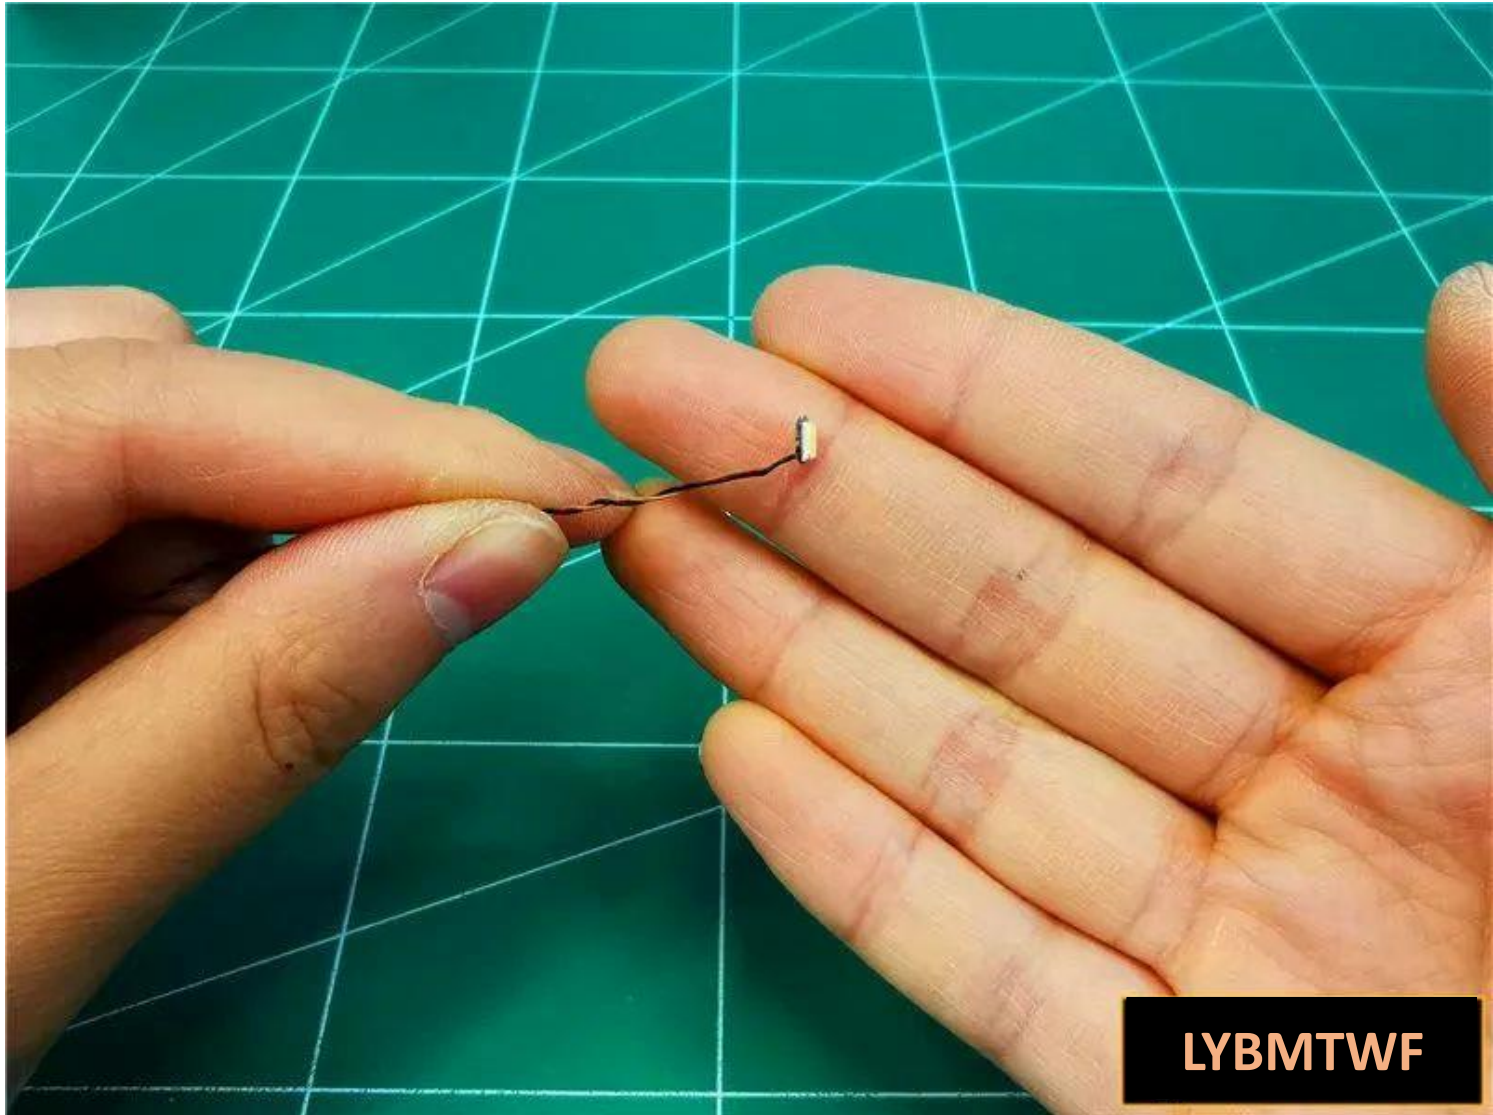

Tighten the wires so that the lamp particles are exactly placed in the center of the transparent circle

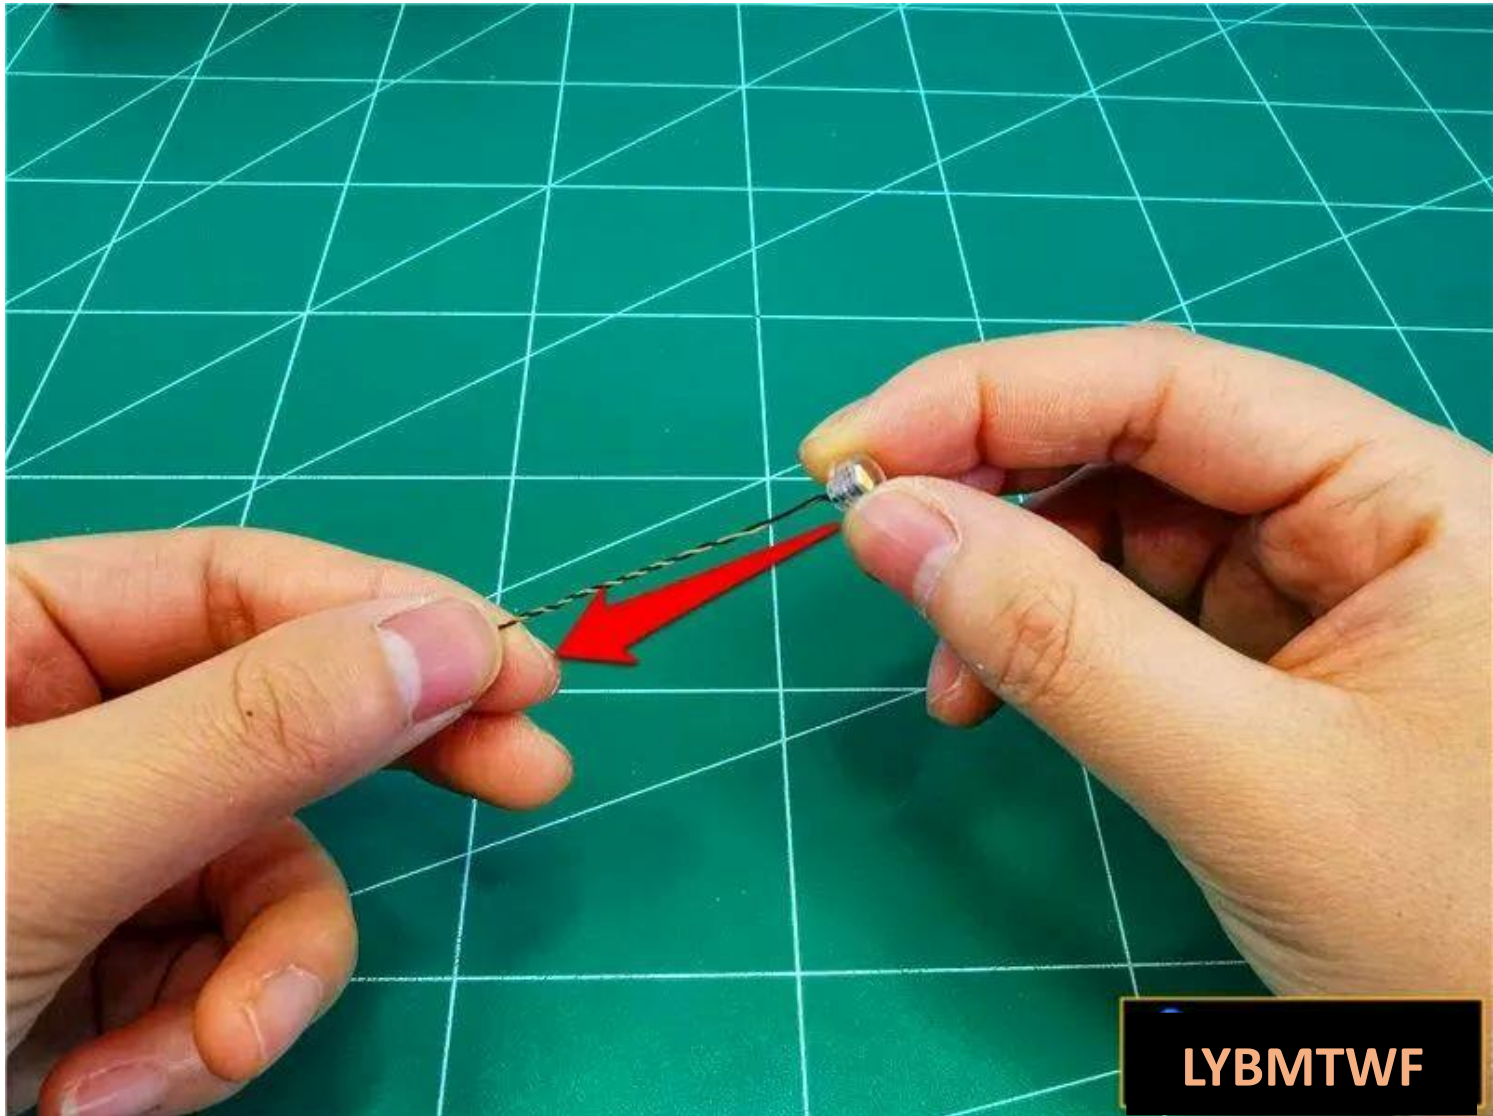


LYBMTWF

Snap wires to edge of part



Install the parts on the second floor indoor beams, with the wires facing the chimney

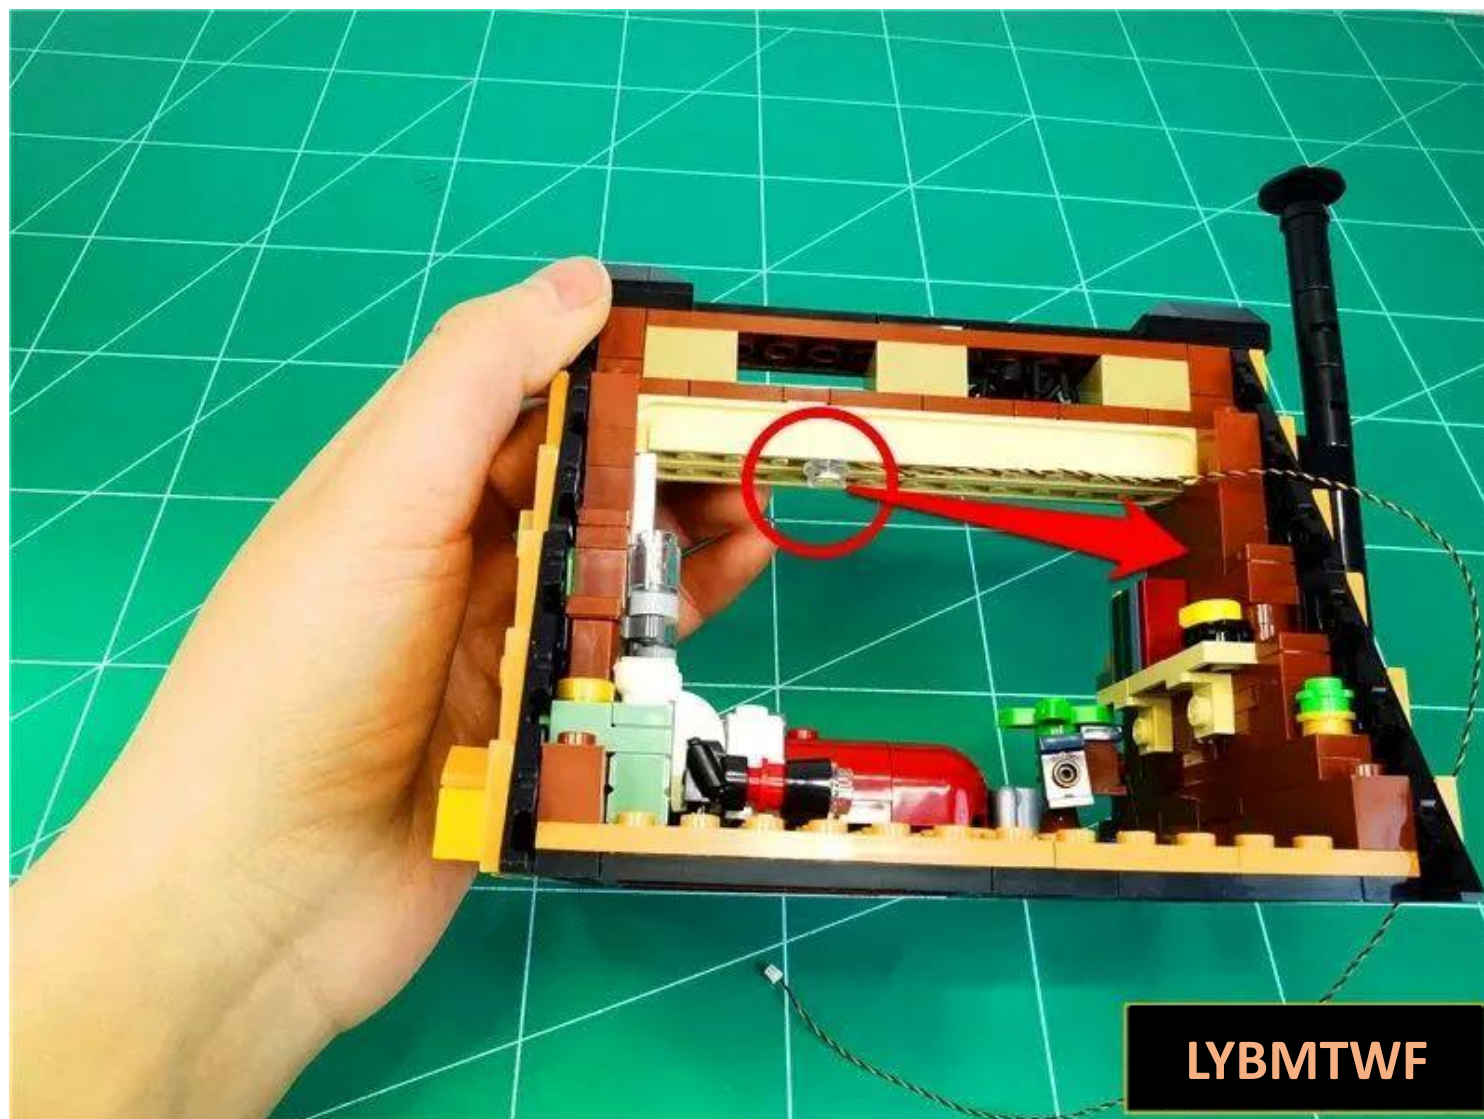

LYBMTWF

The specific location is as follows



Remove the chimney



Remove the parts indicated by the arrows in sequence





LYBMTWF



LYBMTWF



LYBMTWF

Pull the wire out along the angle of the part




Restore parts and fix wires




LYBMTWF

Continue to wrap the wire around the raised particles as shown in the figure

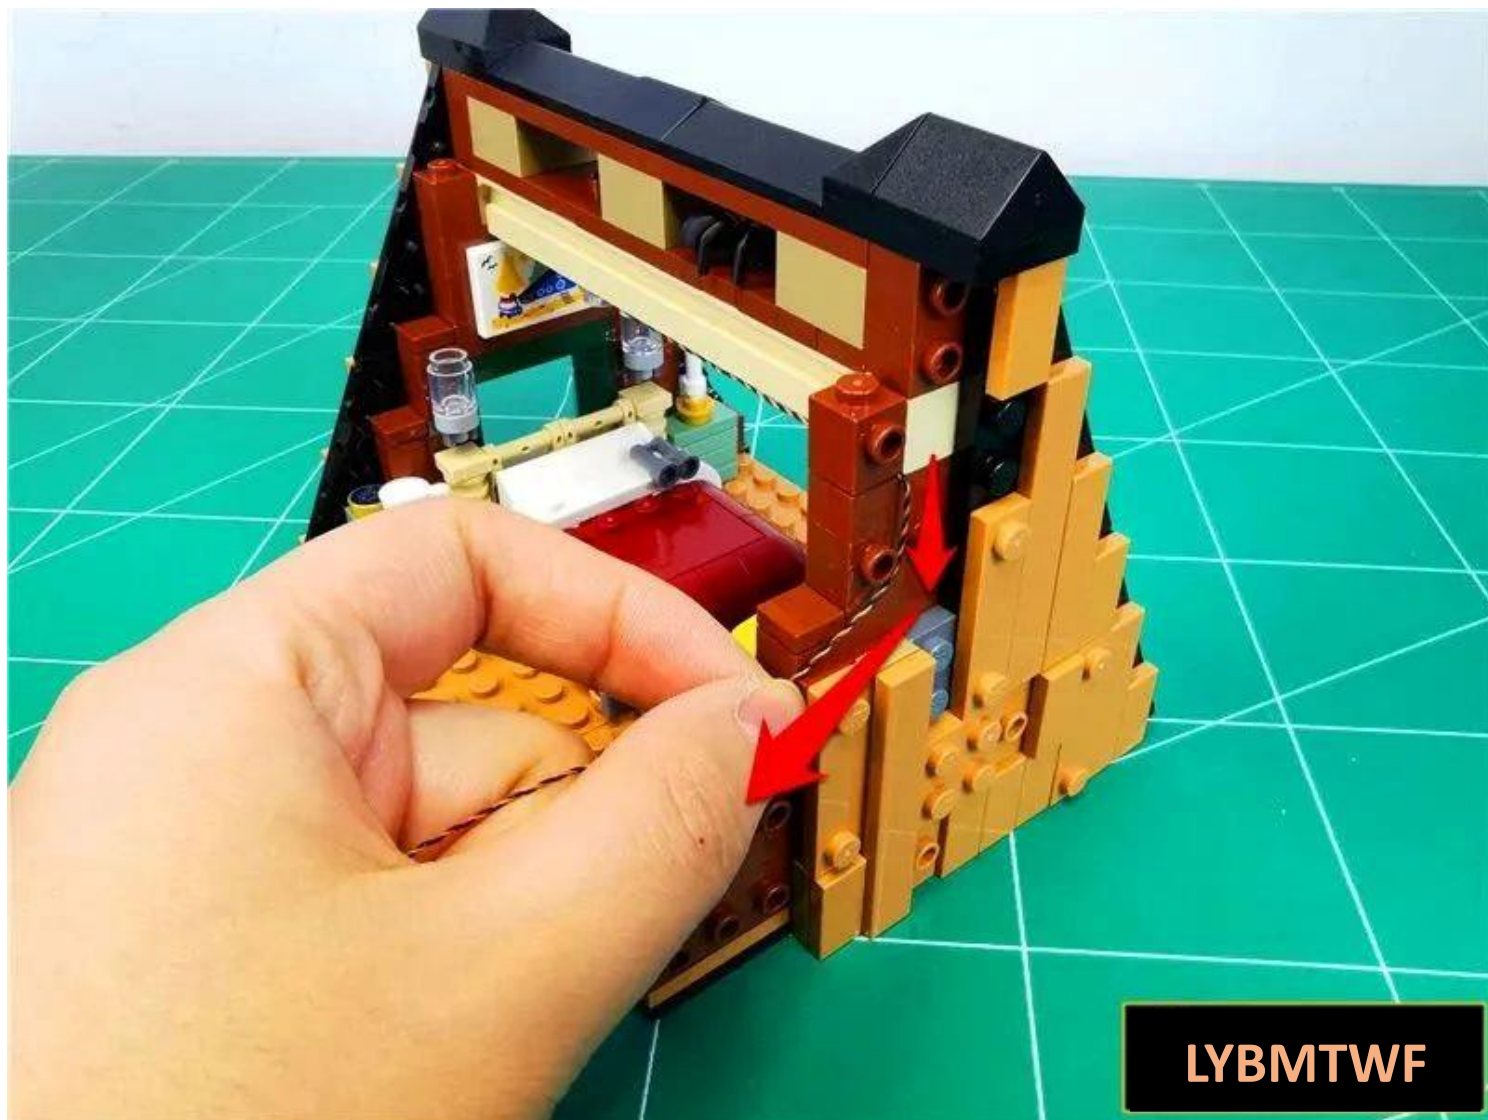


LYBMTWF

Restore parts and fix wires

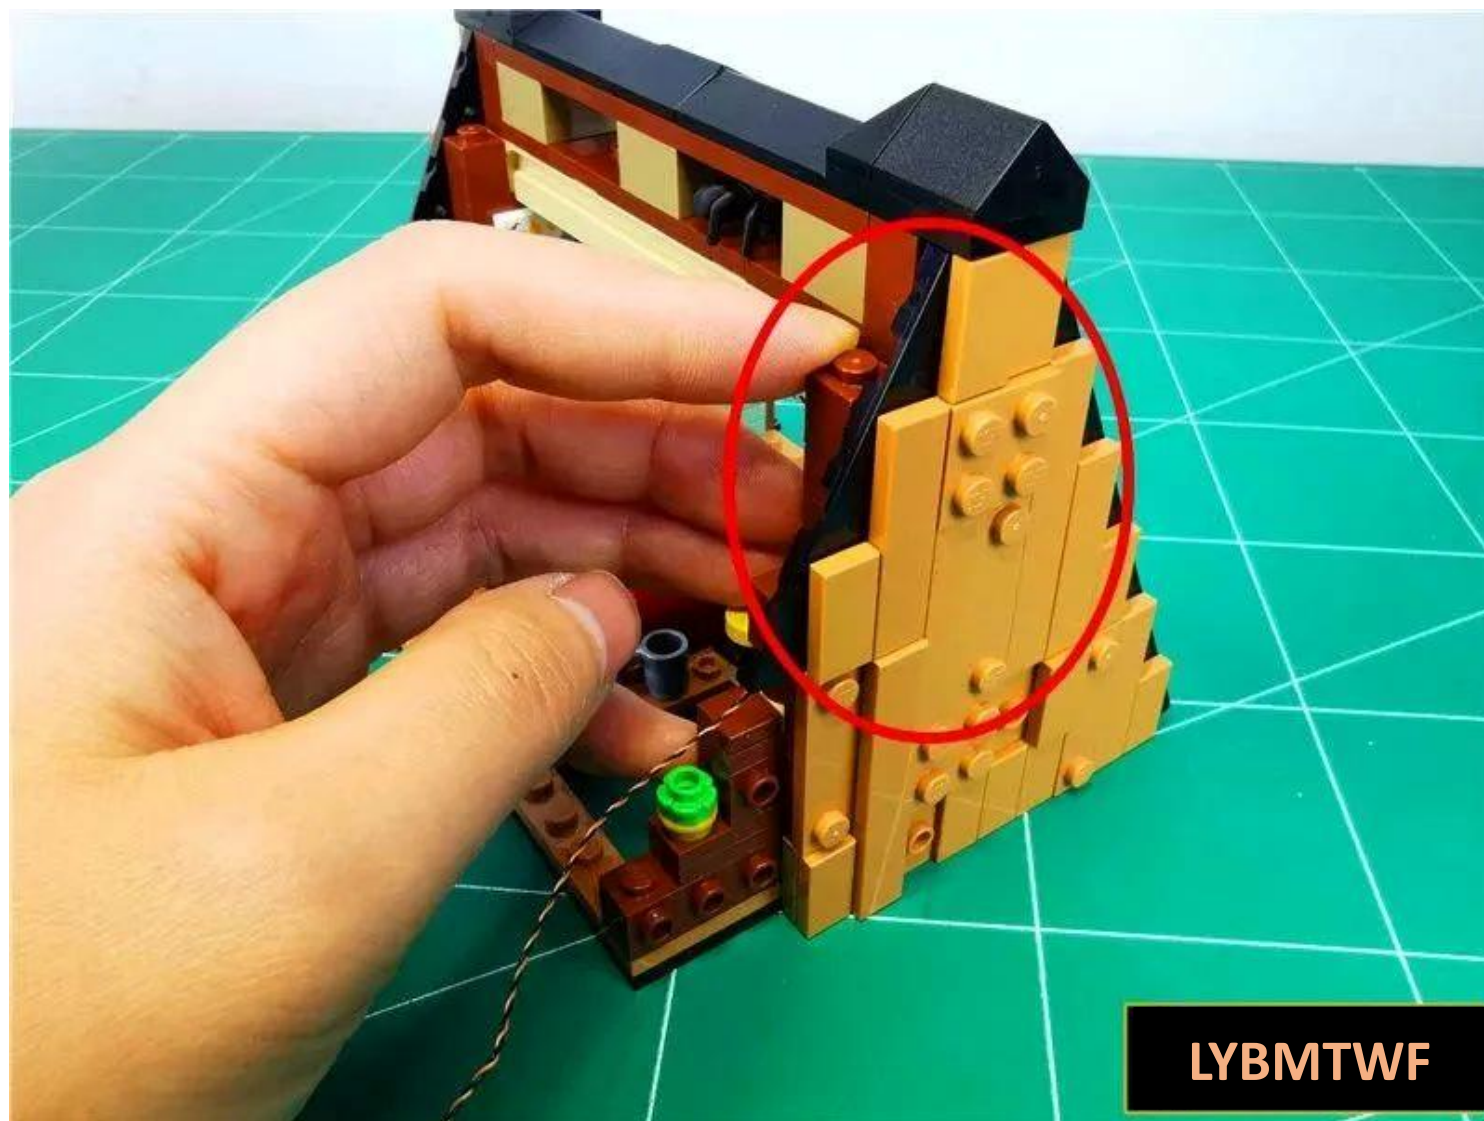


Continue to pull the wire down along the edge of the part

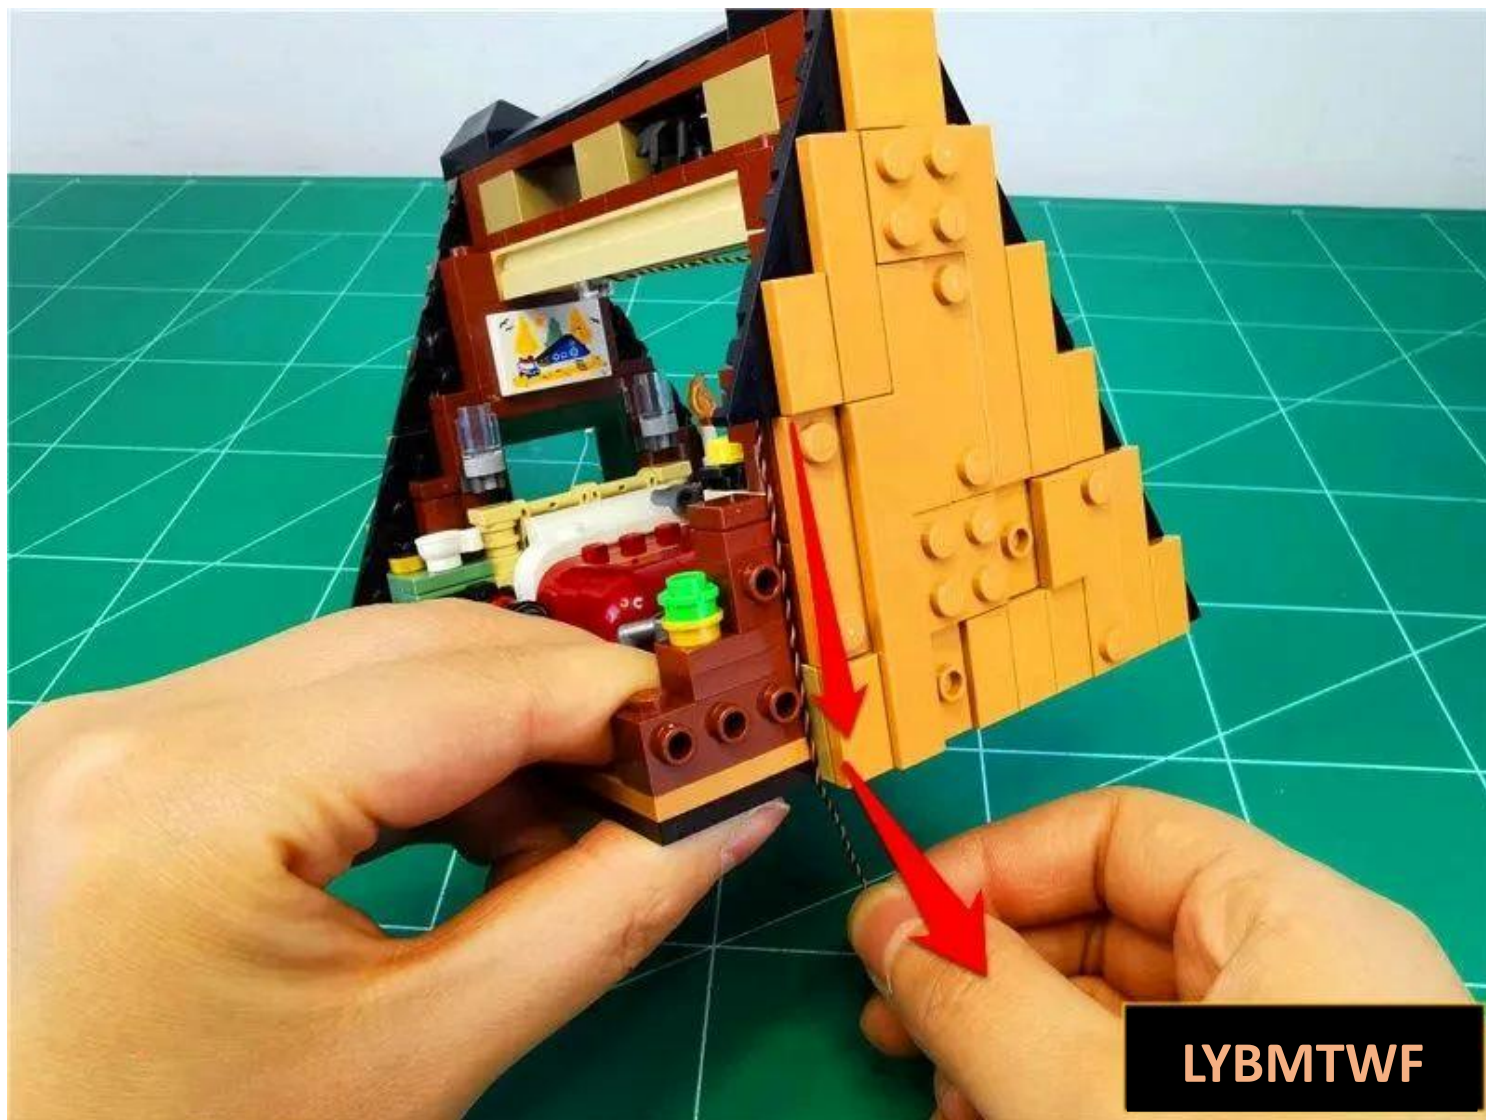

LYBMTWF

Restore parts and fix wires

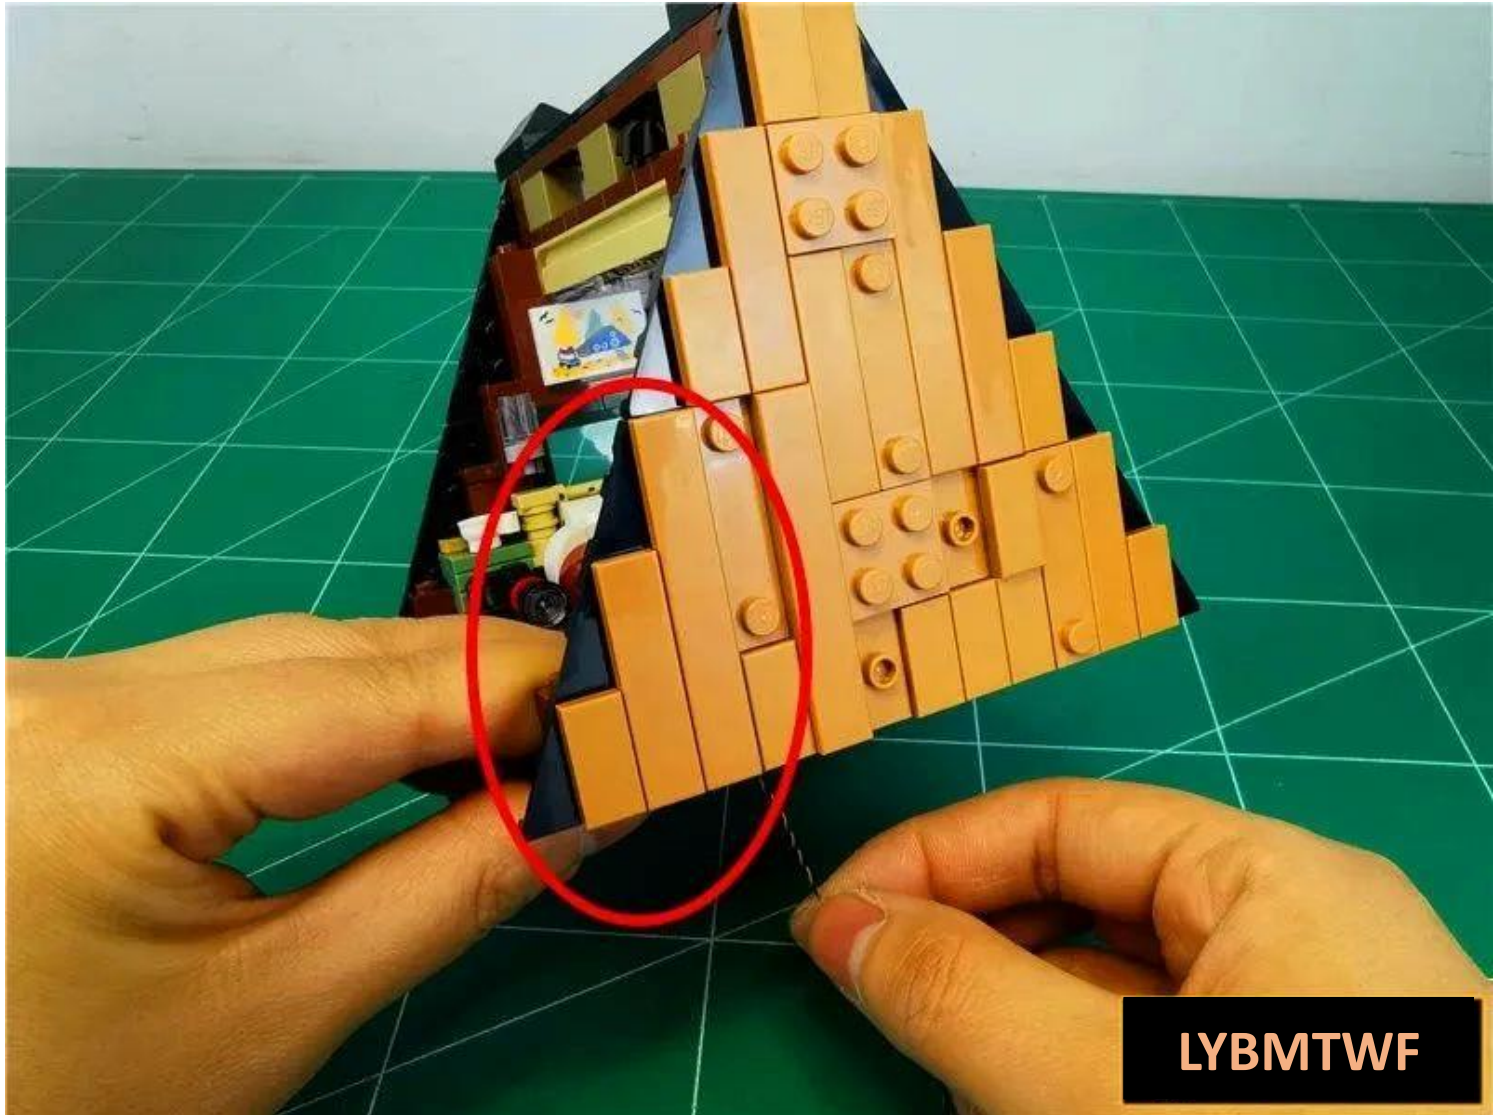


Take out the chimney and remove the 1x2 parts indicated by the arrow






LYBMTWF

Take 1 30cm warm ordinary light bulb and 1 hollow transparent red circle

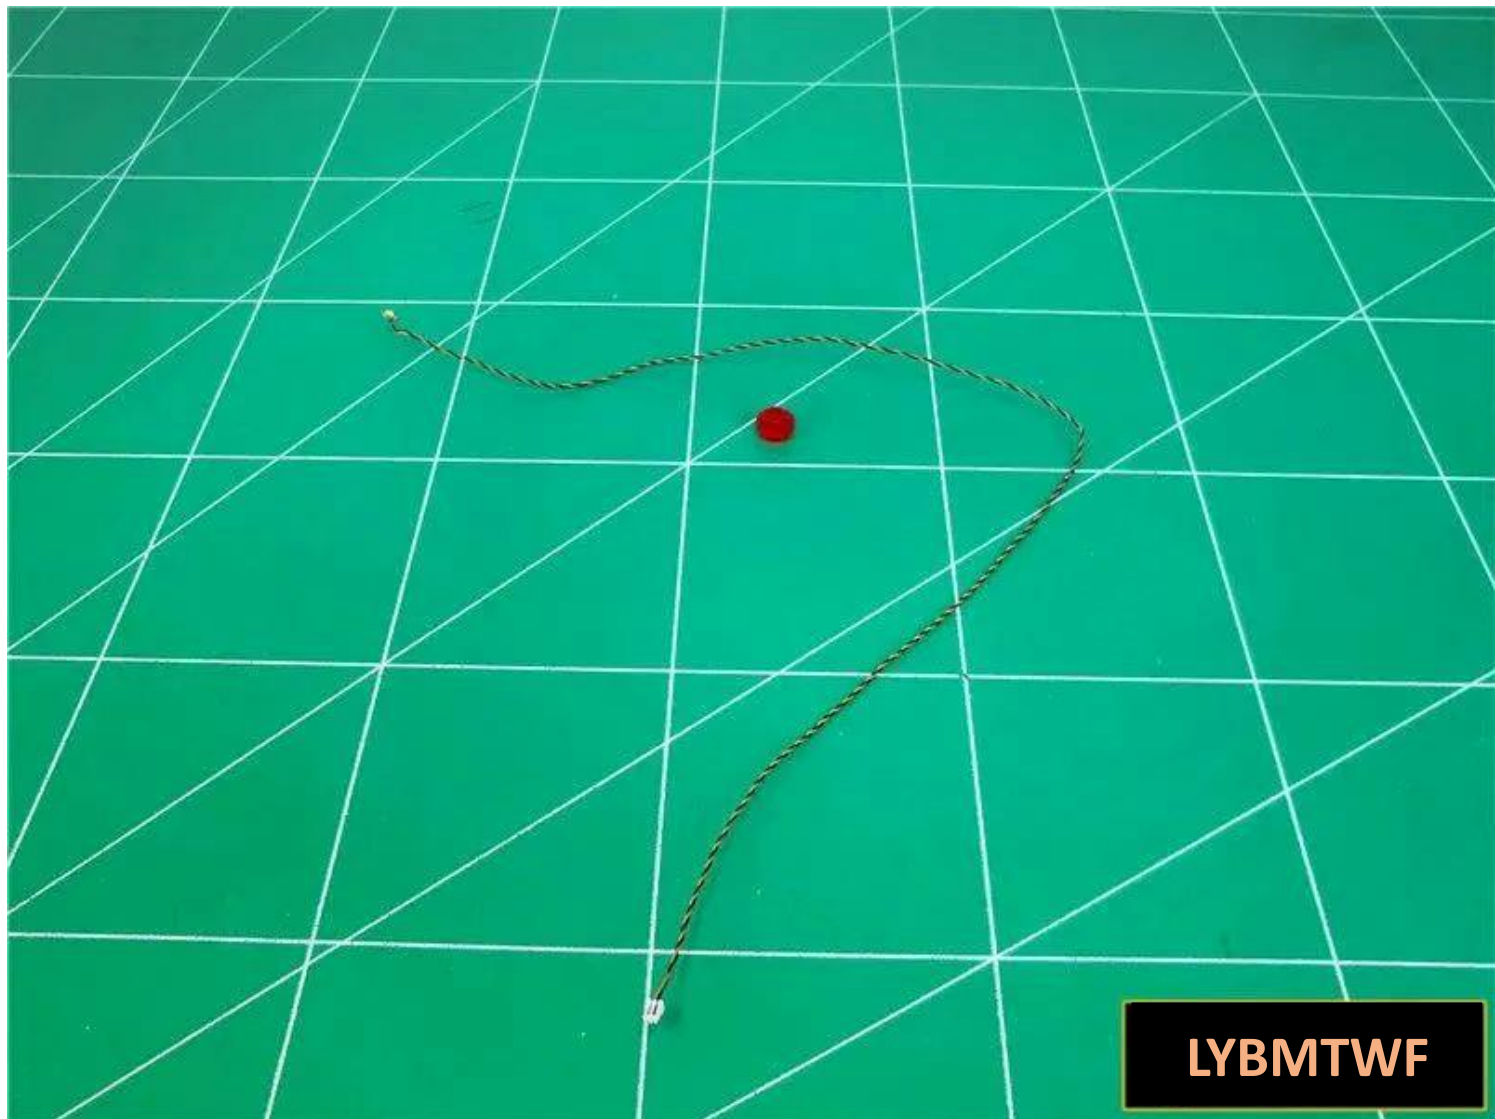

Place the lamp particles with the luminous side facing upwards at the top of the chimney,
paying attention to the direction of the wires.

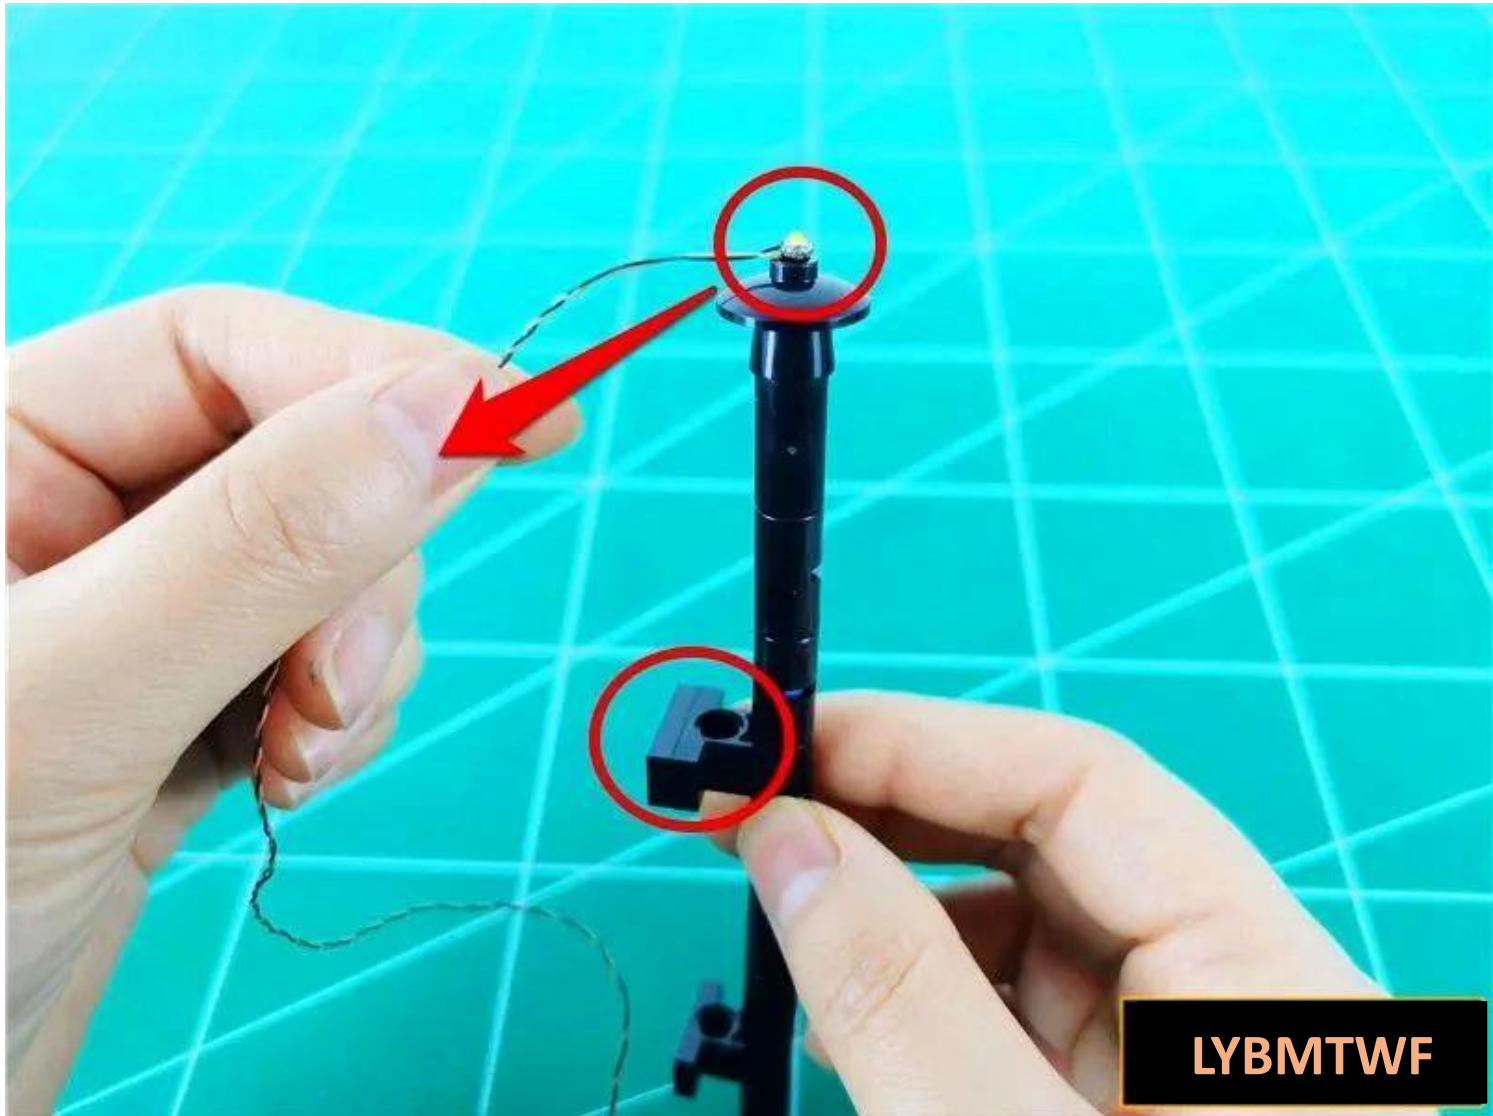

Install the hollow transparent red circle and fix the lamp particles



Wrap the wire properly around the chimney



Route the wire along the part shown in the figure and pass it through the middle



Restore 1x2 parts, fix wires



Restore the chimney



Lay the two-story building on its side




LYBMTWF

Take 1 15CM warm light headlight grain and 1 hollow transparent round



LYBMTWF

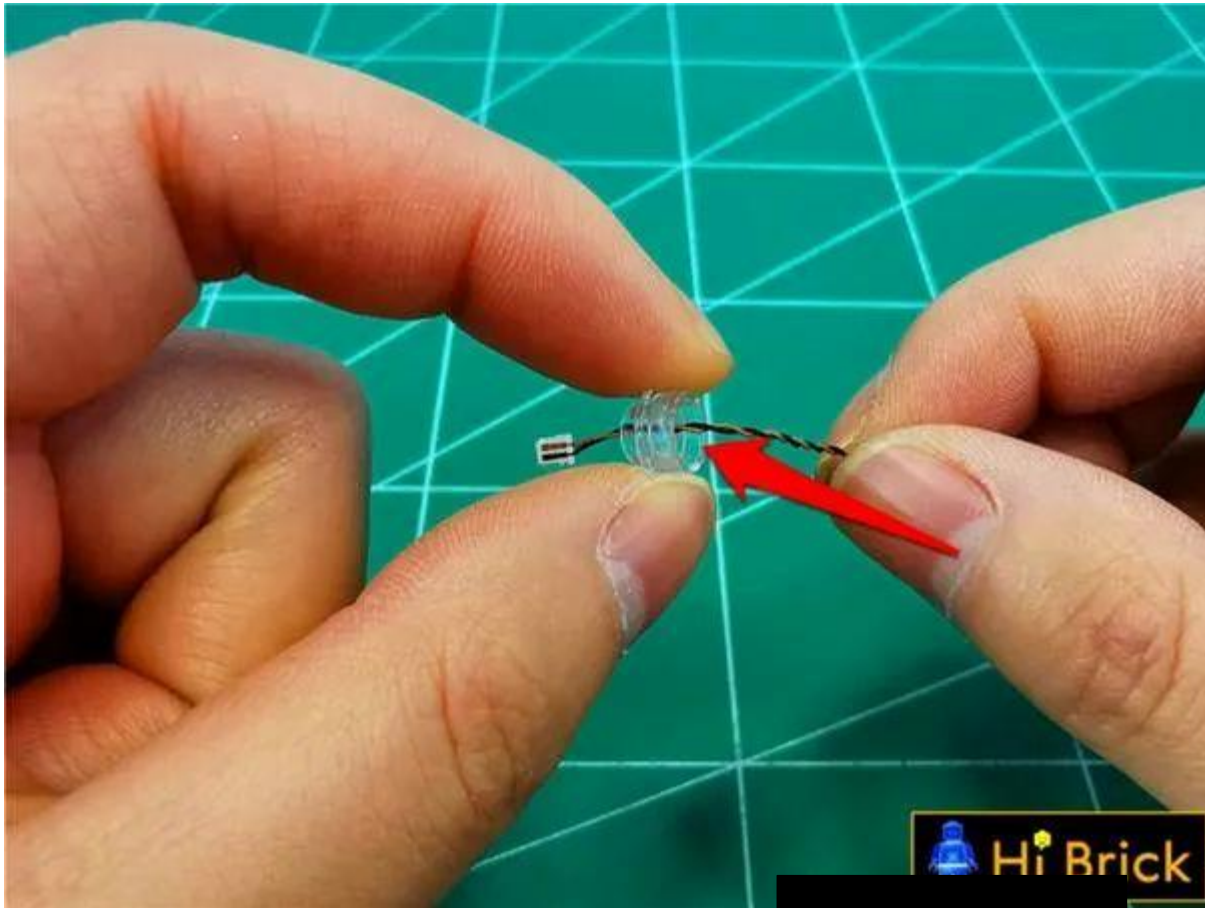


Pass


plug through the hollow round hole.

the lamp

Bend the lamp 90 degrees, with the luminous side facing outwards

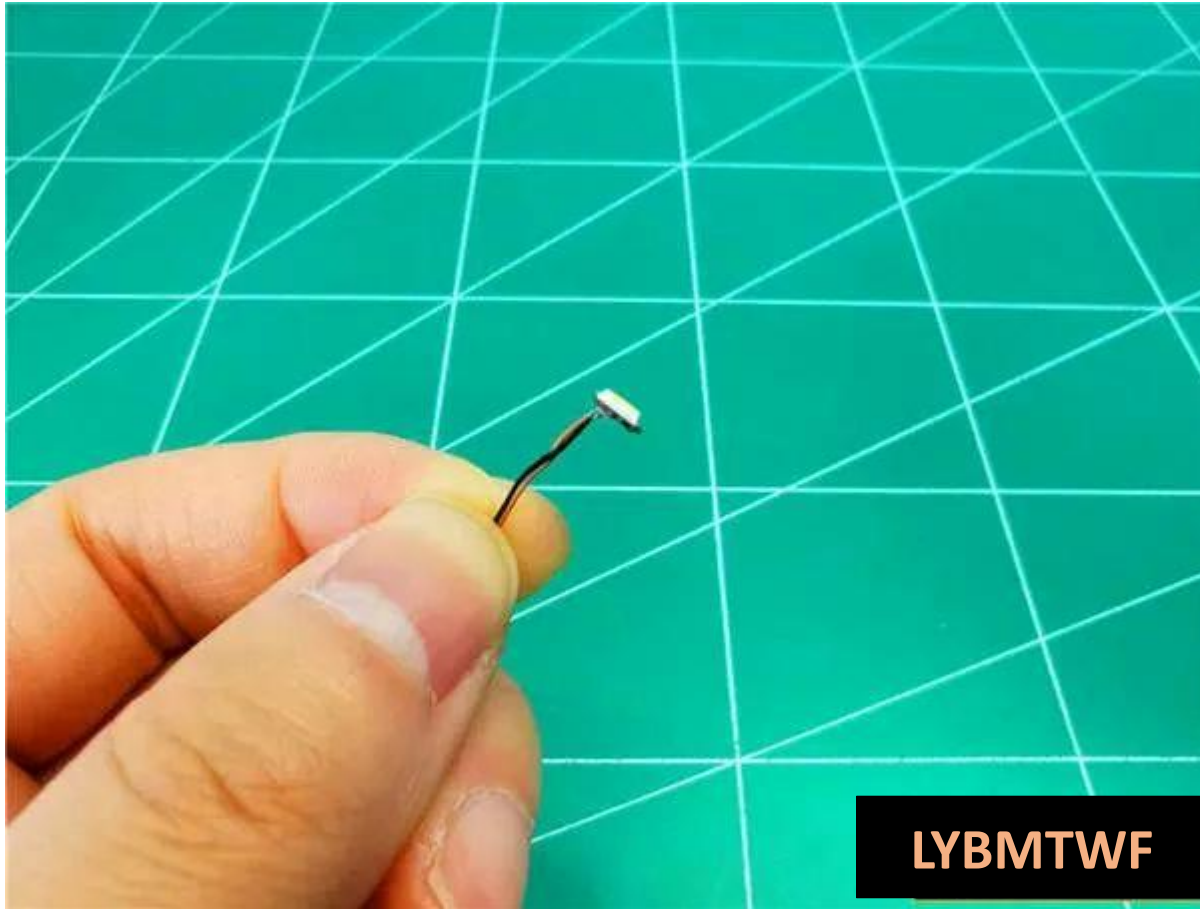


Tighten the wires so that the lamp particles are exactly placed in the center of the transparent

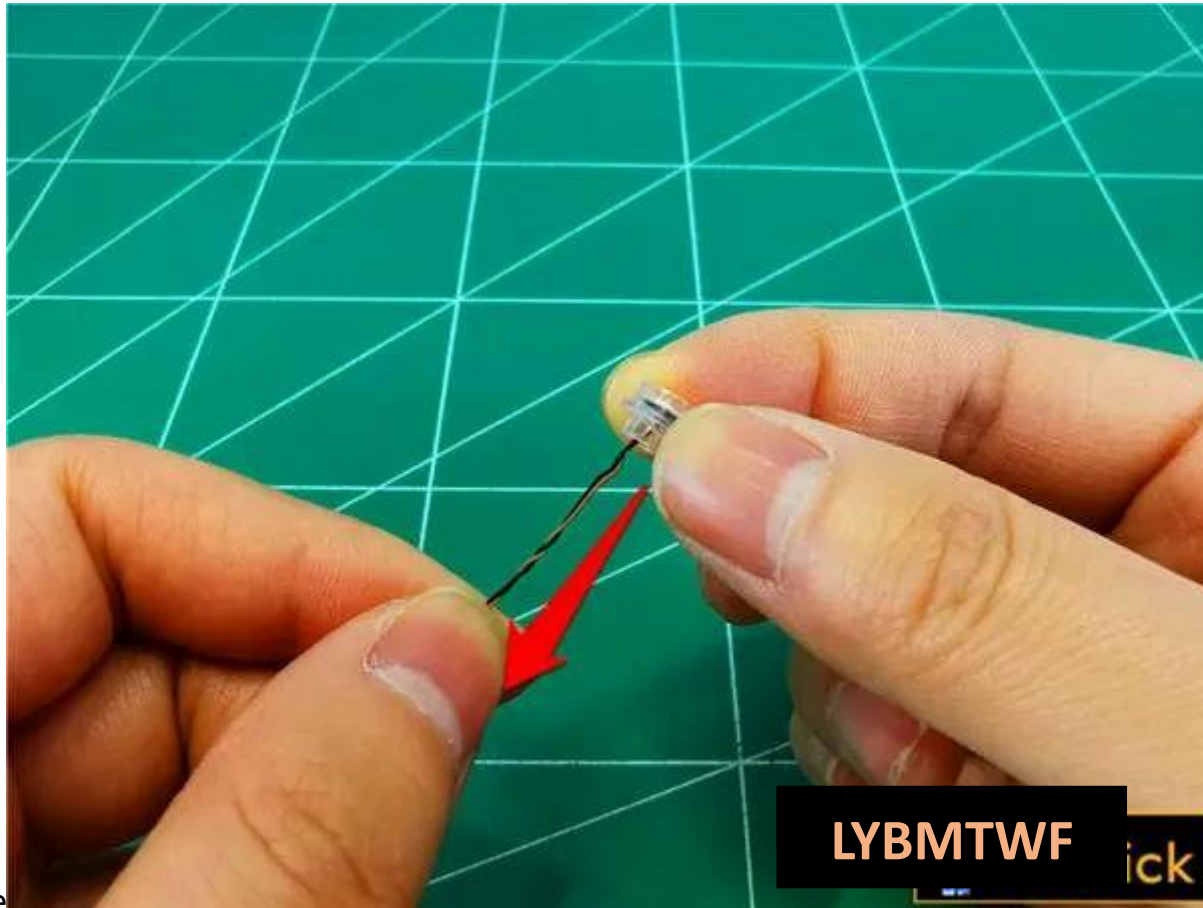


circle


Install the lamp particles to the position shown in the picture, **paying attention to the direction of the wires**

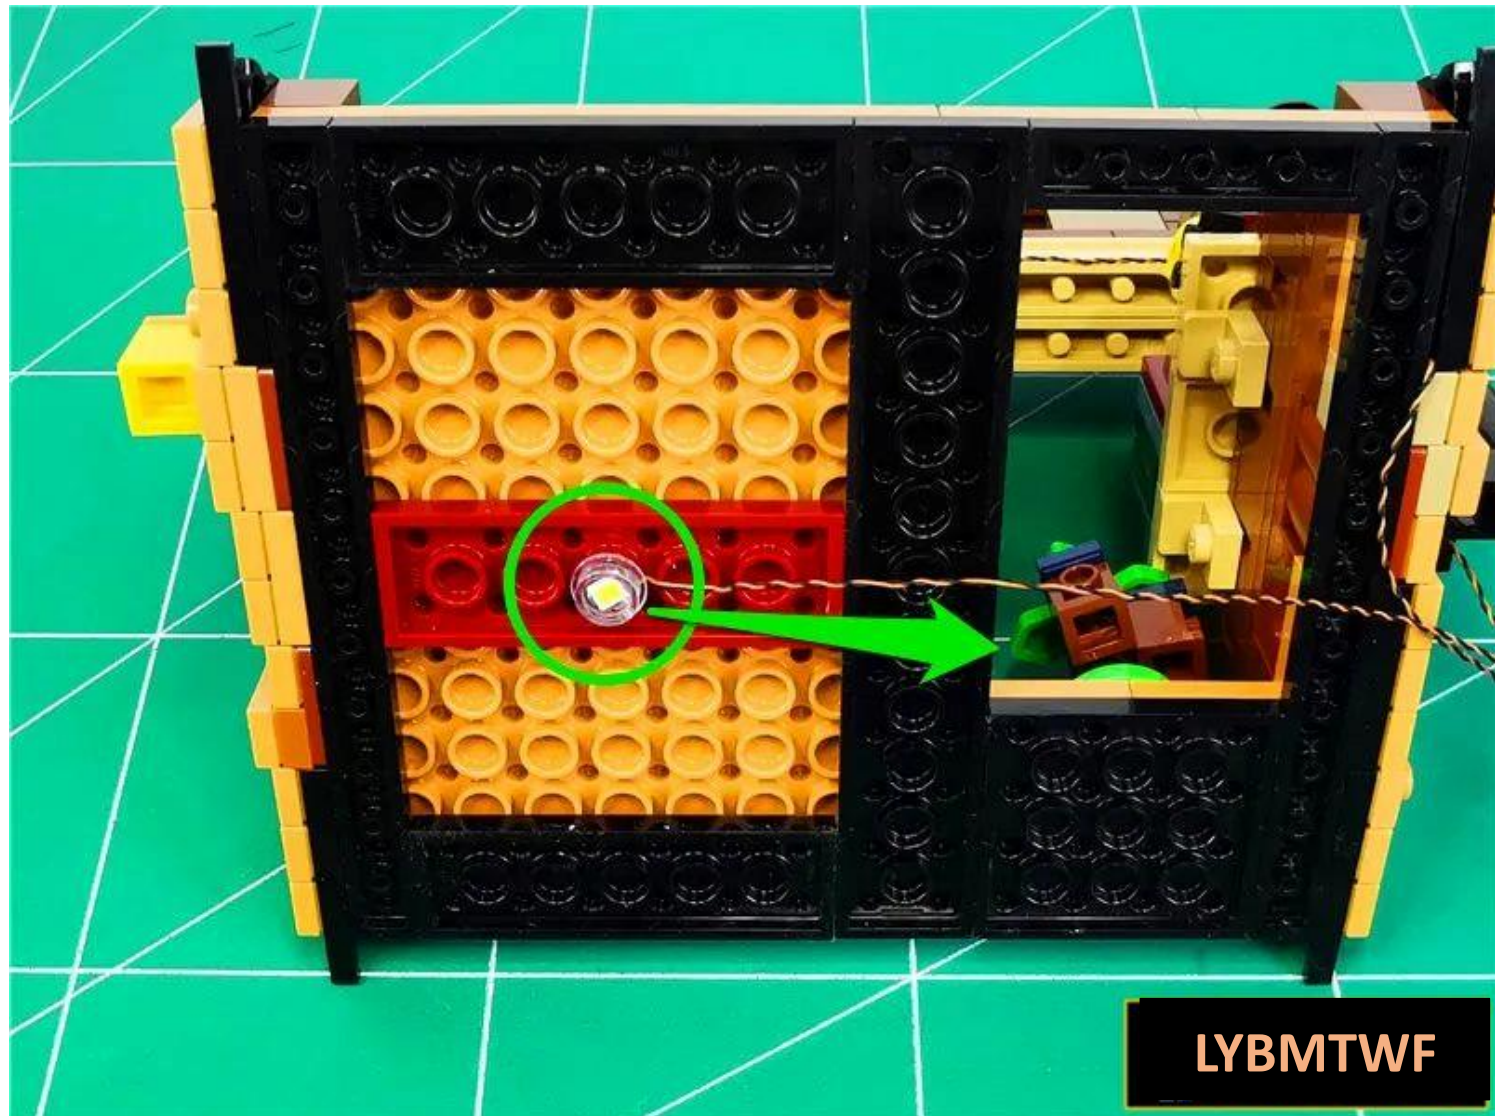

Twist the 3 wires together appropriately

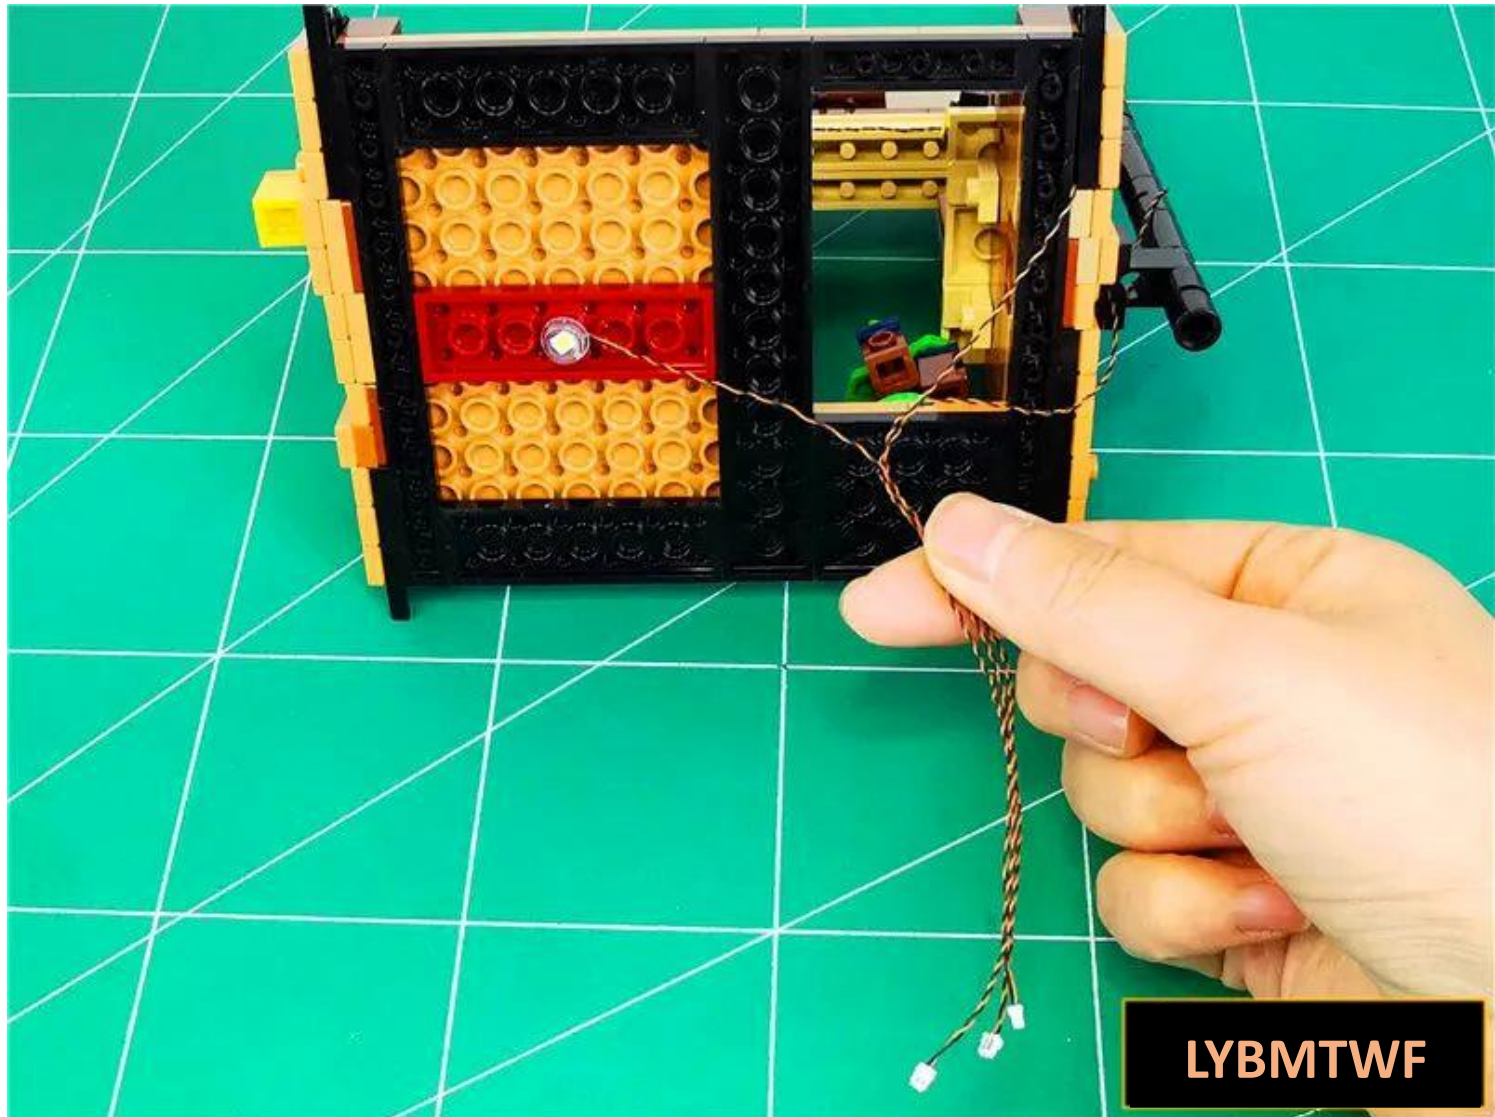

Pass the wire through the gap to the top

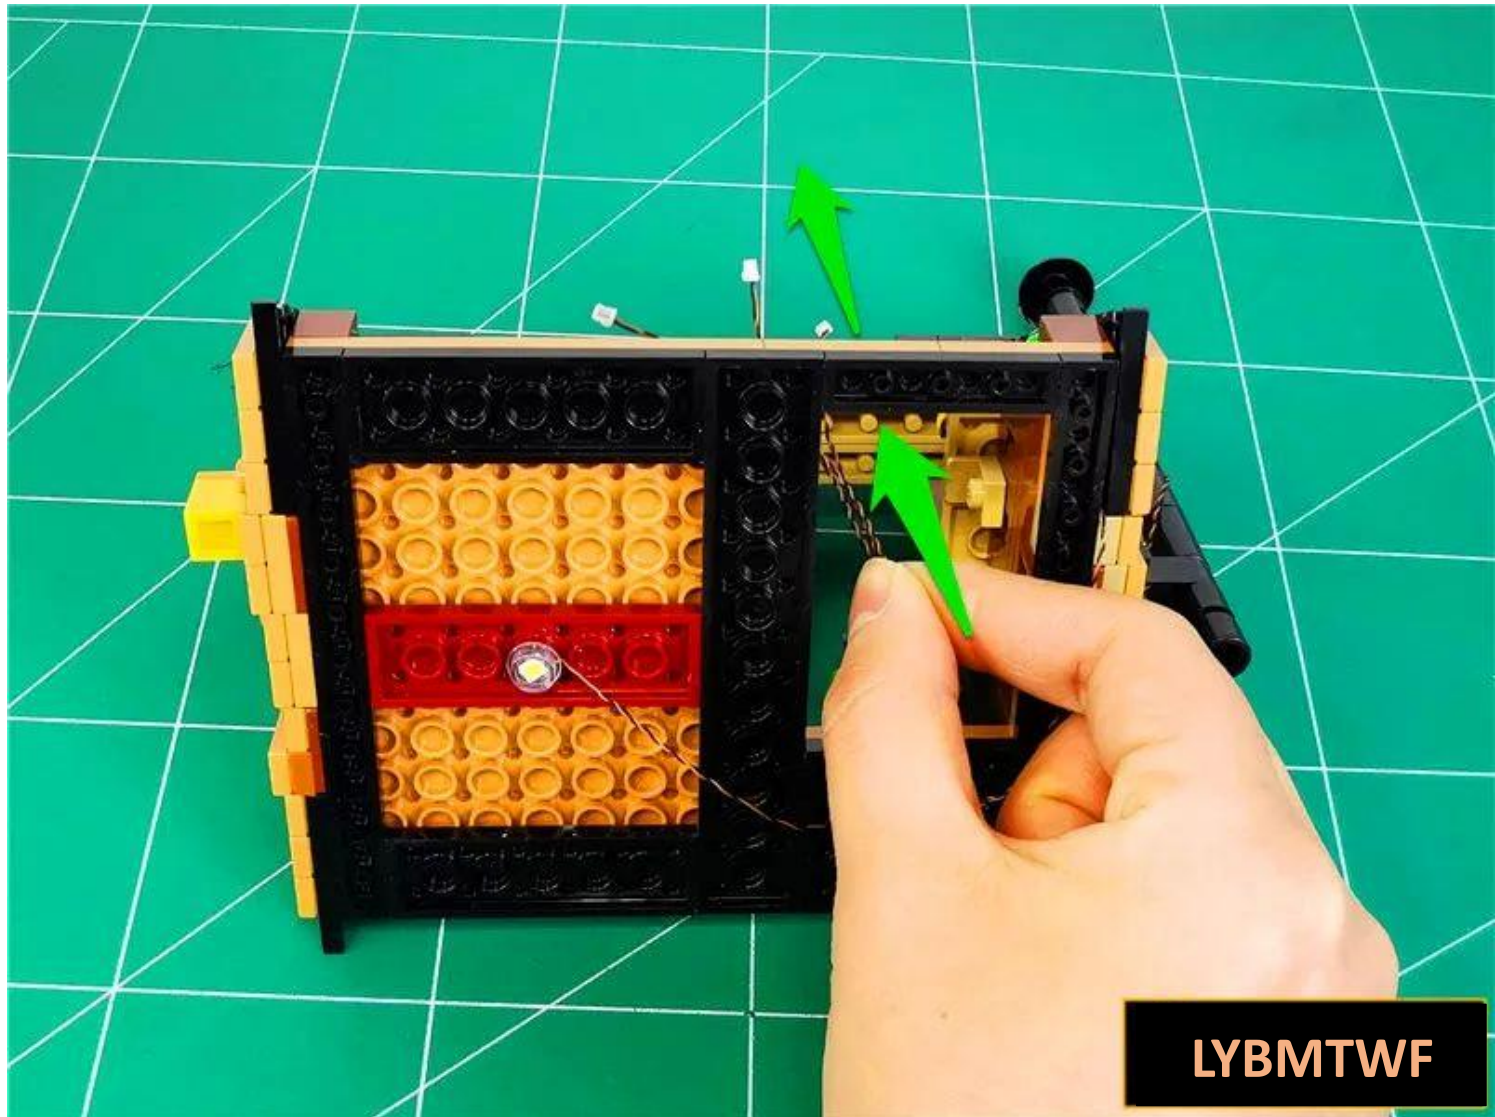

Put the building back on track



LYBMTWF

Take out the substructure and remove the parts indicated by the arrows in sequence











LYBMTWF




LYBMTWF




Disassemble the removed parts



Take 1 30CM **white light ordinary lamp particle** and 1 hollow transparent round

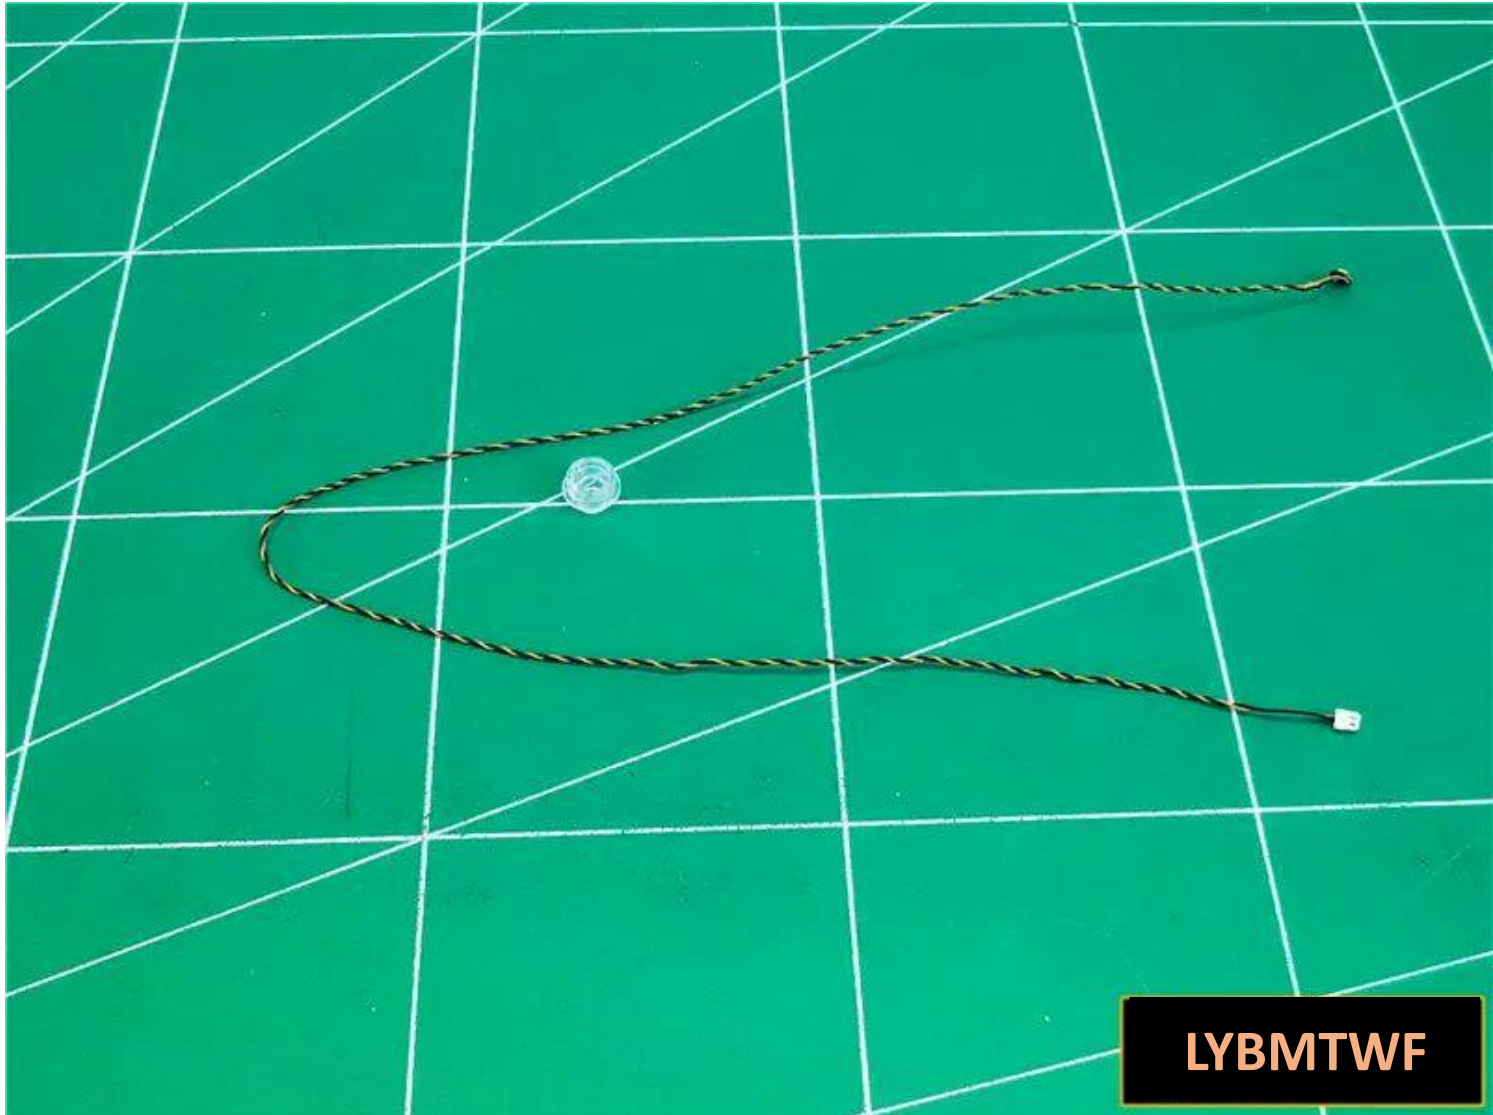


Pass

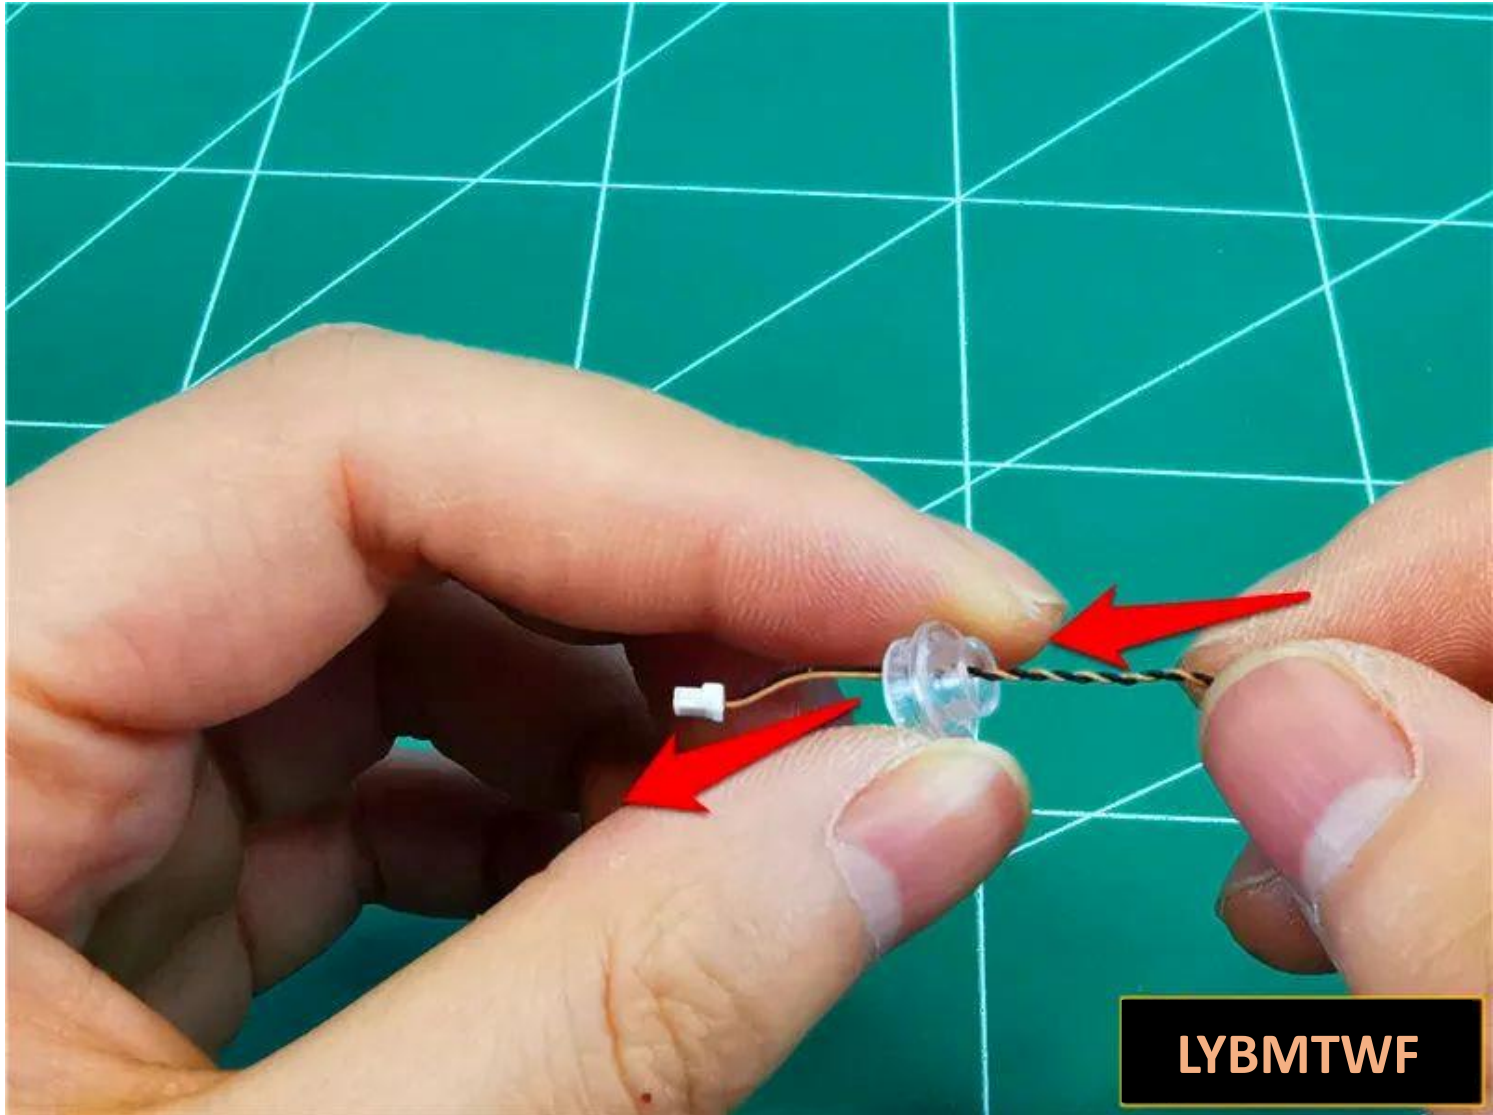


the lamp plug through the hollow round **hole**.

Bend the lamp 90 degrees, with the luminous side facing outward and tighten the wires

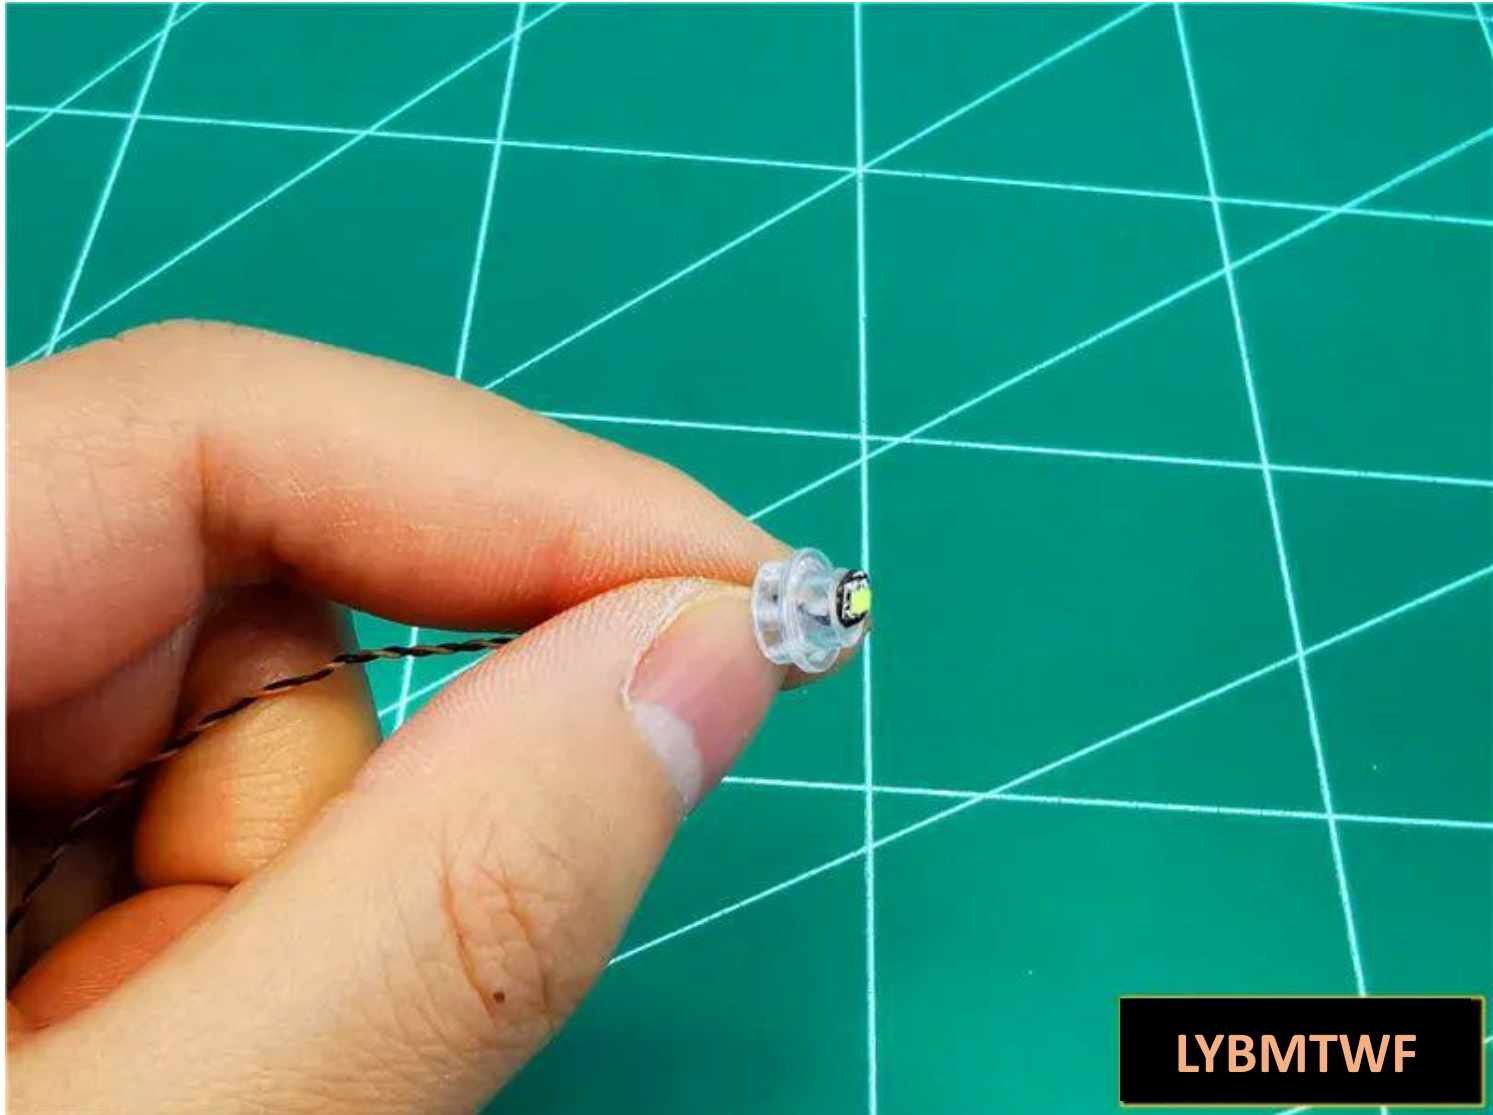

Install the lamp particles under the portable lamp

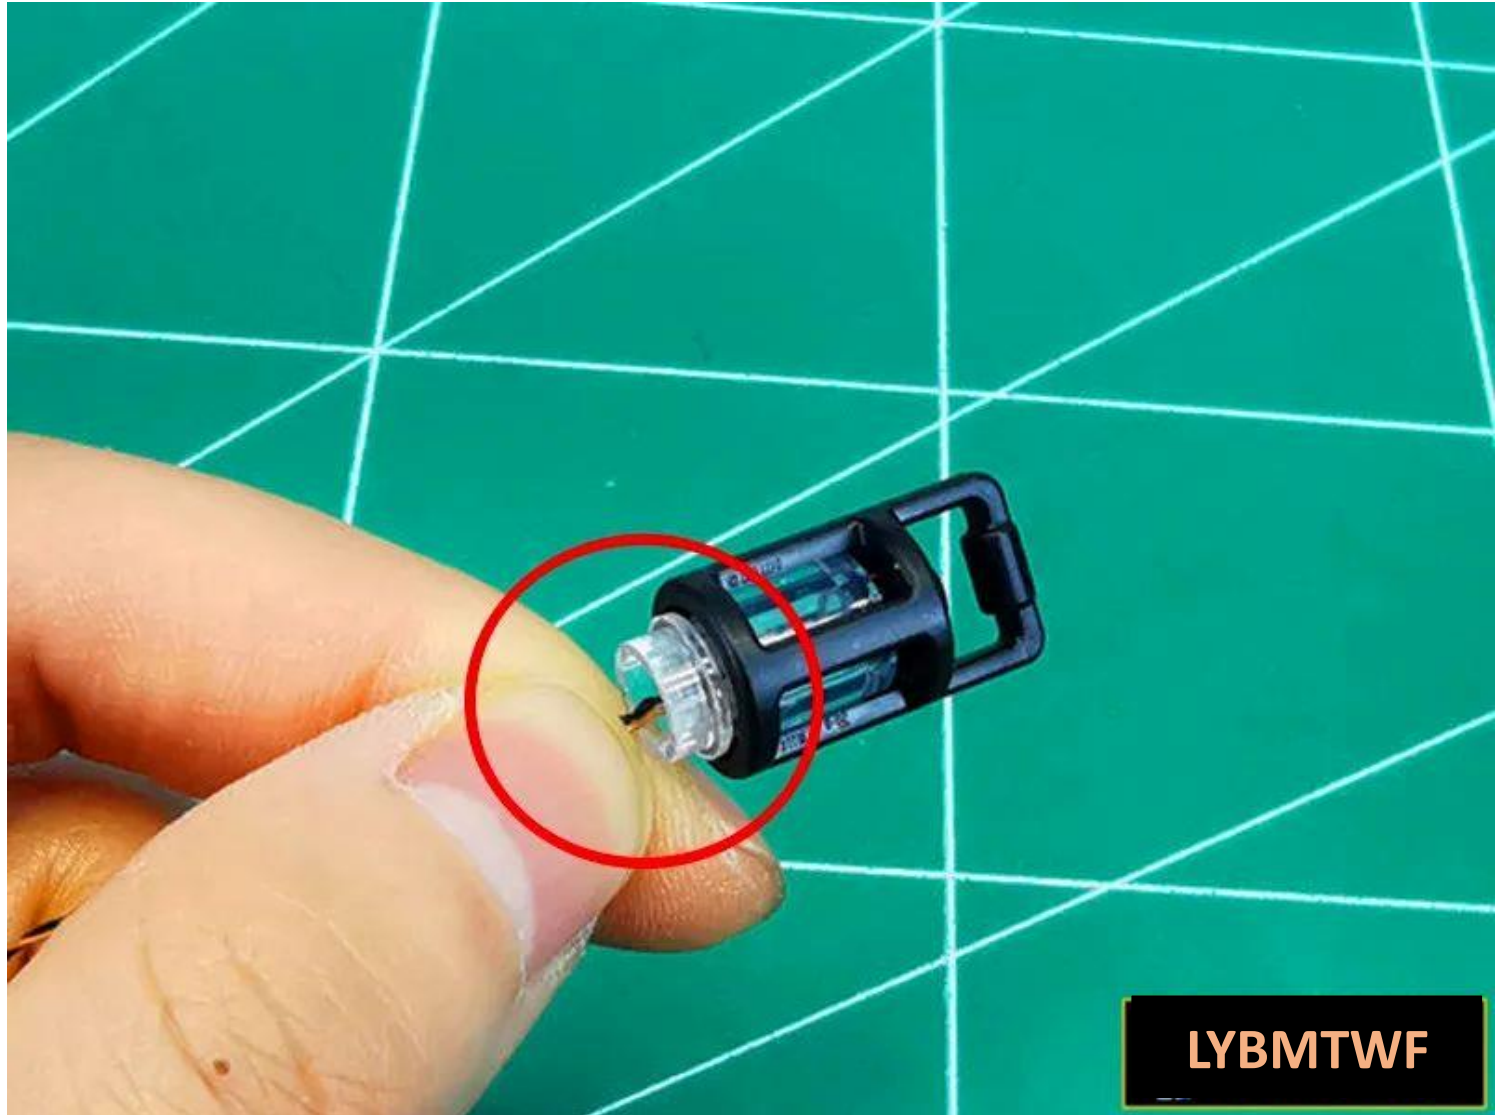


Restore the portable lamp, **pay attention to the direction of the wires**




LYBMTWF

Pull the wire down, restore the parts shown in the picture, and fix the wire

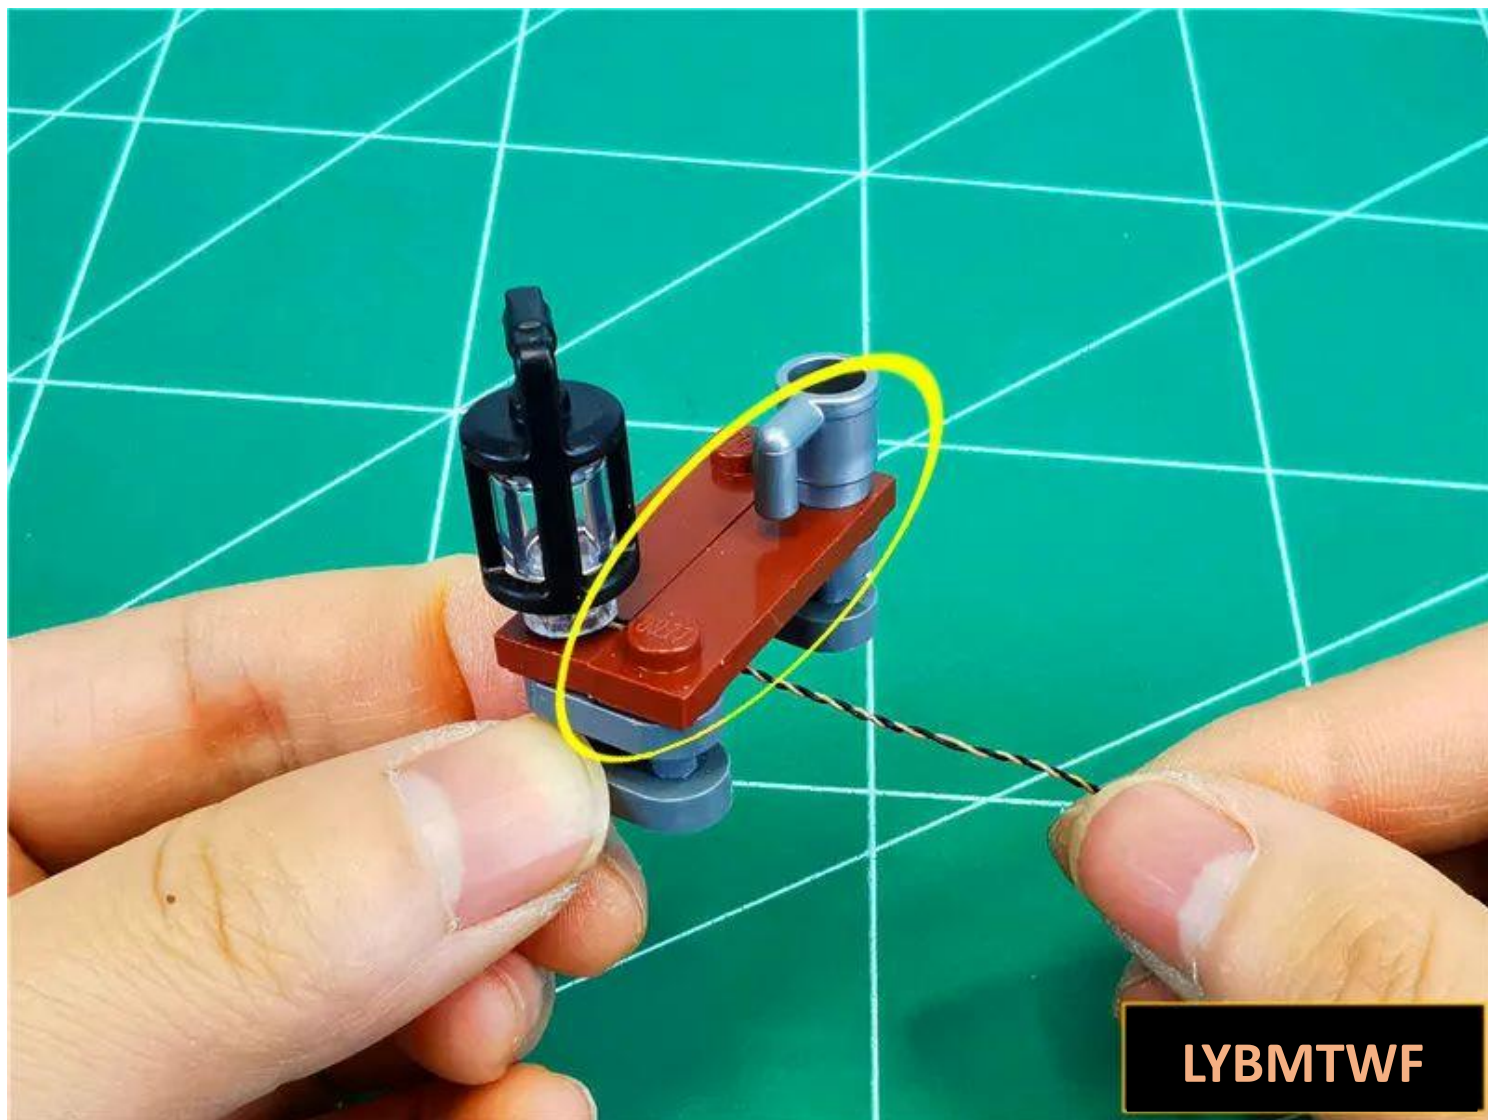


Restore the parts with the wires facing indoors

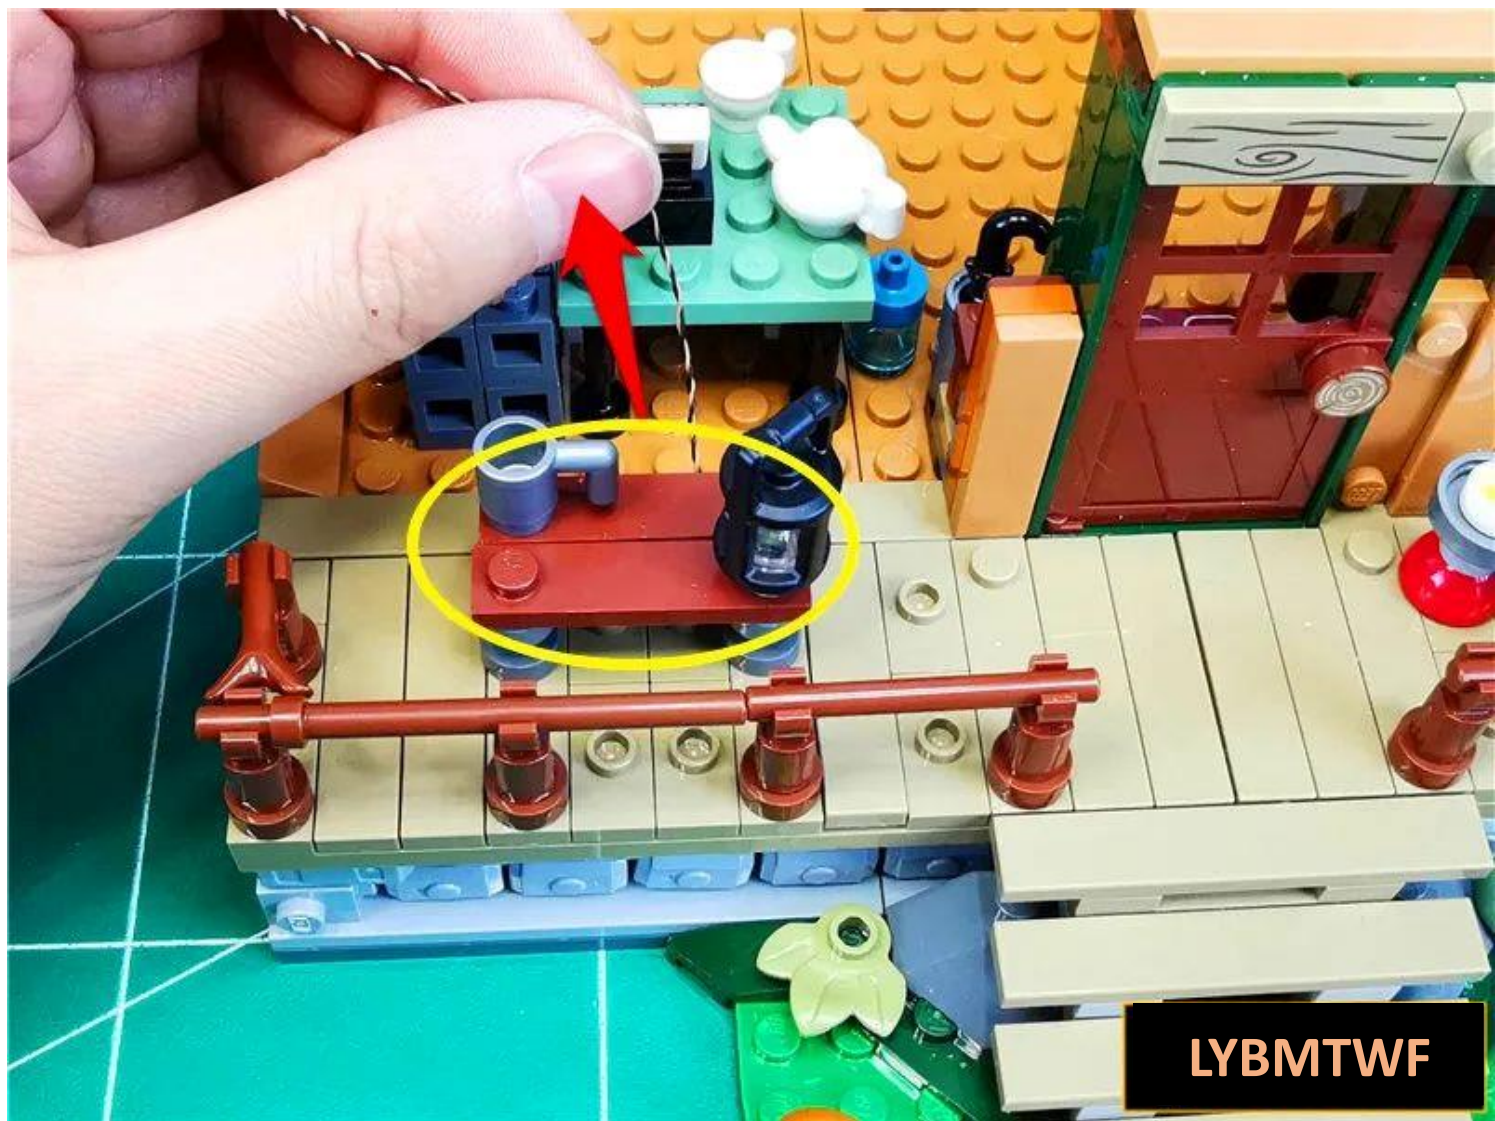

As shown in the picture, pass the wire along the gap between the raised particles.



Restore walls and secure wires

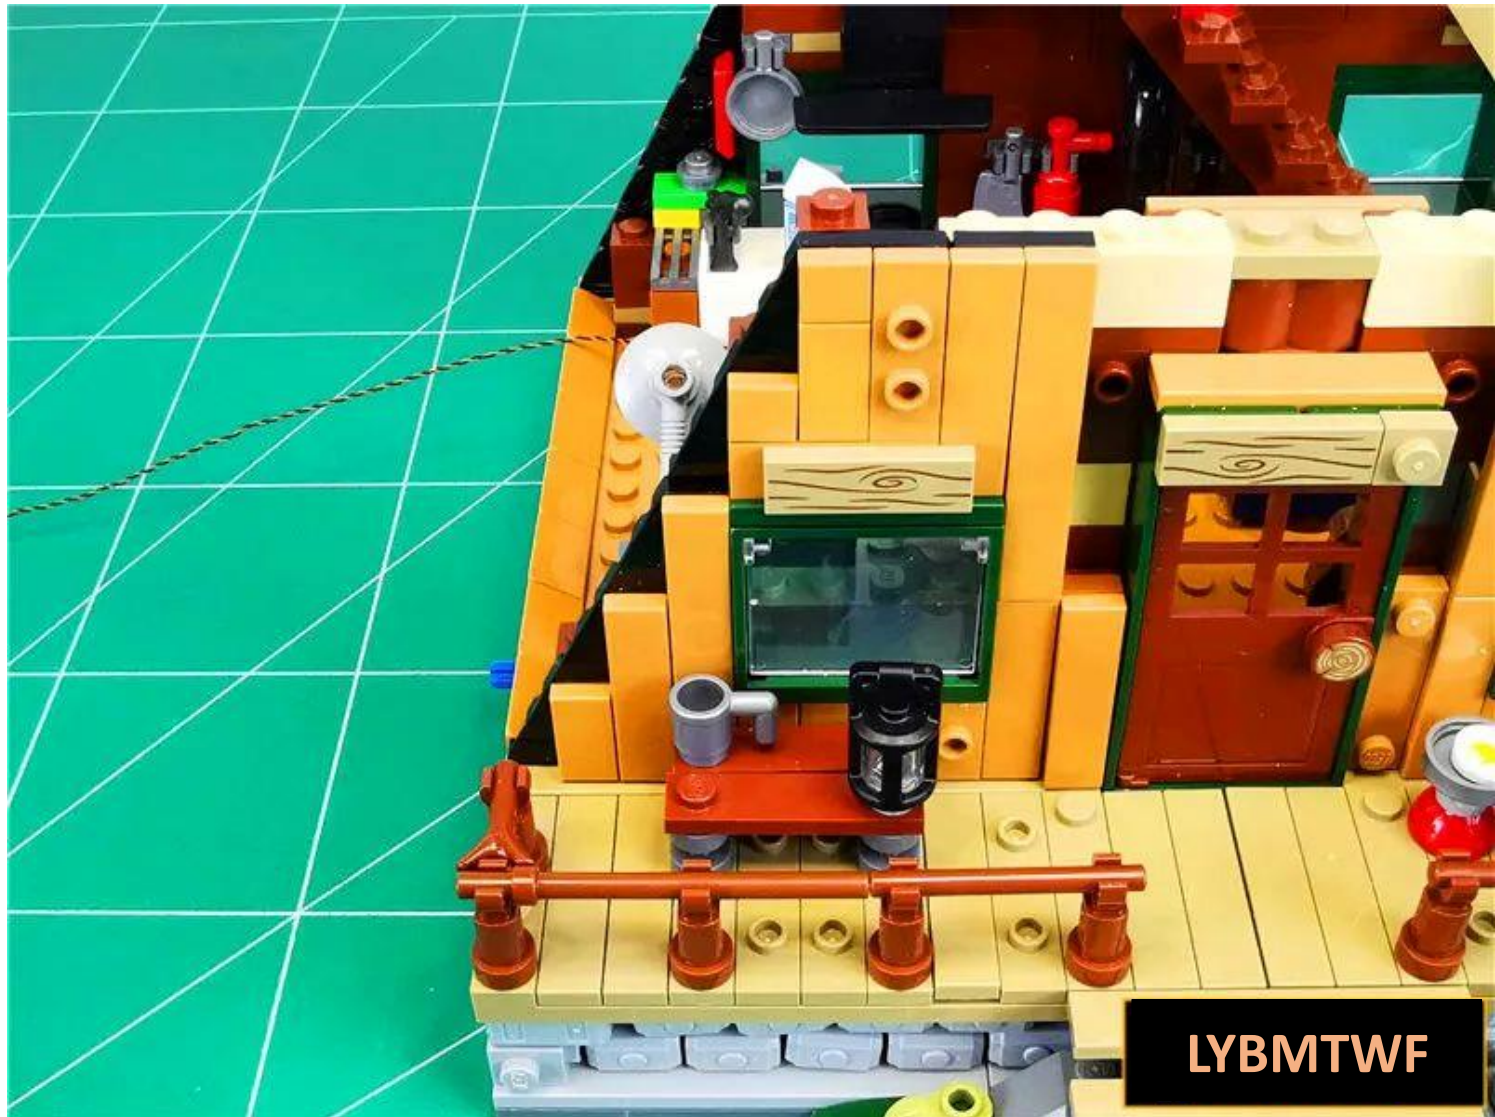

Restore the disassembled parts in sequence



Take 2 30cm warm ordinary light bulbs and prepare to install them on the wall lamp as shown in the picture




LYBMTWF

disassemble parts




Take any 30cm warm light ordinary lamp grain, with the luminous side facing up, and place it in the position shown in the picture, **with the wire facing to the right.**

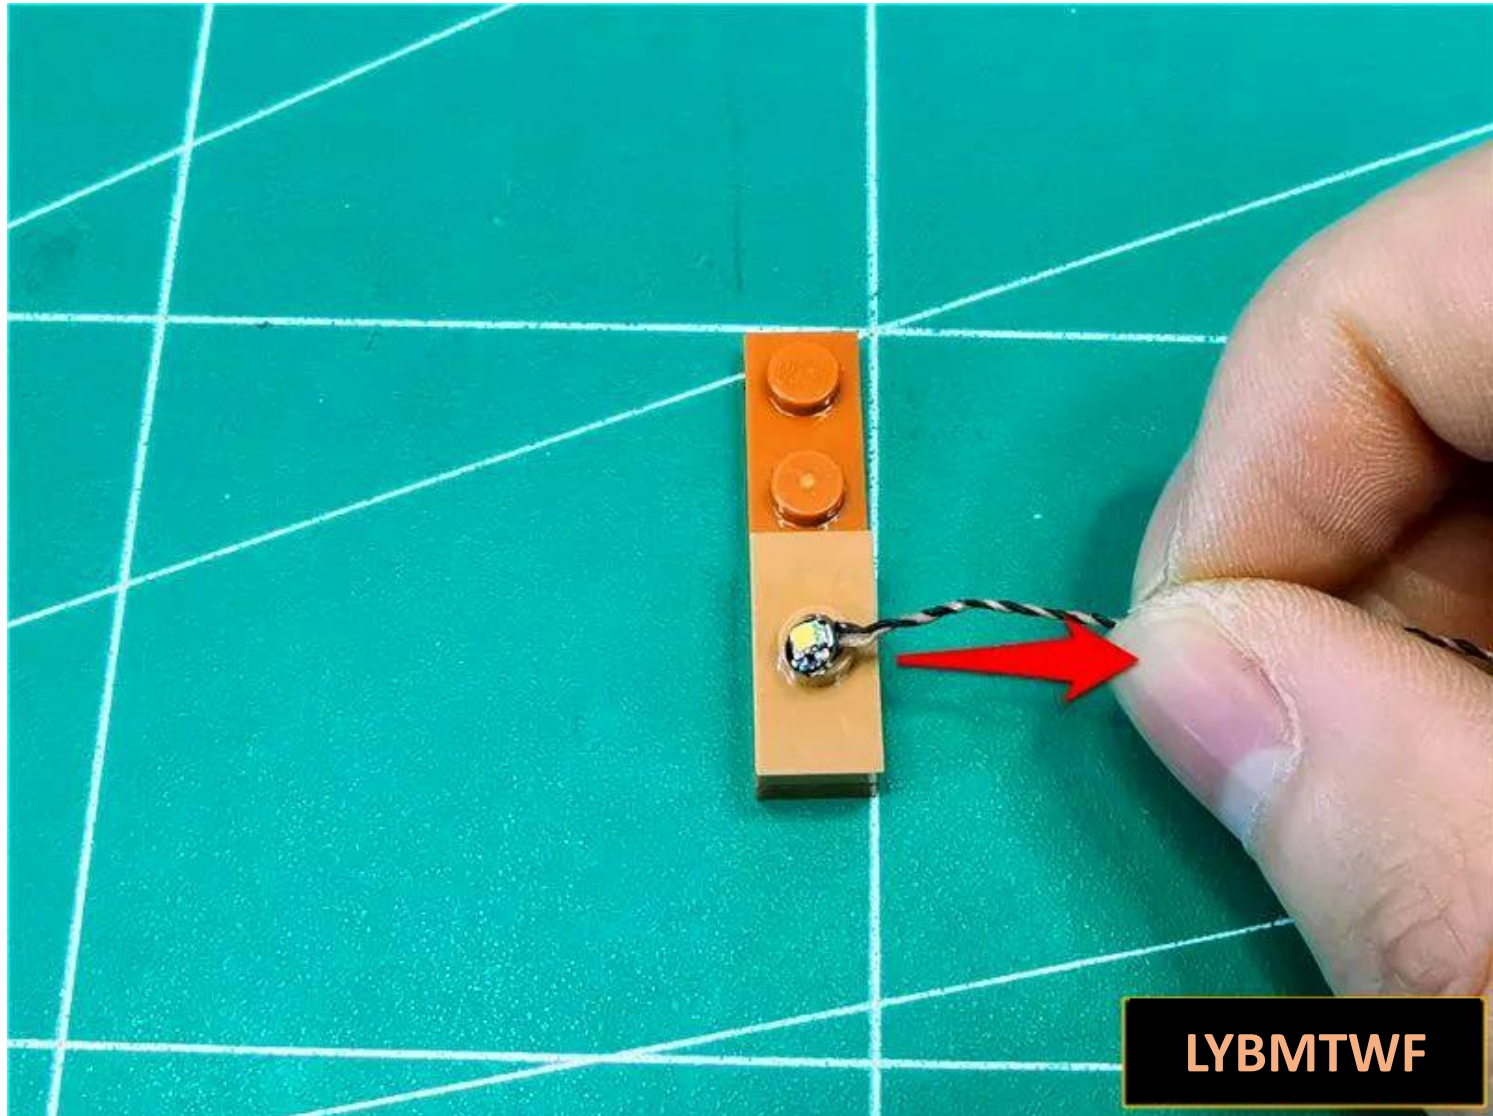

Restore the transparent circle and fix the lamp particles




Before restoring the part, pull the wire up along the edge of the part

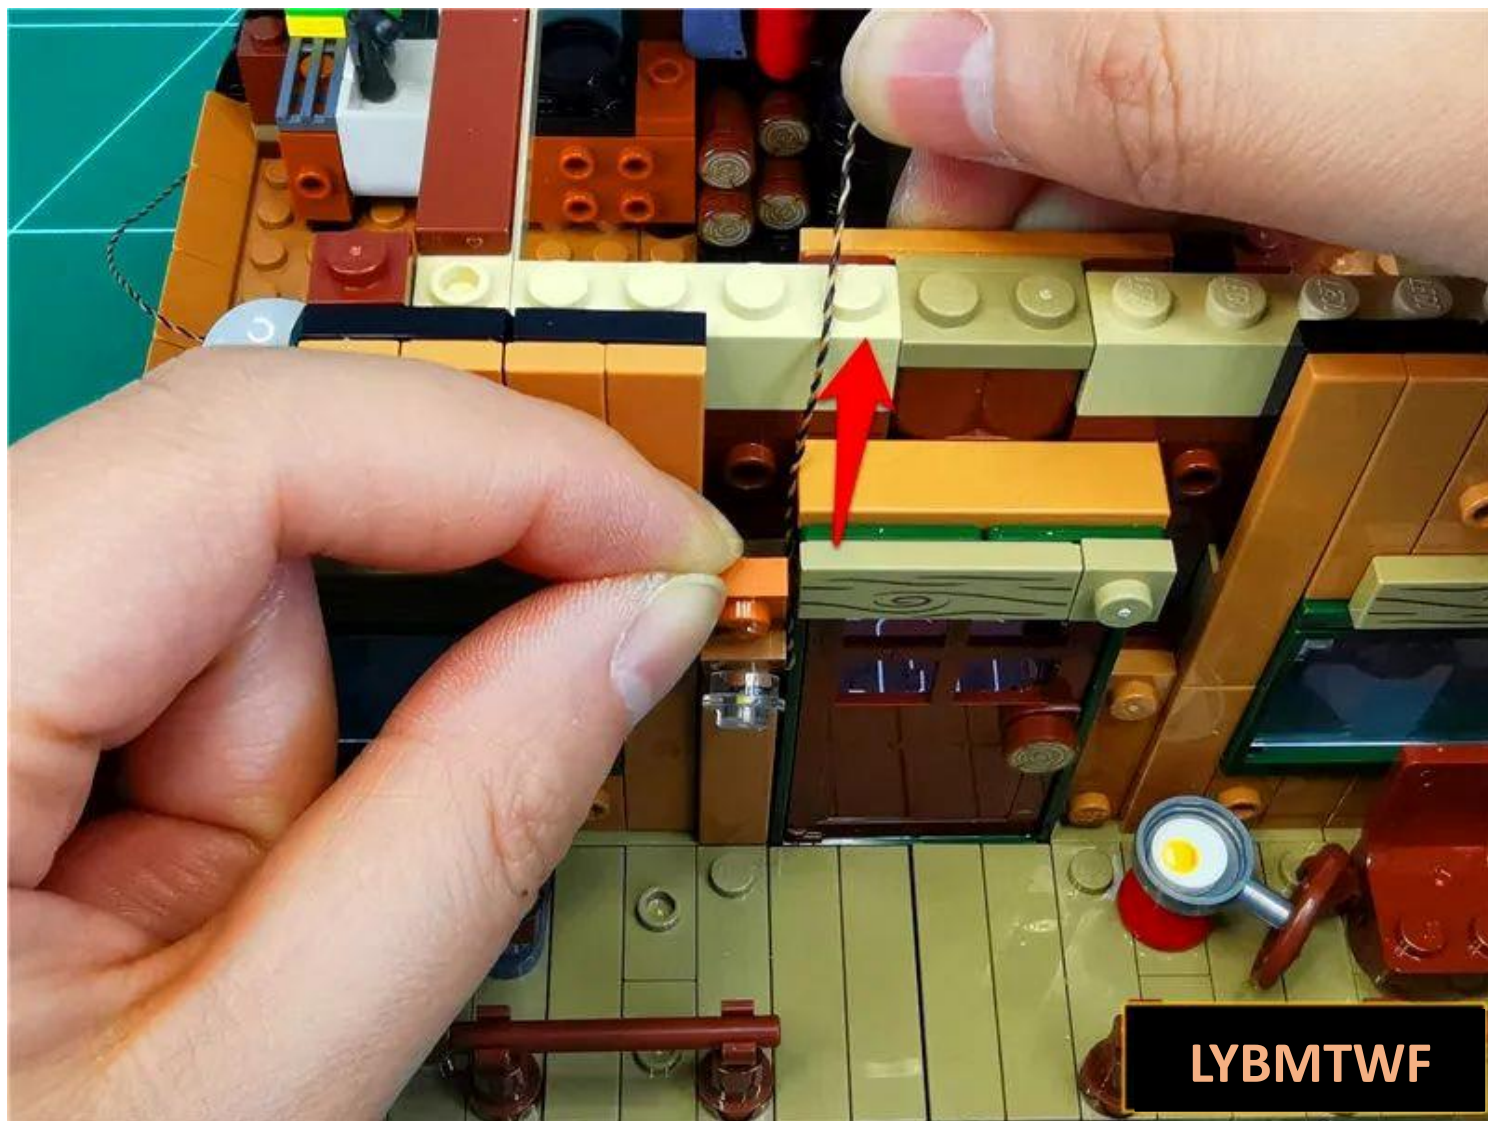


Restore parts and fix wires



Take another 30cm warm ordinary light bulb, place the light-emitting side of the light bulb upward, and place it in the position shown in the picture, **with the wire facing to the left.**

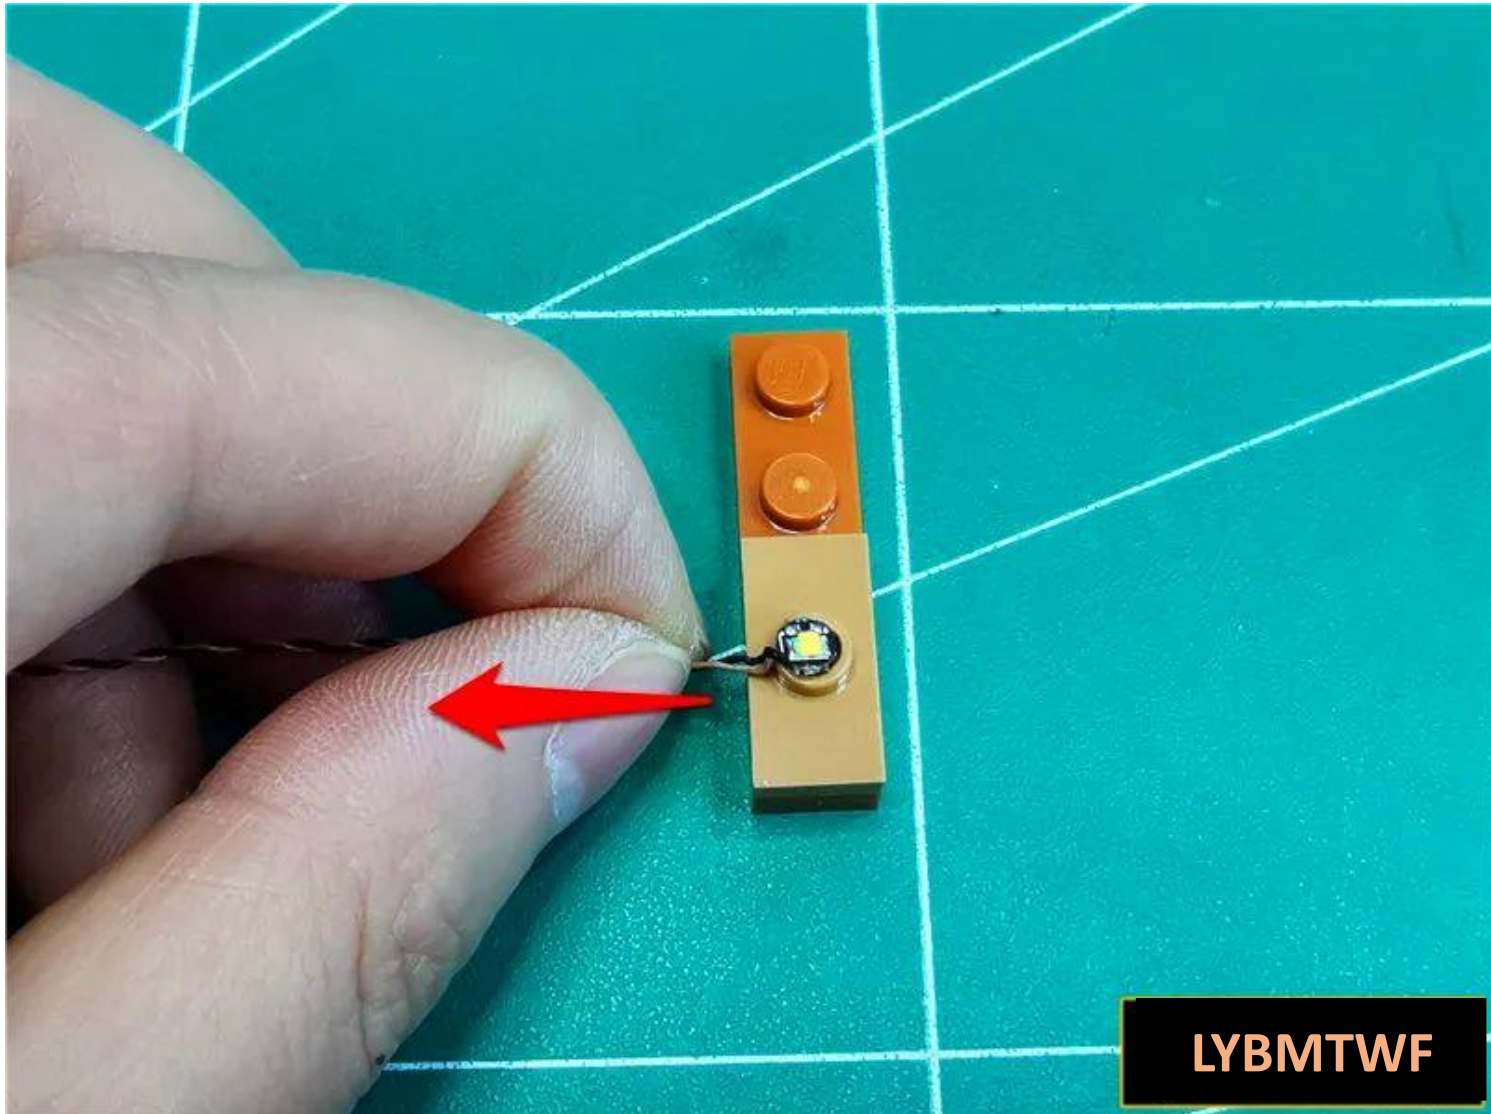

Restore the transparent circle and fix the lamp particles

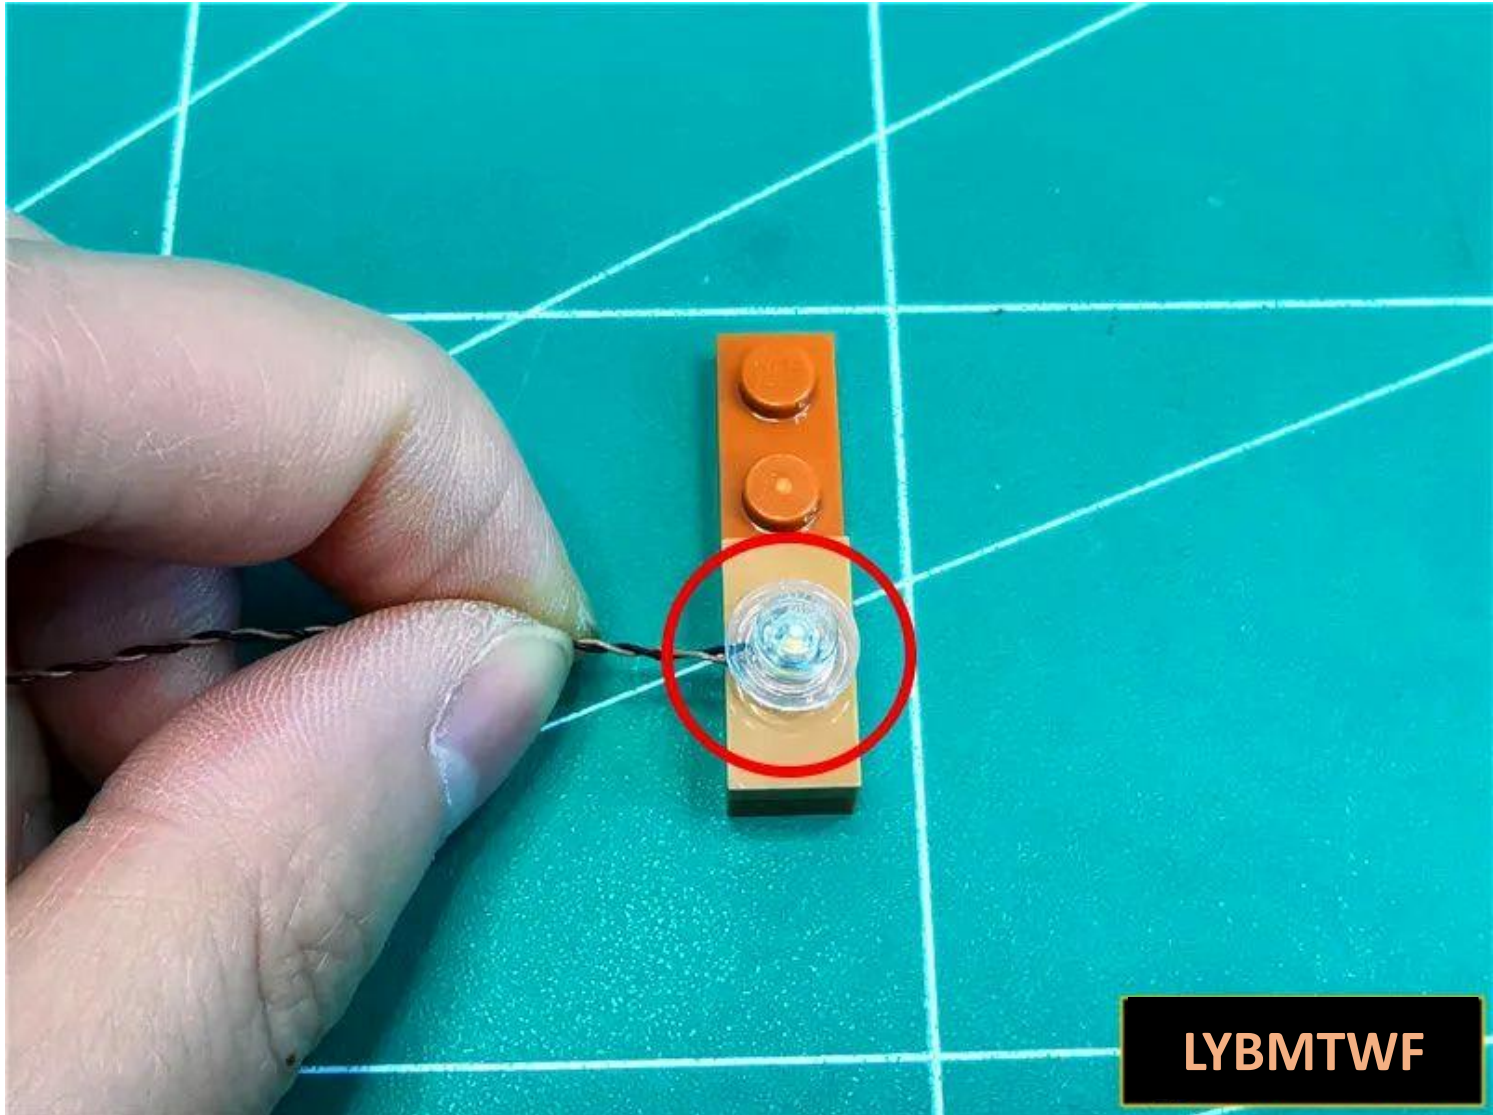

In the same way, restore the parts and fix the wires




Restore the illustrated parts



Pull the lantern wire up close to the wall and around the raised particles as shown in the picture



Restore the parts shown in the picture and fix the wires

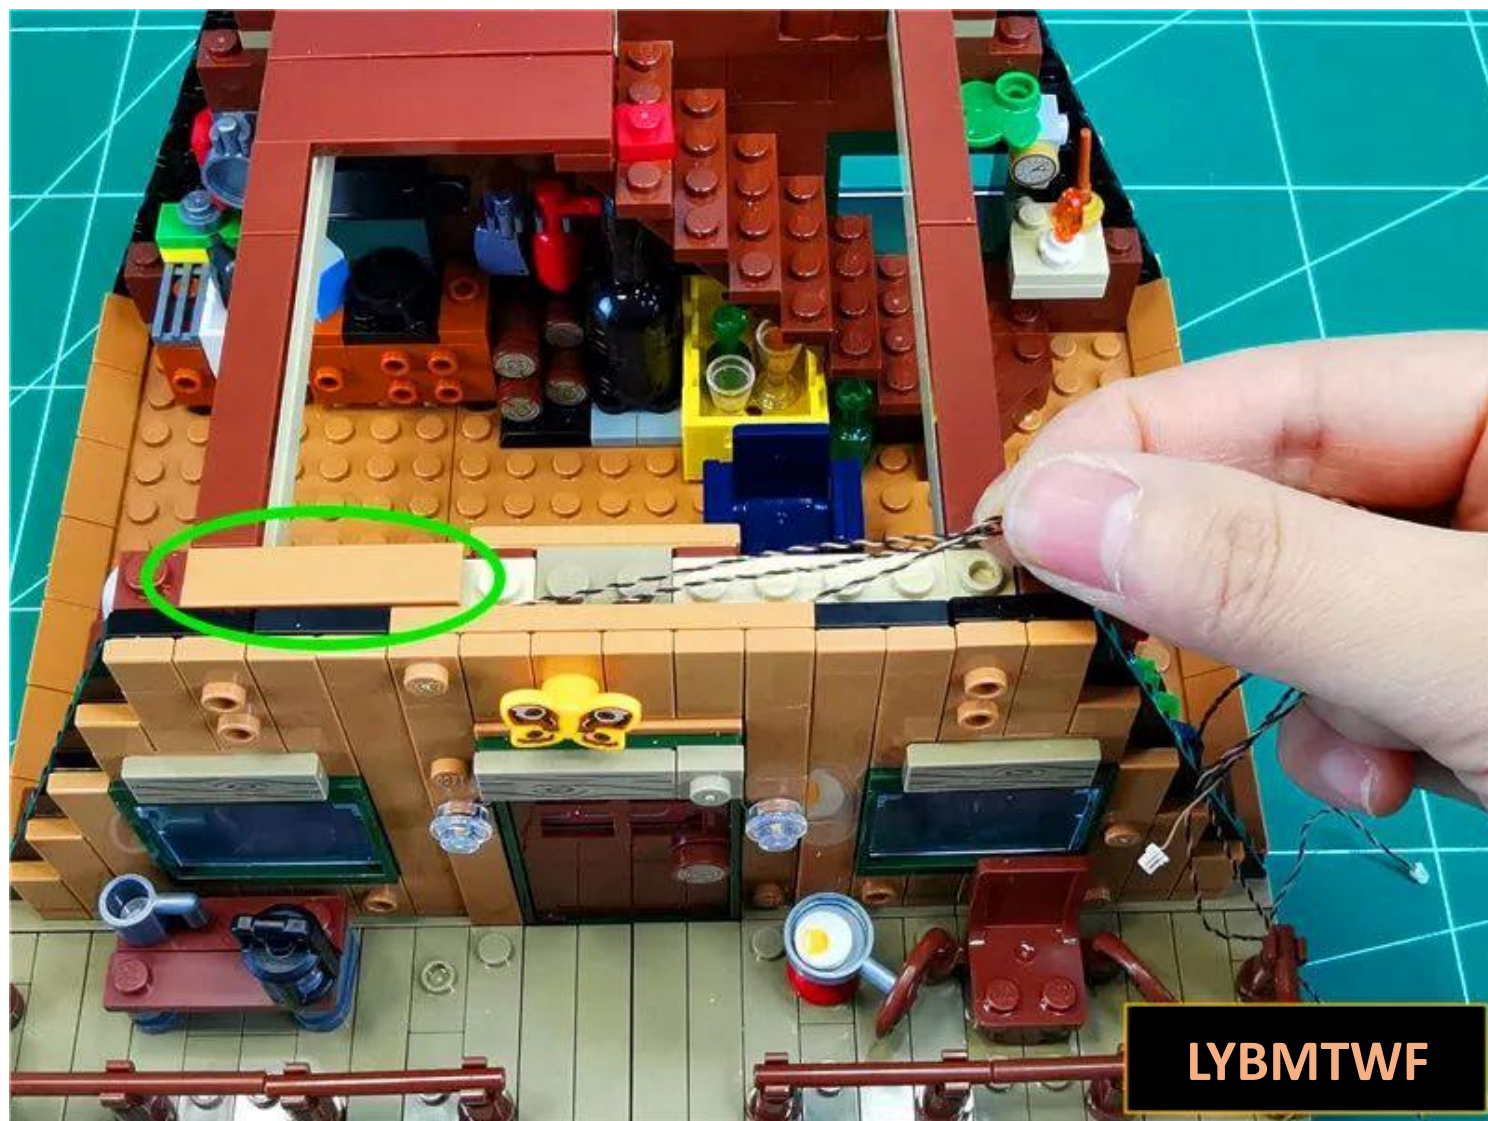


Pull the 2 wires on the left side along the edge of the part to the right side



Restore the parts shown in the picture and fix the wires




Pull the three wires into the room along the gaps between the raised particles.

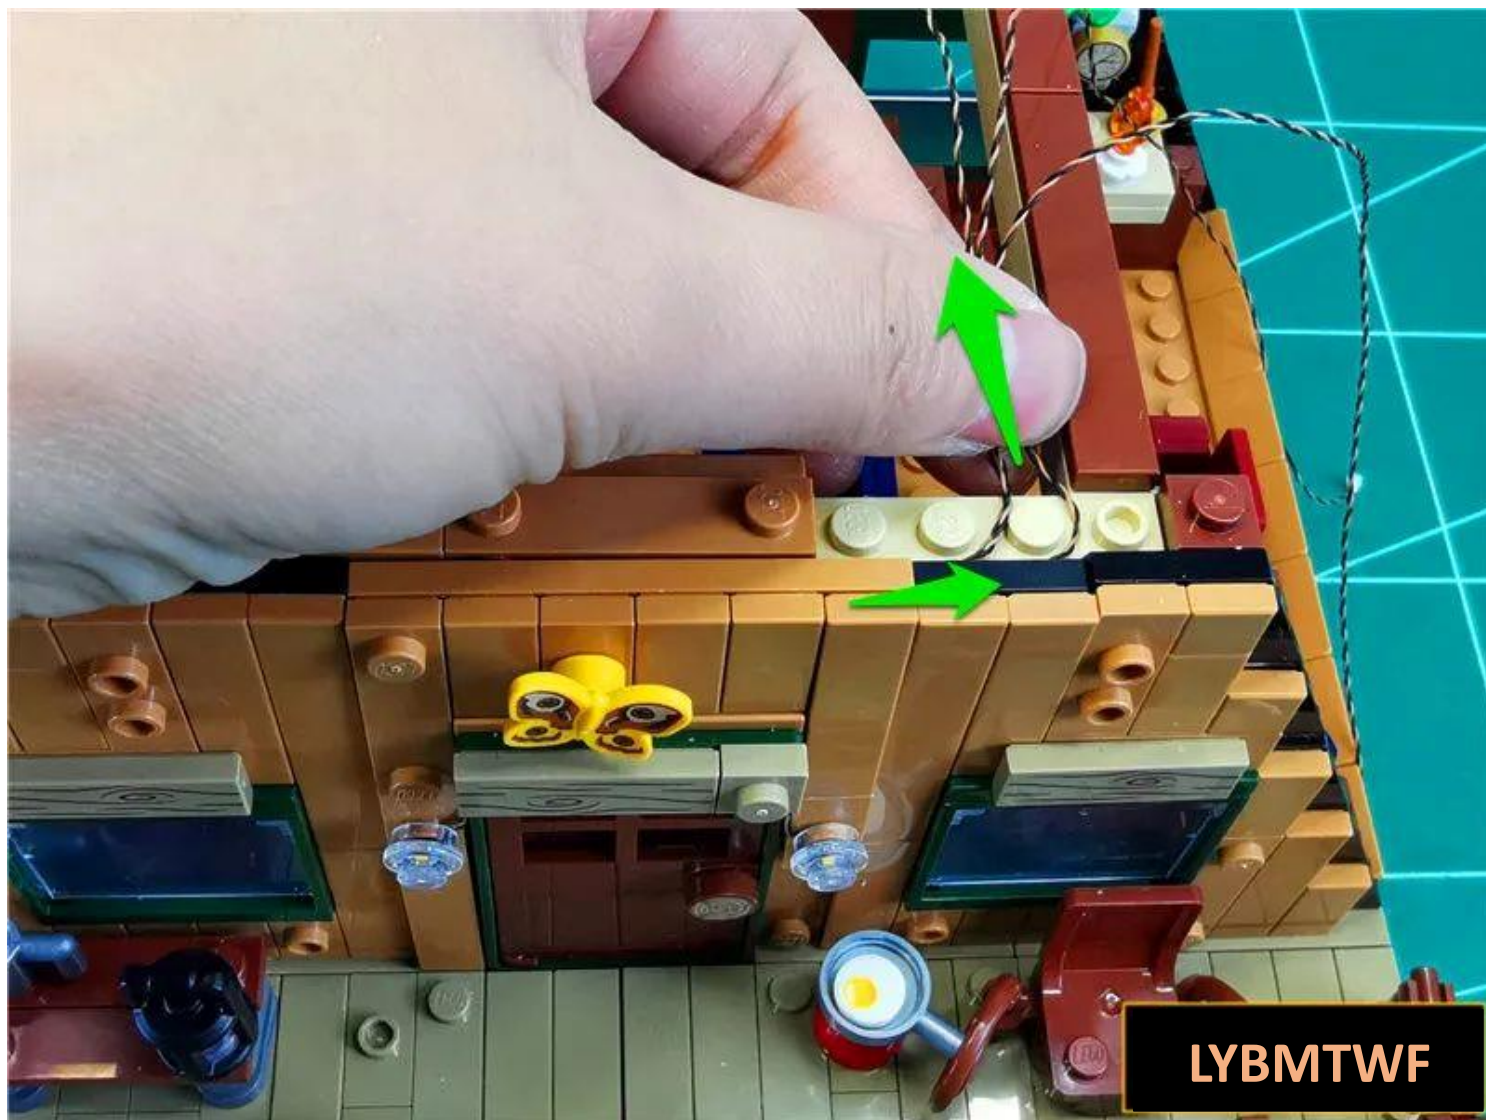


LYBMTWF

Restore the parts shown in the picture and fix the wires

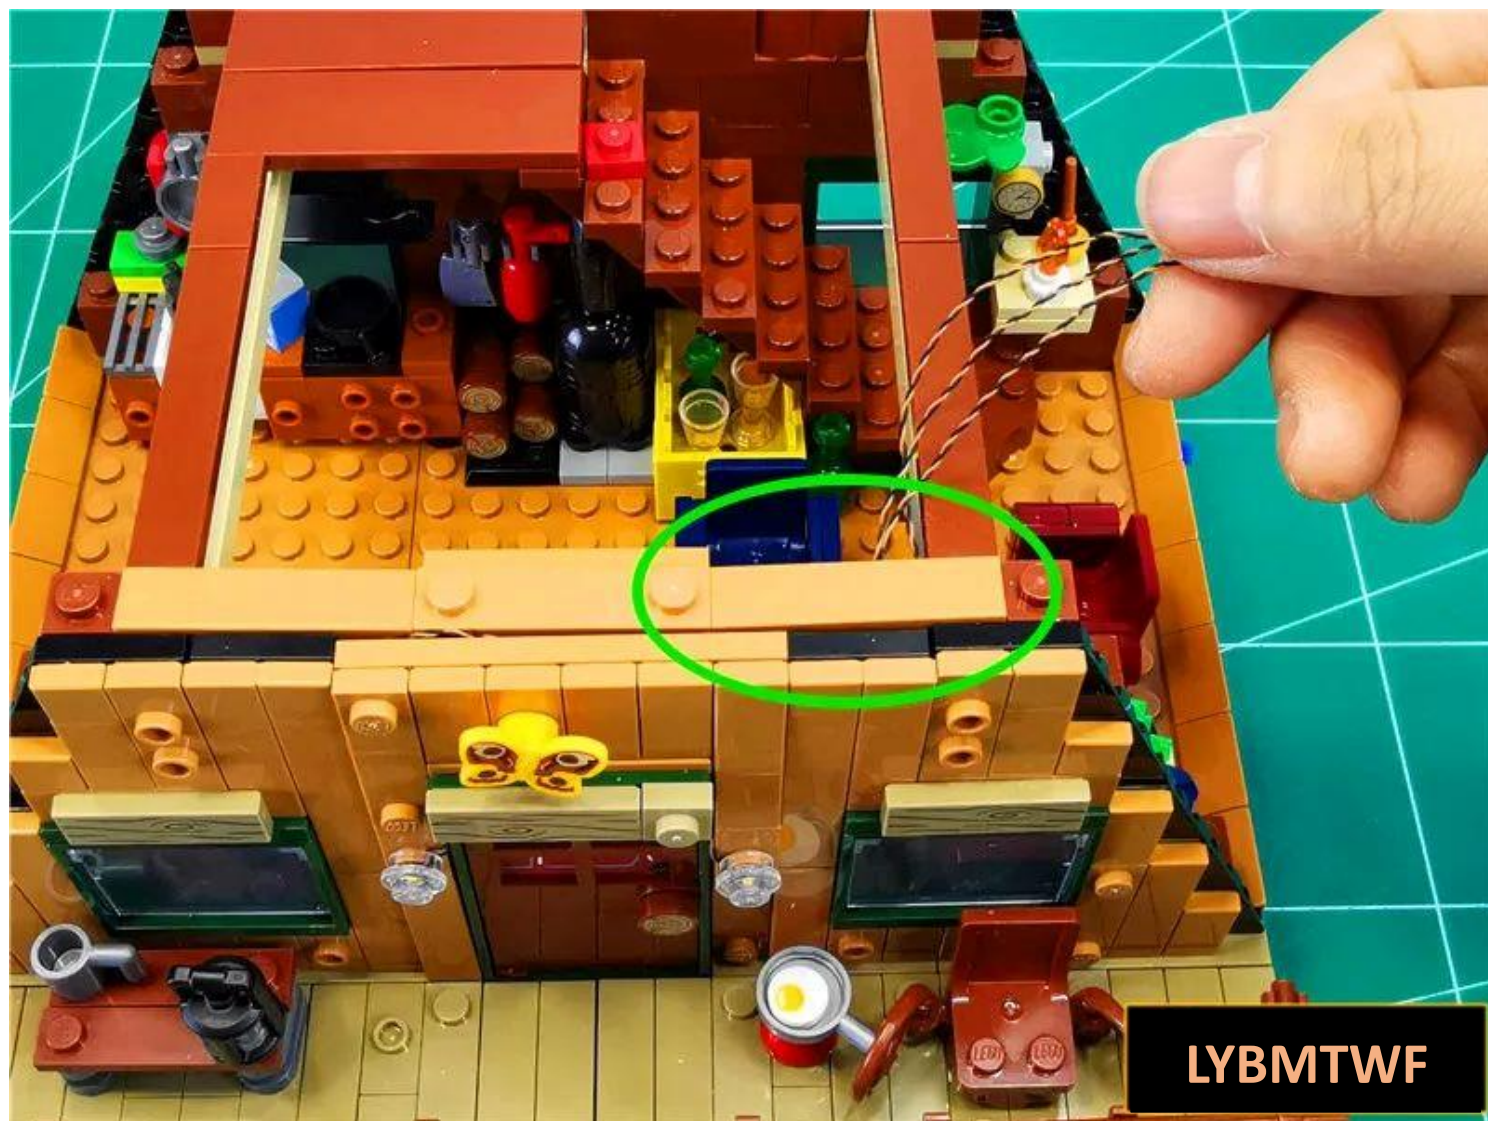

Take out the two-story building and pass the wires through the gaps to the upper floor

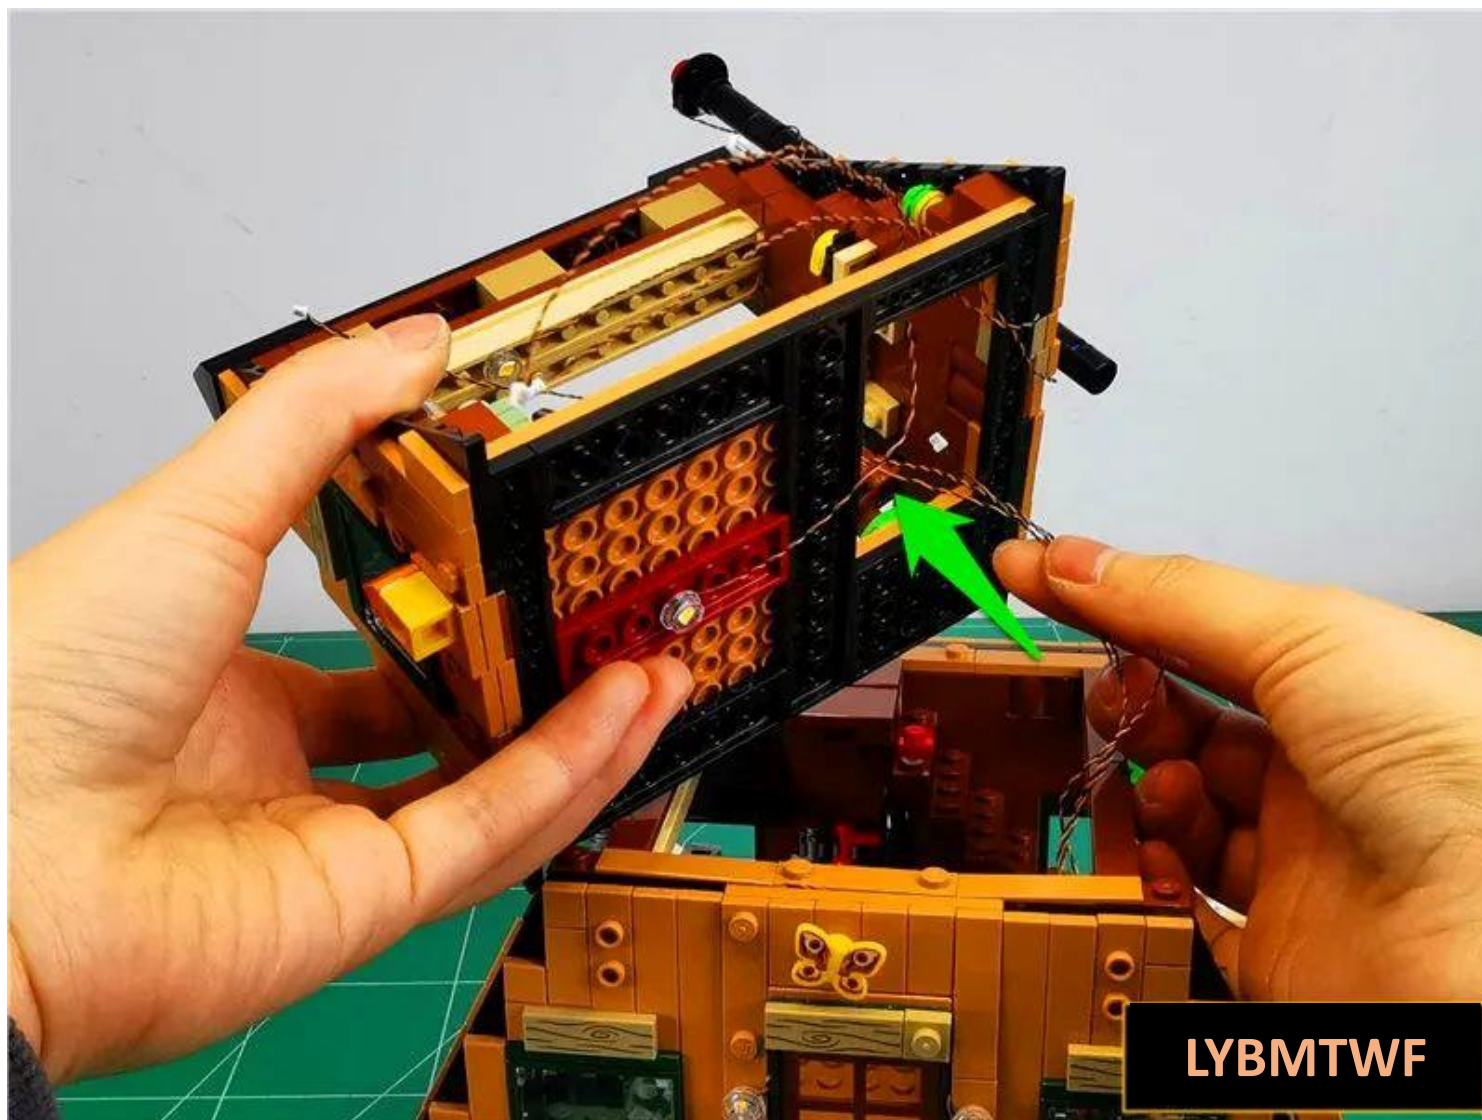

LYBMTWF


Restore the two-story building



Take a 30cm cable and an 8-seater cable and connect them together



Insert all 6 wires into 8 sockets

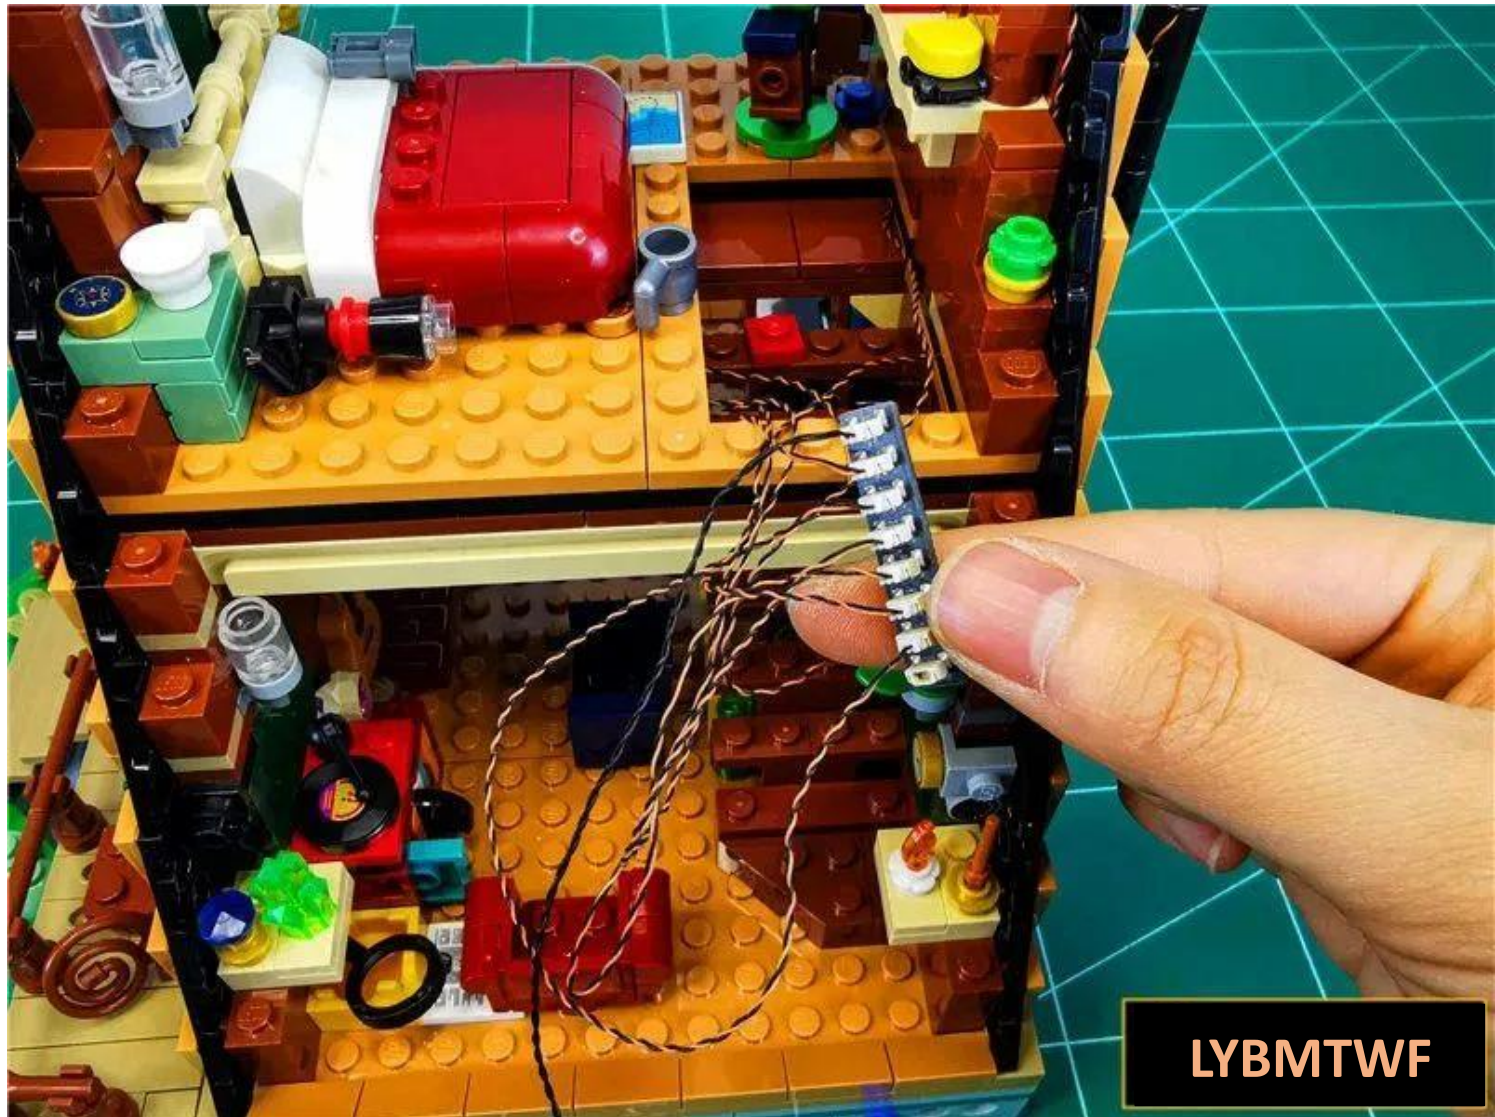


Insert the cable and connect the 6 sockets of the power supply



Turn on the power and test that the light lights up normally



After the test is completed, turn off the power, unplug the connection cable, and **leave the 6 sockets on the power supply**

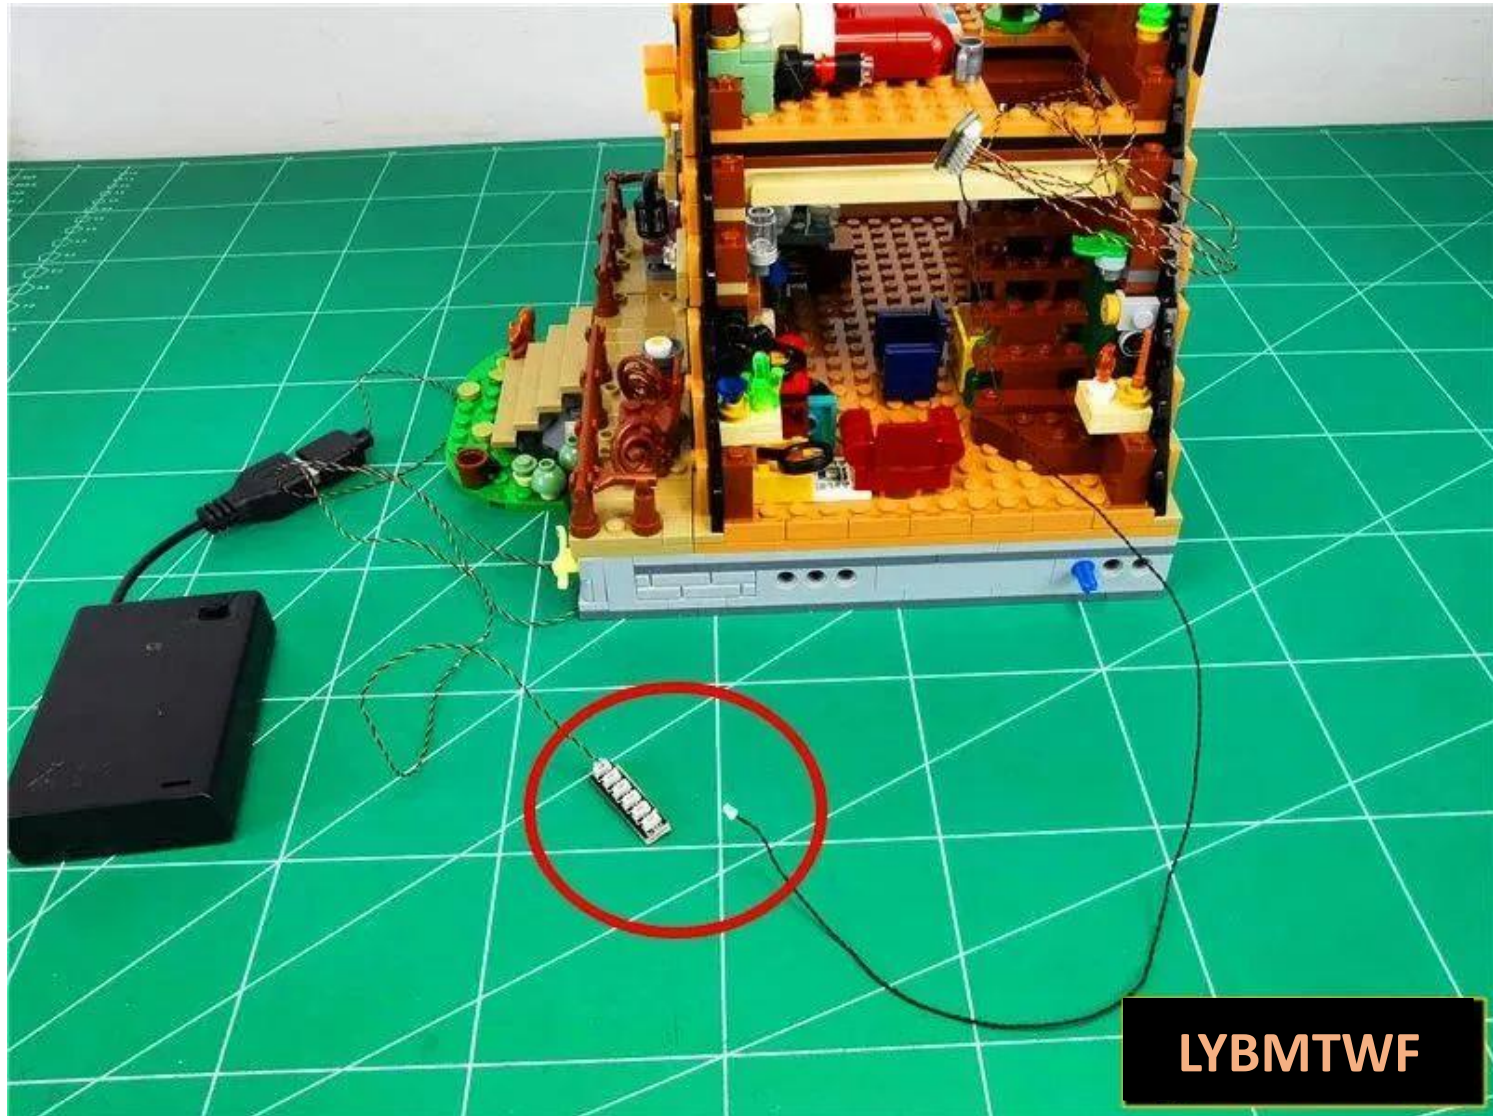

Go to the front and place the tree on the left close to the house




Pass the connecting wire on the tree from indoor to the right side



Pull out from the right




Pass the connecting wire through the gap to the upper layer

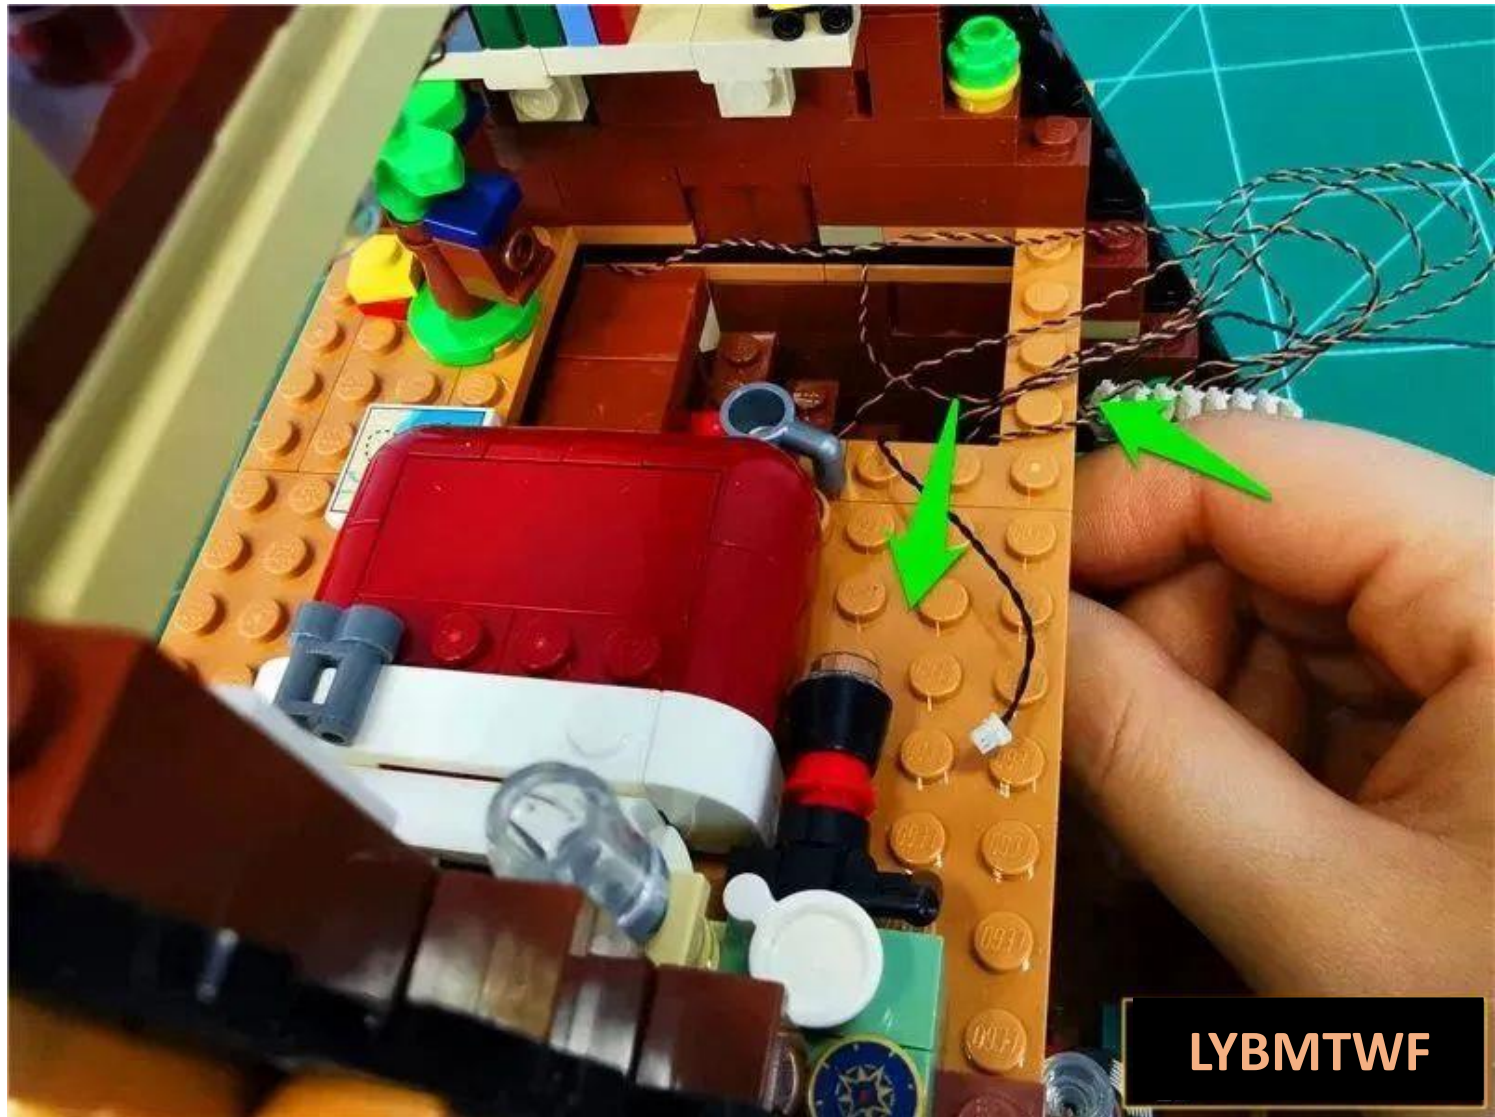

Plug the cable into the 8-socket



Paste the 8 seats to the location shown in the picture

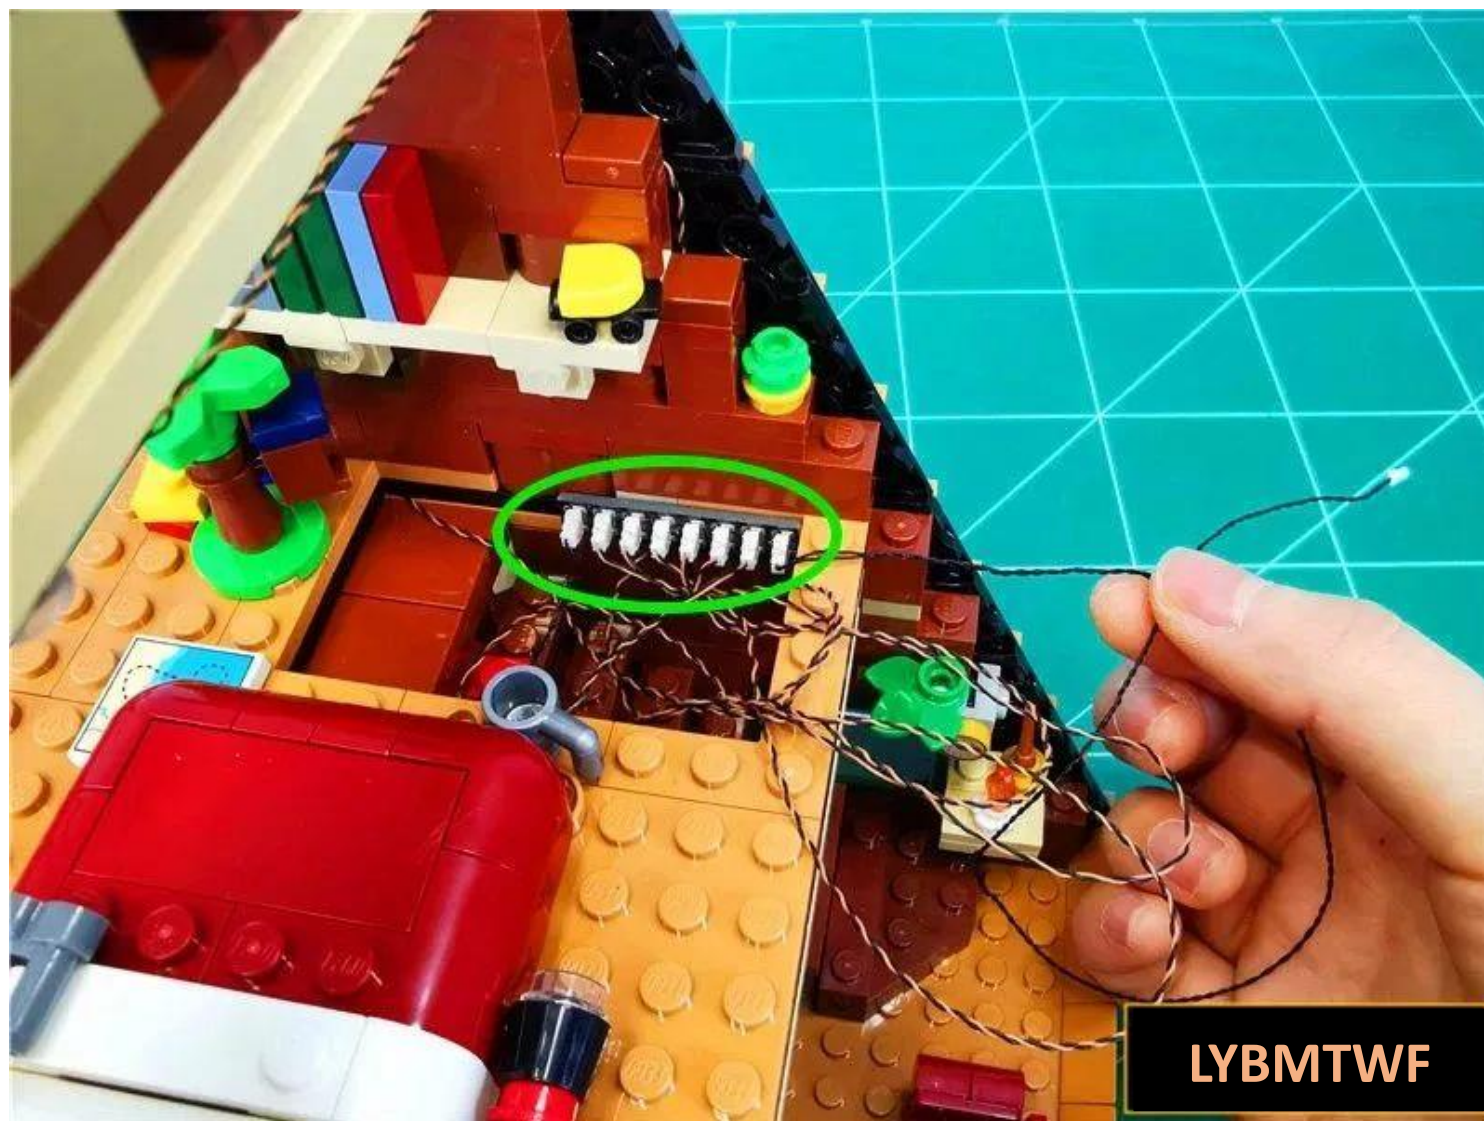

LYBMTWF


Twist the excess wires together appropriately




Fit the wires to the positions shown in the picture




Go to the back of the building and remove the parts indicated by the arrows in sequence

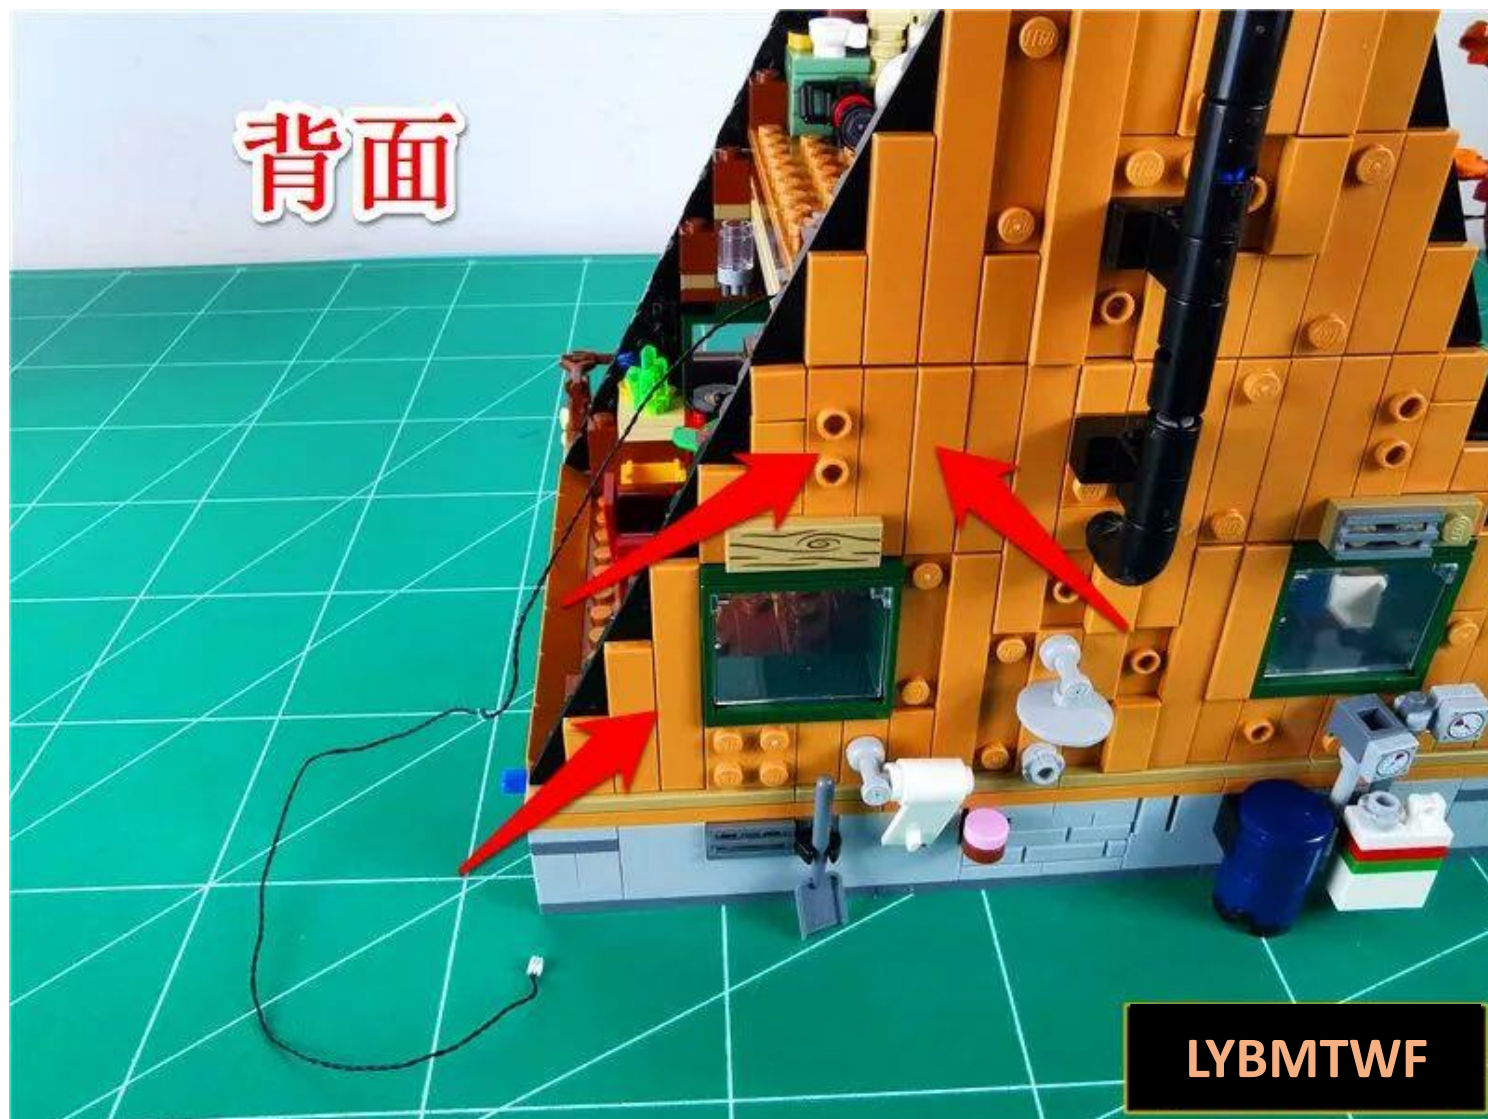

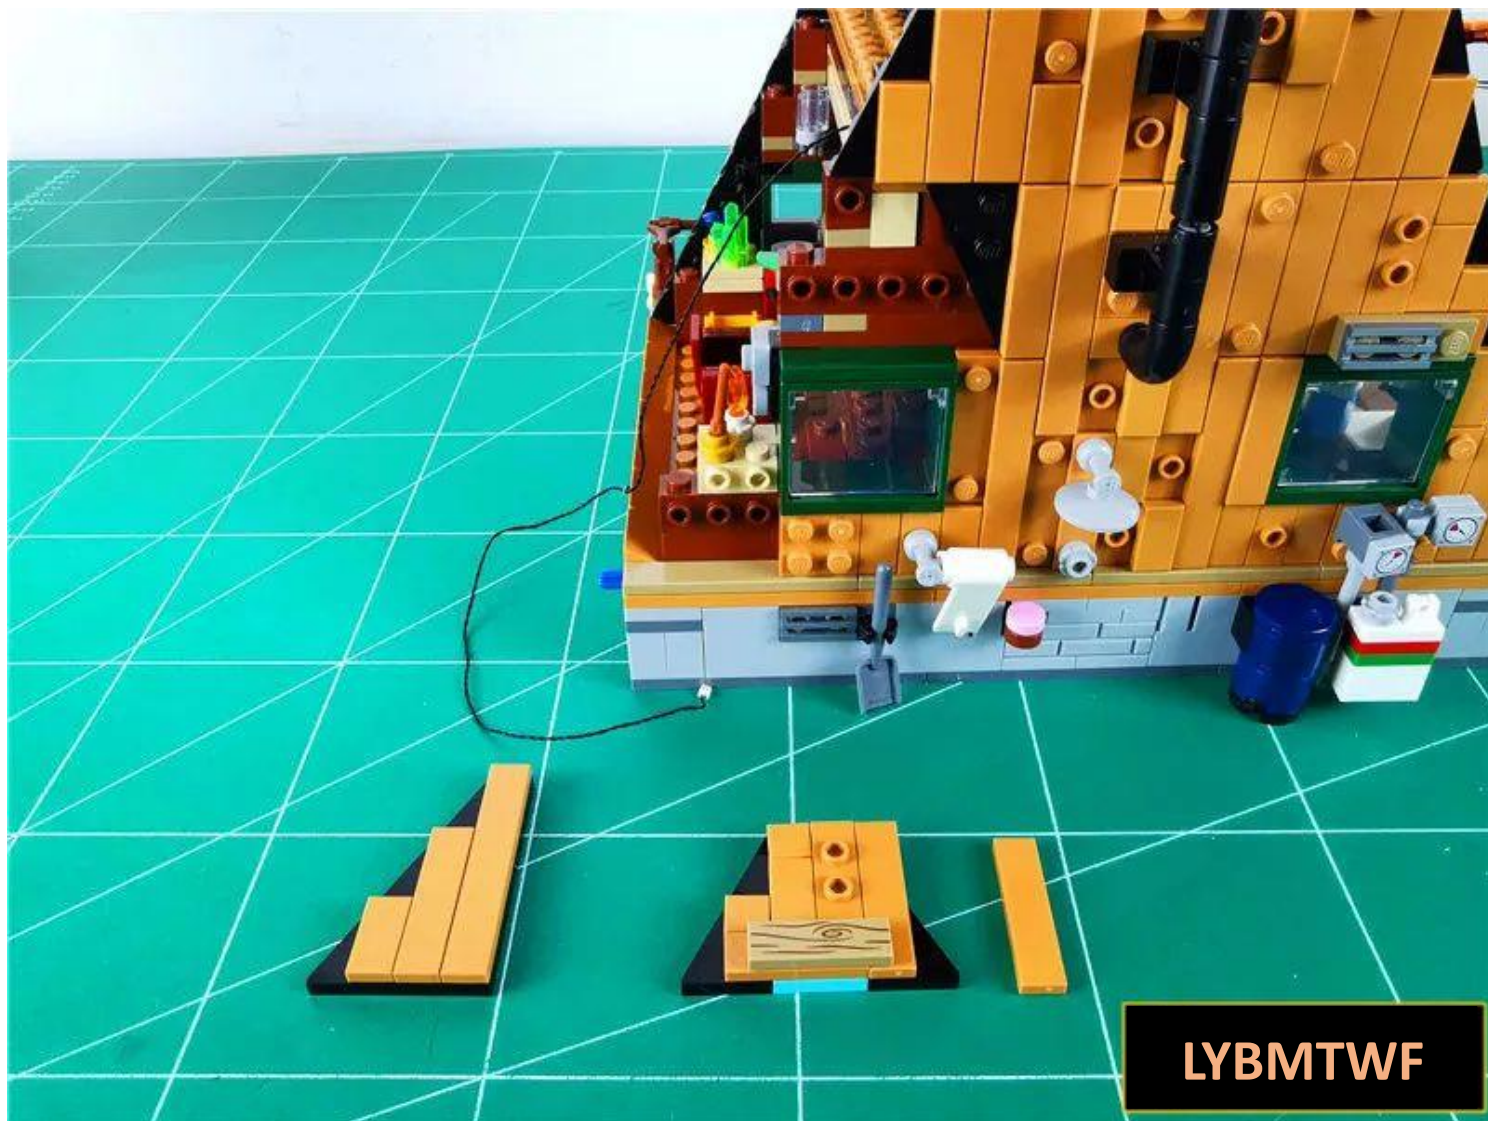

LYBMTWF

Pull the connecting wire along the gap to the back

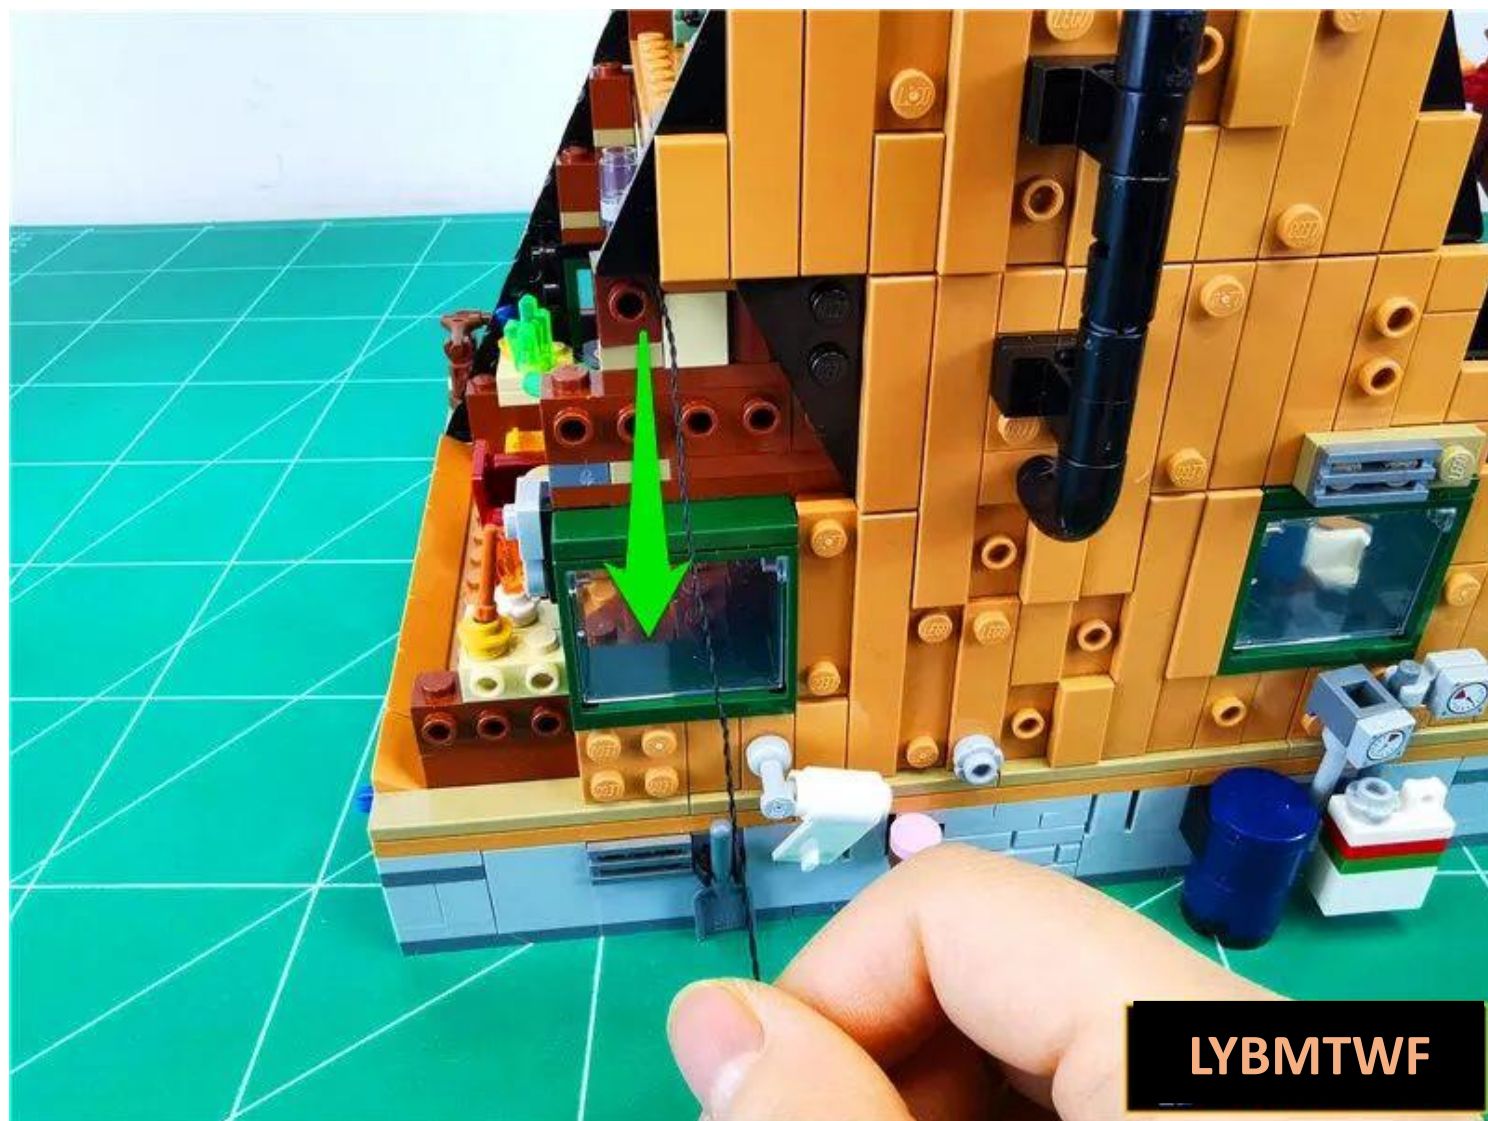


LYBMTWF


Continue to connect the wire around the raised particles as shown in the figure



Restore parts and fix wires

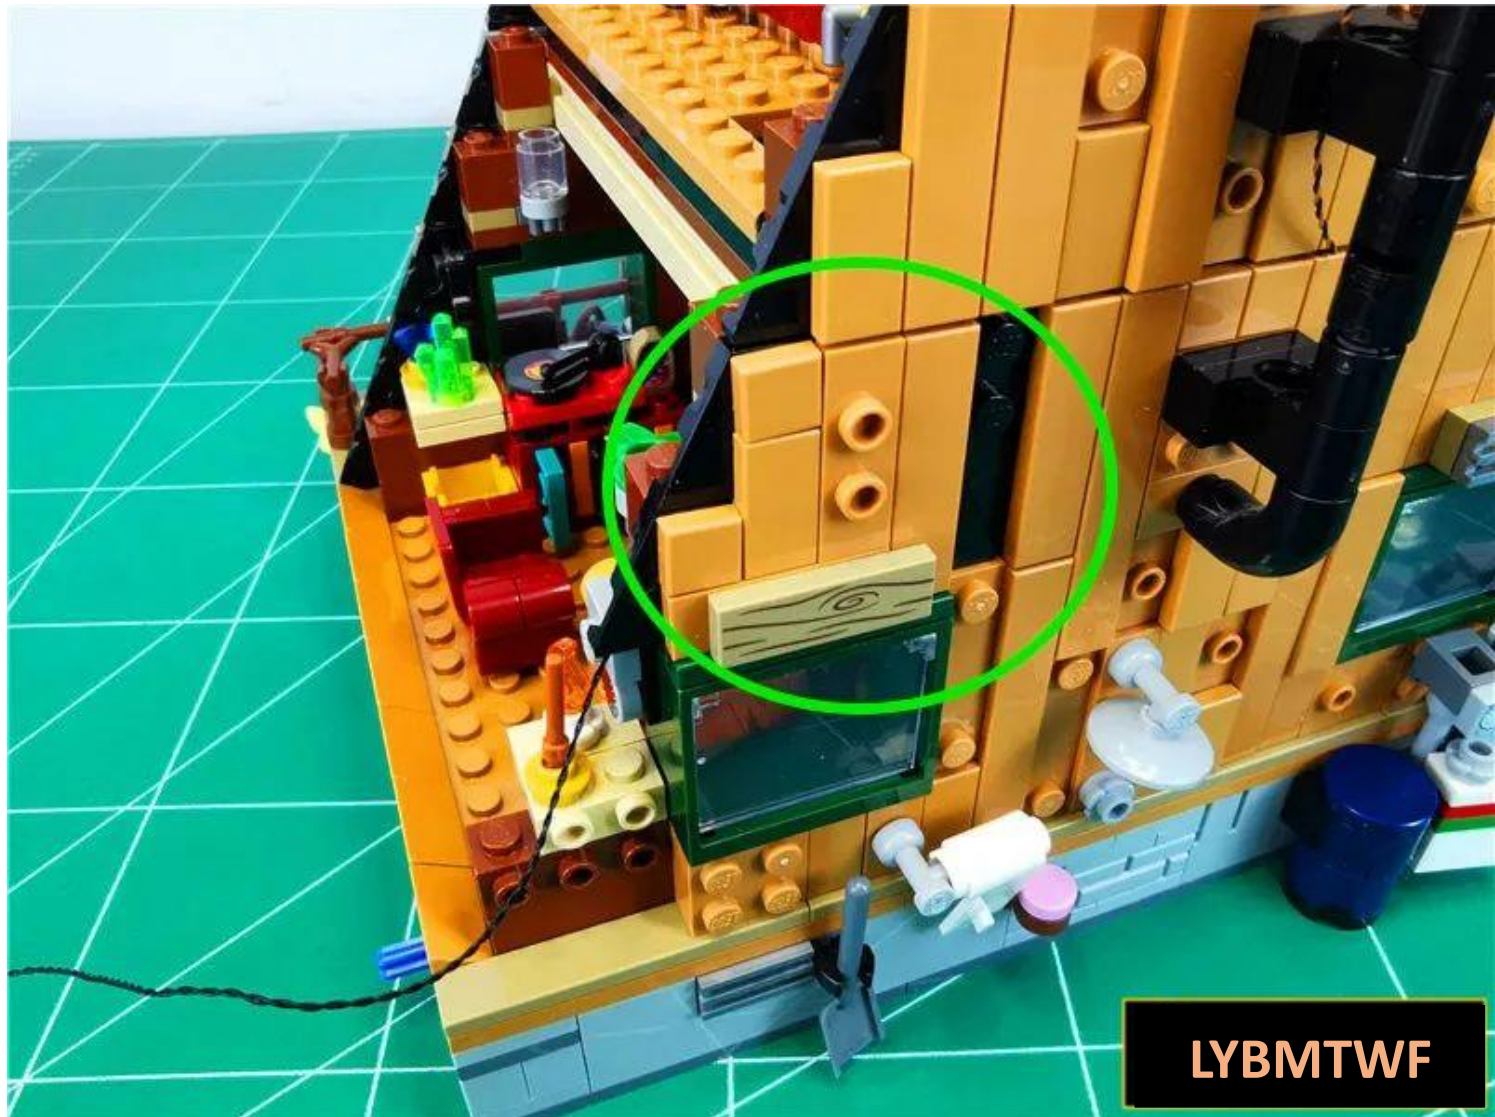


Restore the illustrated parts

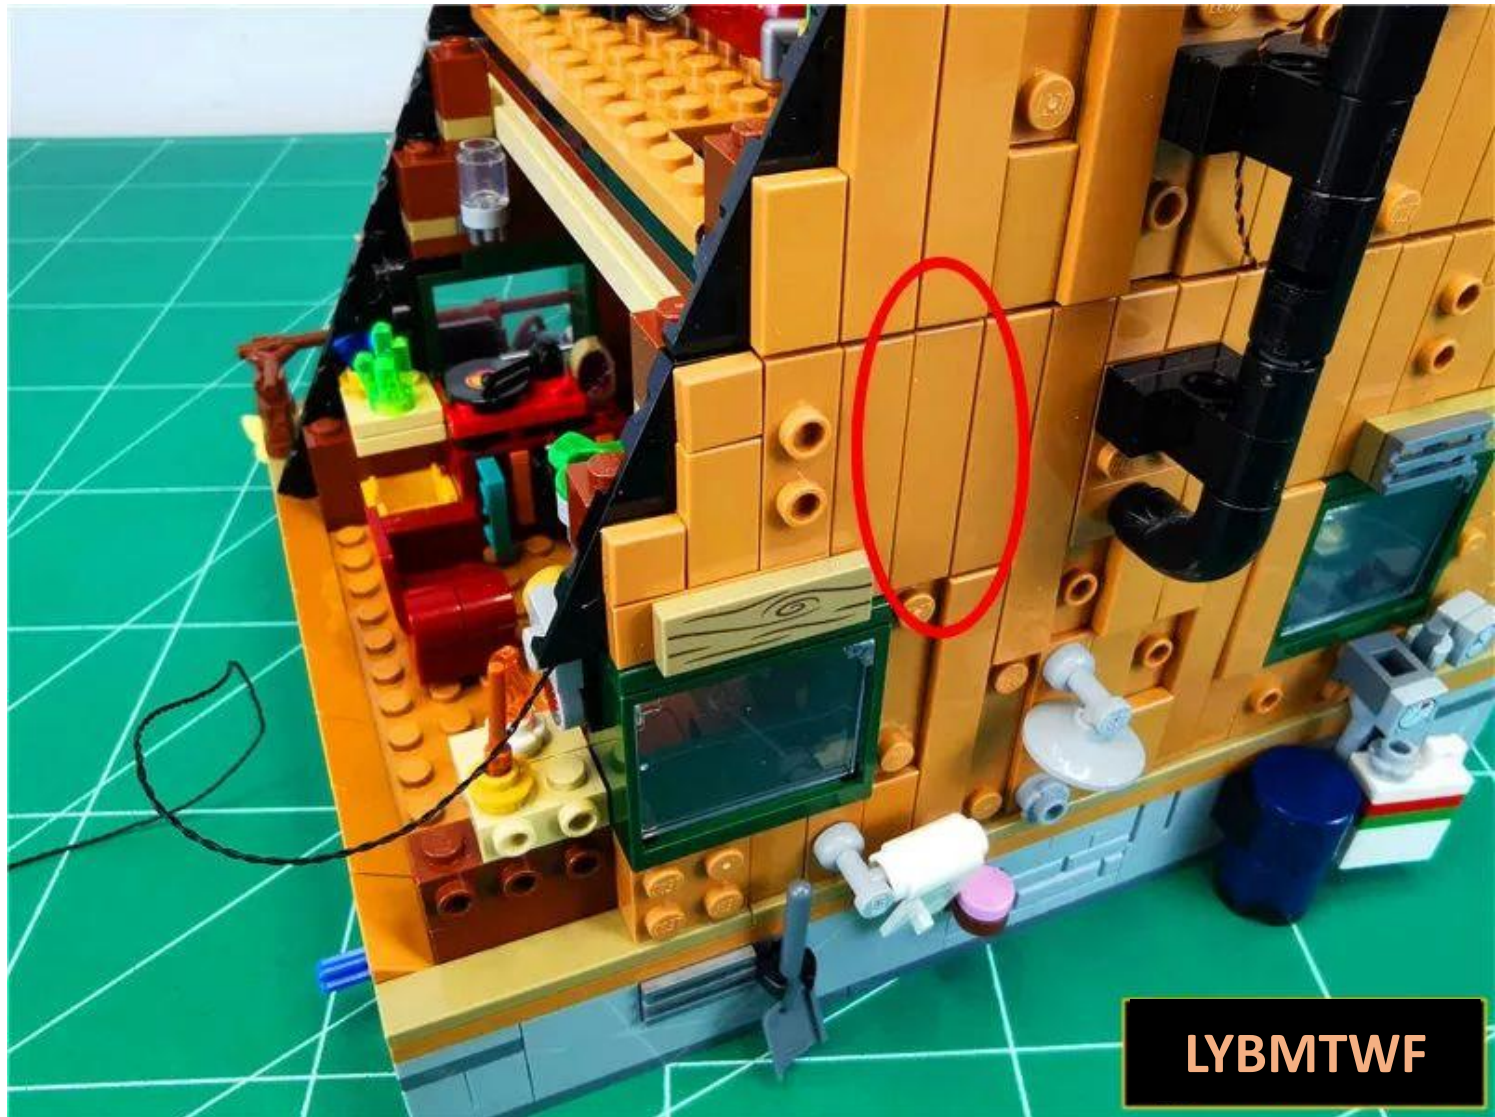

Continue to wrap the wire around the raised particles and pull it into the room



Restore parts and fix wires

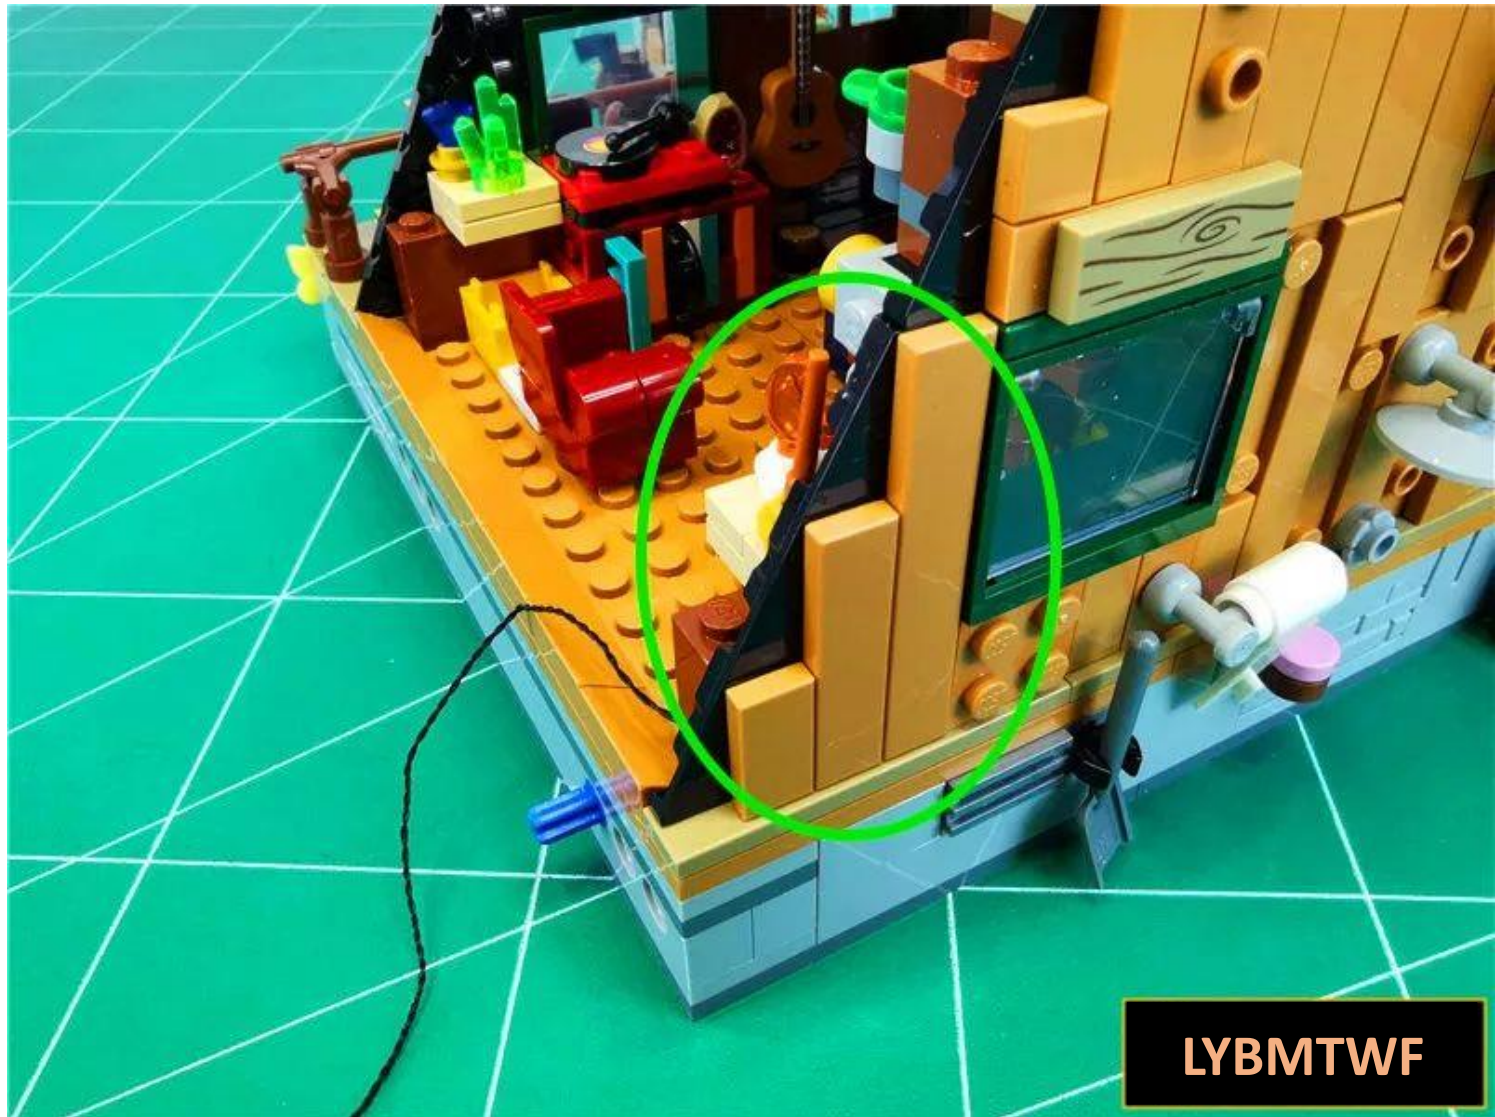

Go to front



Remove the parts indicated by arrows



Pull out the excess connecting wire from the left side along the edge of the part




Restore parts and fix connecting wires




Restore the trees on the left



Remove the parts indicated by arrows

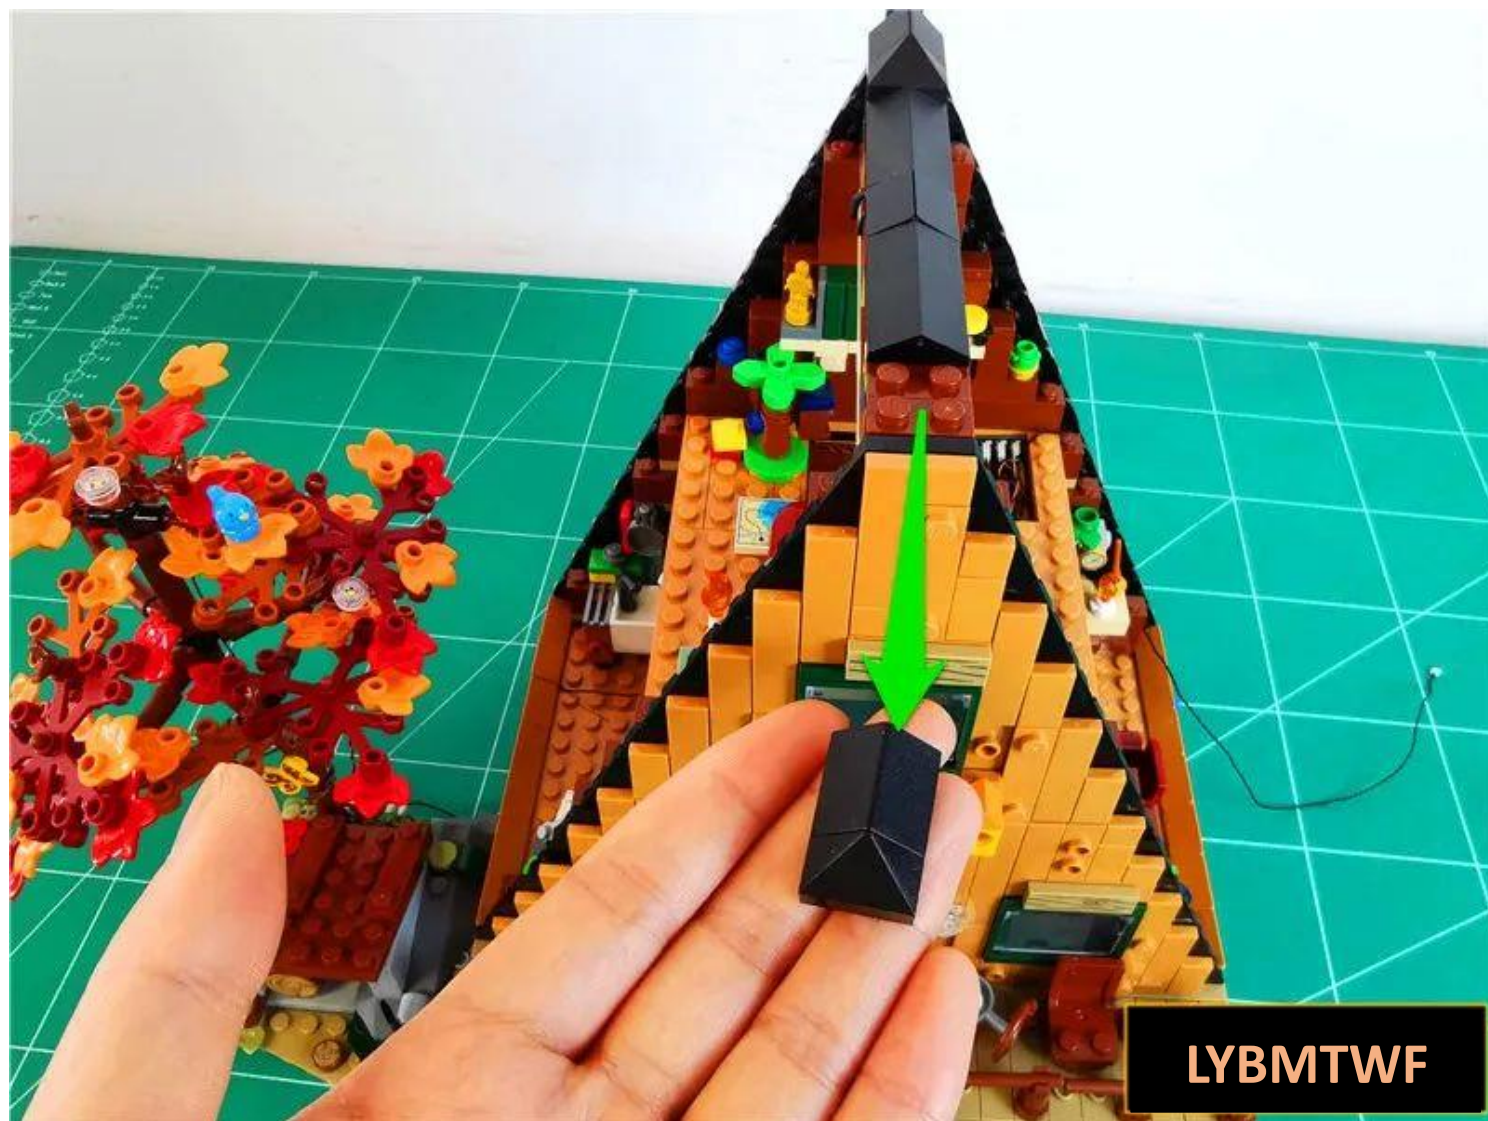


Take out 2 roofs and prepare to install the roof on the left as shown in the picture (pay attention to the direction)

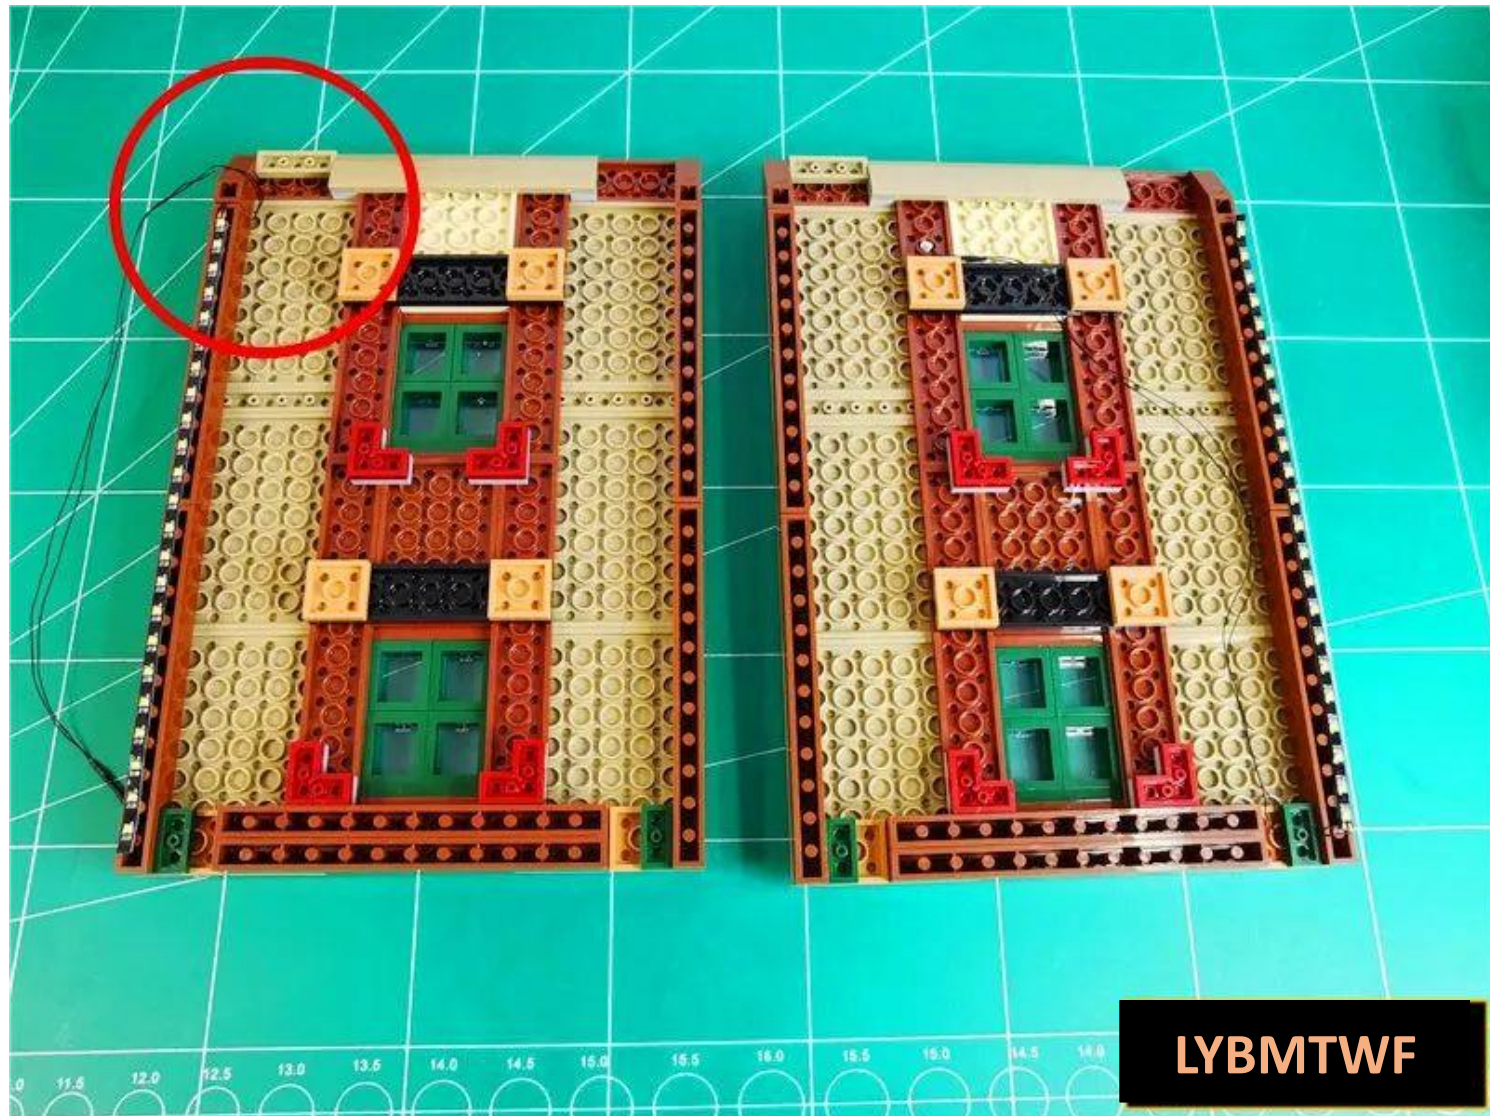


Restore the left roof



Place the roof on the right side close to the house

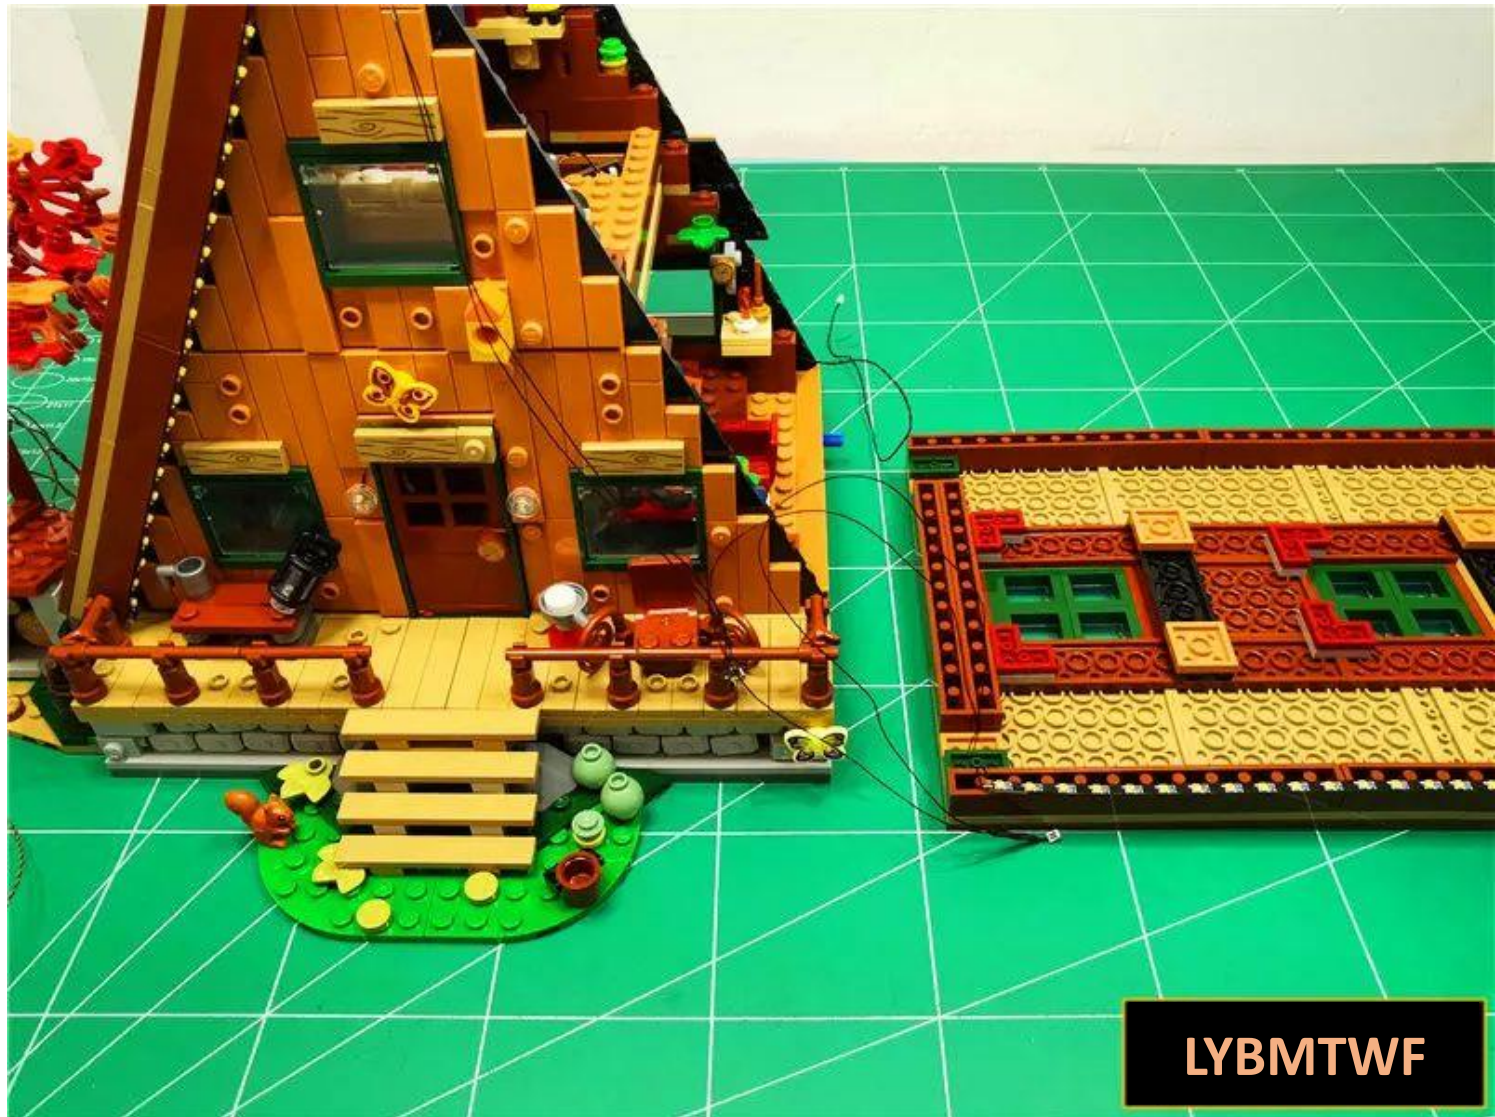

Insert **the 2 light strip wires** and connect the 6 sockets of the power supply

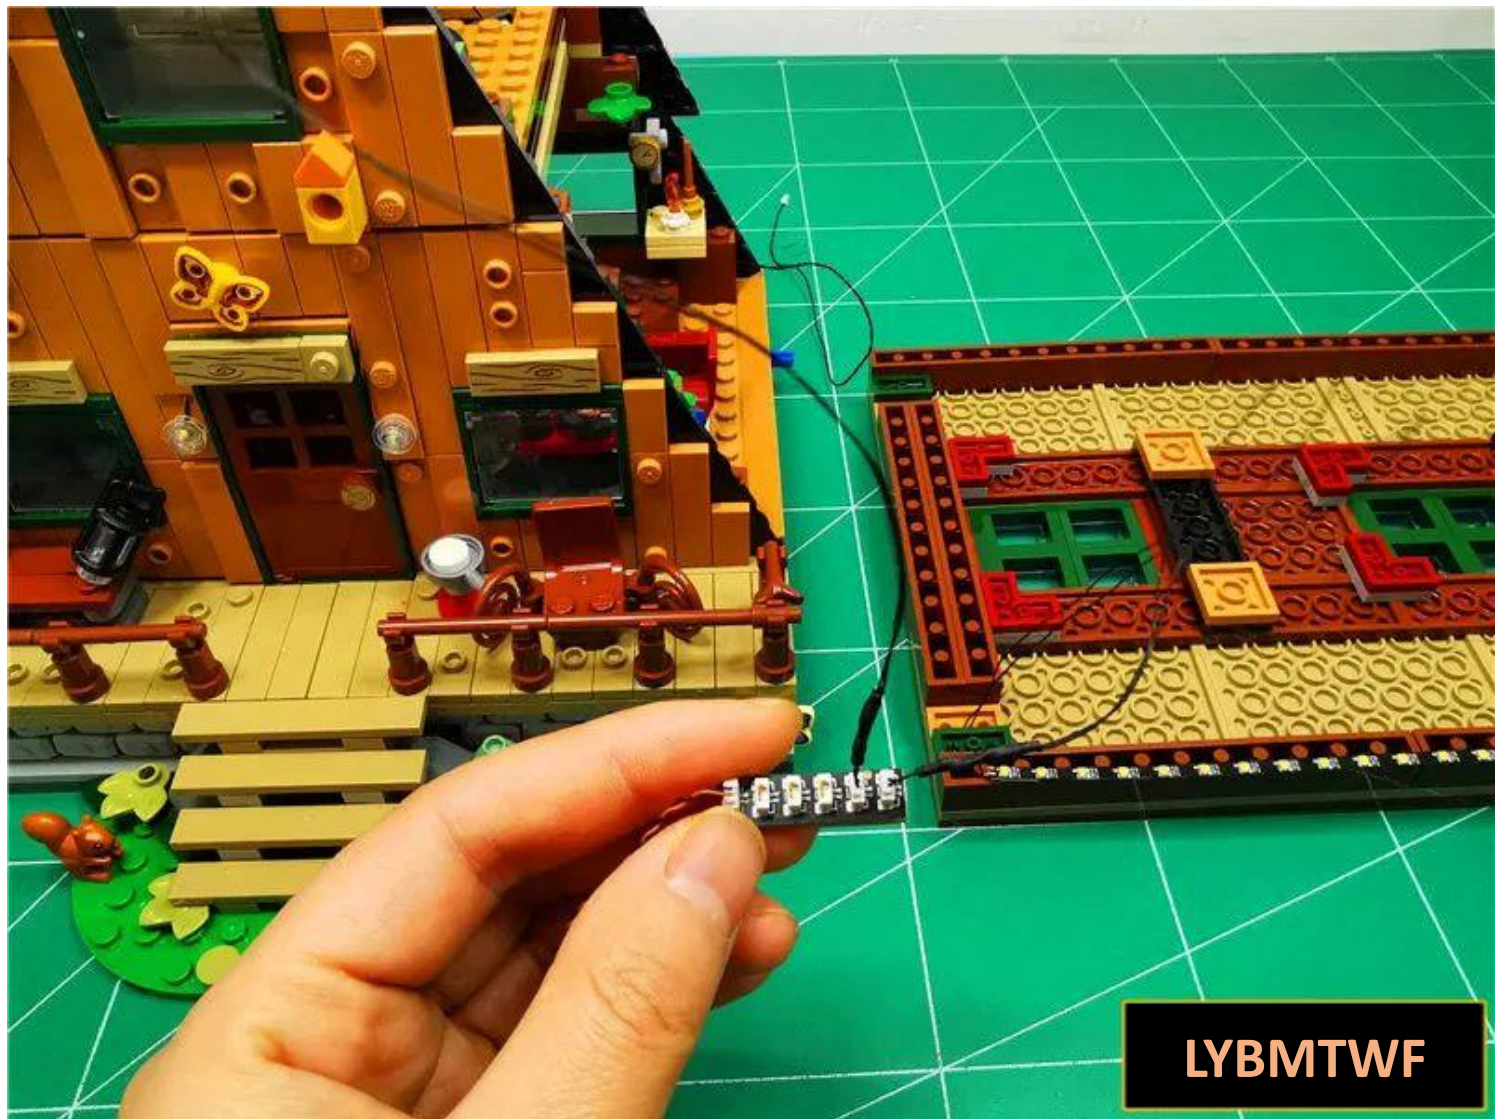

Restore the trees on the right



Plug the cable into the 6-seat




Turn on the power and test that the light lights up normally



After the test is completed, turn off the power and remove the adhesive tape from the 6 seats.



Paste the 6 seats into the positions shown in the picture

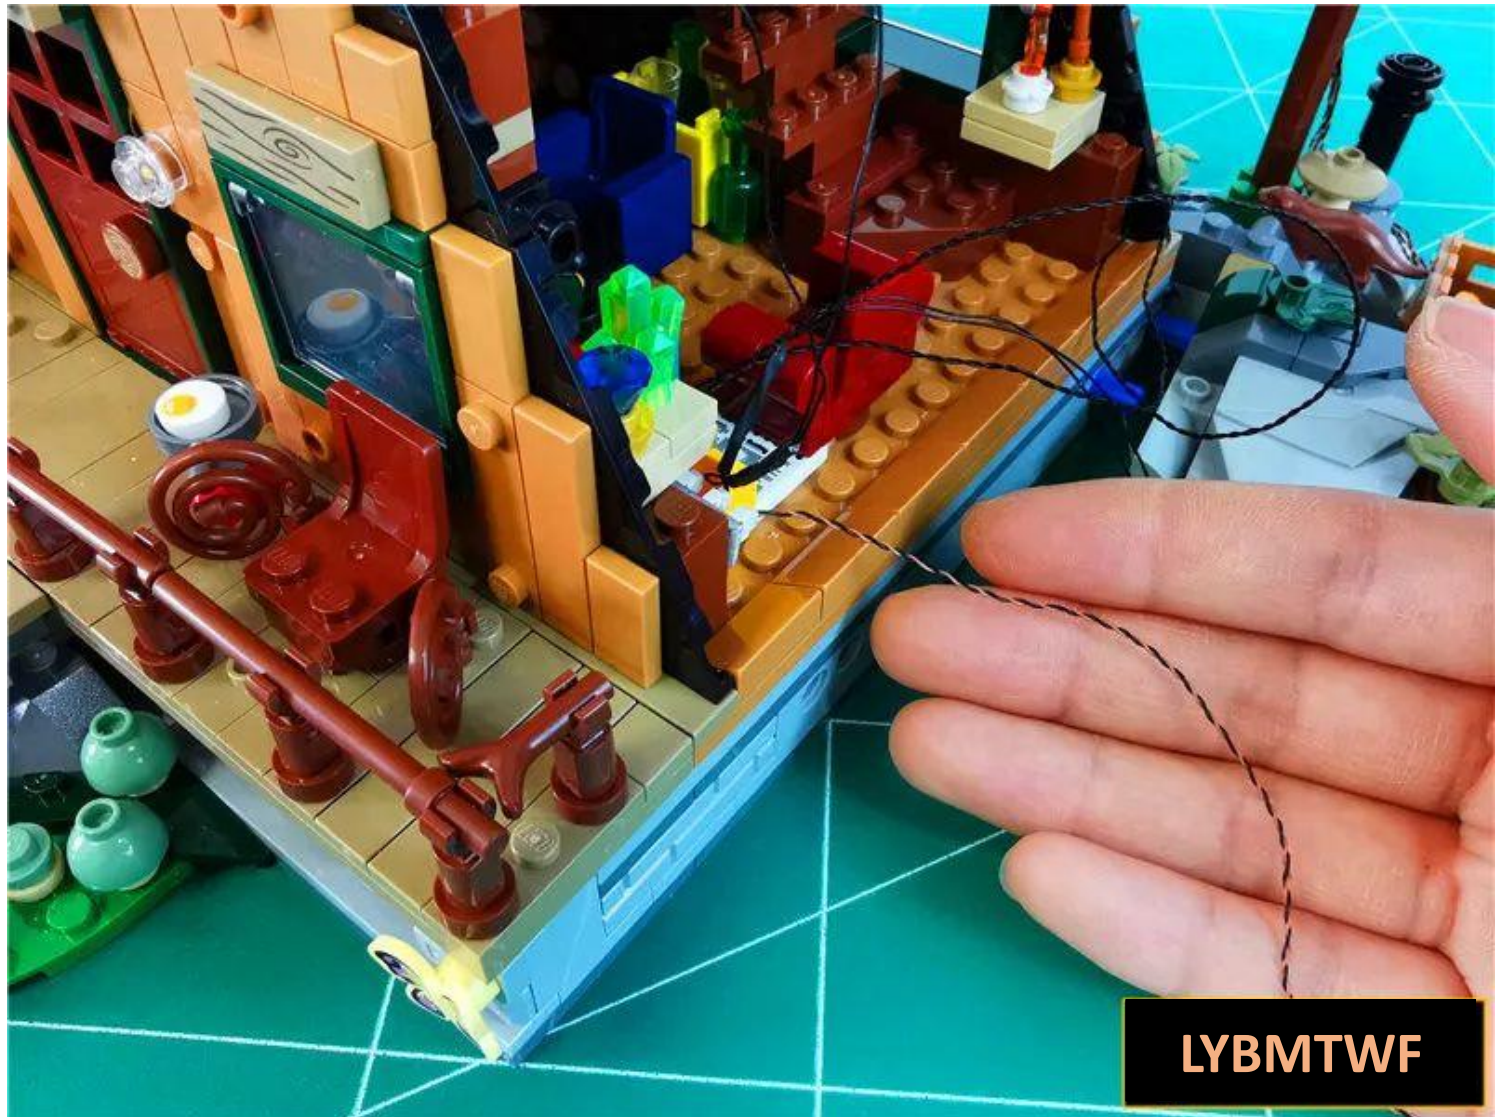


LYBMTWF

The specific location is as follows



Remove the parts indicated by arrows

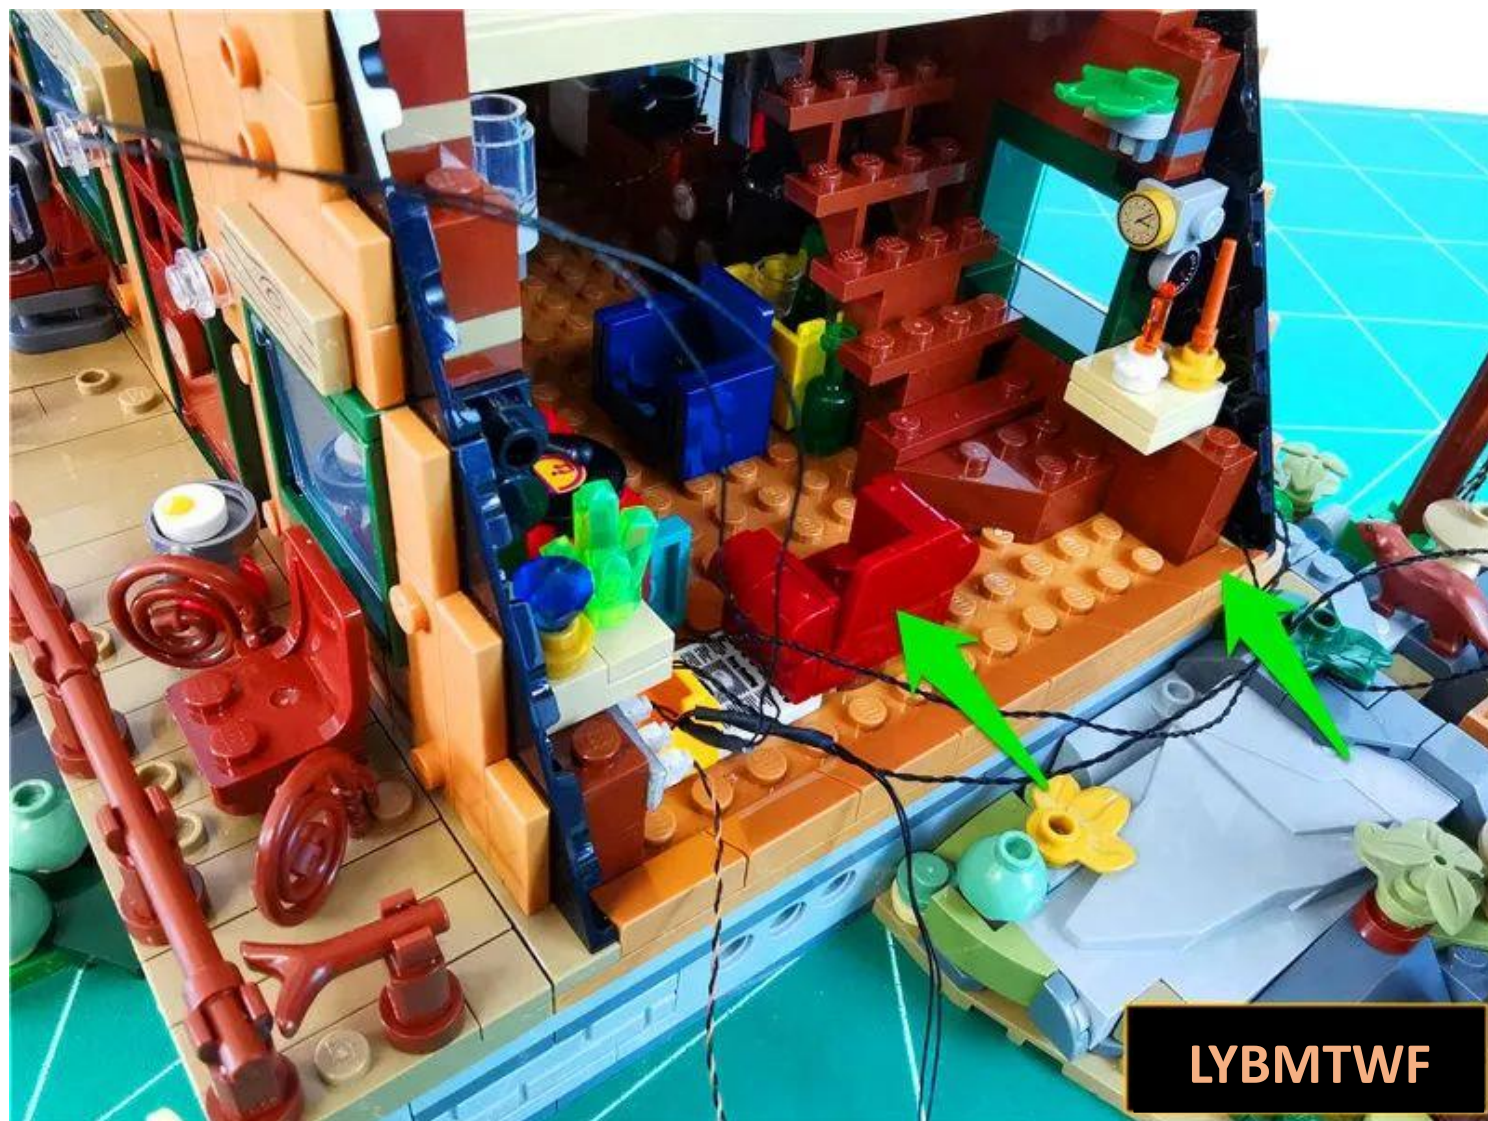




LYBMTWF

Pass the connection line along the edge of the part




Restore parts and fix connecting wires

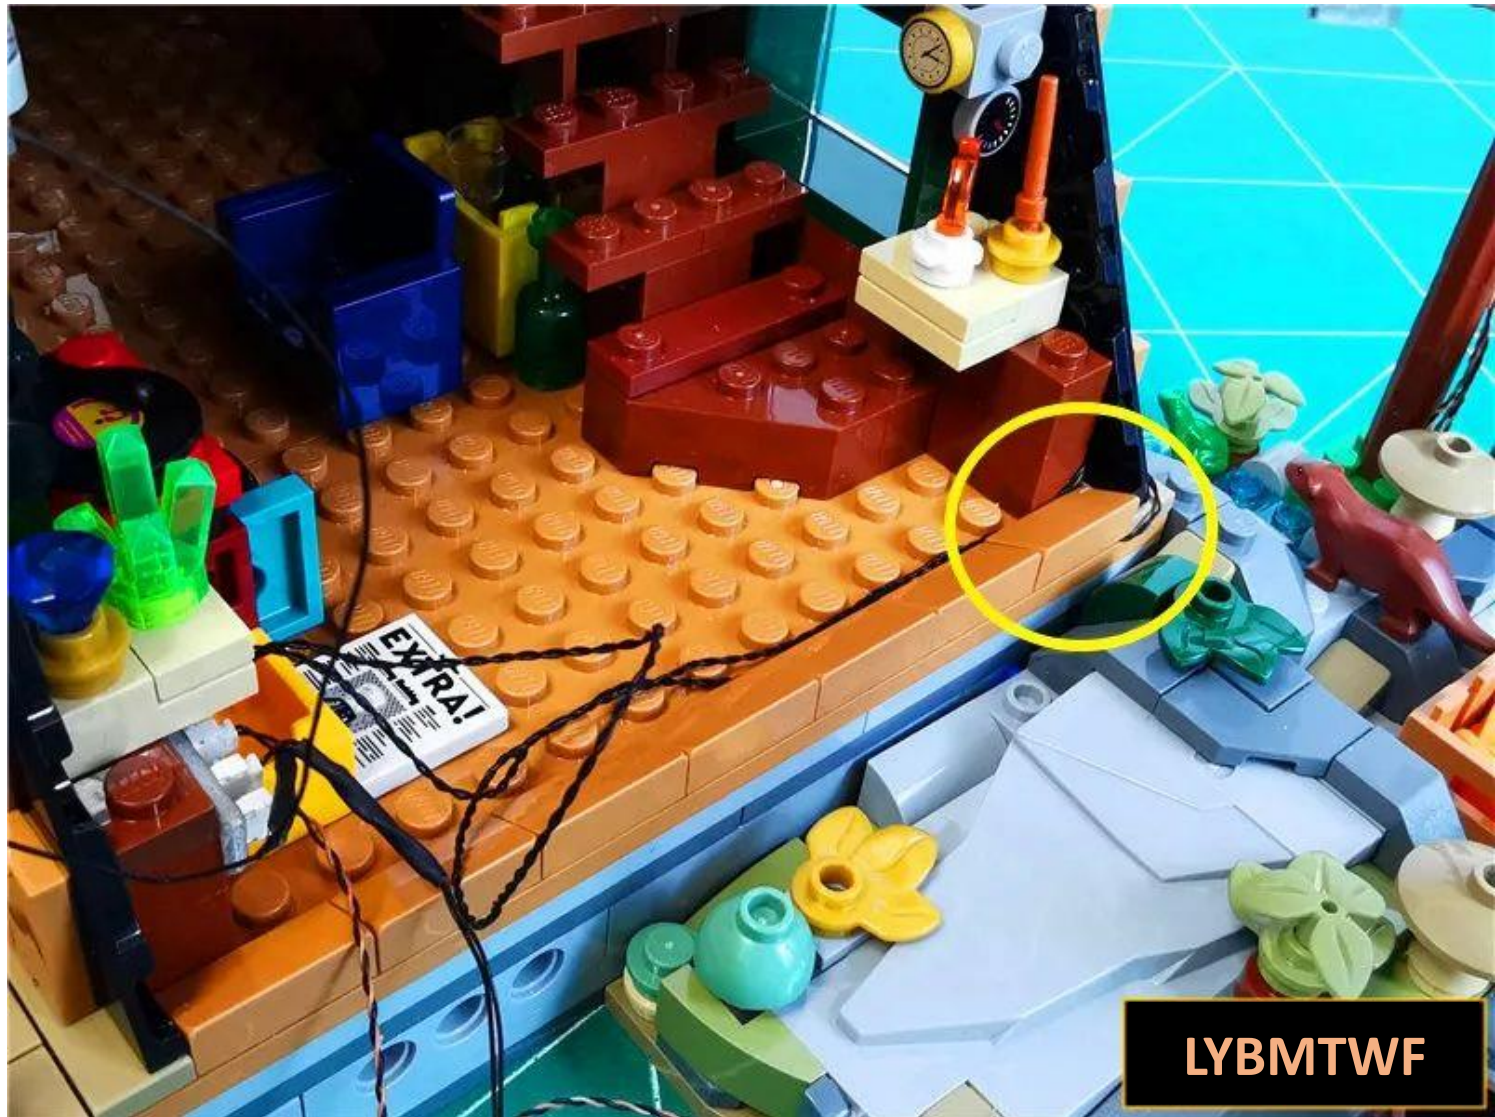

LYBMTWF

Continue to pass the connecting line along the gaps between the raised particles.

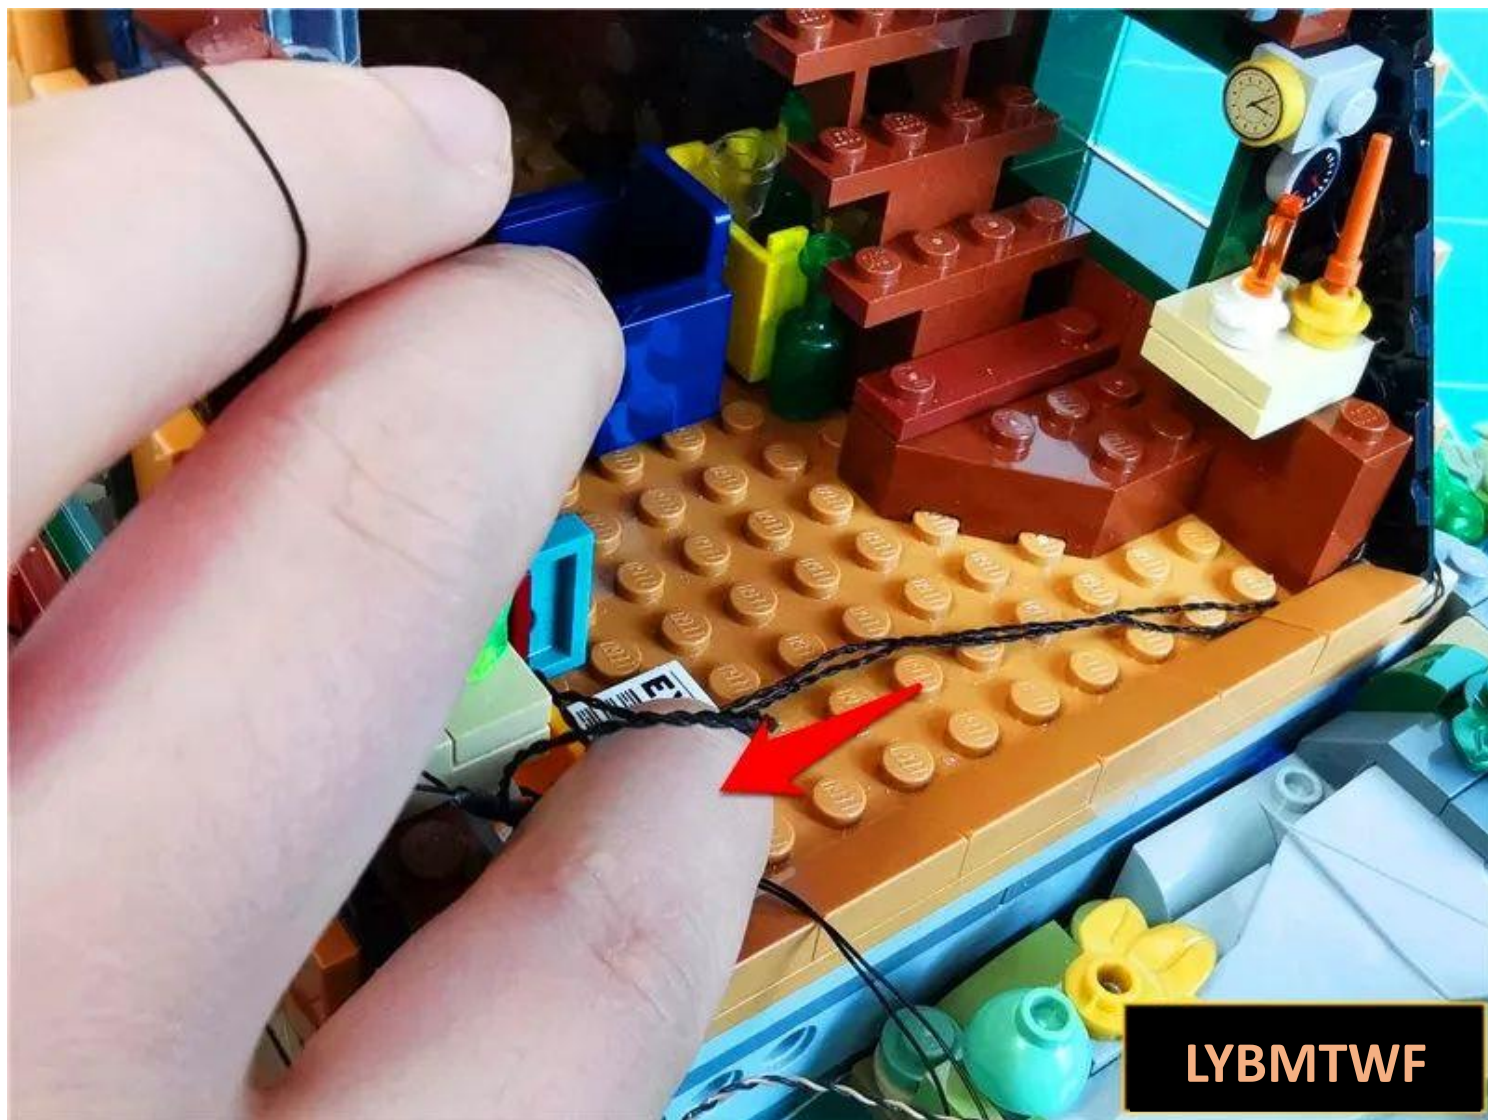


Restore the sofa and fix the connecting wires



LYBMTWF

Fit the excess connecting wires to the positions shown in the picture

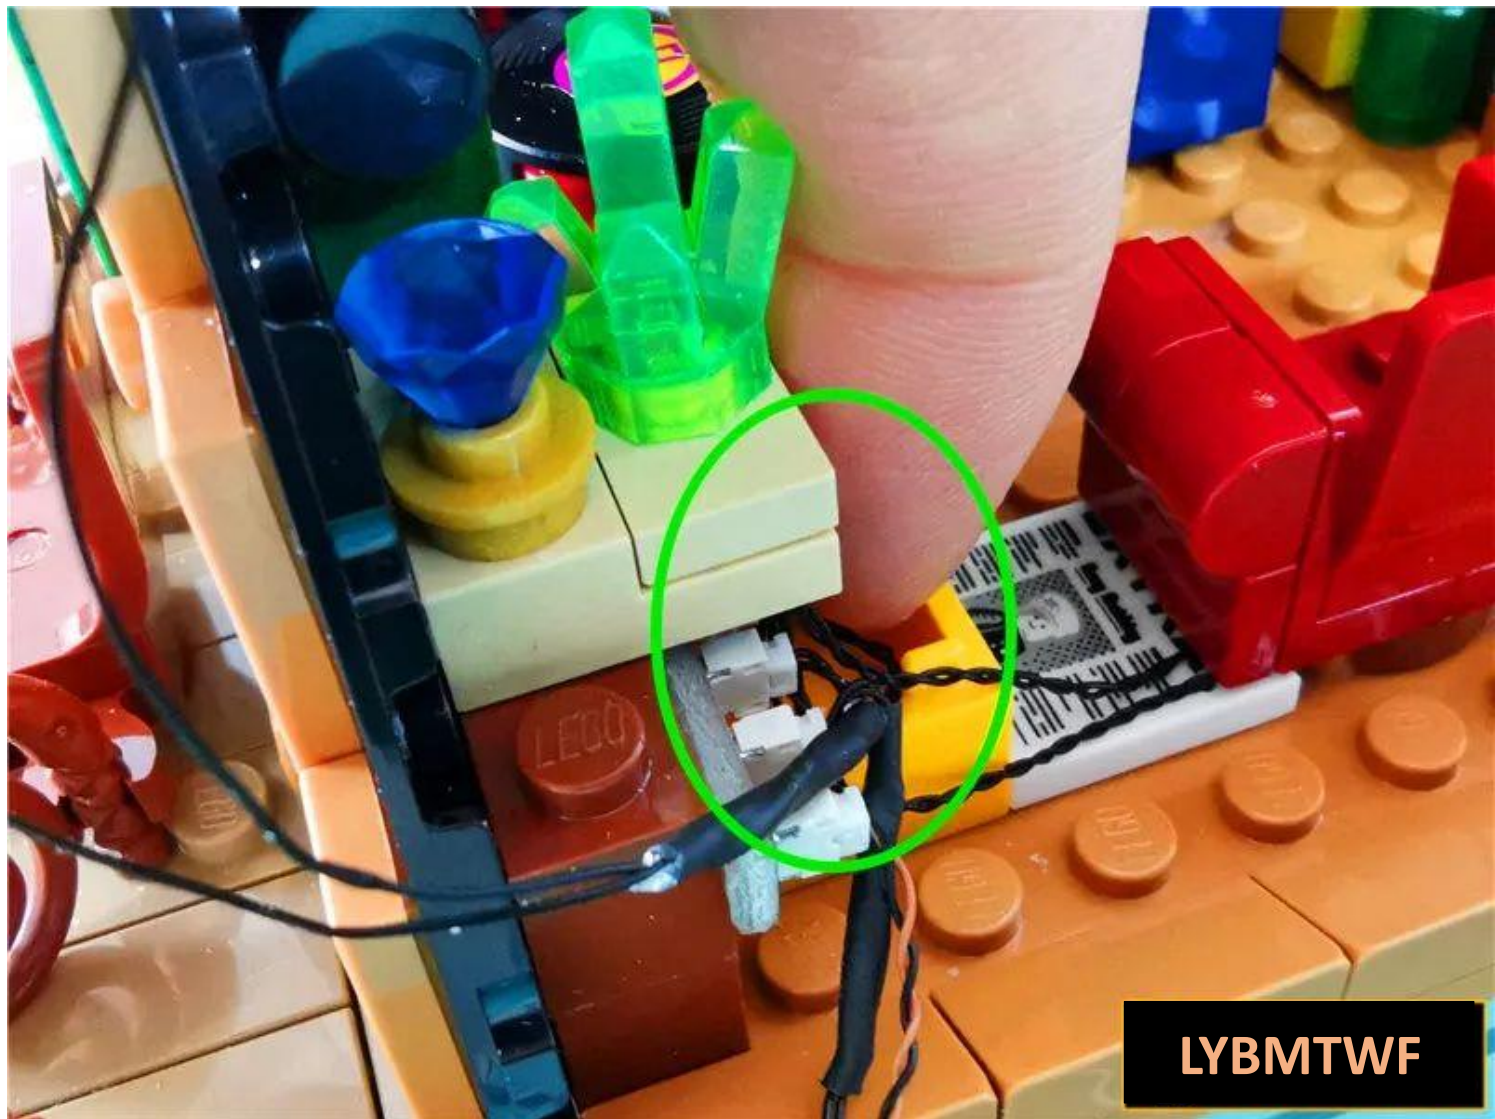

Remove the hollow black circle shown by the arrow



Pass the light strip wire on the left roof around the raised particles in the picture and pull it upward



Restore parts and fix wires



LYBMTWF

Snap wires to edge of part



LYBMTWF

Bypass the raised particles shown in the image




Restore parts and fix wires




The effect after finishing is as follows




Remove the parts indicated by arrows

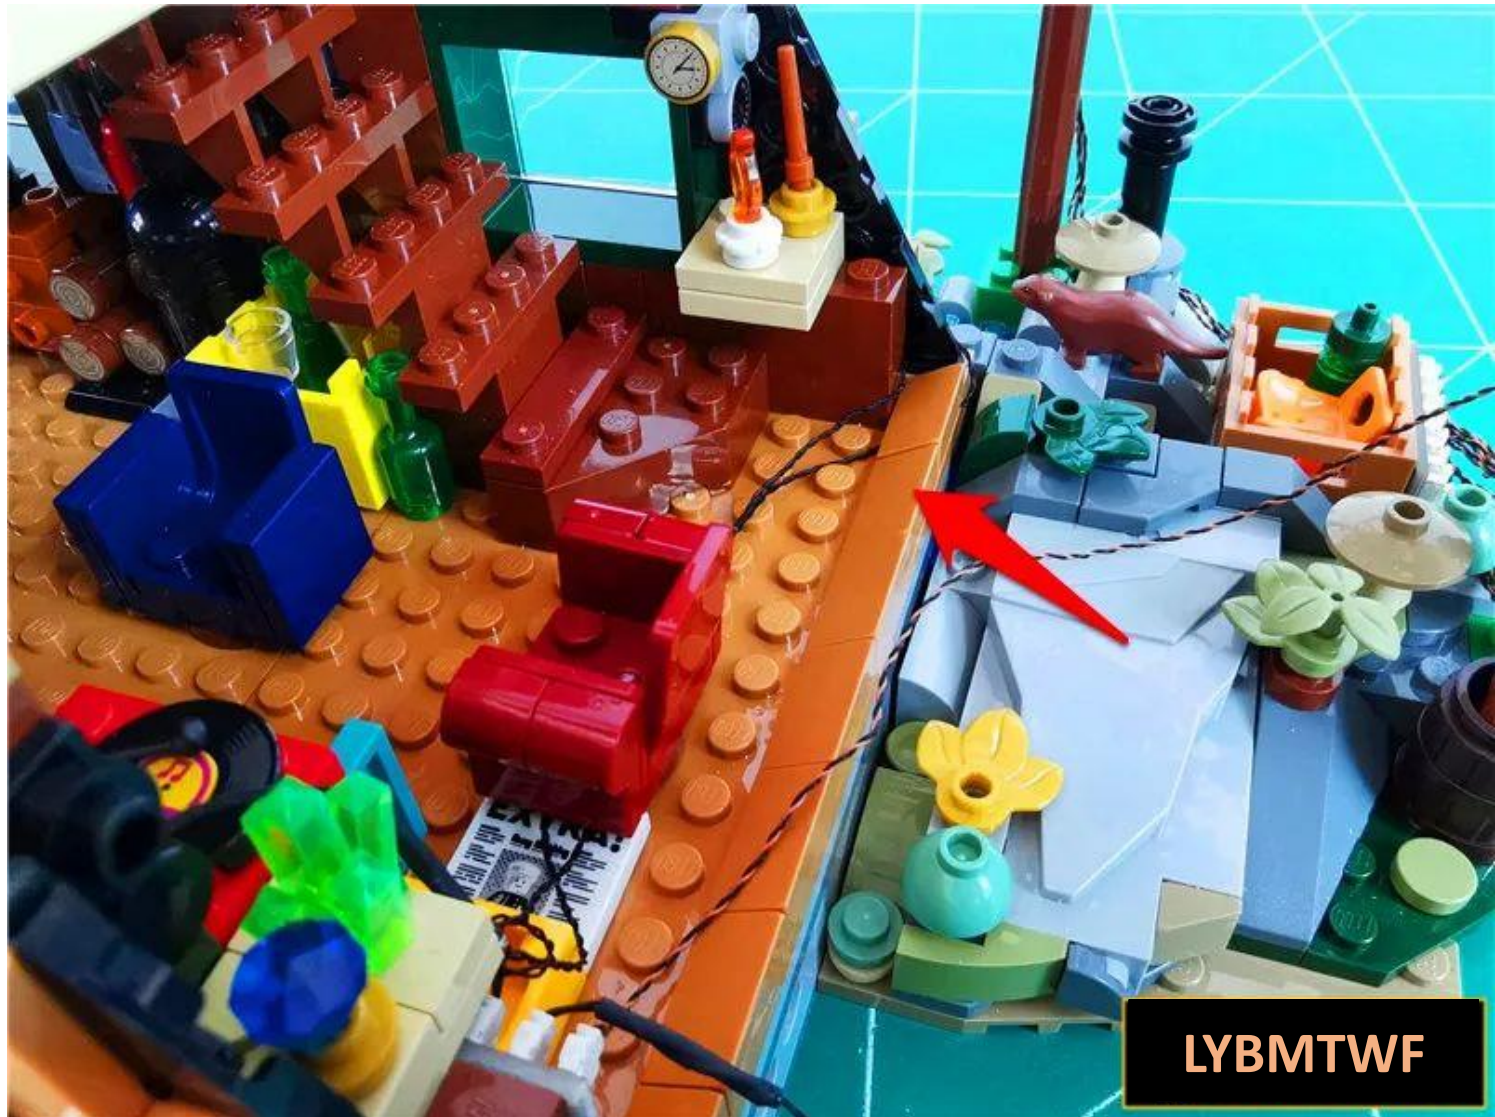

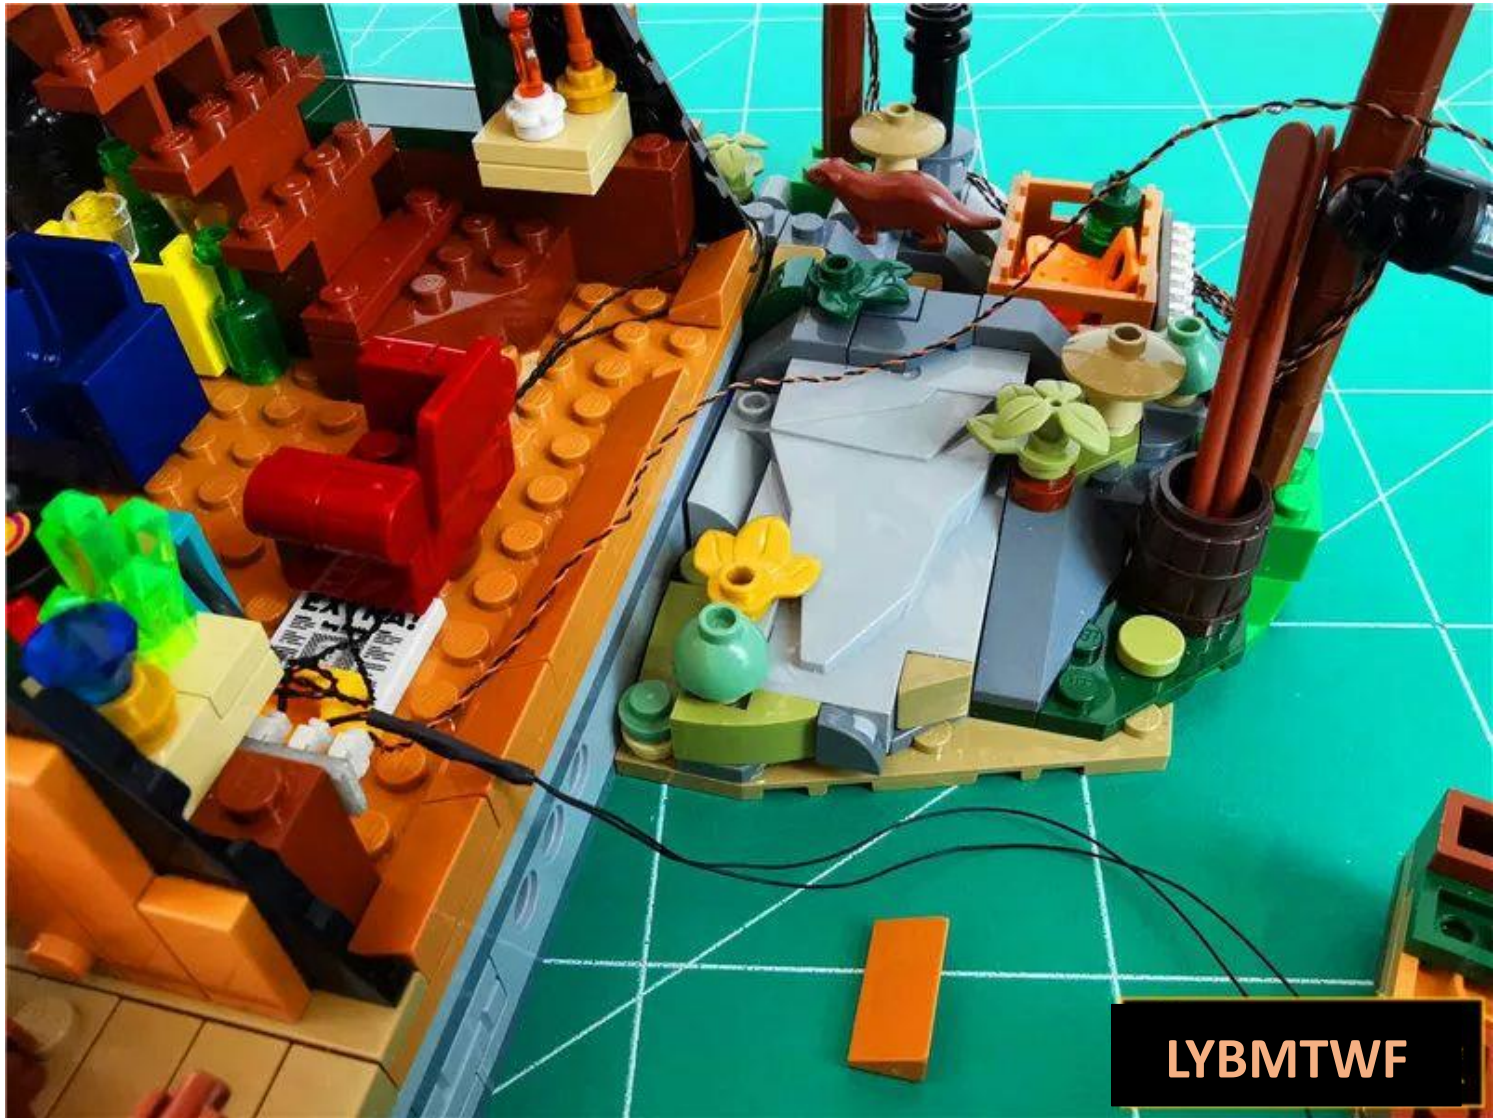

LYBMTWF


Pull **the USB cable** along the edge of the raised particles

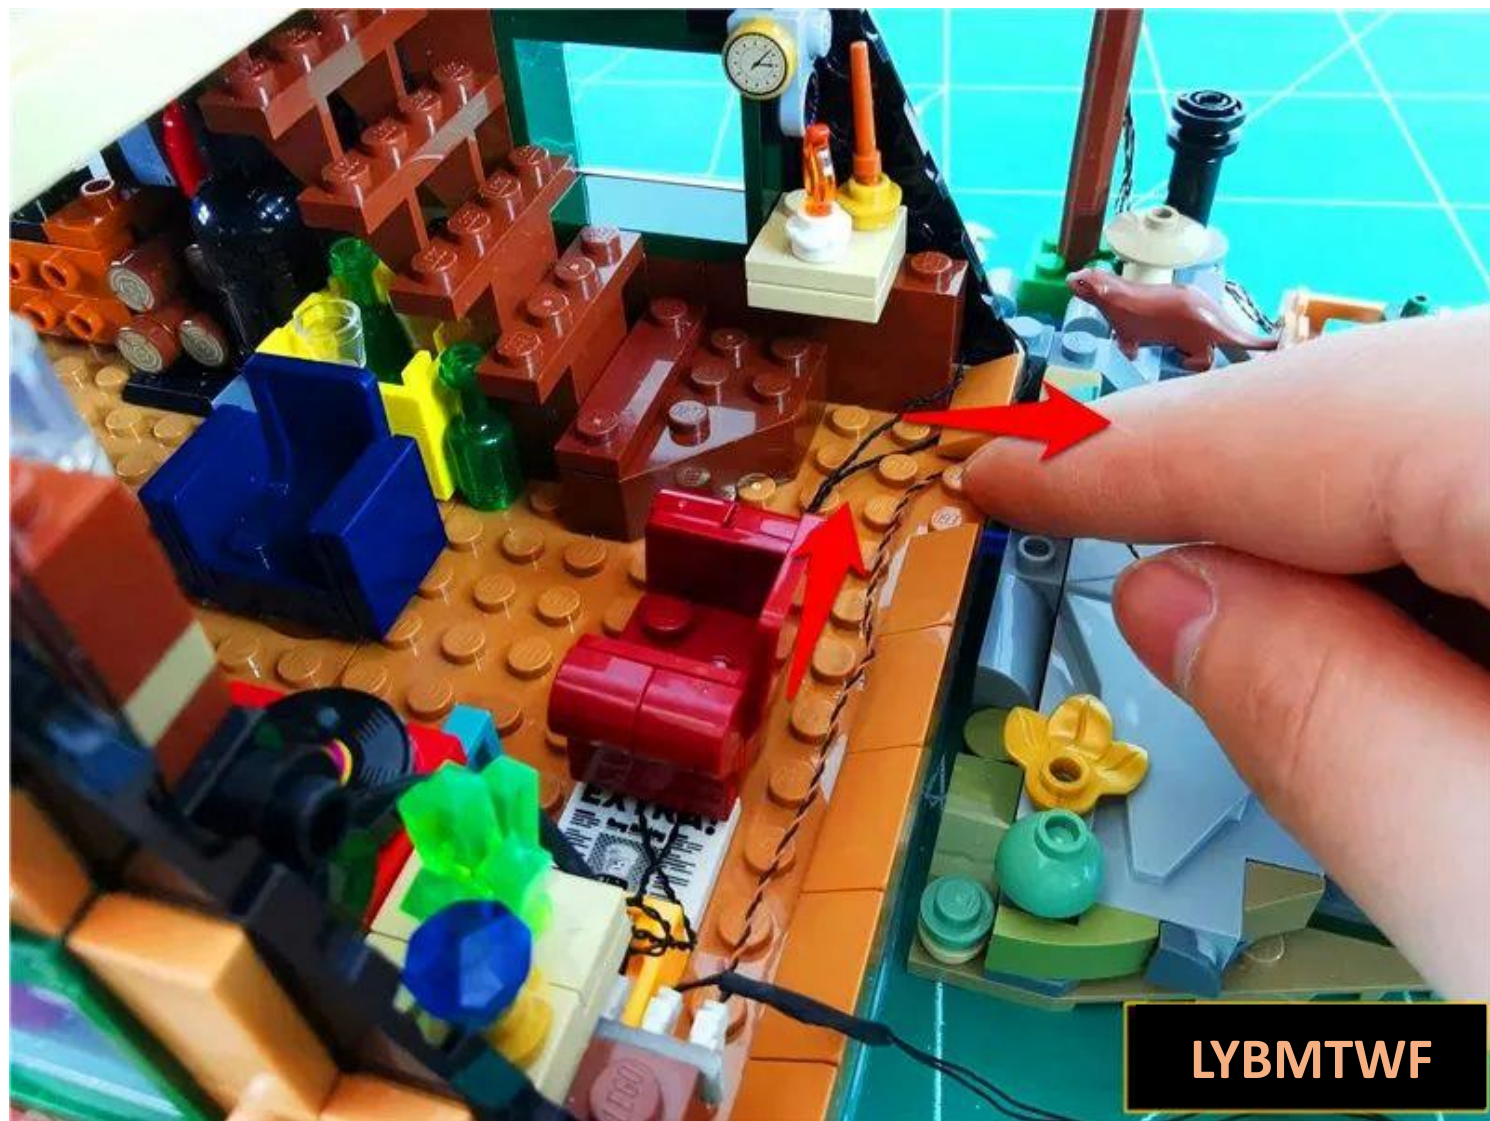

Restore parts and fix wires



Pull the USB cable to the back of the building

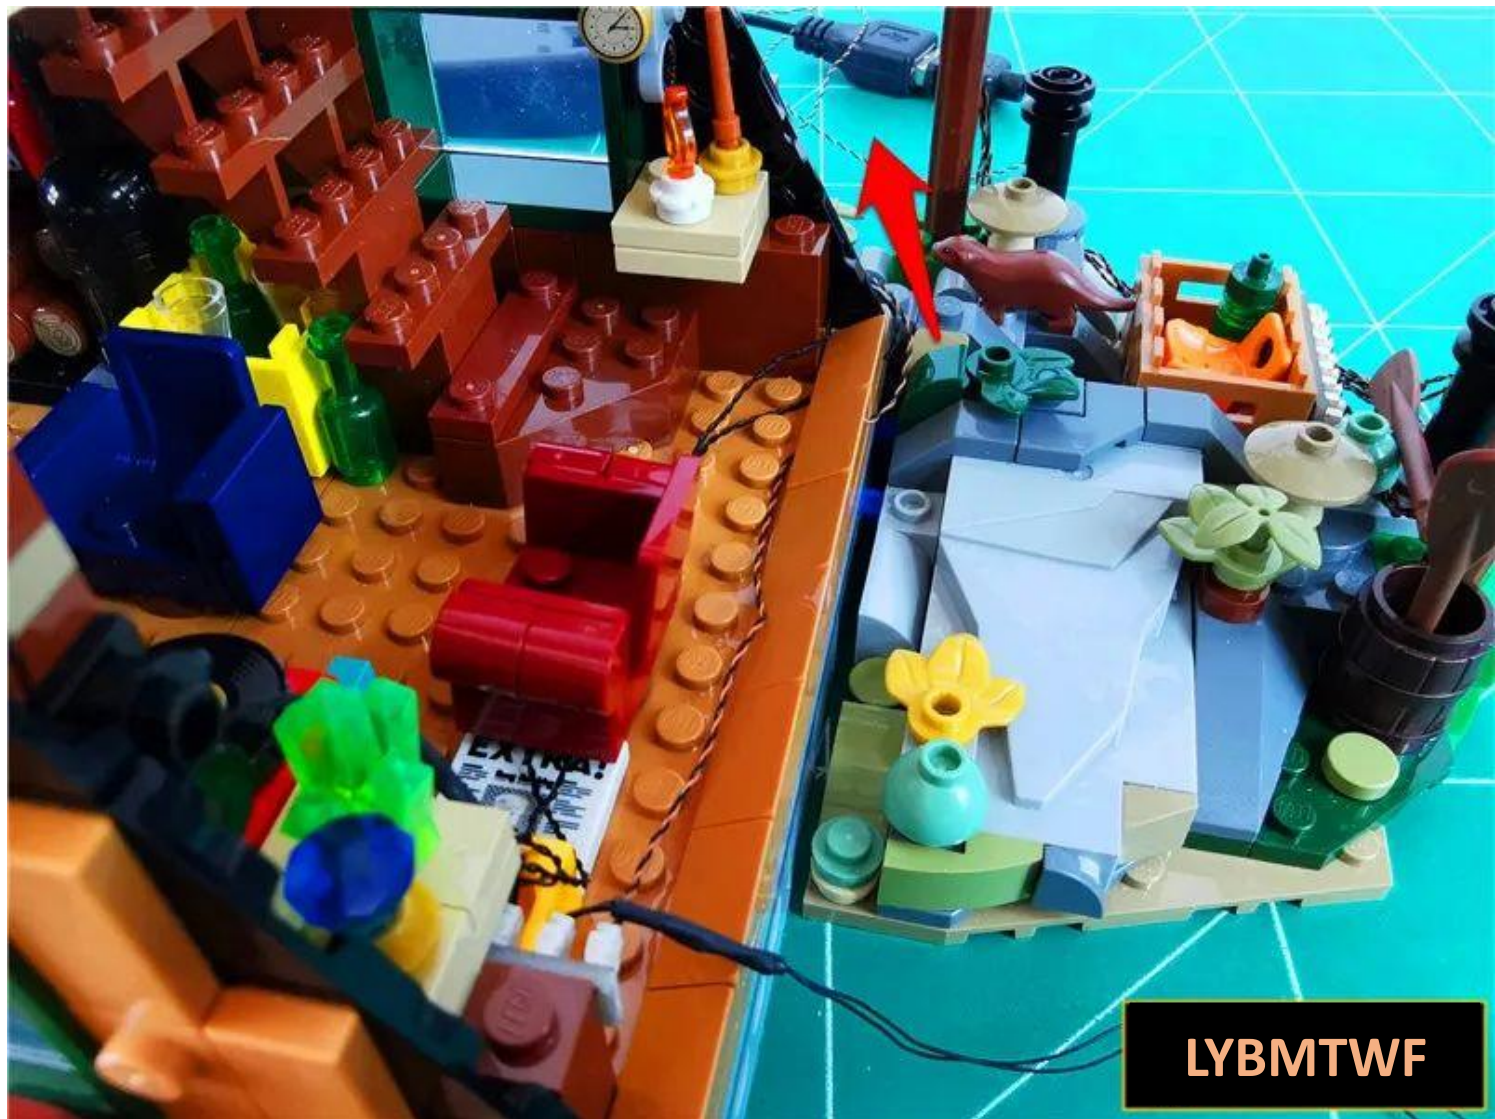

Prepare to restore the right roof and collect excess wires indoors



Restore the right roof



At this point, this set of lighting is installed, turn on the power and enjoy it!



If you want the light to stay on, you can plug the USB port into a USB power supply

