

4 sockets x 2

6 sockets x 1

8 sockets x 3

12 Socket x 1

Lamp grain warm light 15cm x 6

Lamp grain warm light 30cm x 13

Lamp grain blue light 15cm x 4

Headlight grain warm light 15cm x 2

Headlight grain warm light 30cm x 7

Led soft light strip warm light x 5

Colored light strip ice blue (1 section) x 1

Cable 5cm x 1; Cable 15cm x 5

Cable 30cm x 3; Cable 50cm x 2


Usb interface 50cm x 1 Battery box AA (USB port) x 1

Several building block parts

Notes (the pictures appearing in this paragraph are demonstration content and not parts of this set):


Routing wires on and under building boards


Wires can be routed between the building blocks and boards or underneath the boards, but they need to be properly placed between the studs

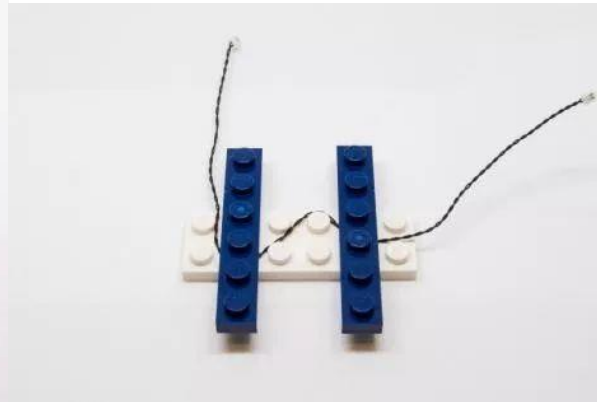

Install light particles on building blocks

Please make sure they are placed correctly (yellow LED assembly exposed). You can place them directly on top of the block studs or in between.

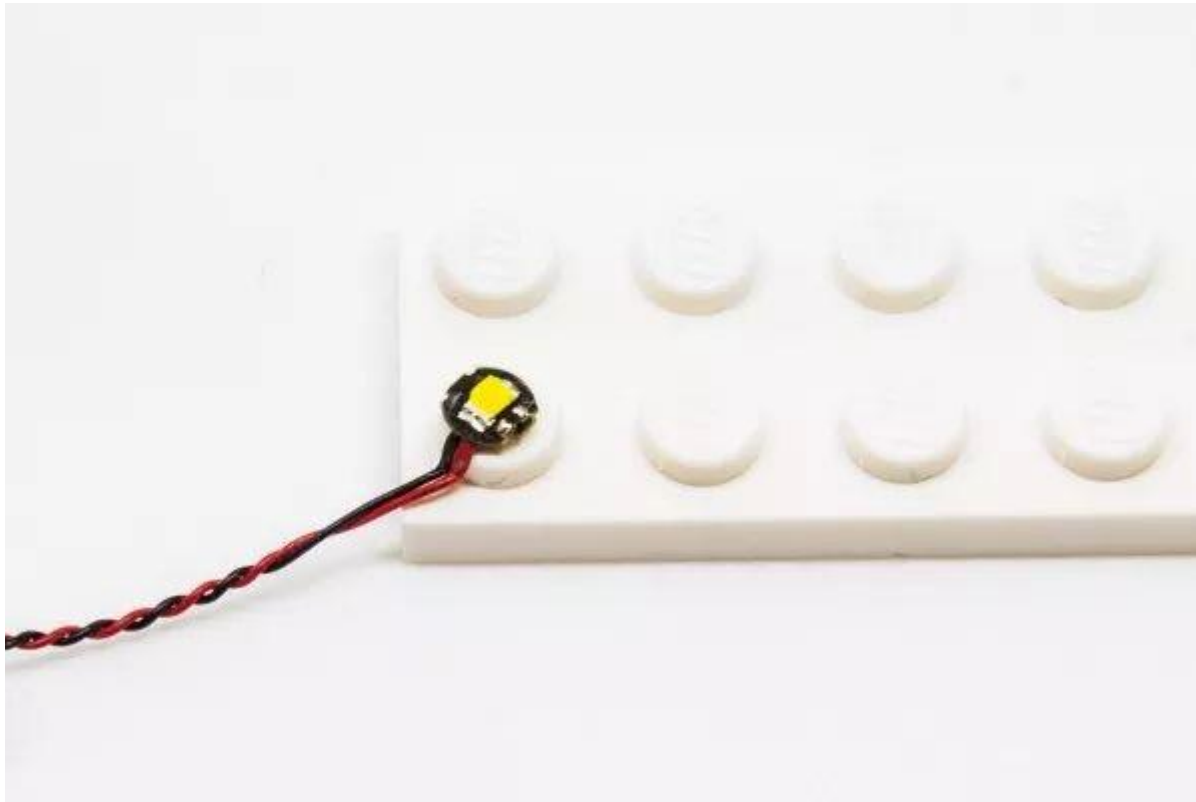

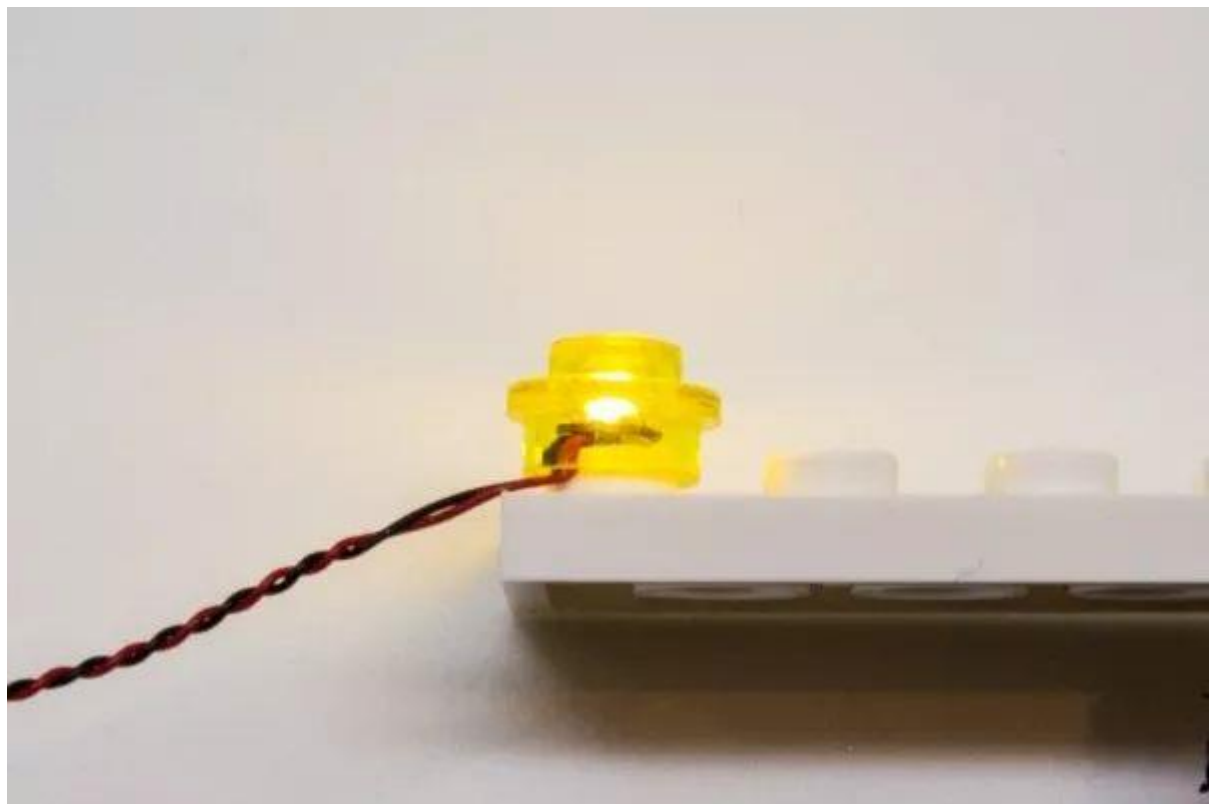




Link the cord jack to the outlet

Be careful when inserting the cord socket into the socket; the socket can only be inserted one way. With the socket facing up, look for the soldered "=" symbol on the left side of the port. When you plug into the port, the side of the socket with the exposed wires should be facing the soldered "=" symbol. If the plug does not fit easily into the port, do not force it in.

Inserting the socket incorrectly may cause the pins within the port to bend or may cause the socket to overheat when connected.



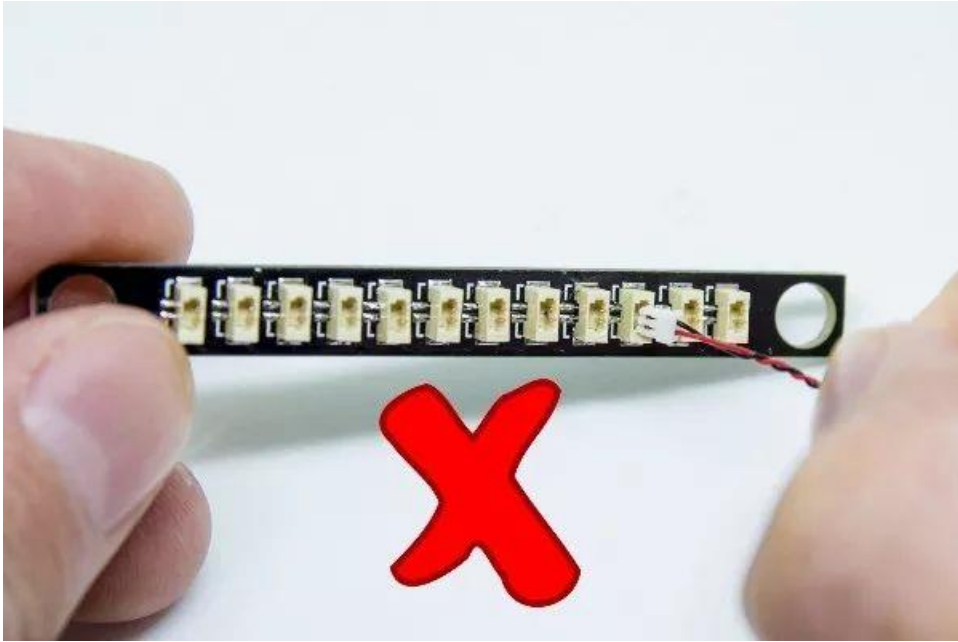

Connect the wires to the light strip

Be careful when inserting the wire into the light strip connector, the plug only goes in one way. Place the light strip with the lighted side facing up, making sure the side of the plug with exposed wires is facing down. If the plug does not fit easily into the socket, do not force it in. To avoid damaging the interface and plug.


The correct connection method of the light bar




Install the battery into the battery box

Several battery boxes have different specifications, please pay attention to the positive and negative poles of the battery.


AA battery box Correct battery installation

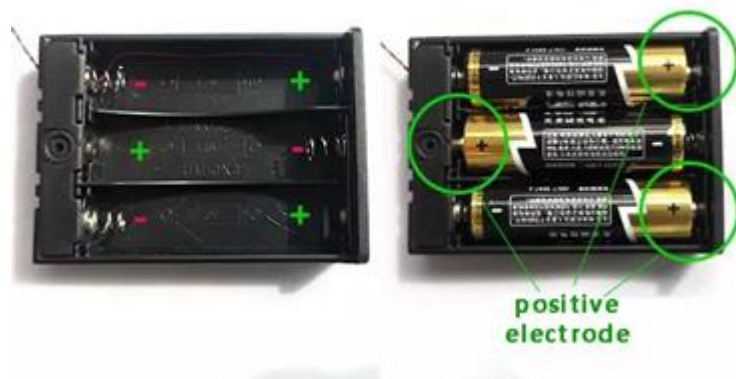

Button battery box (flat) battery correct installation method

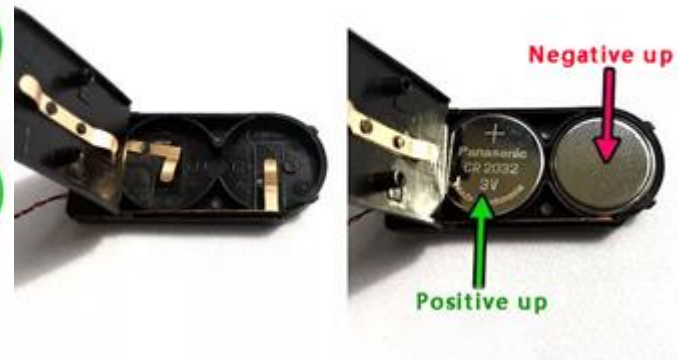


Button battery box (round) battery correct installation

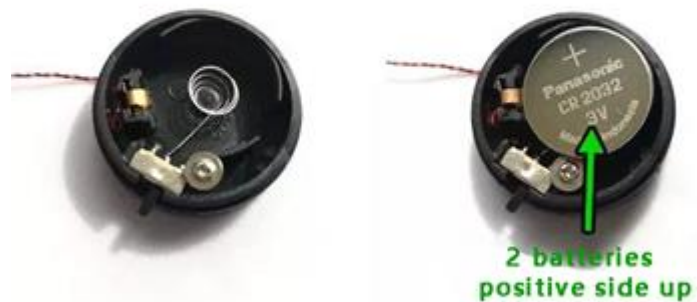

Installation Notes:


Take out the AA battery box and insert 3 AA batteries correctly (it is recommended to use brand new batteries)

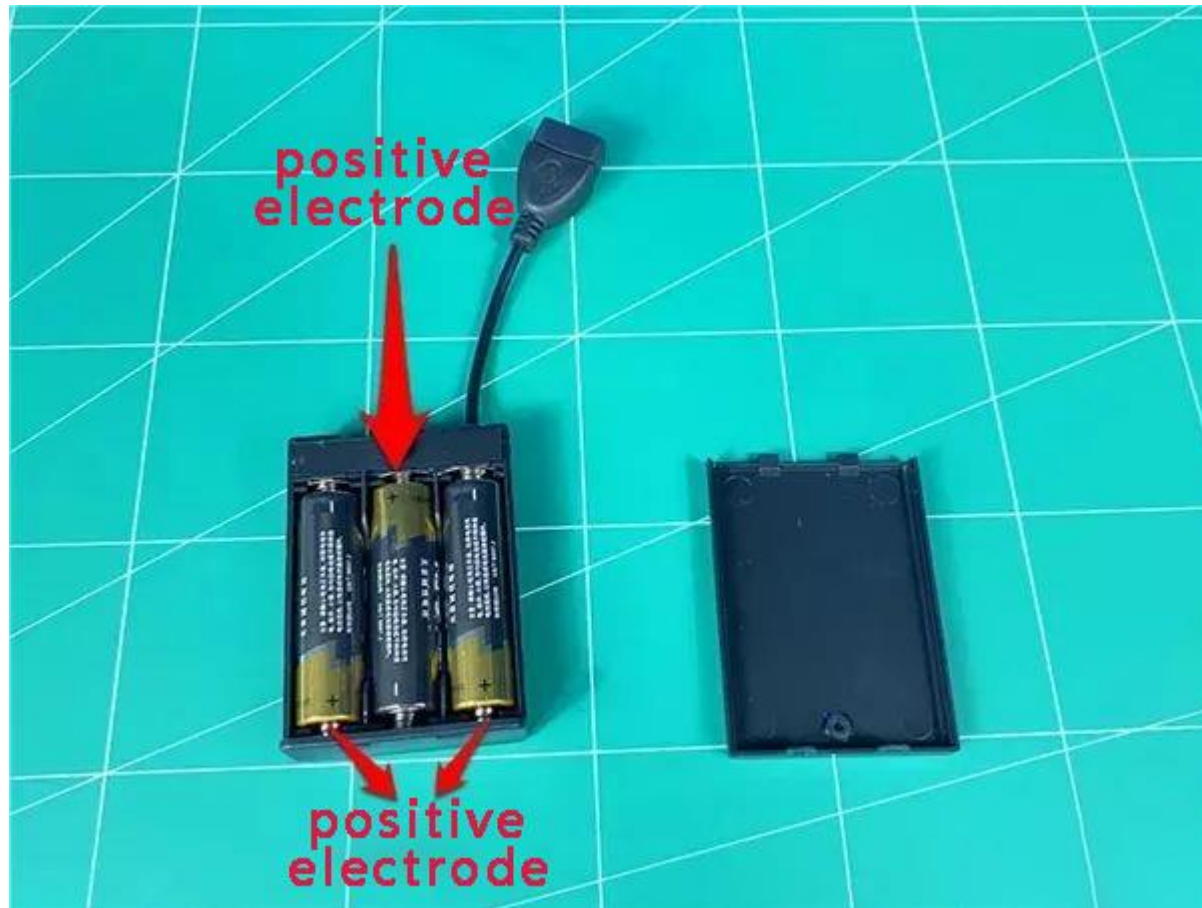

Take out the USB power cord and insert it into the battery box



Take a 12-socket and plug the power cord into the 12-socket

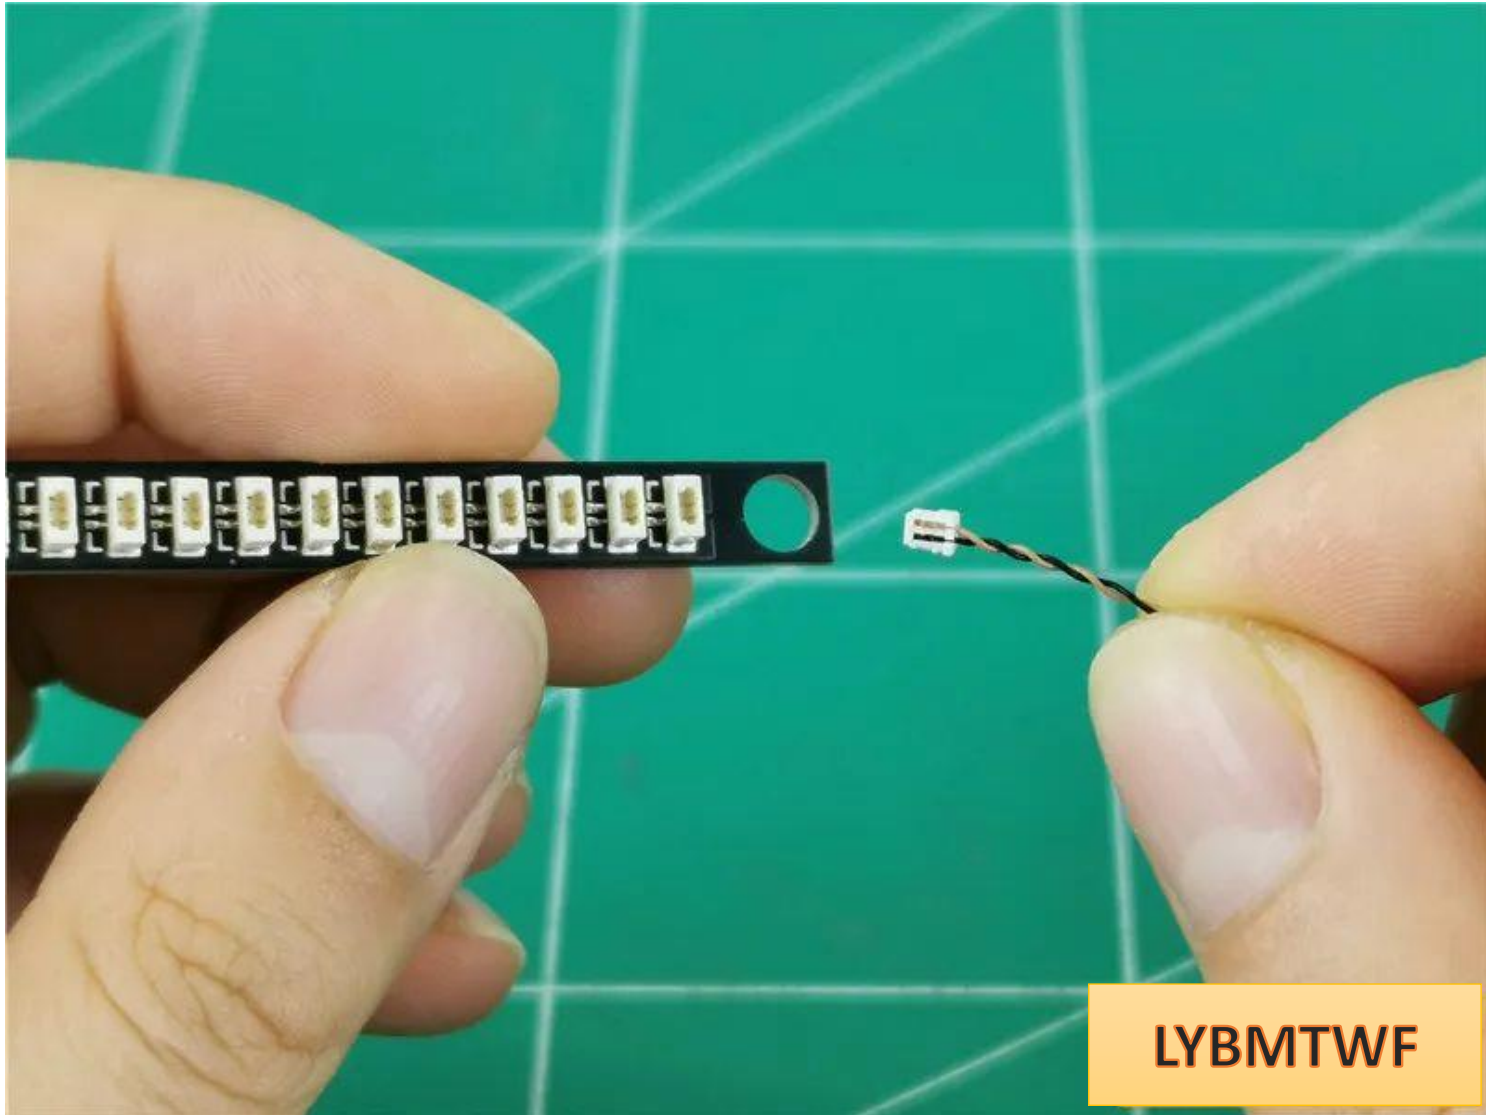


LYBMTWF

Plug and socket connection method


Align the "=" on the plug with the "=" side on the receptacle



The "=" on the plug
can clearly see one
side of the line

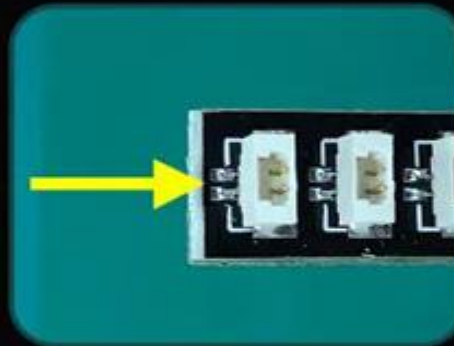

There are two silver
dots next to the "="
socket on the socket

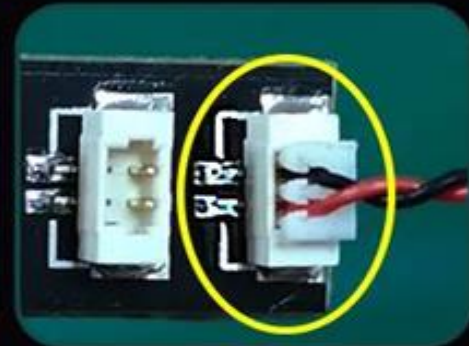


equal sign equal sign



LYBMTWF


Take 1 15cm ordinary warm light bulb and insert it into 12 sockets

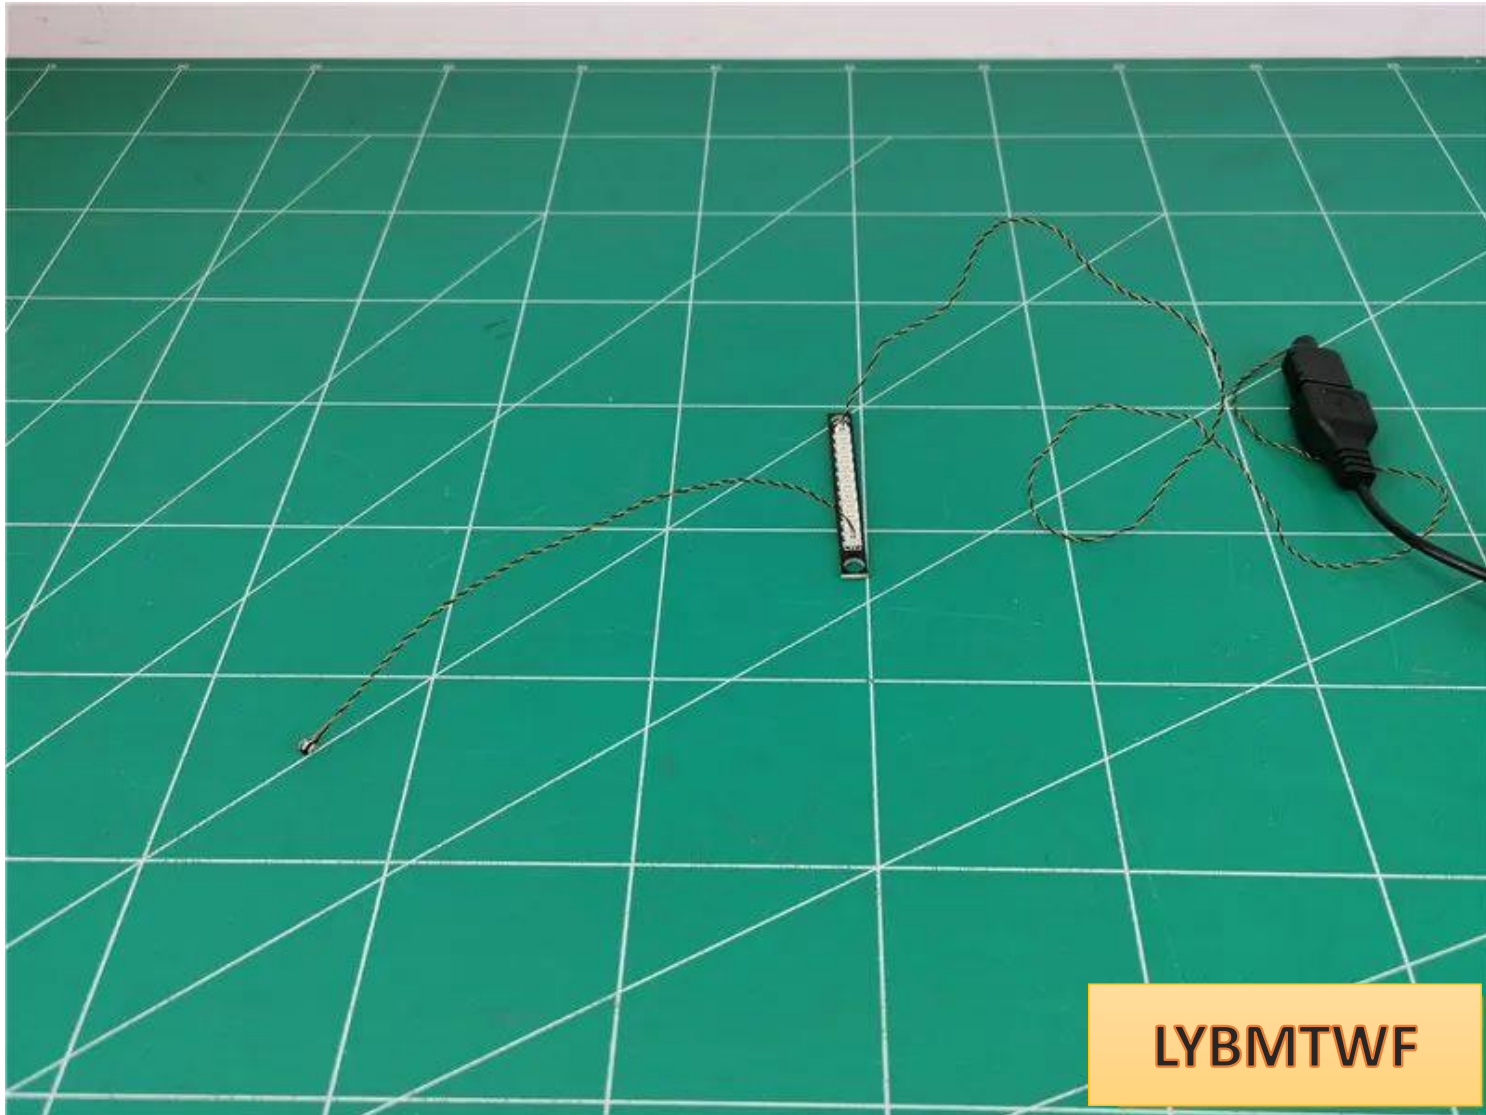

the ON switch of the battery box and test that the light lights up normally.



After the test is completed, turn off the power, pull out the lamps, and **leave the 12 lamps on the power supply.**

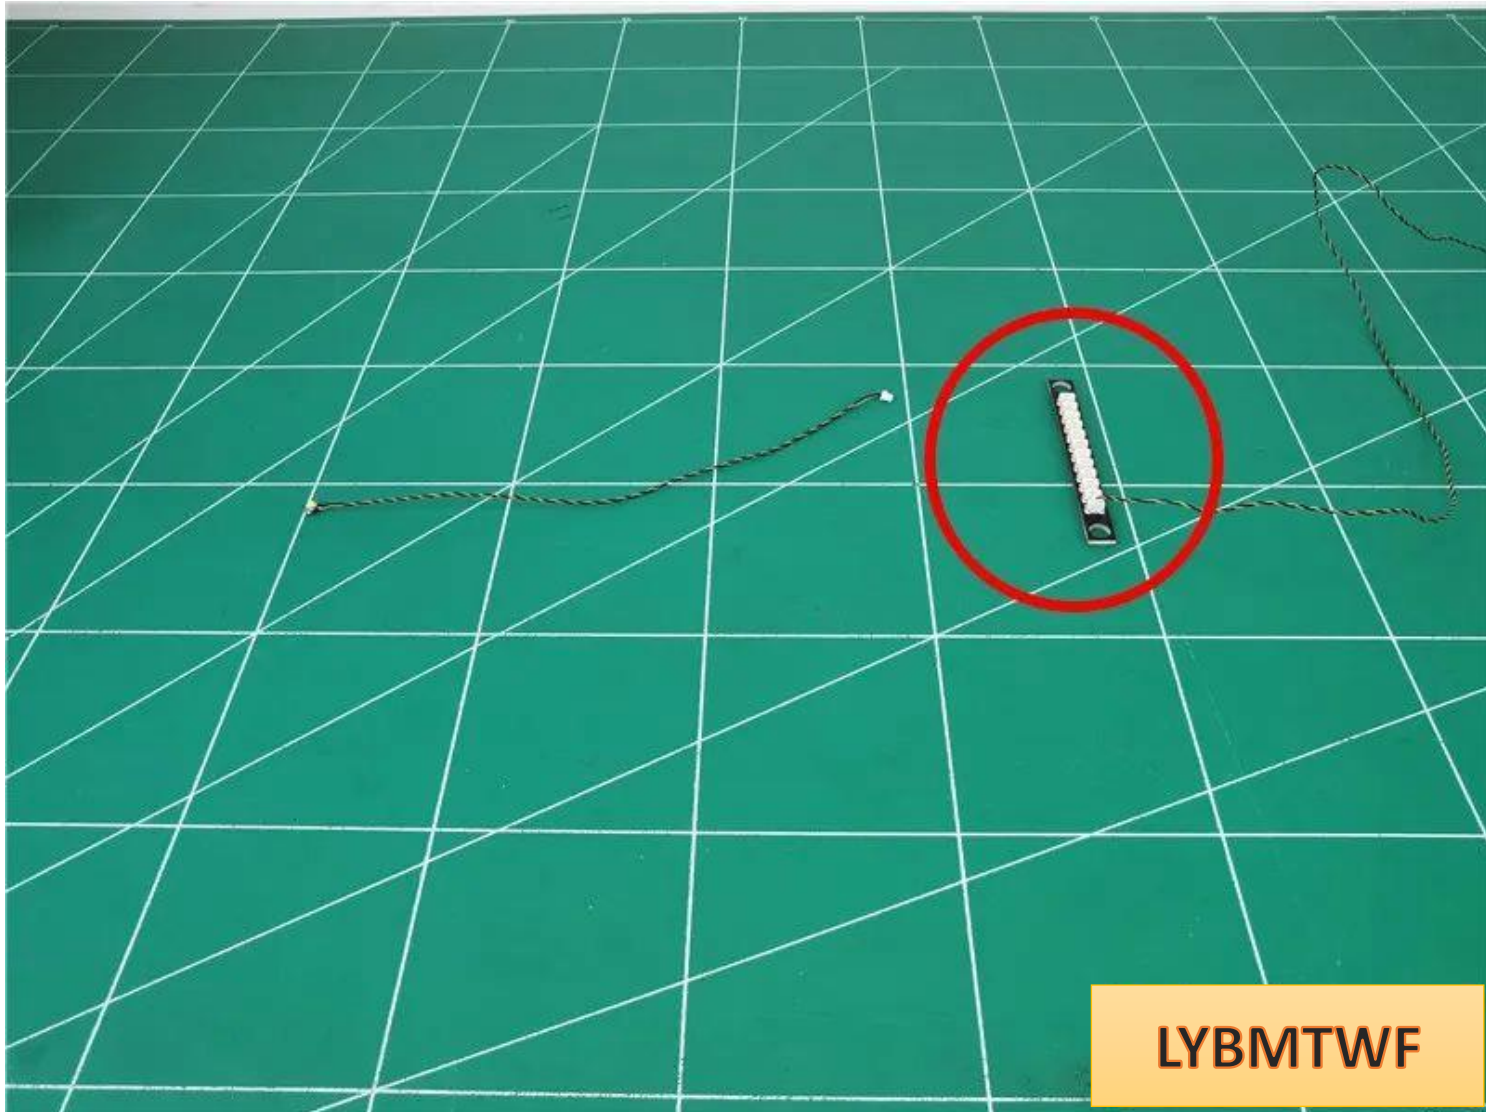

Take out the building and break it down



LYBMTWF

dismantle the dragon




LYBMTWF

Go indoors and remove the roof



Remove the beam

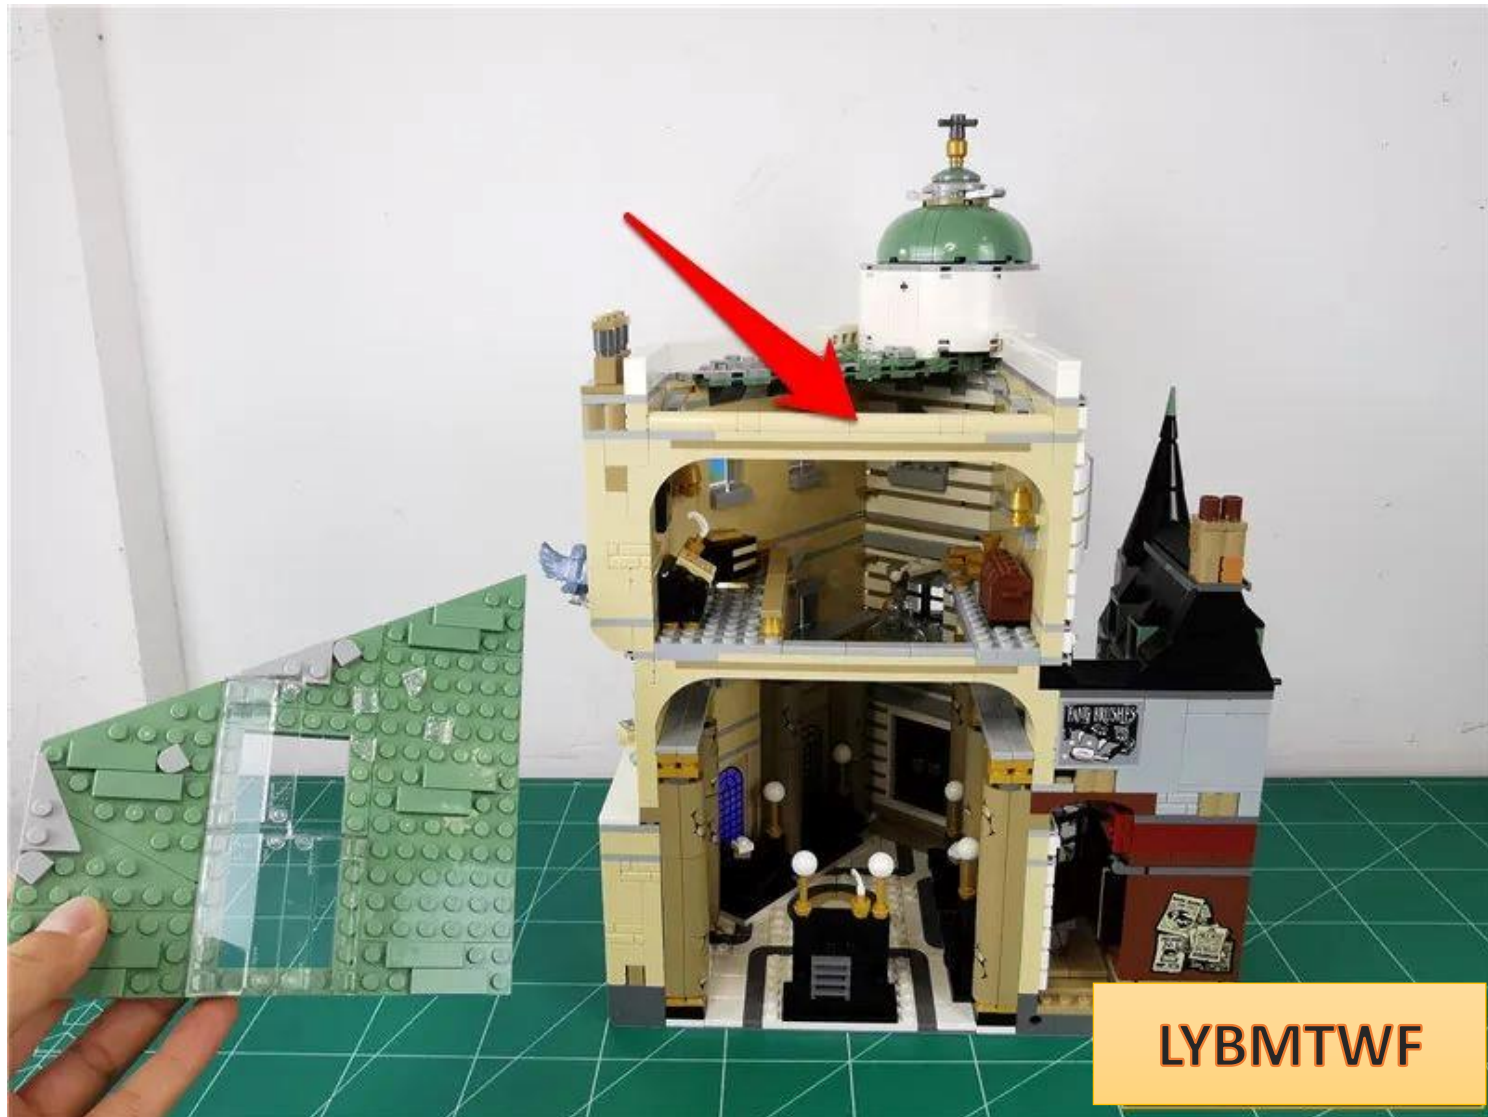


Spread the beam upwards







LYBMTWF

Remove the parts indicated by the arrows in sequence

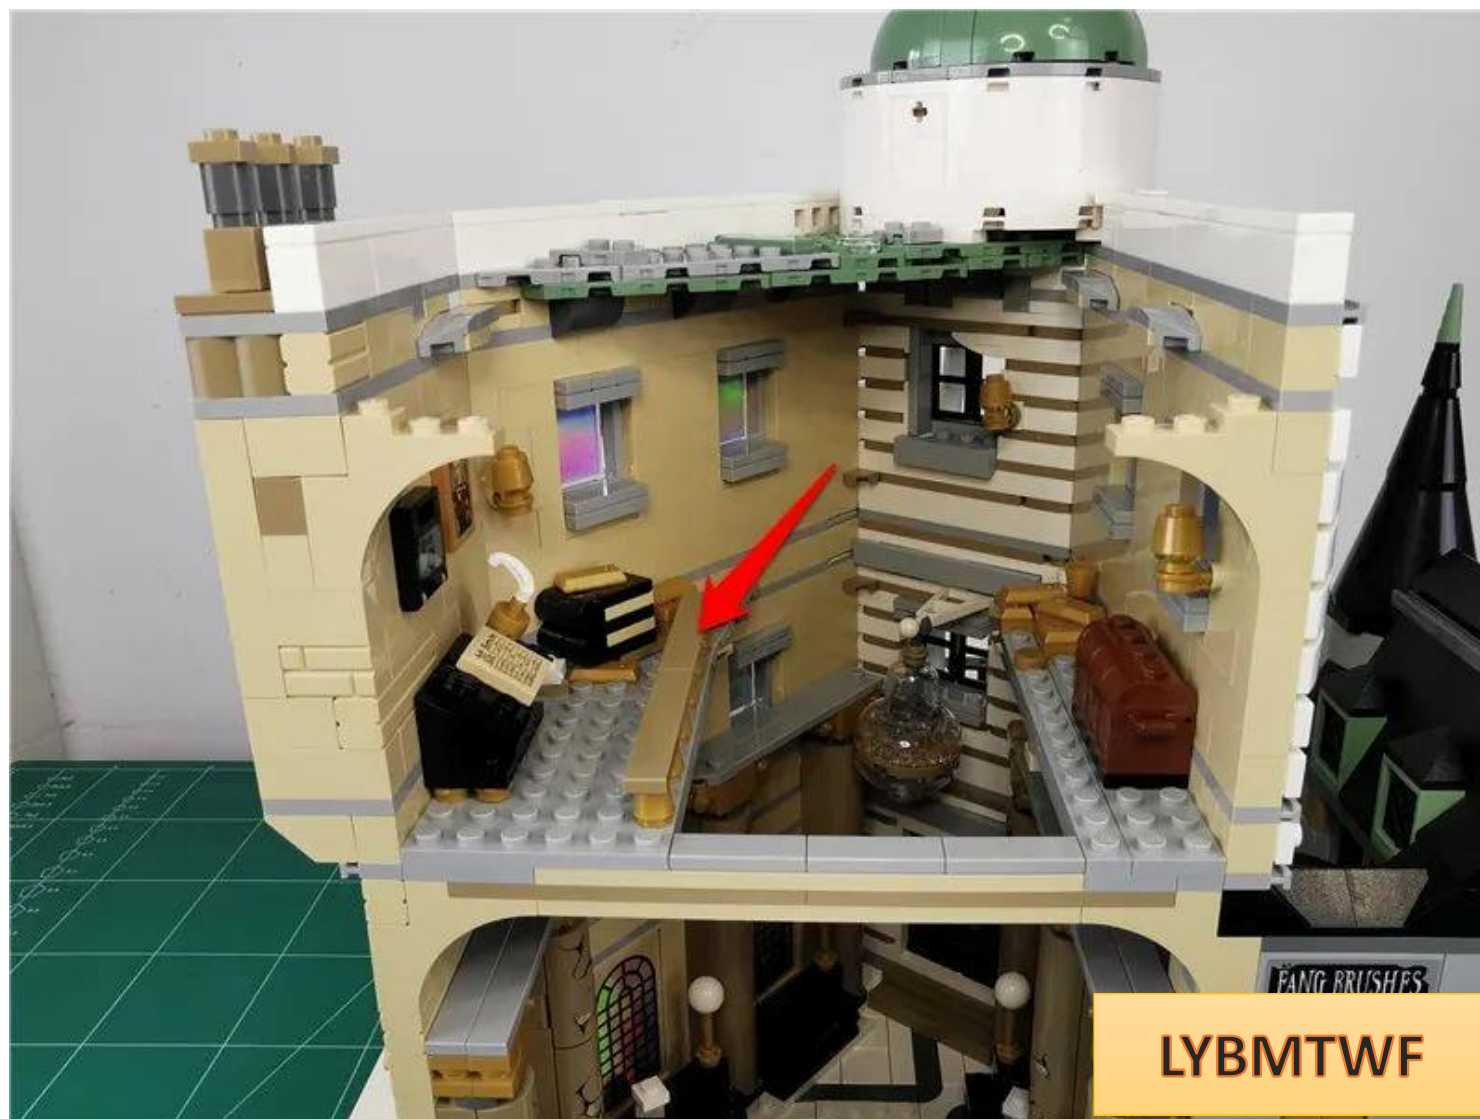

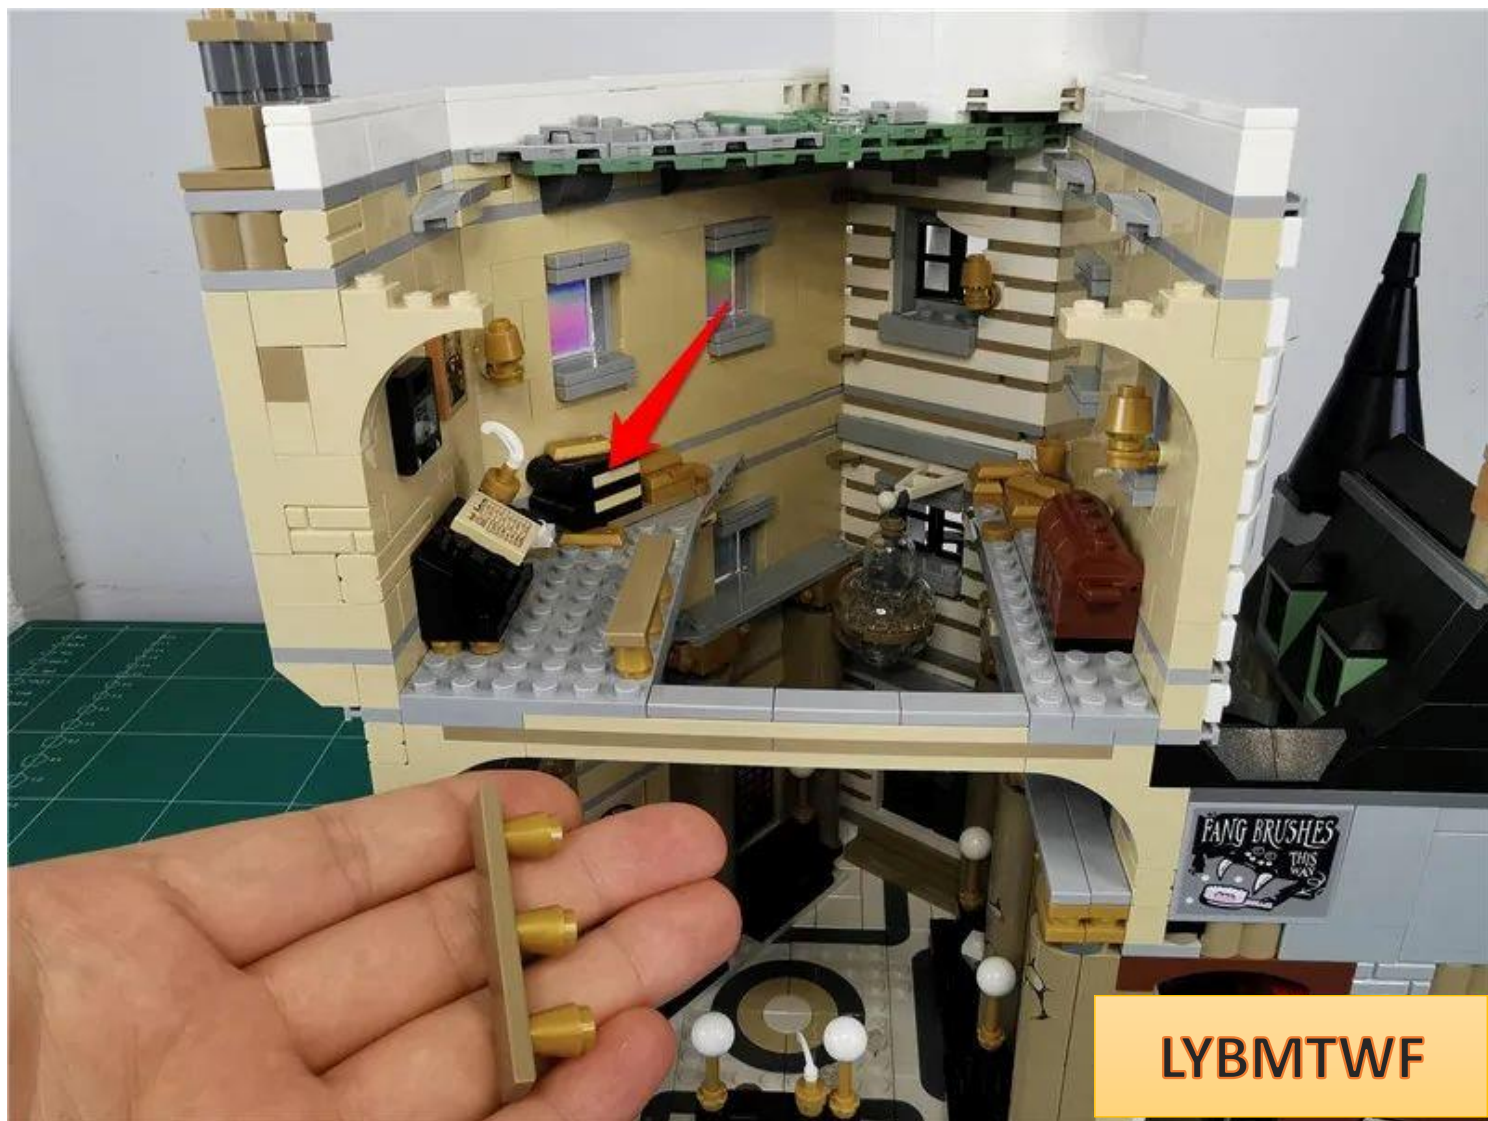


LYBMTWF

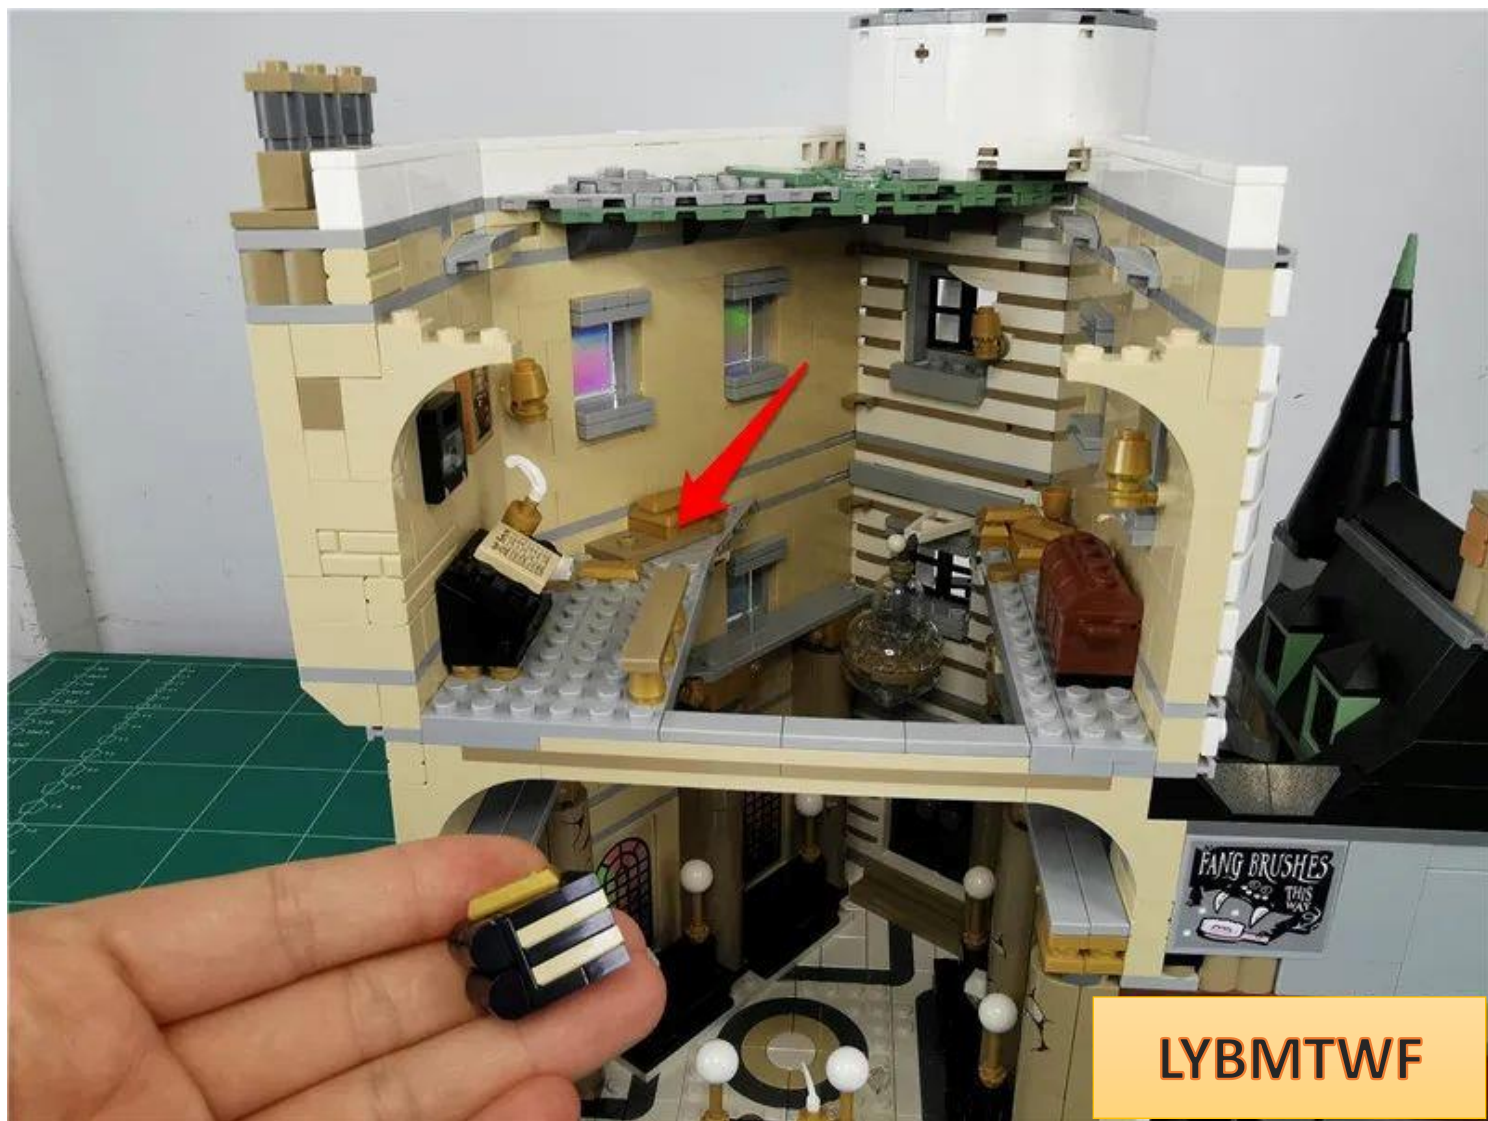


LYBMTWF


Pull the parts apart

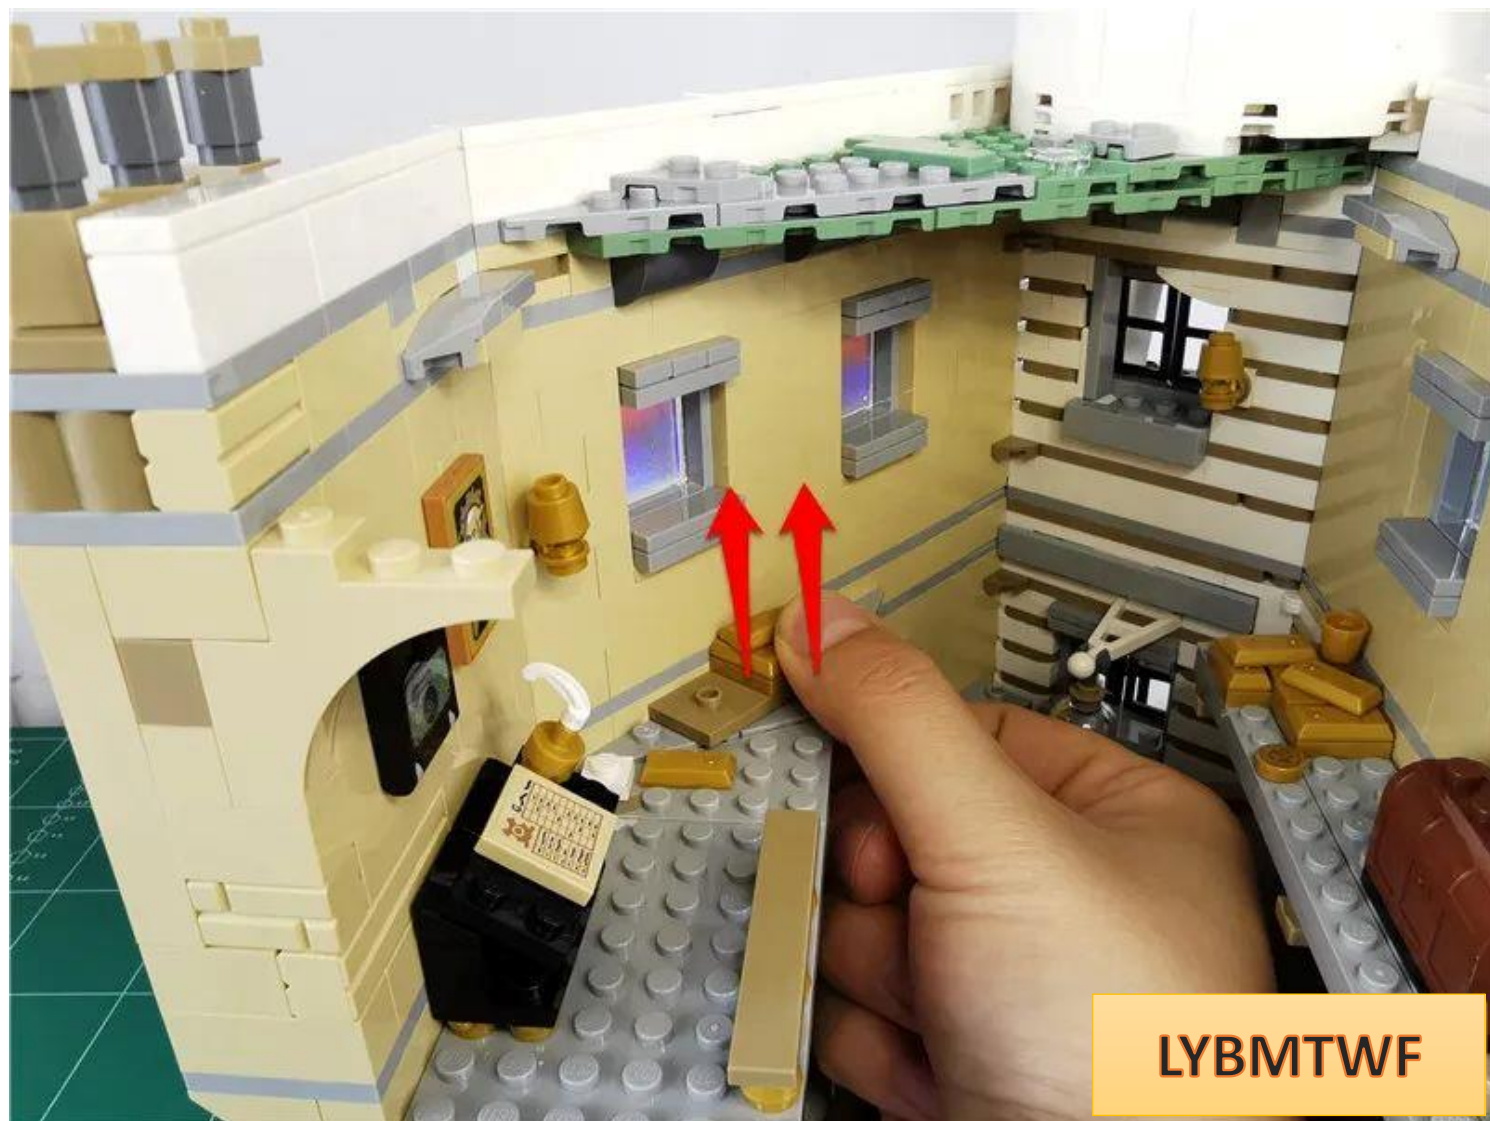

LYBMTWF


Remove wall light

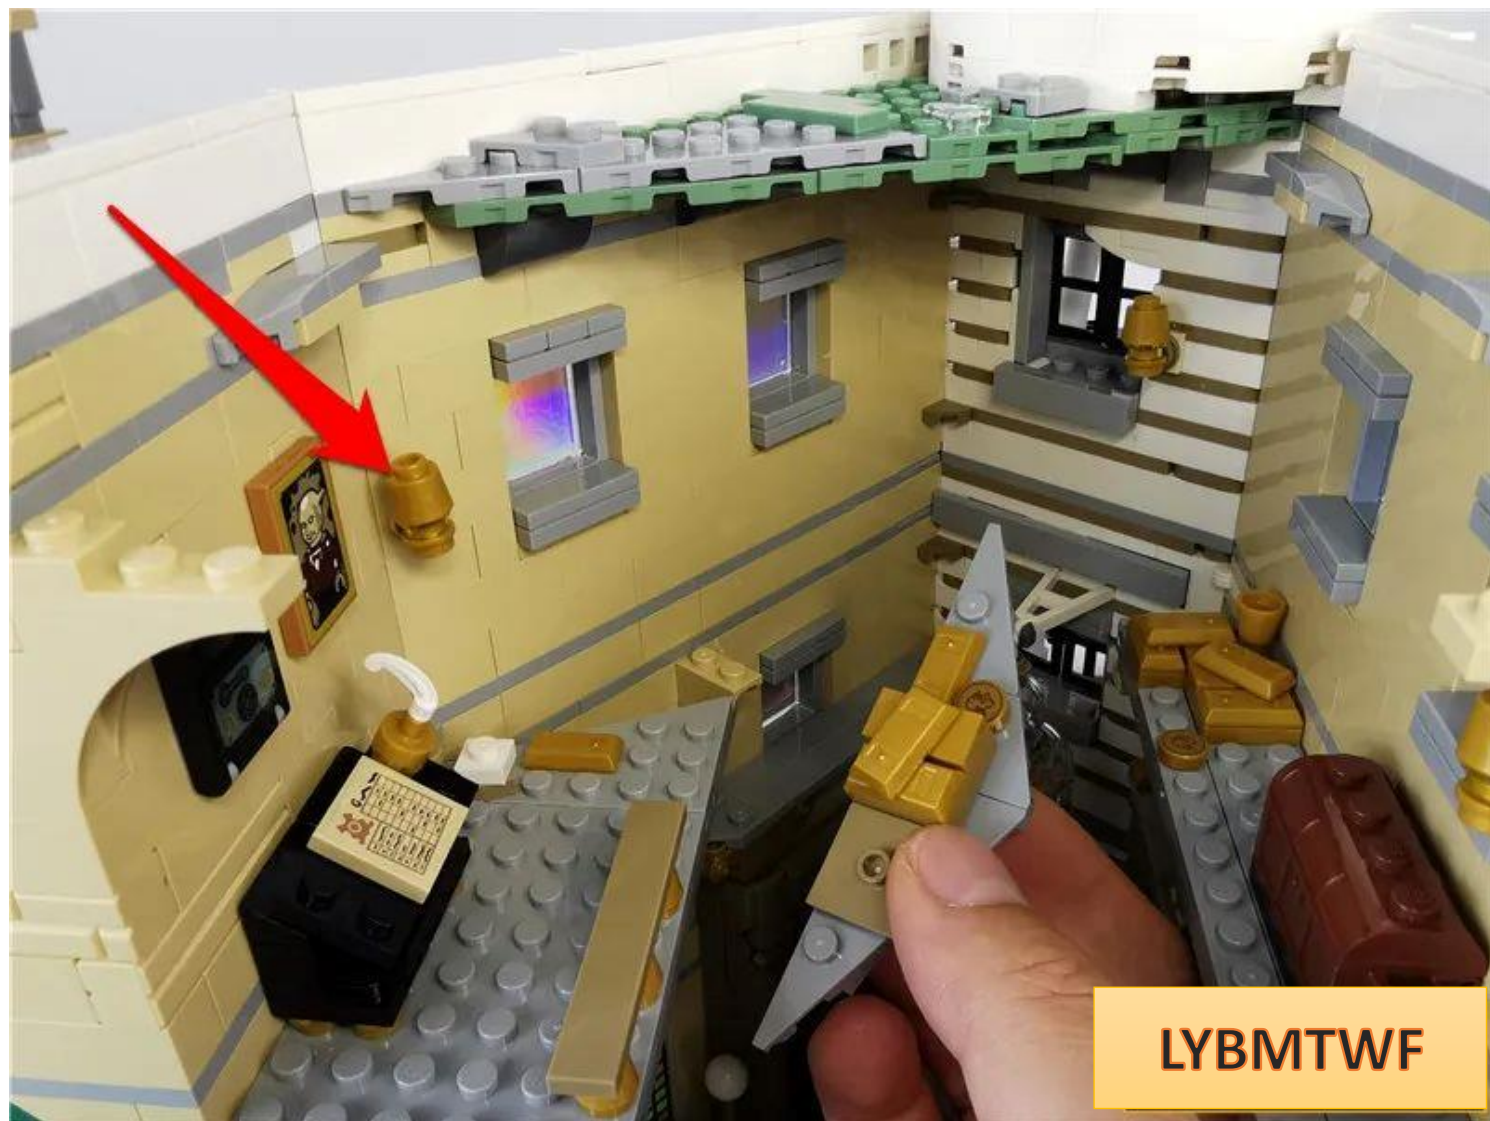

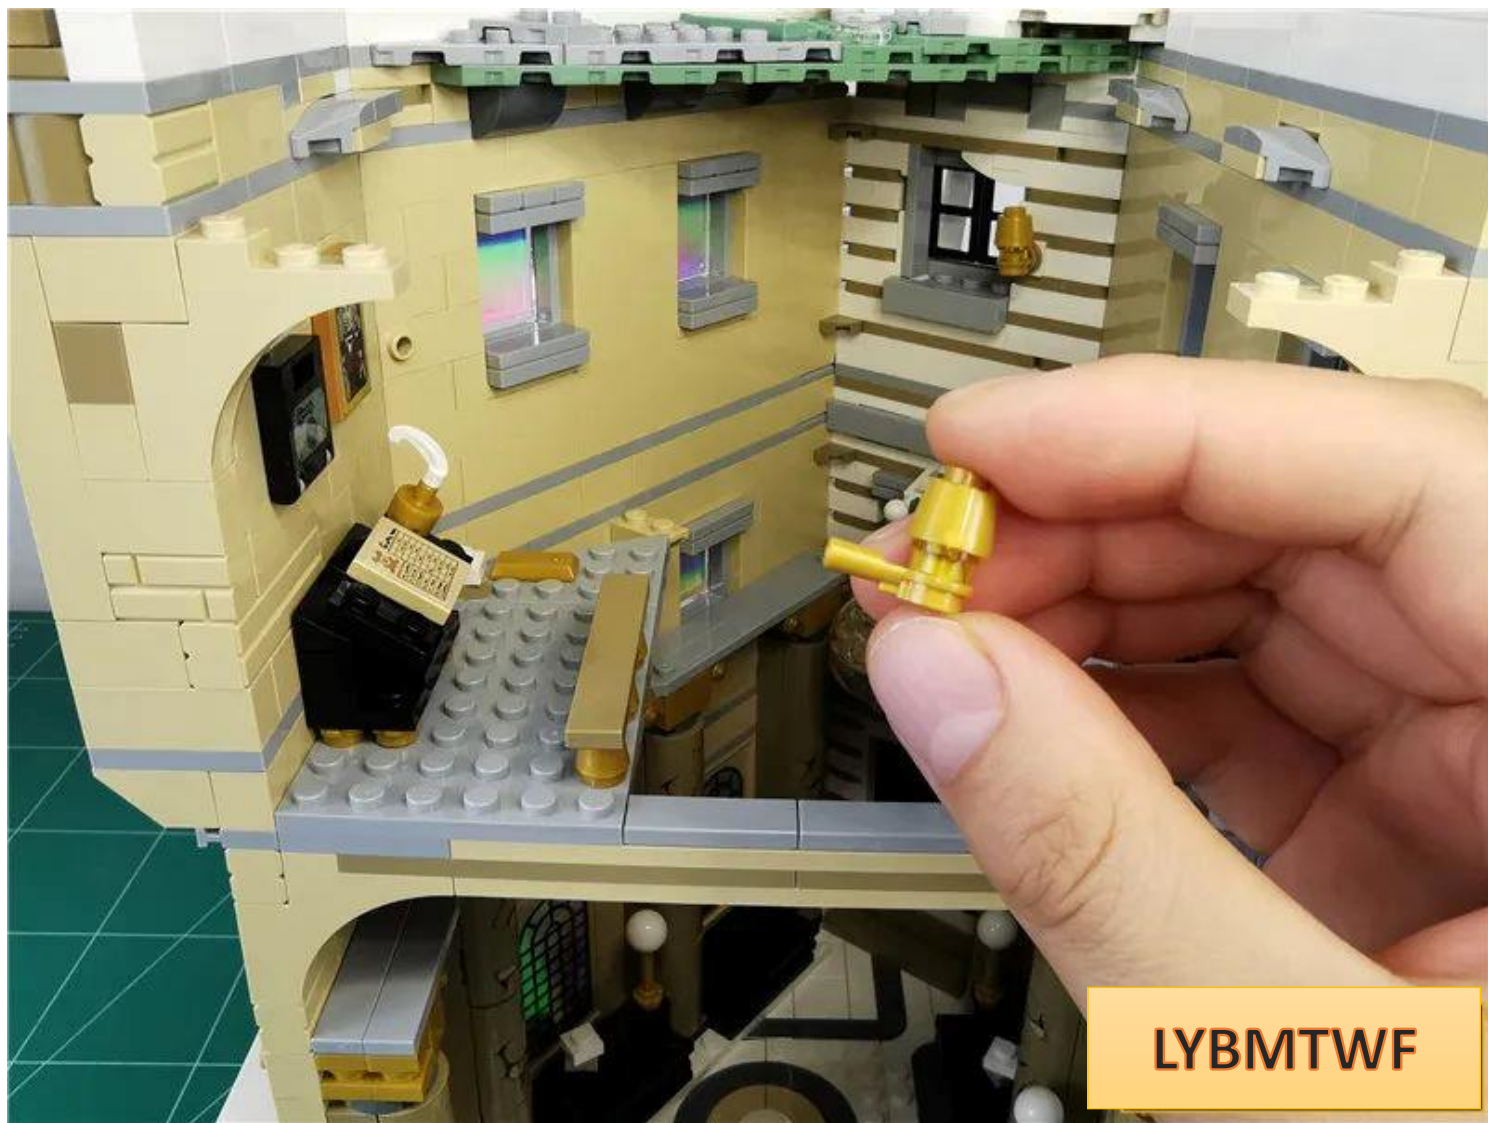

LYBMTWF


Take 1 15cm ordinary warm light bulb and 1 hollow transparent yellow circle, ready to be installed on the wall lamp

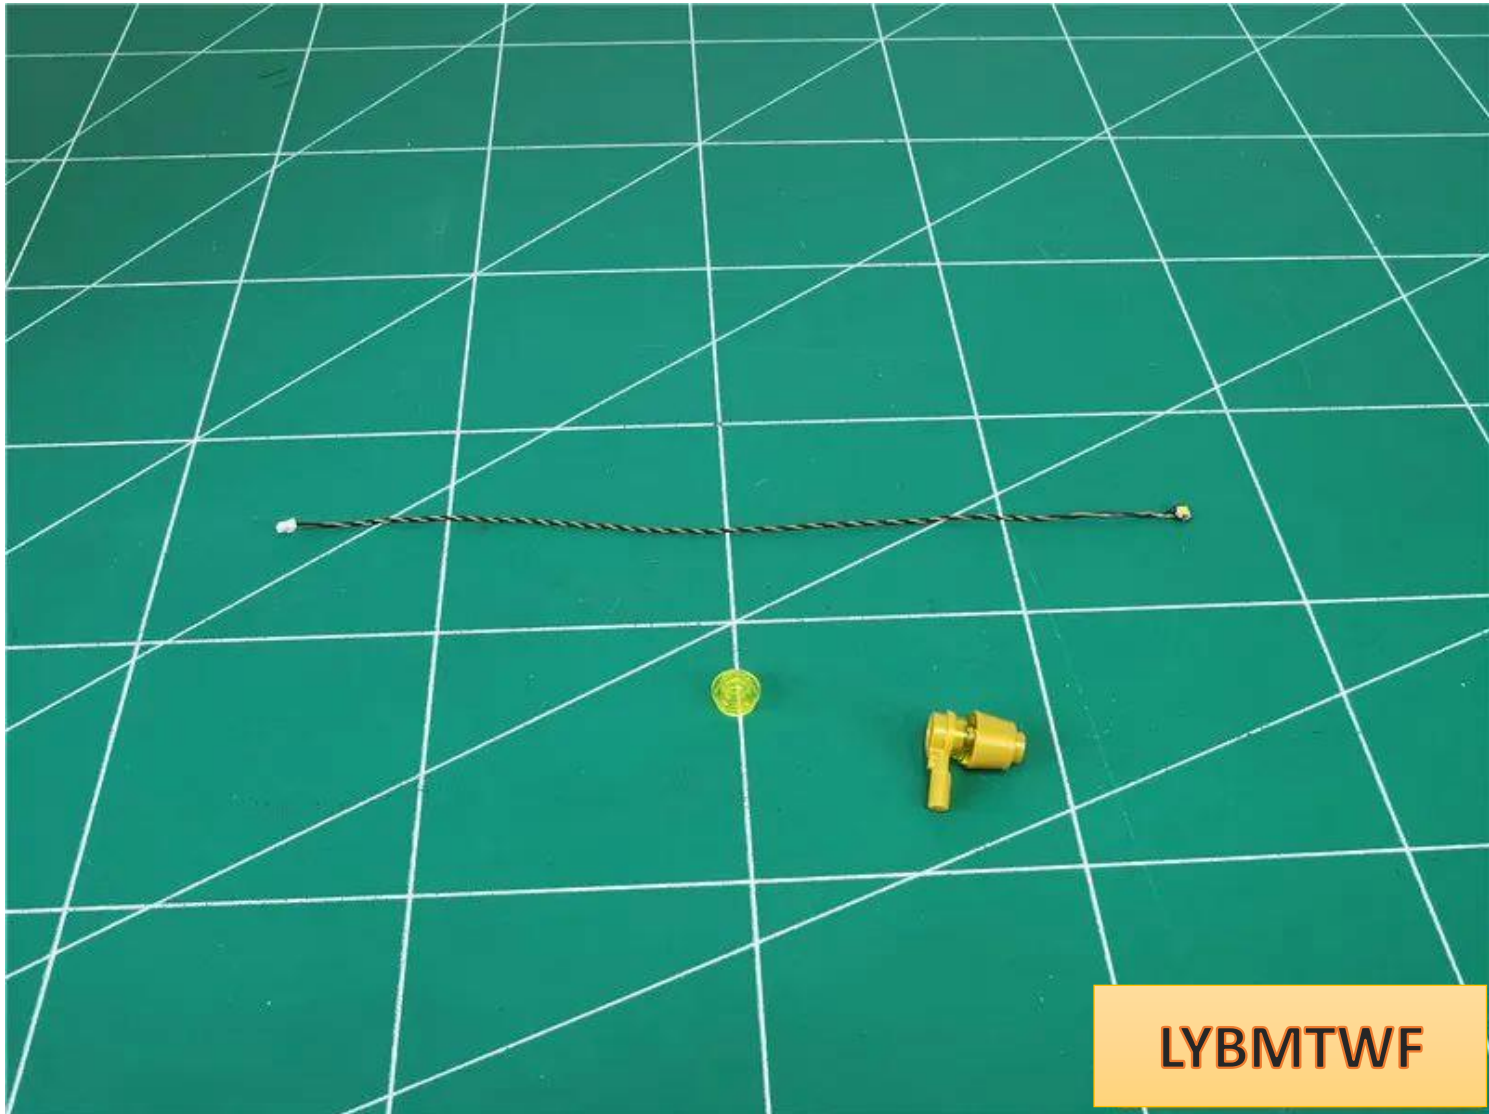


Break down the wall light as follows:




light-emitting surface of the lamp grain upwards on the protrusion, with **the wires facing**
the bracket

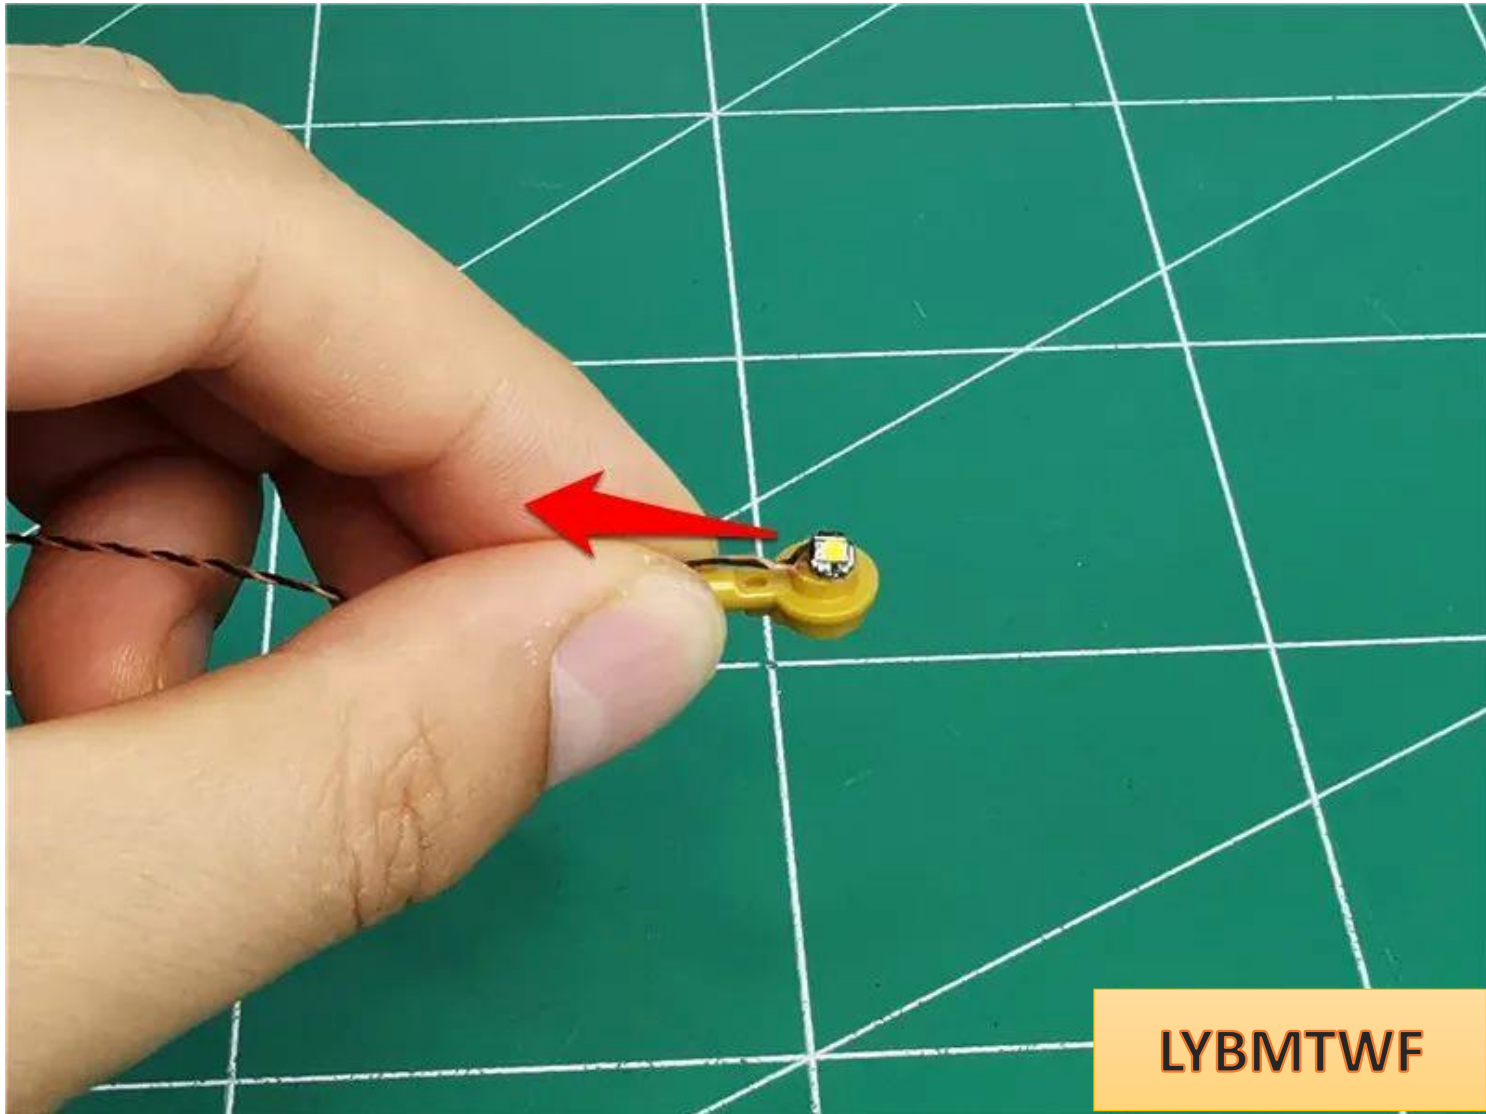

Install the hollow yellow circle and fix the lamp particles

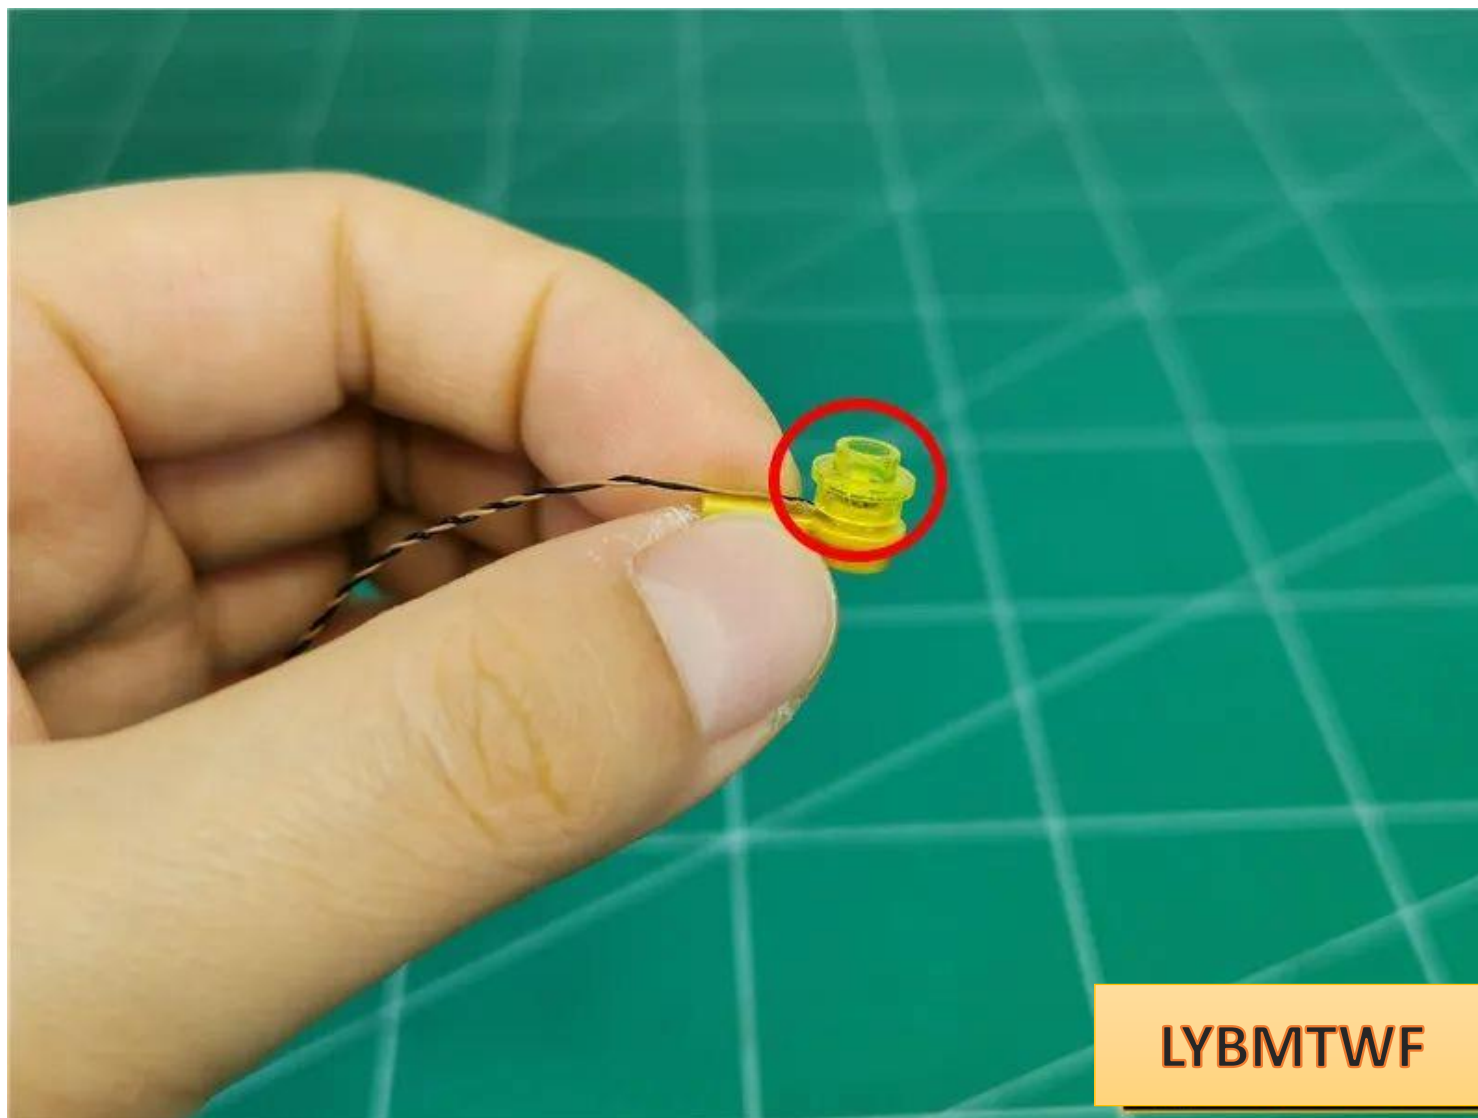

Restoration lampshade

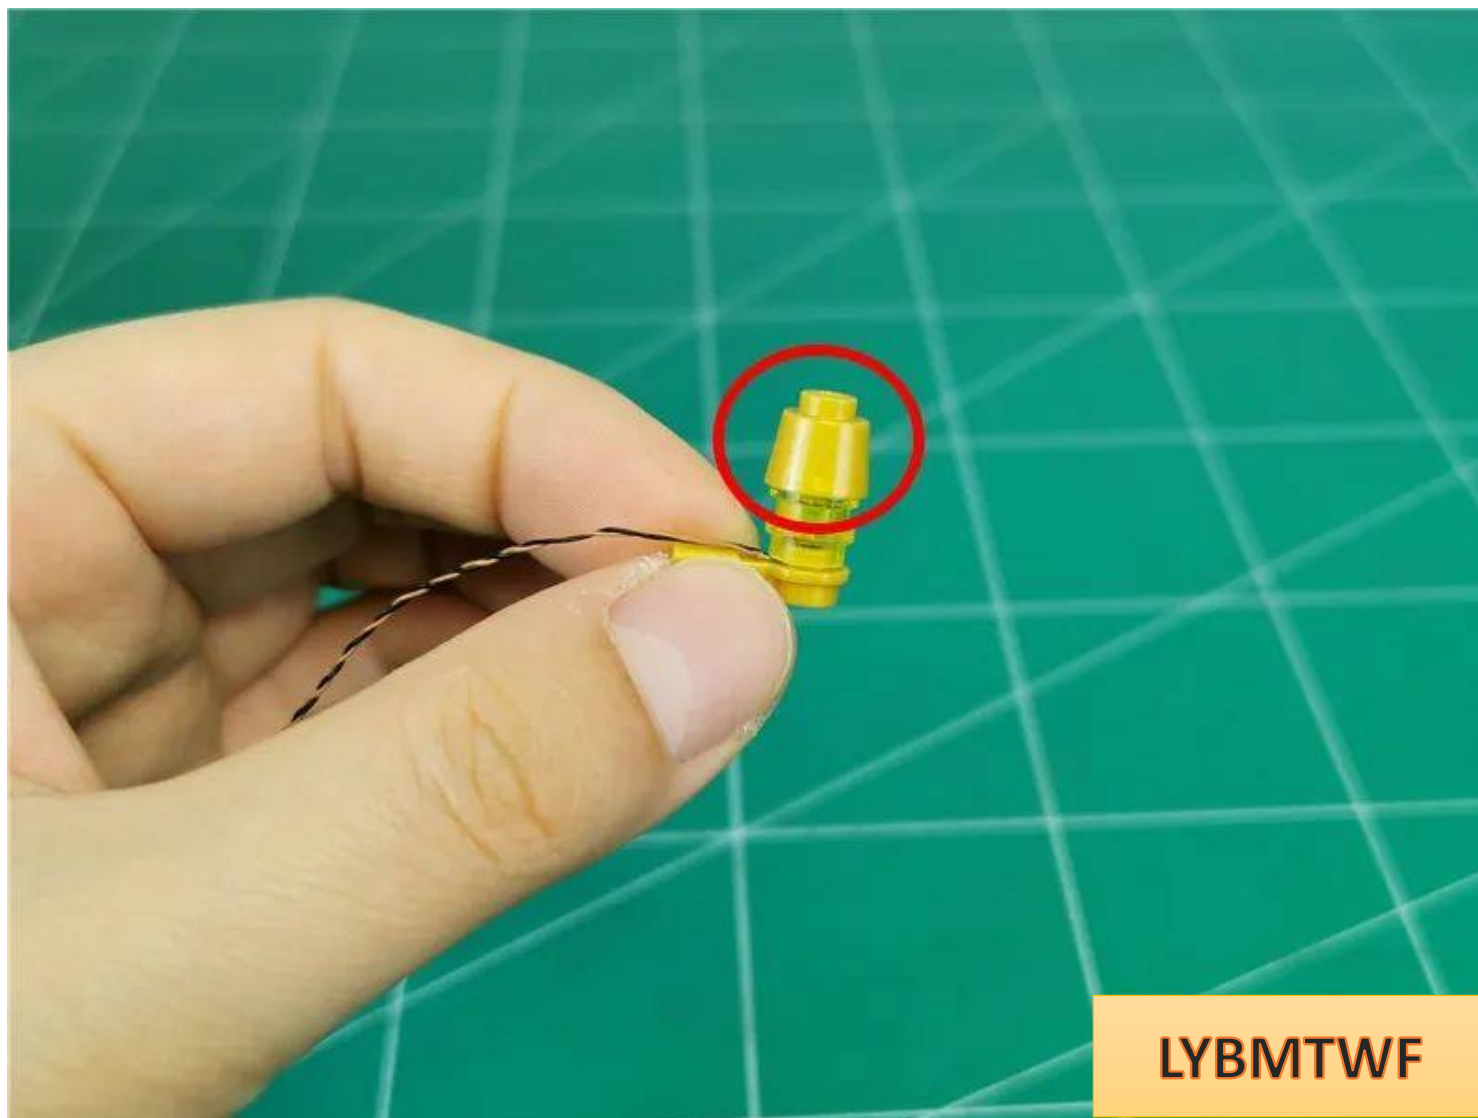


Pull the wire under the bracket




LYBMTWF


Restoration wall lamp

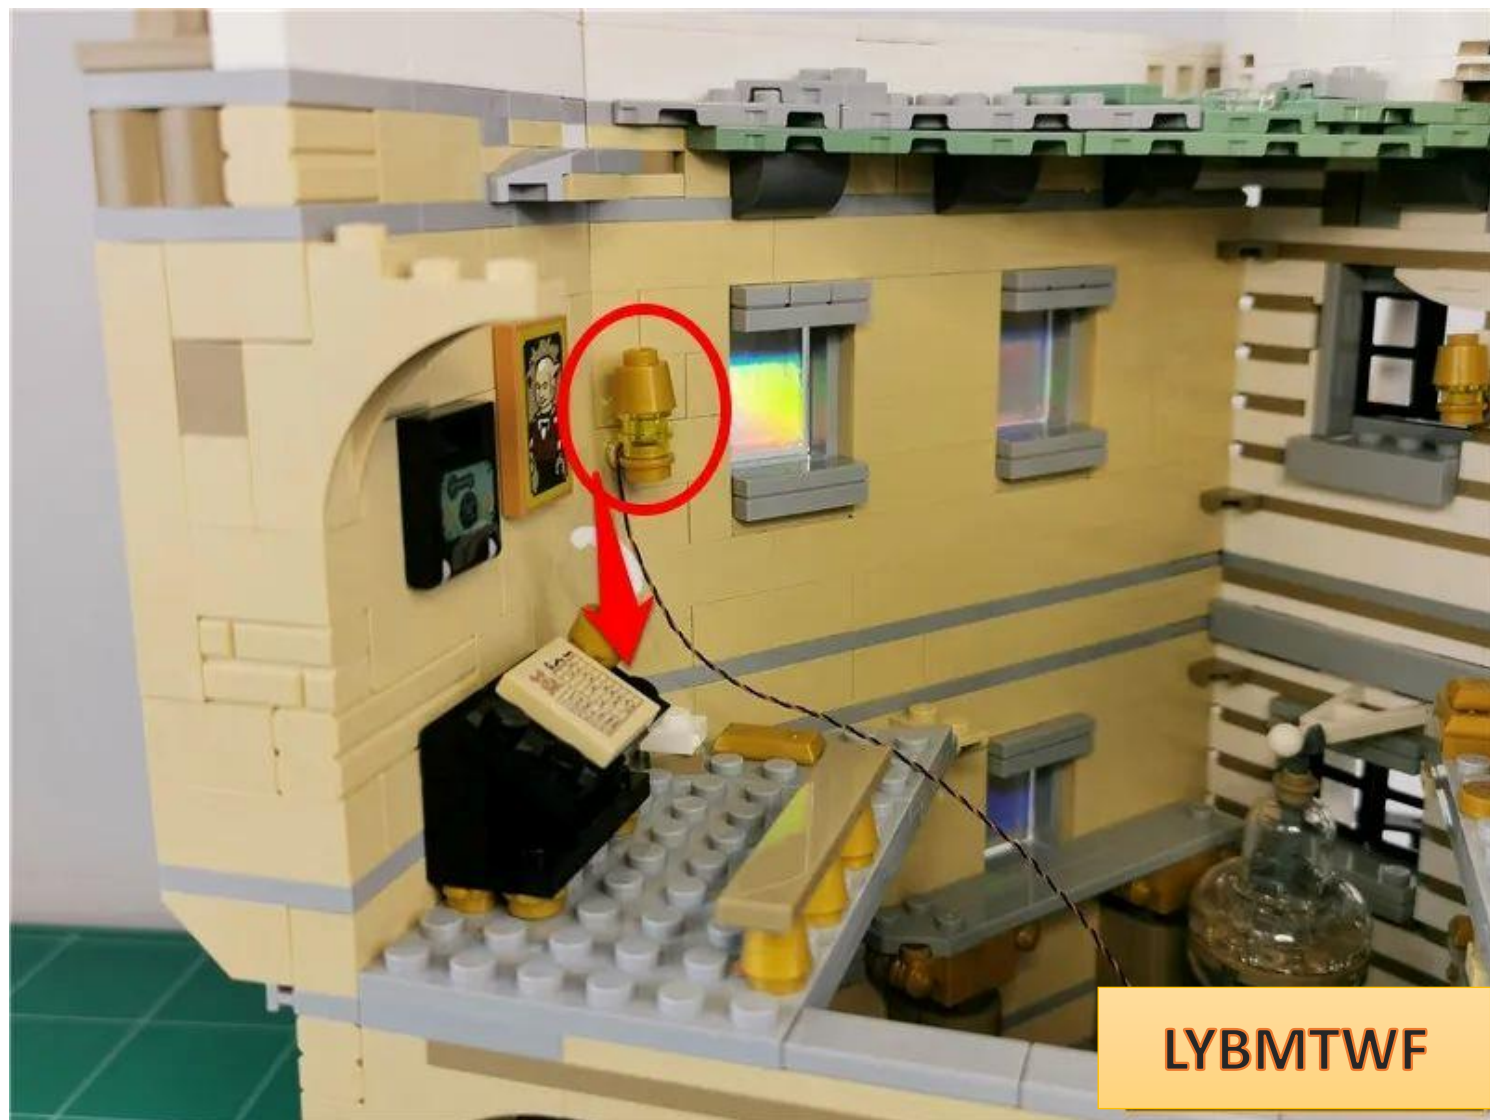


Pass the wire along the gap as shown in the picture to the bottom

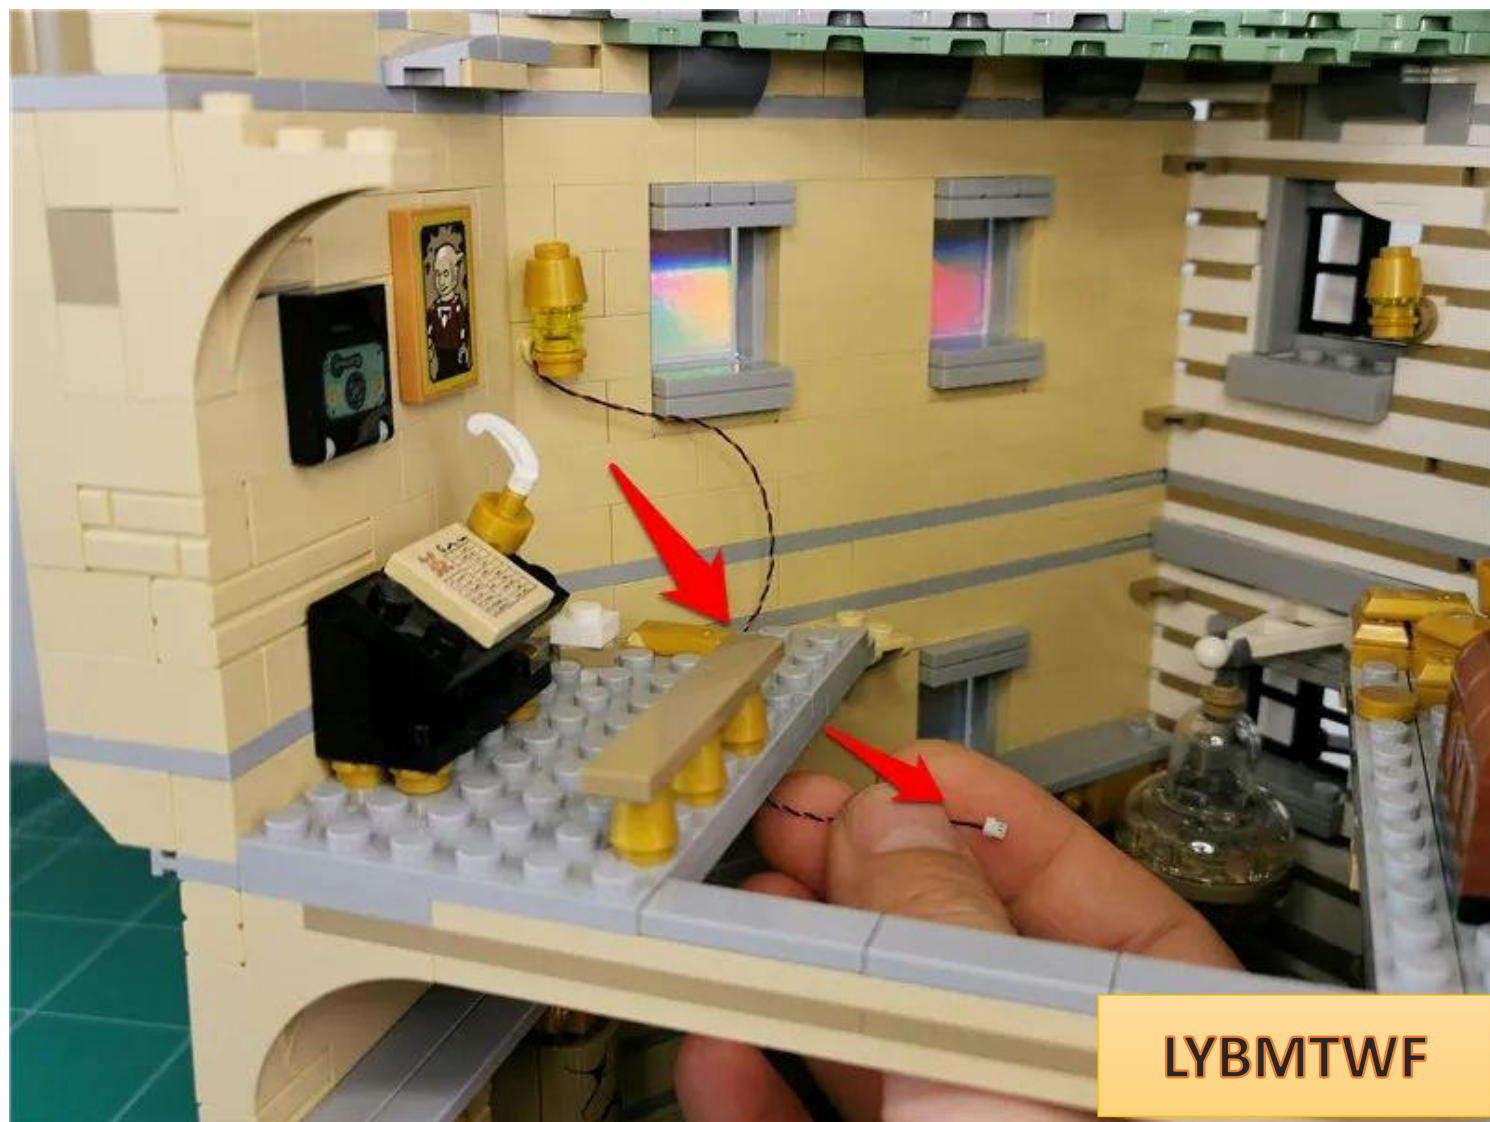

The specific location is as follows

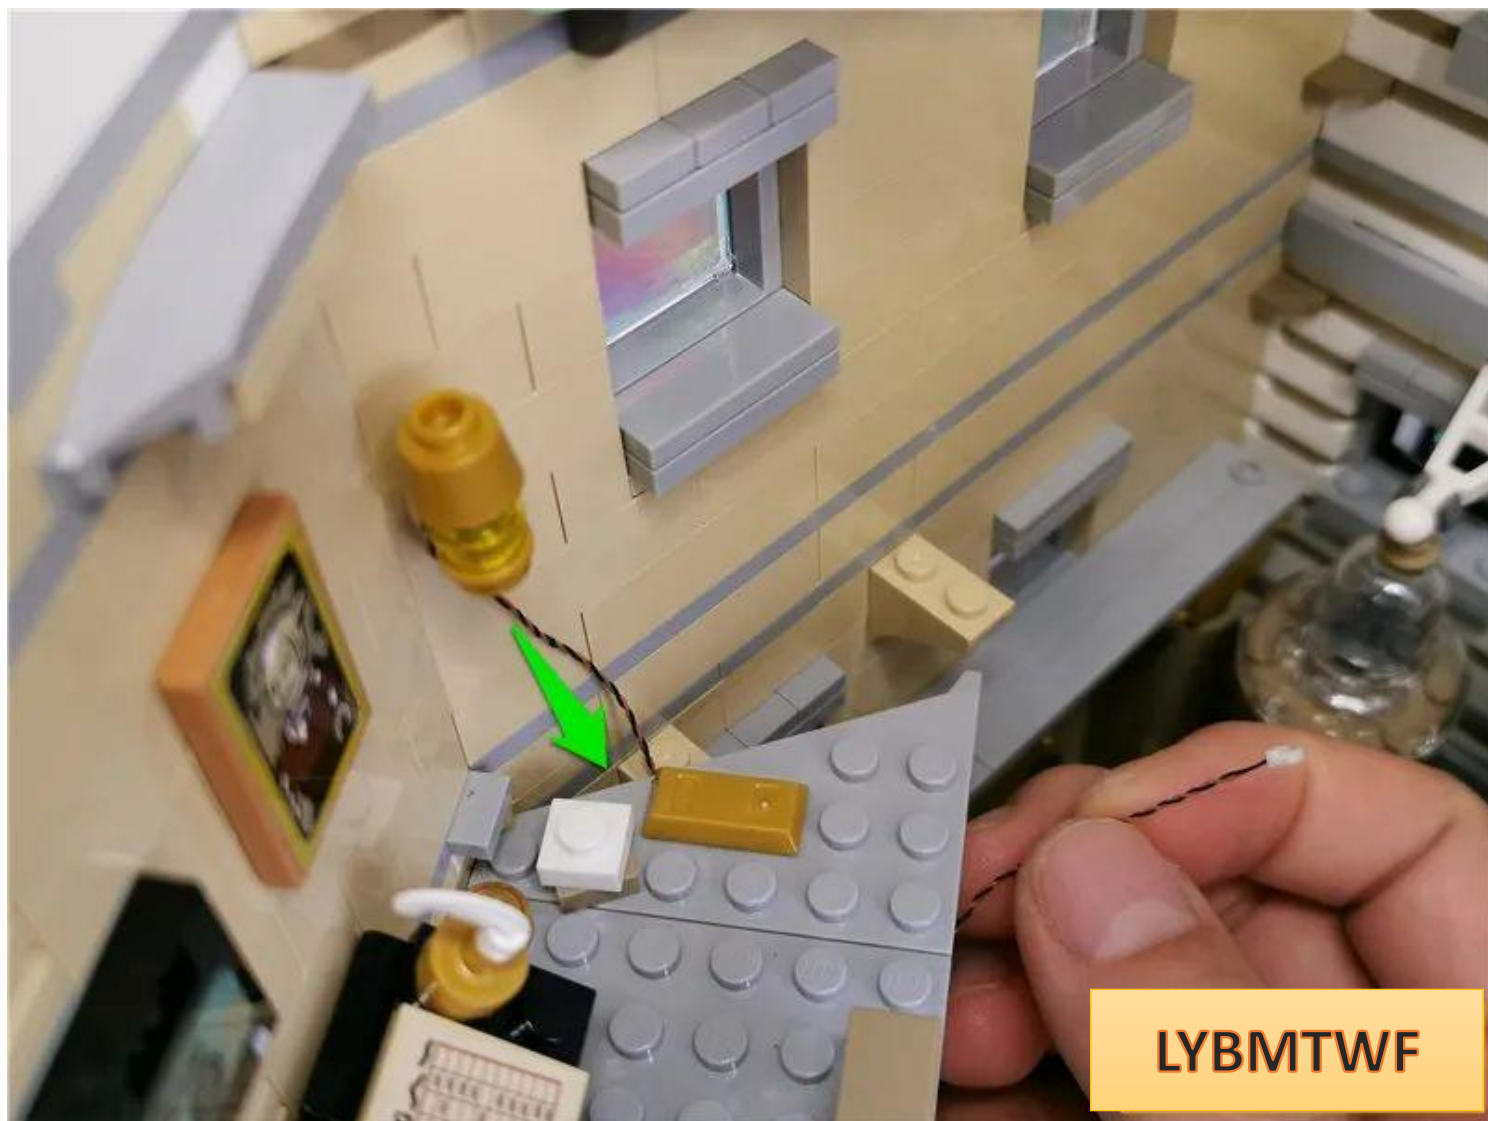

Tighten the wire from below

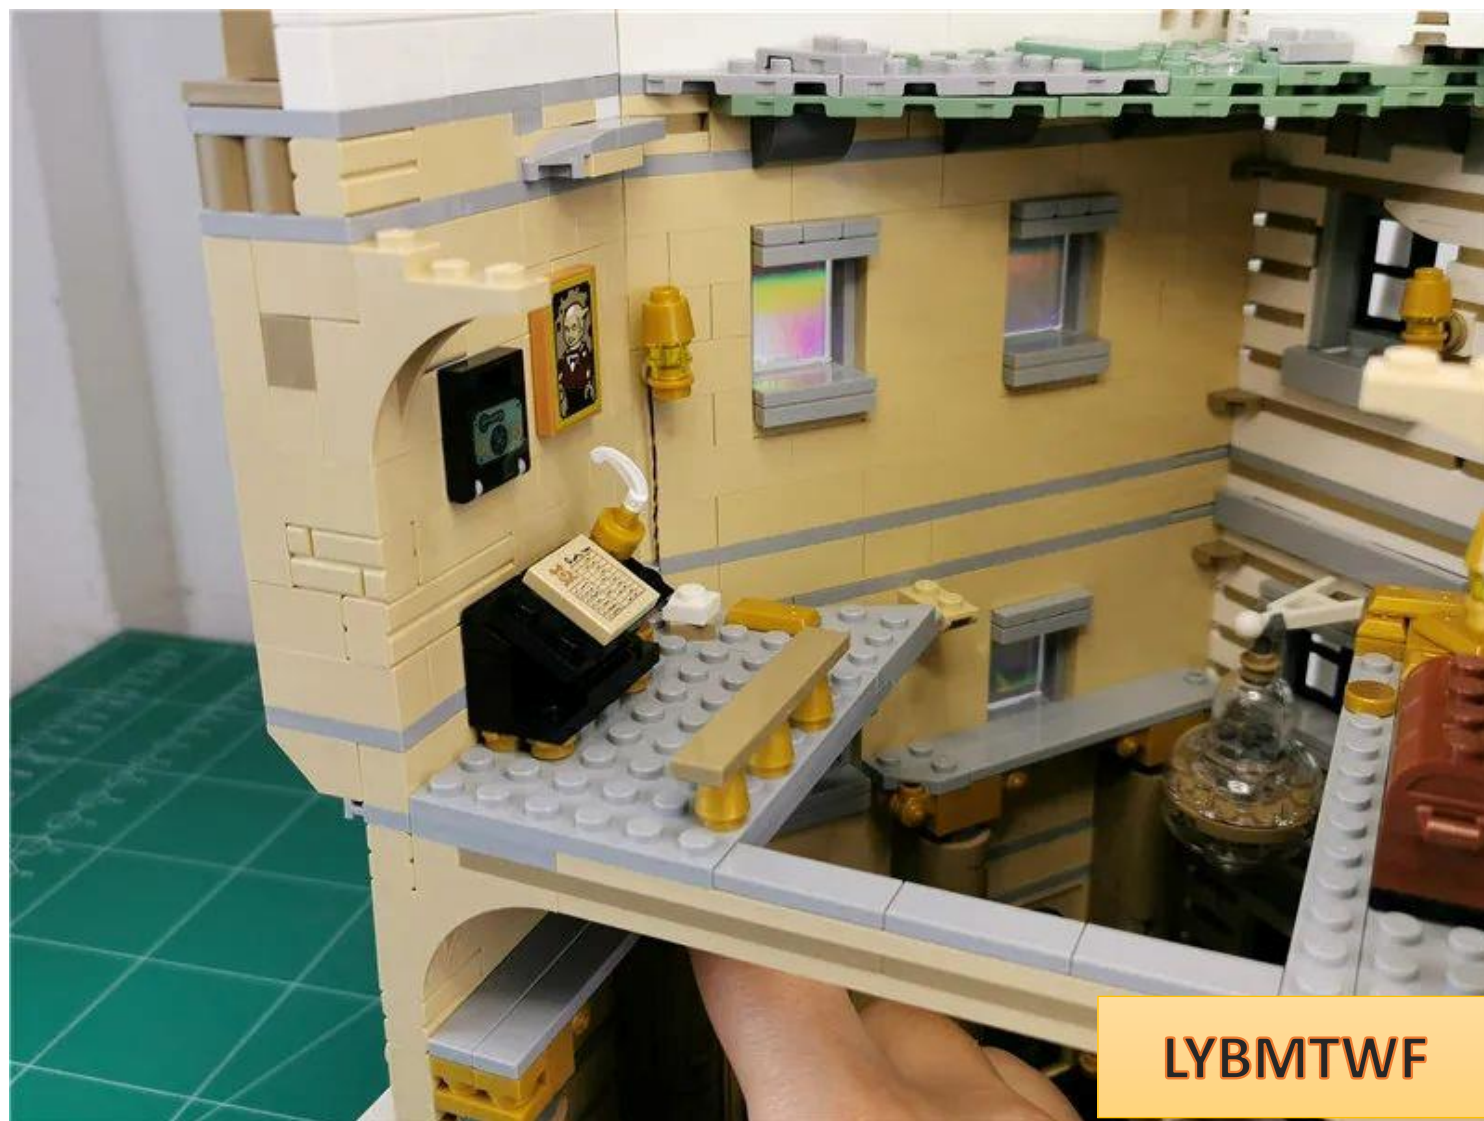


Restore parts and fix wires



LYBMTWF

Restore the disassembled parts in sequence

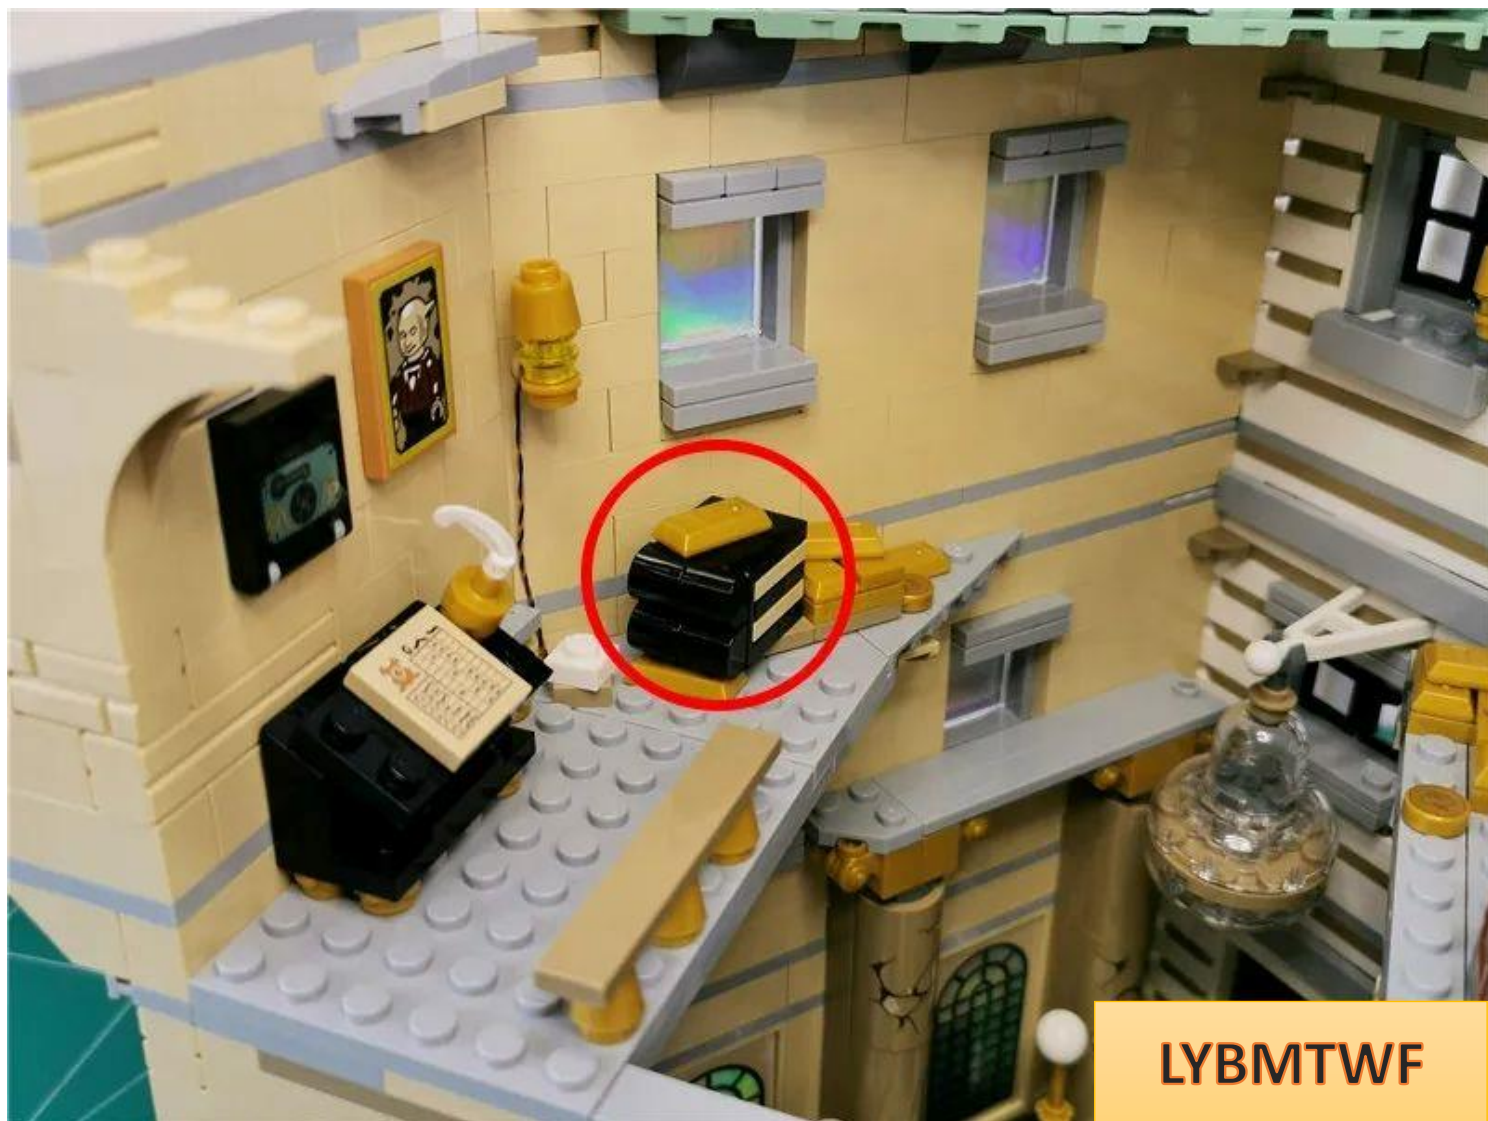


LYBMTWF




LYBMTWF

Take a 15cm connecting cable and a warm soft light strip and connect them together

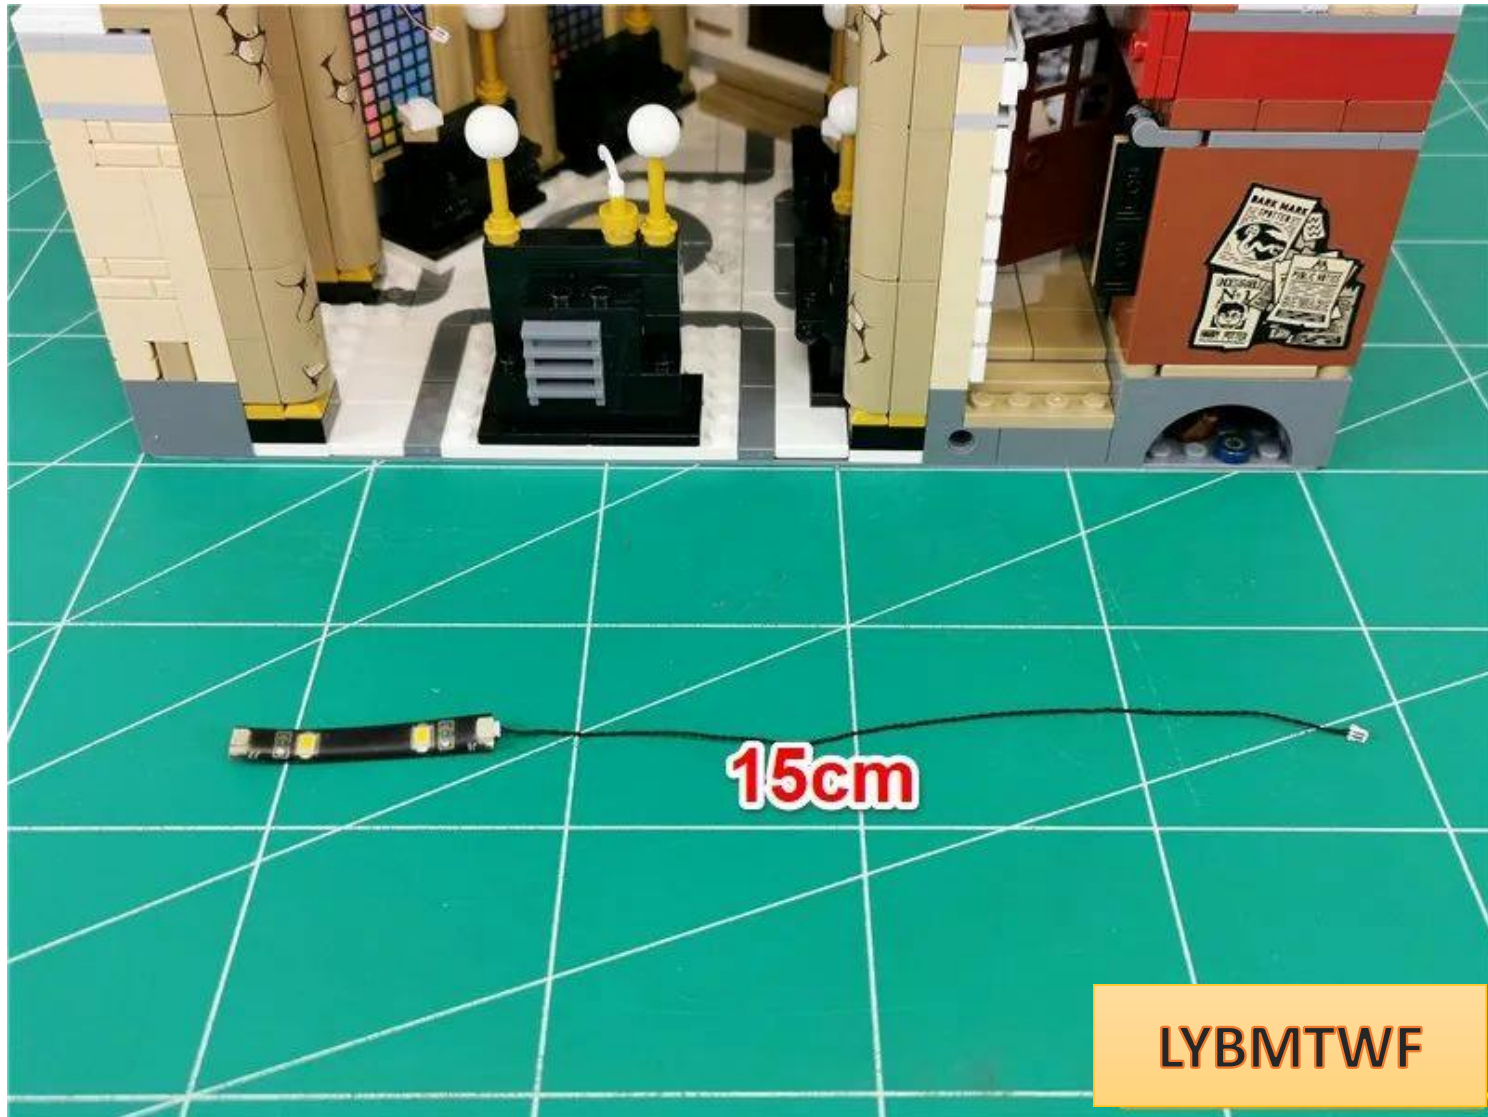


Insert the wall lamp wire into the empty socket of the light strip

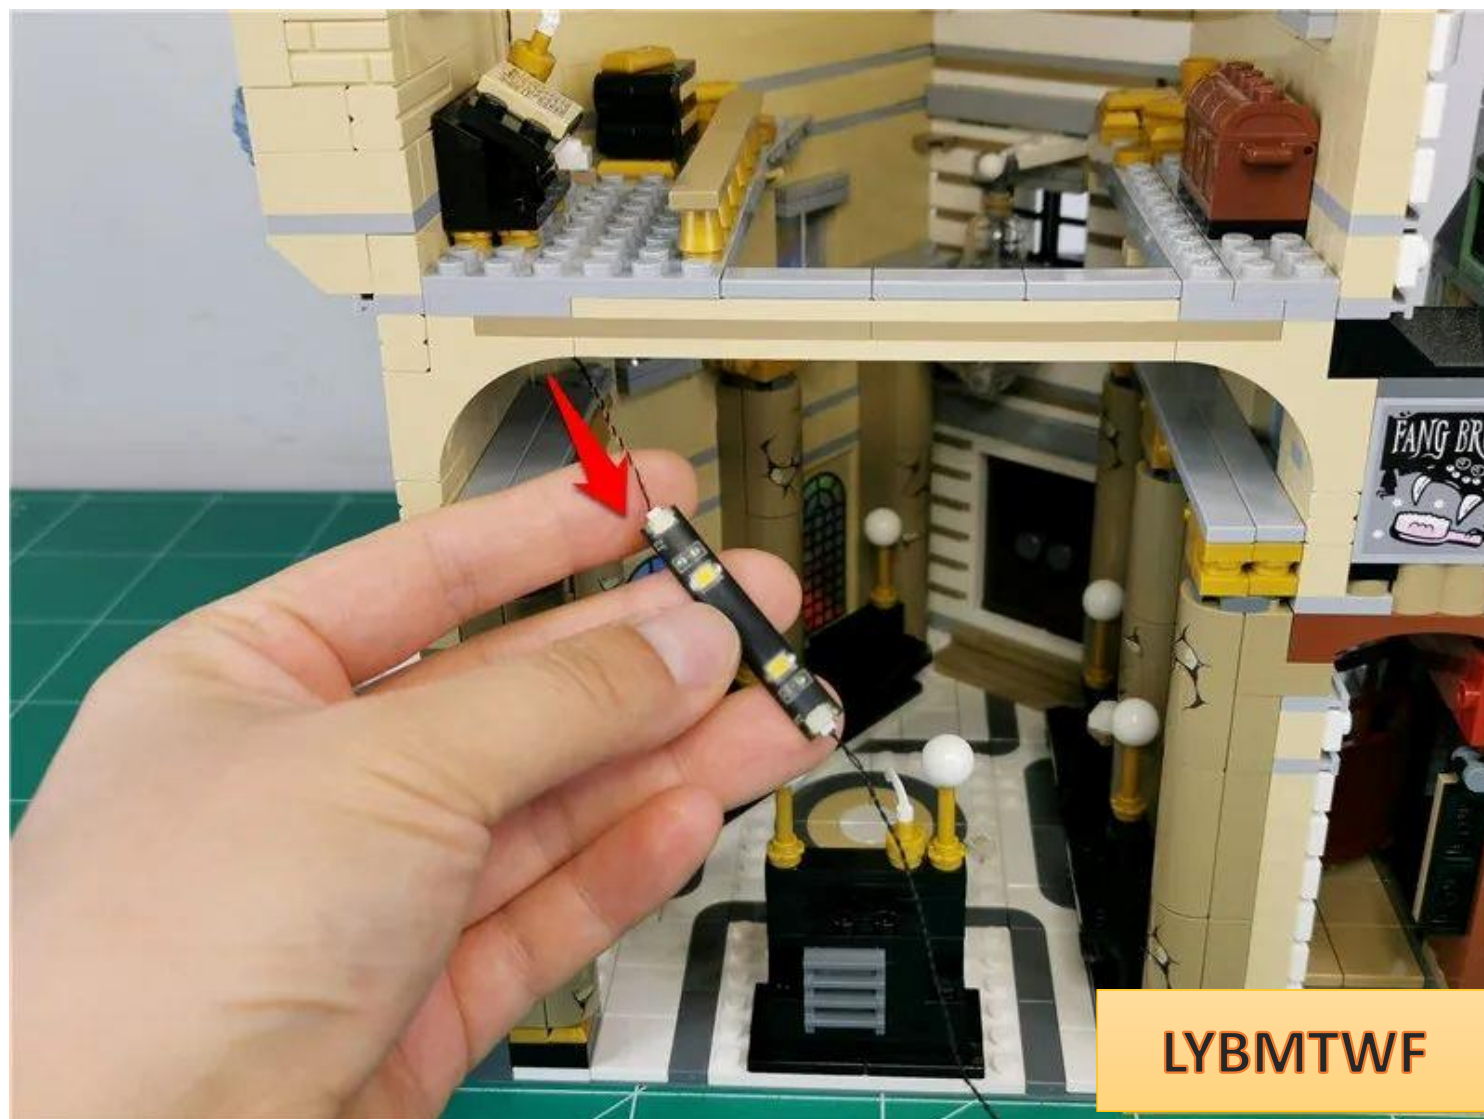


LYBMTWF

Peel off the adhesive tape from the light strip

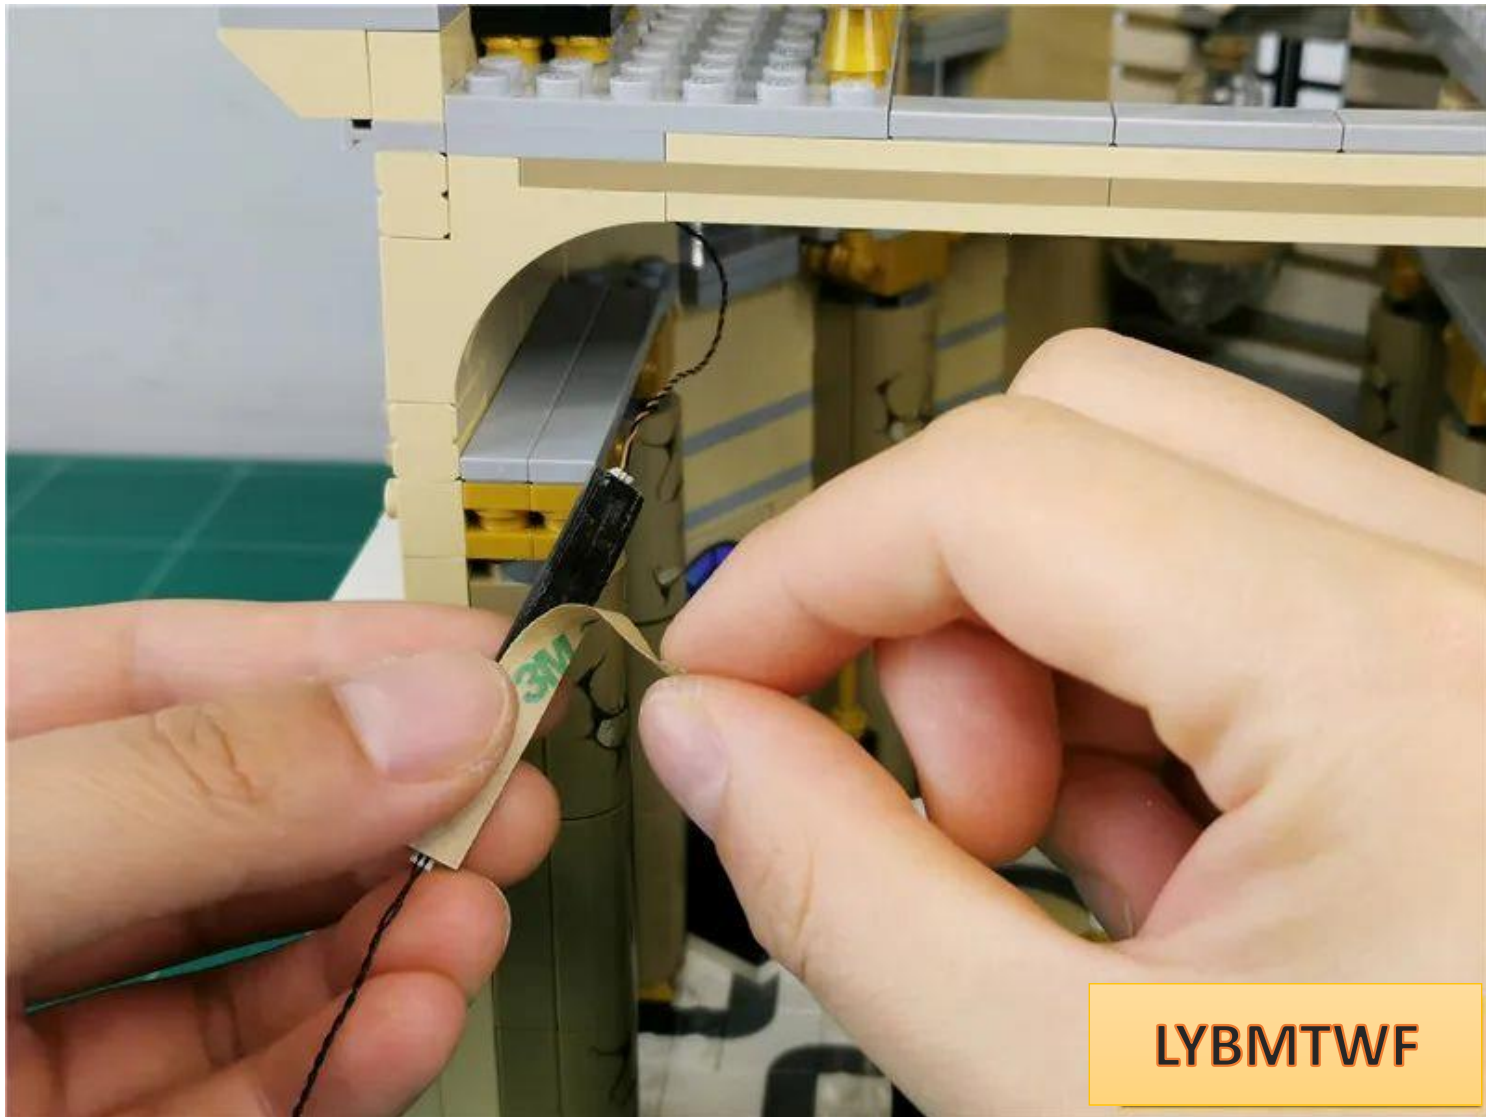

LYBMTWF


Paste the light strip to the position shown in the picture, **with the connecting wire on the outside**

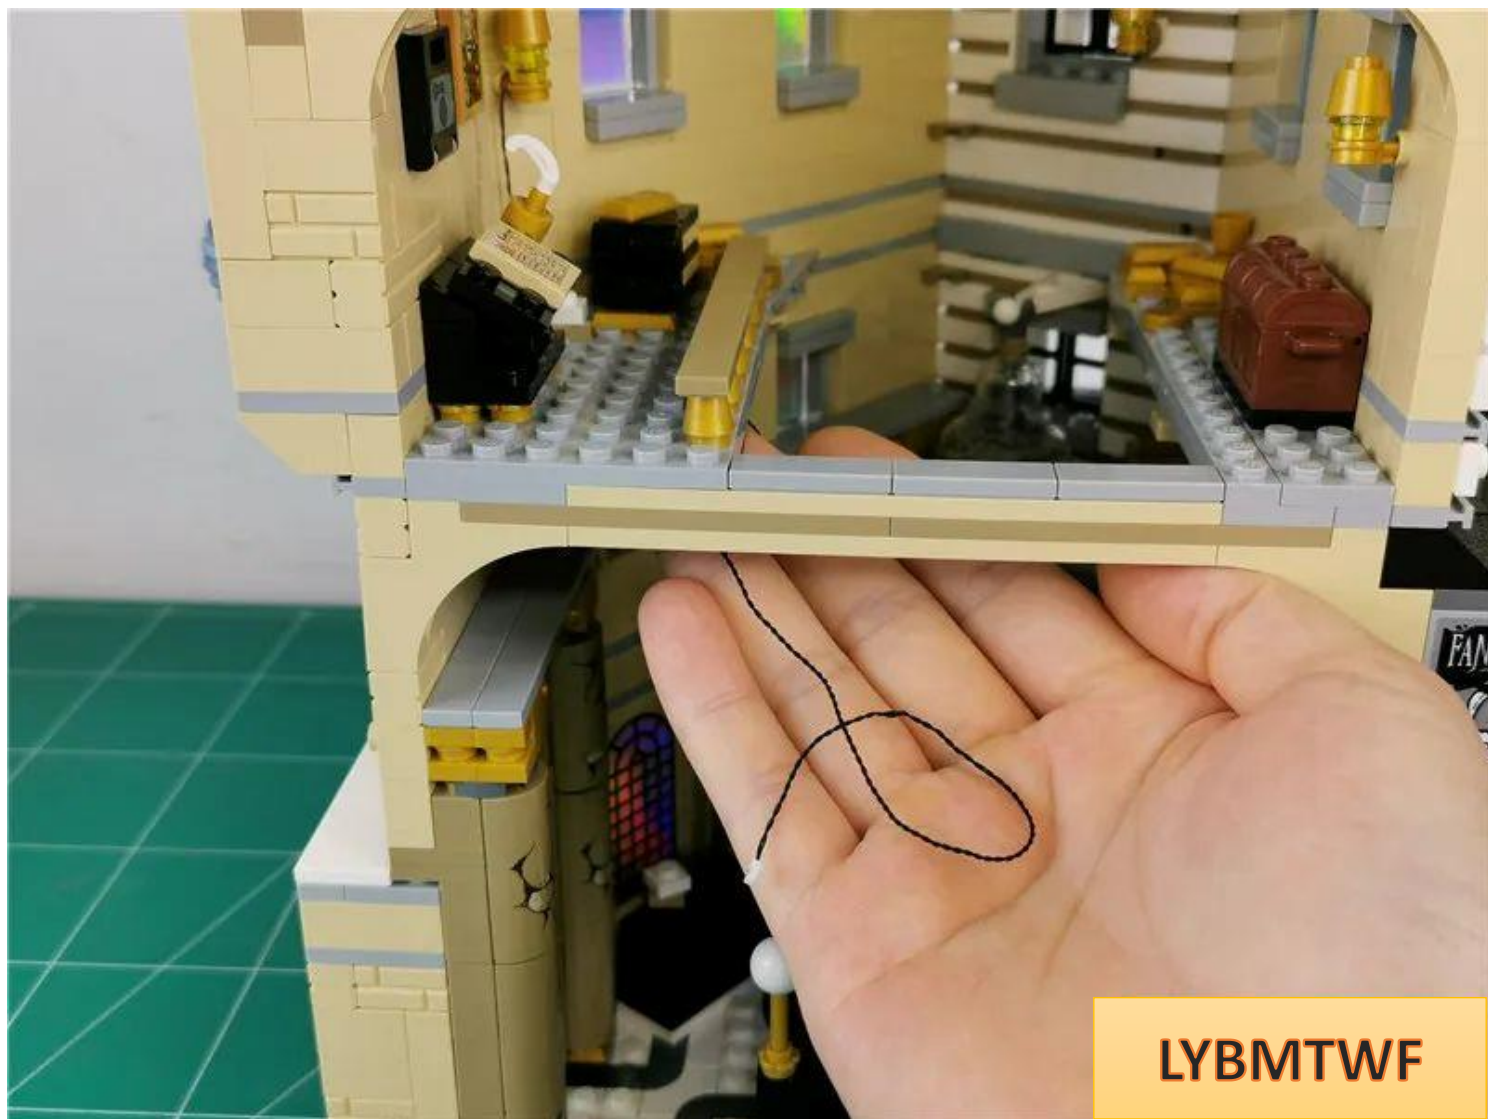


The specific location is as follows




Remove the 2 plates indicated by the arrows

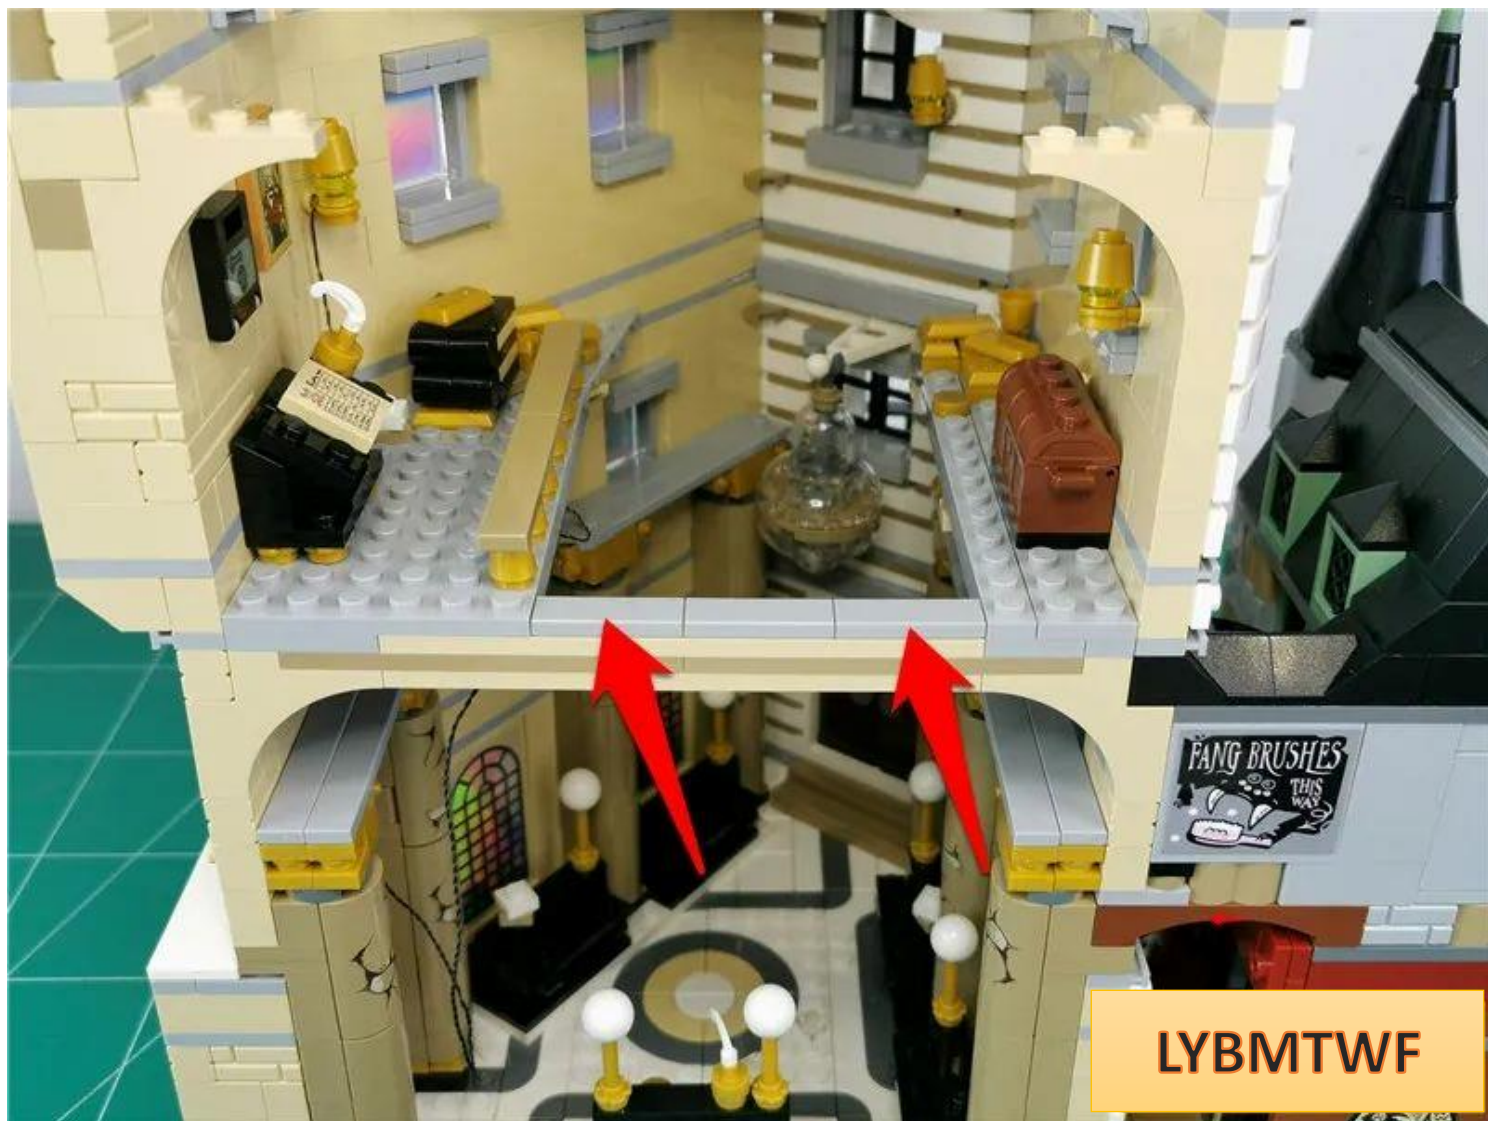

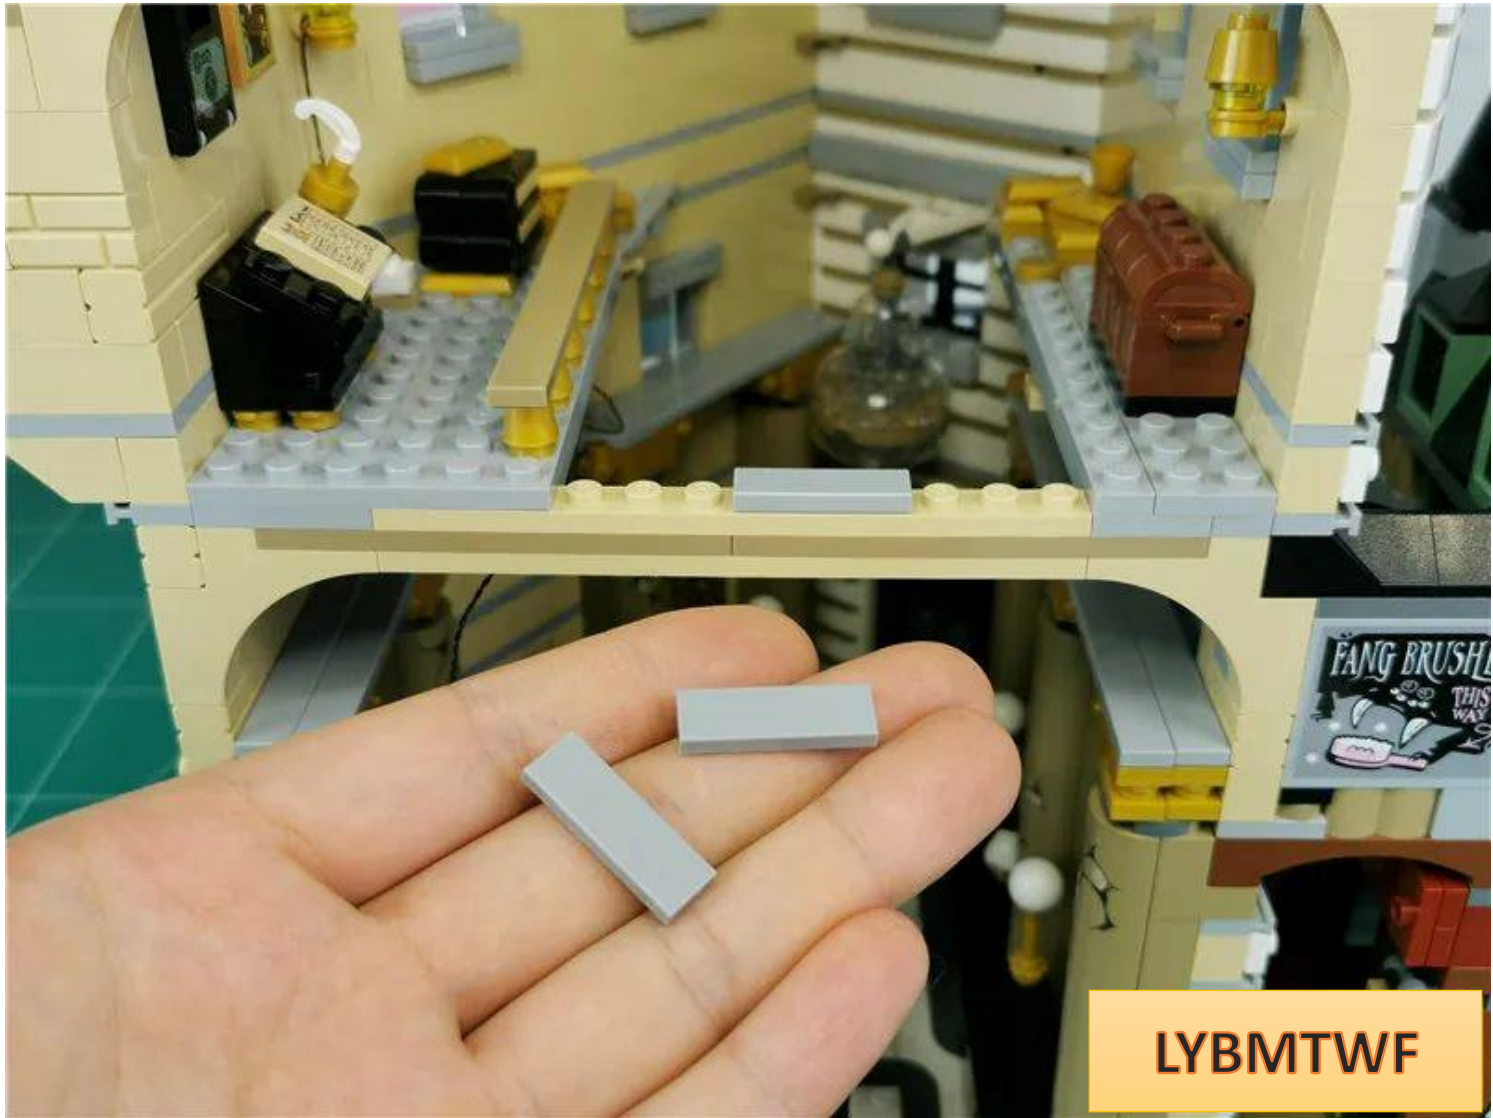


LYBMTWF


Pass the connecting wire around the raised particles as shown in the figure

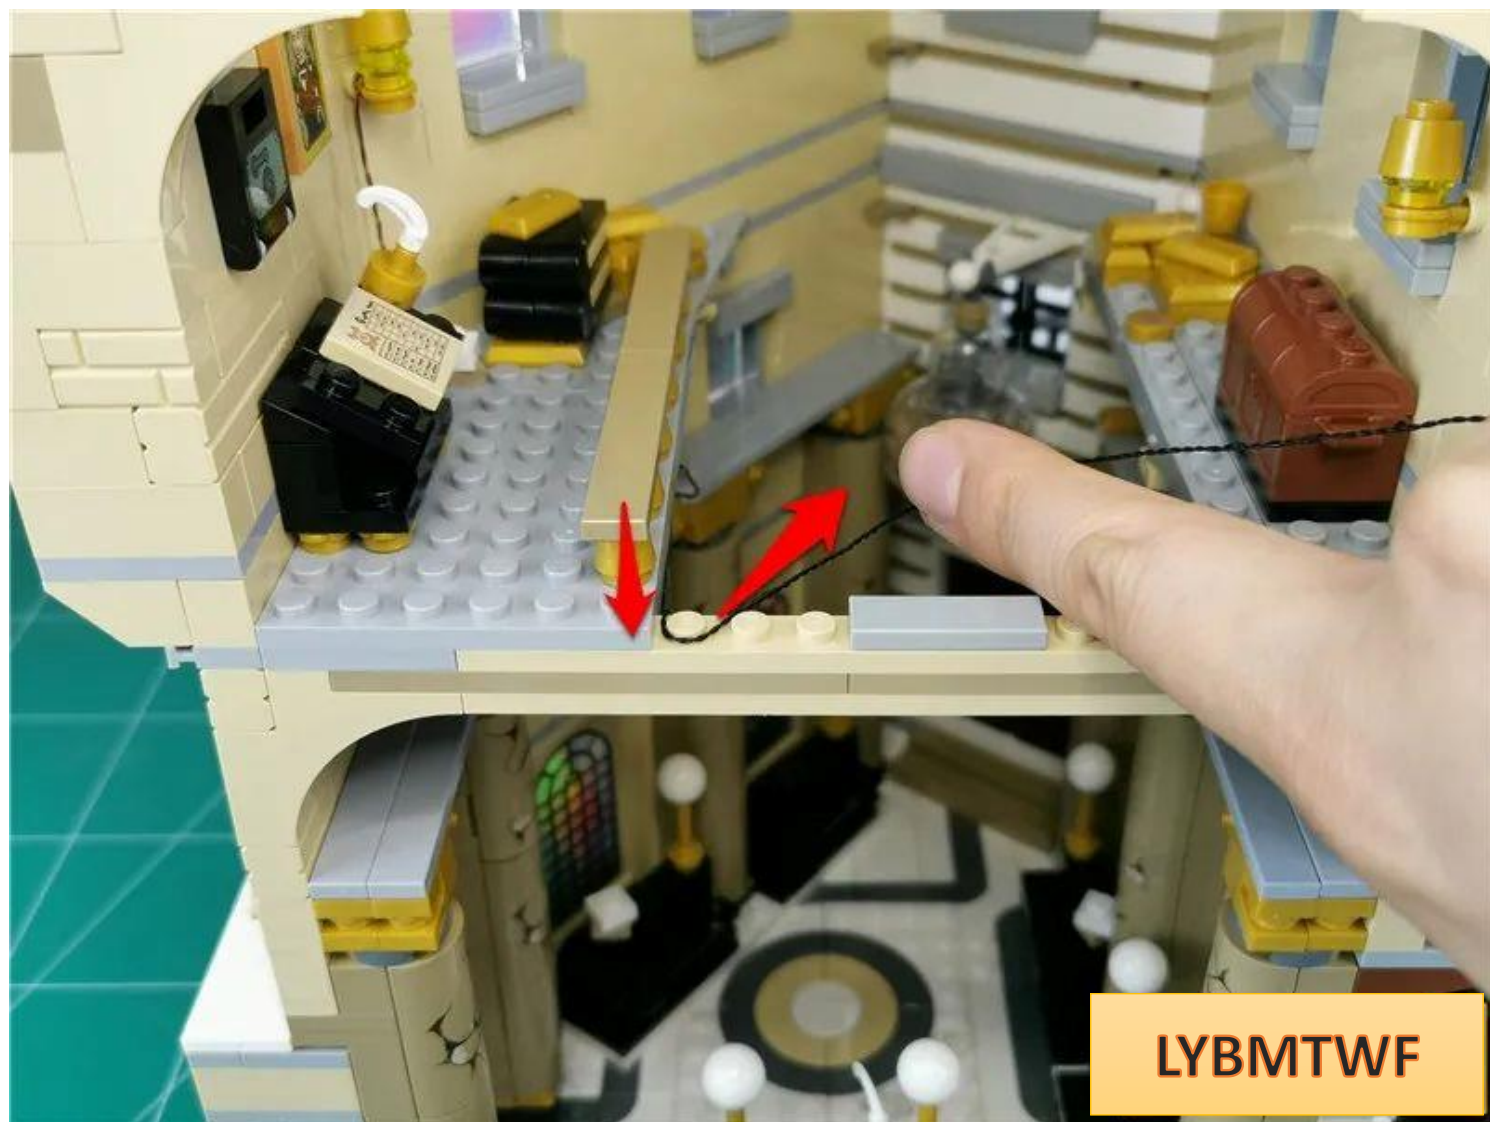

Restore the tablet and fix the cables

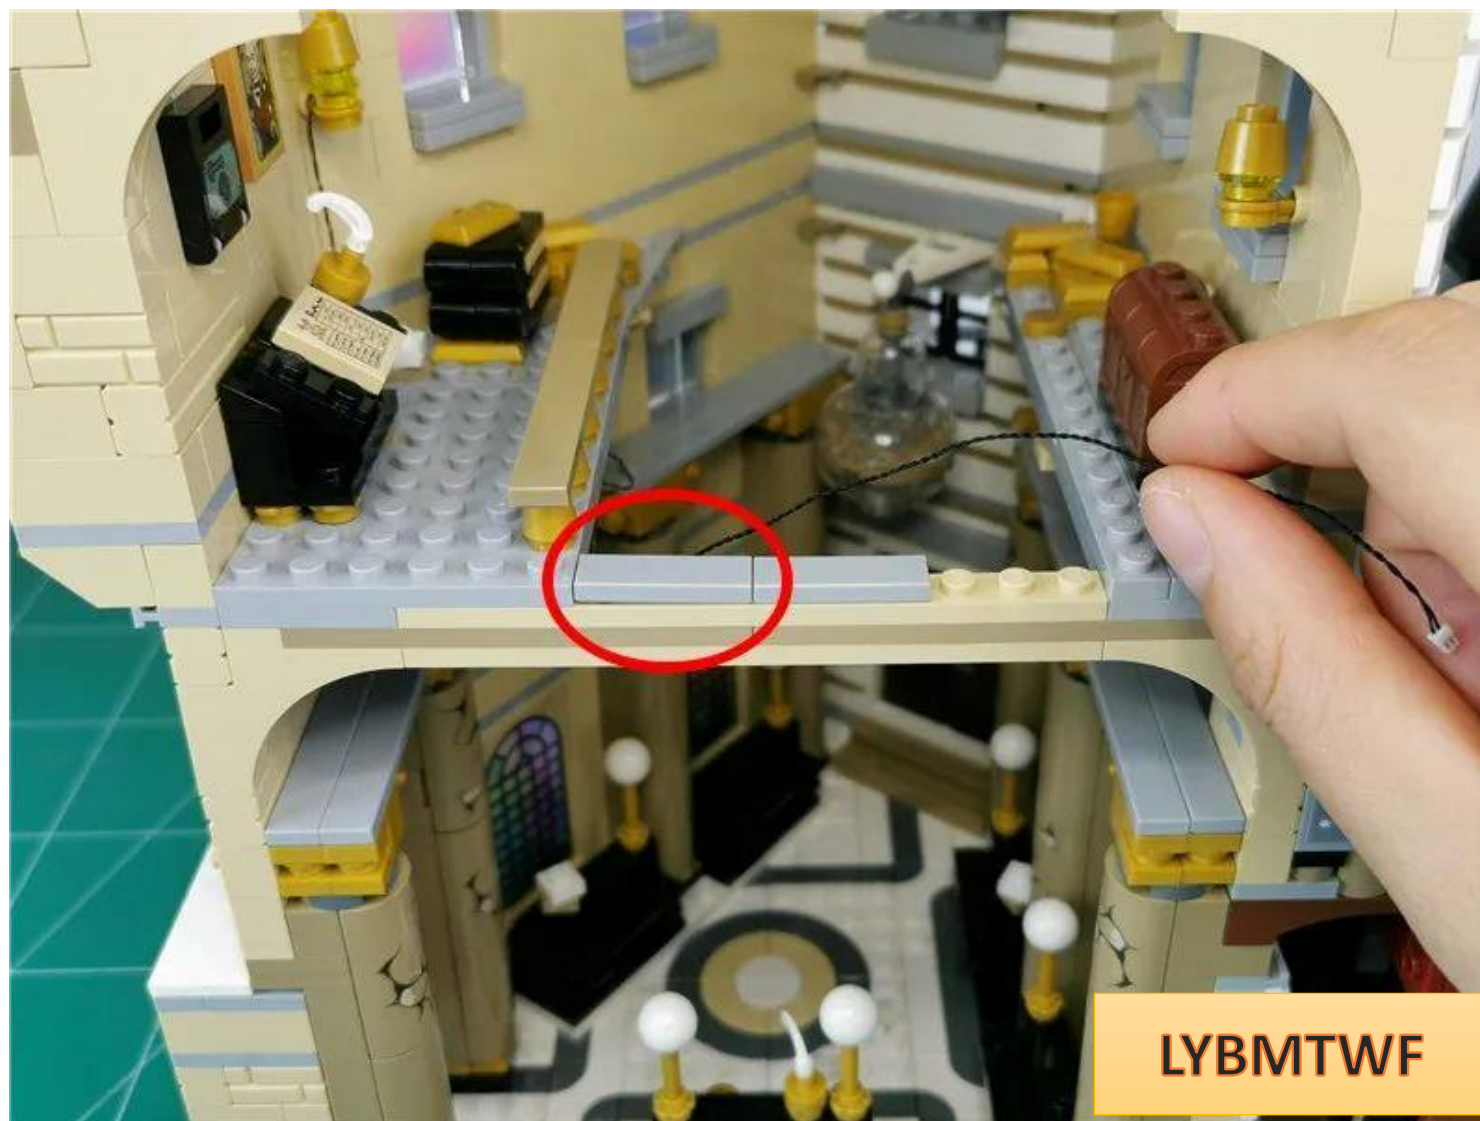


Continue to wrap the connecting wire around the raised particles as shown in the figure

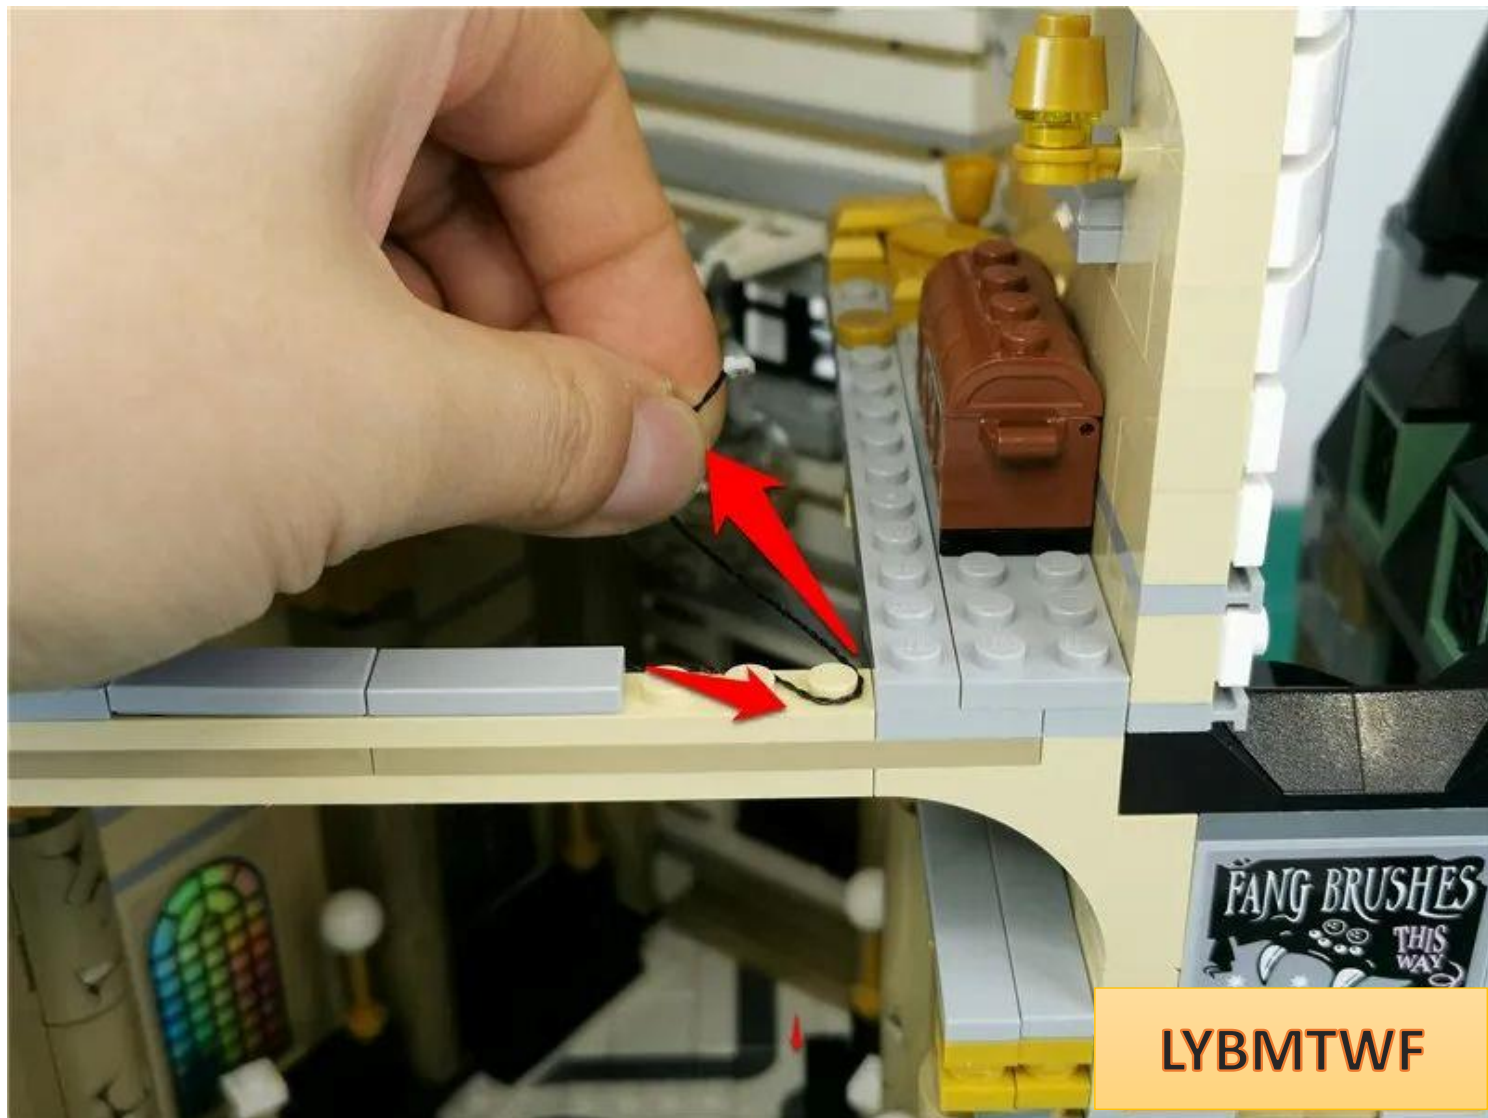

LYBMTWF


Restore the tablet and fix the cables

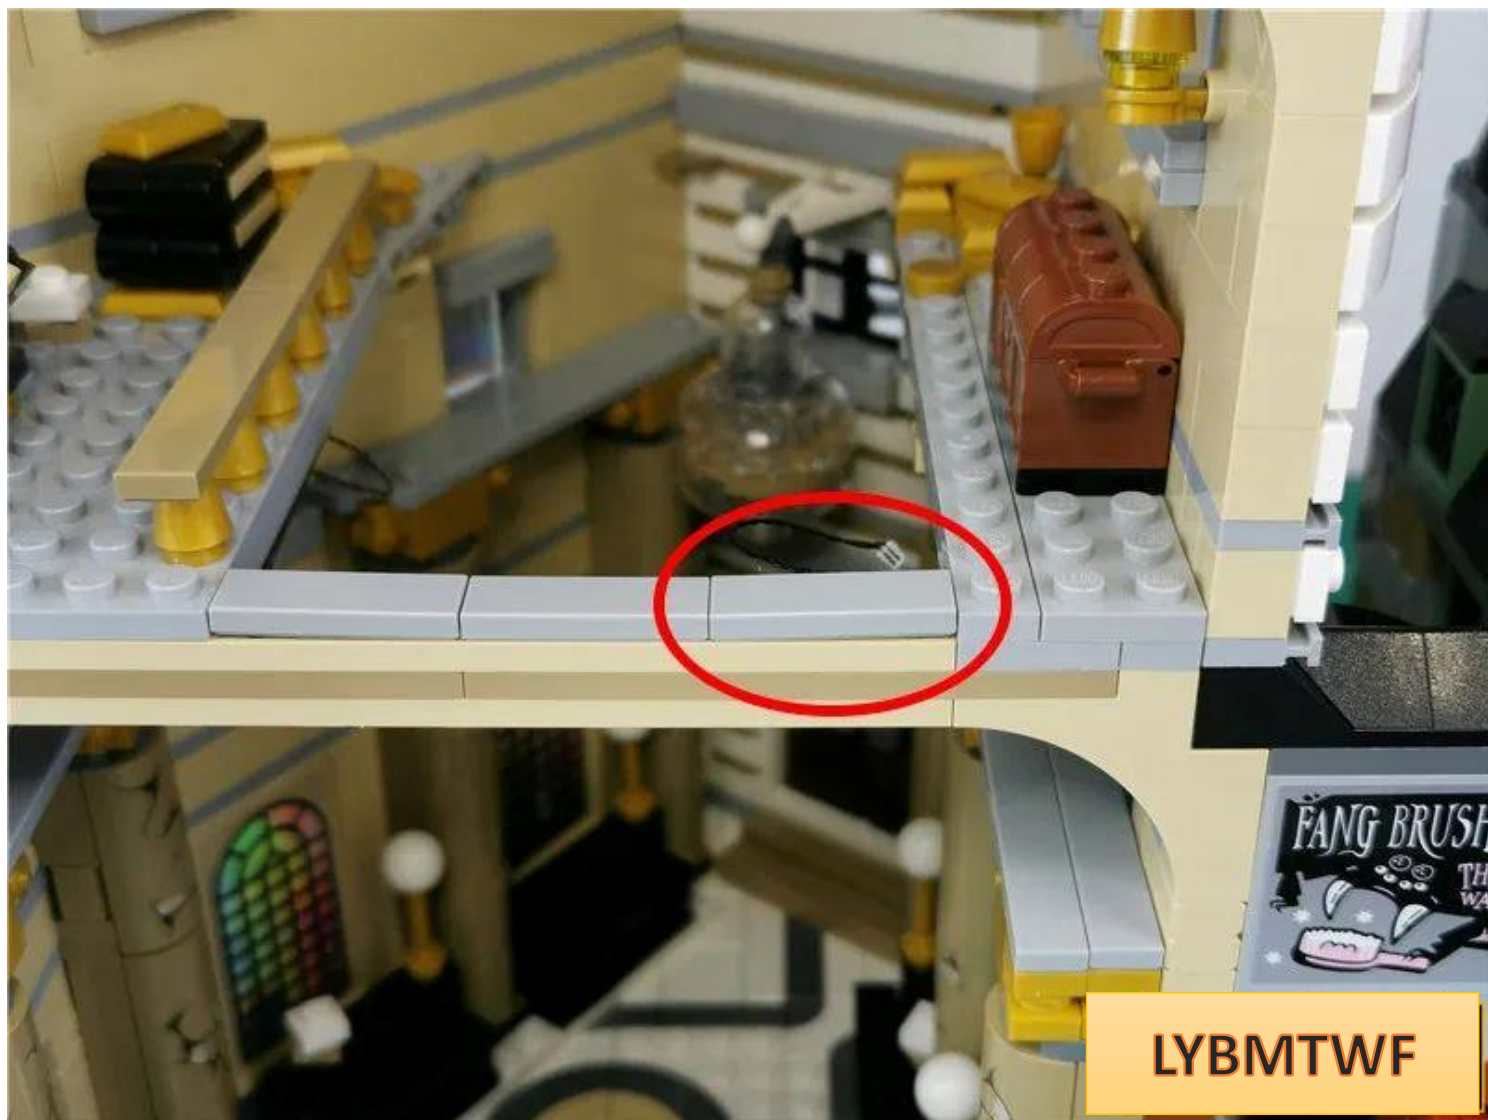

Twist the excess wires of the wall lamp together appropriately




Fit to the position shown in the picture

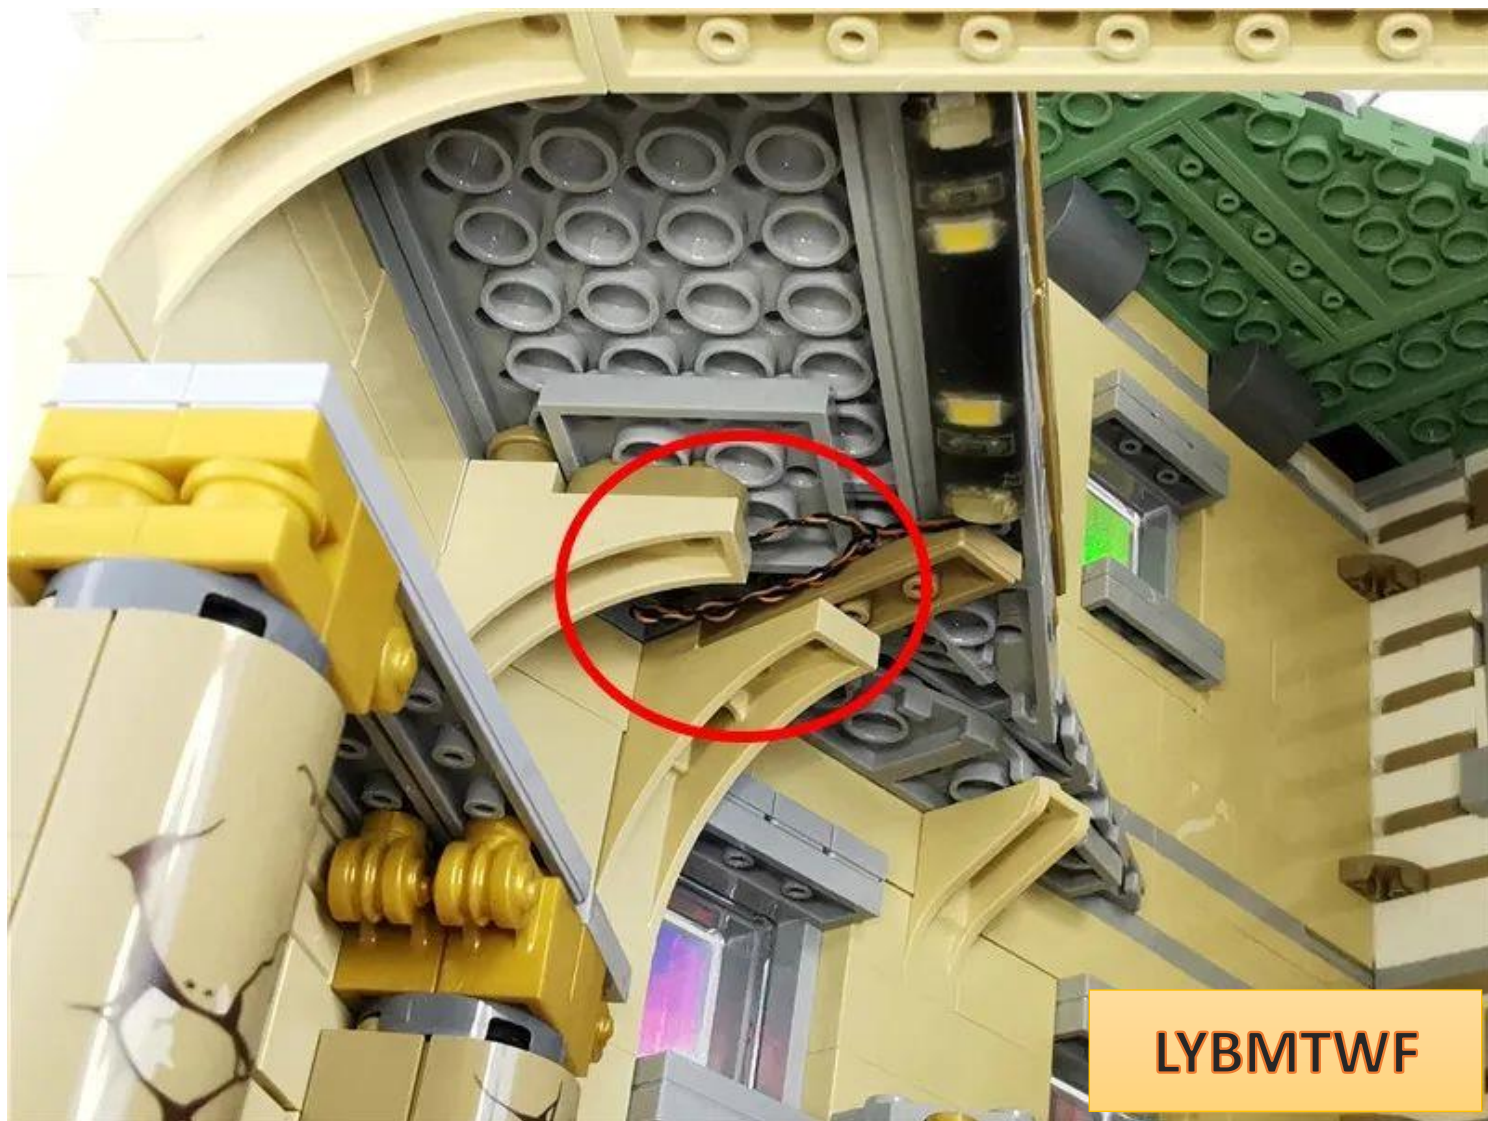


Remove the set of parts indicated by the arrow



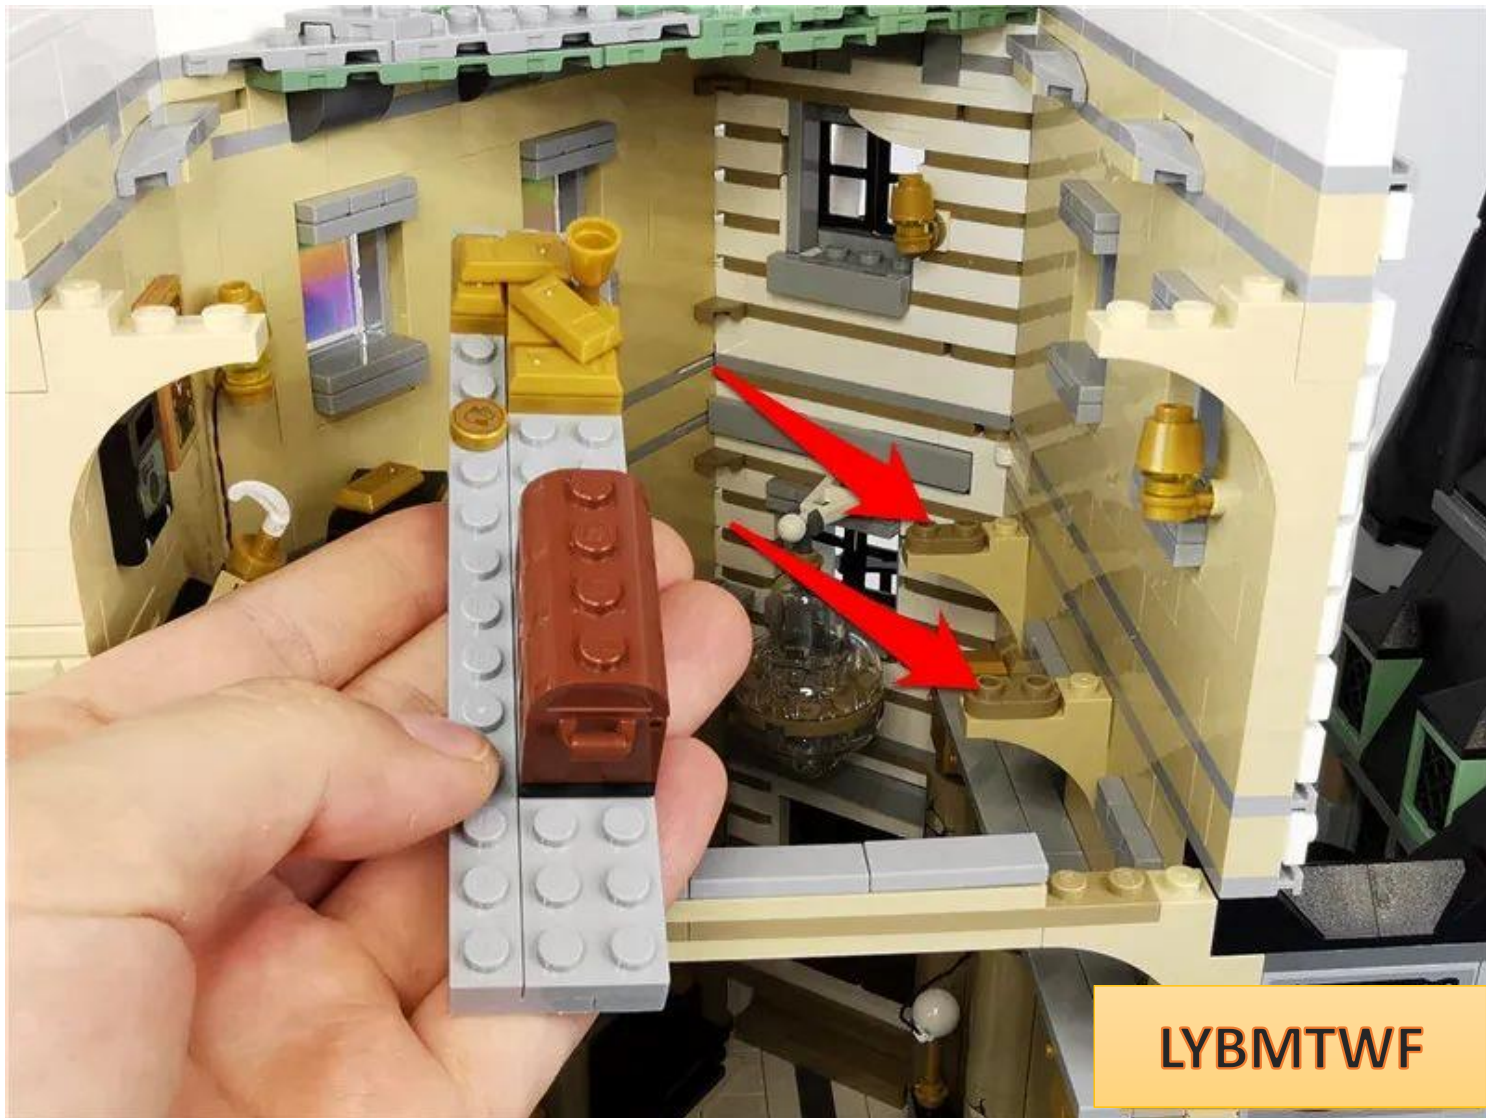

LYBMTWF

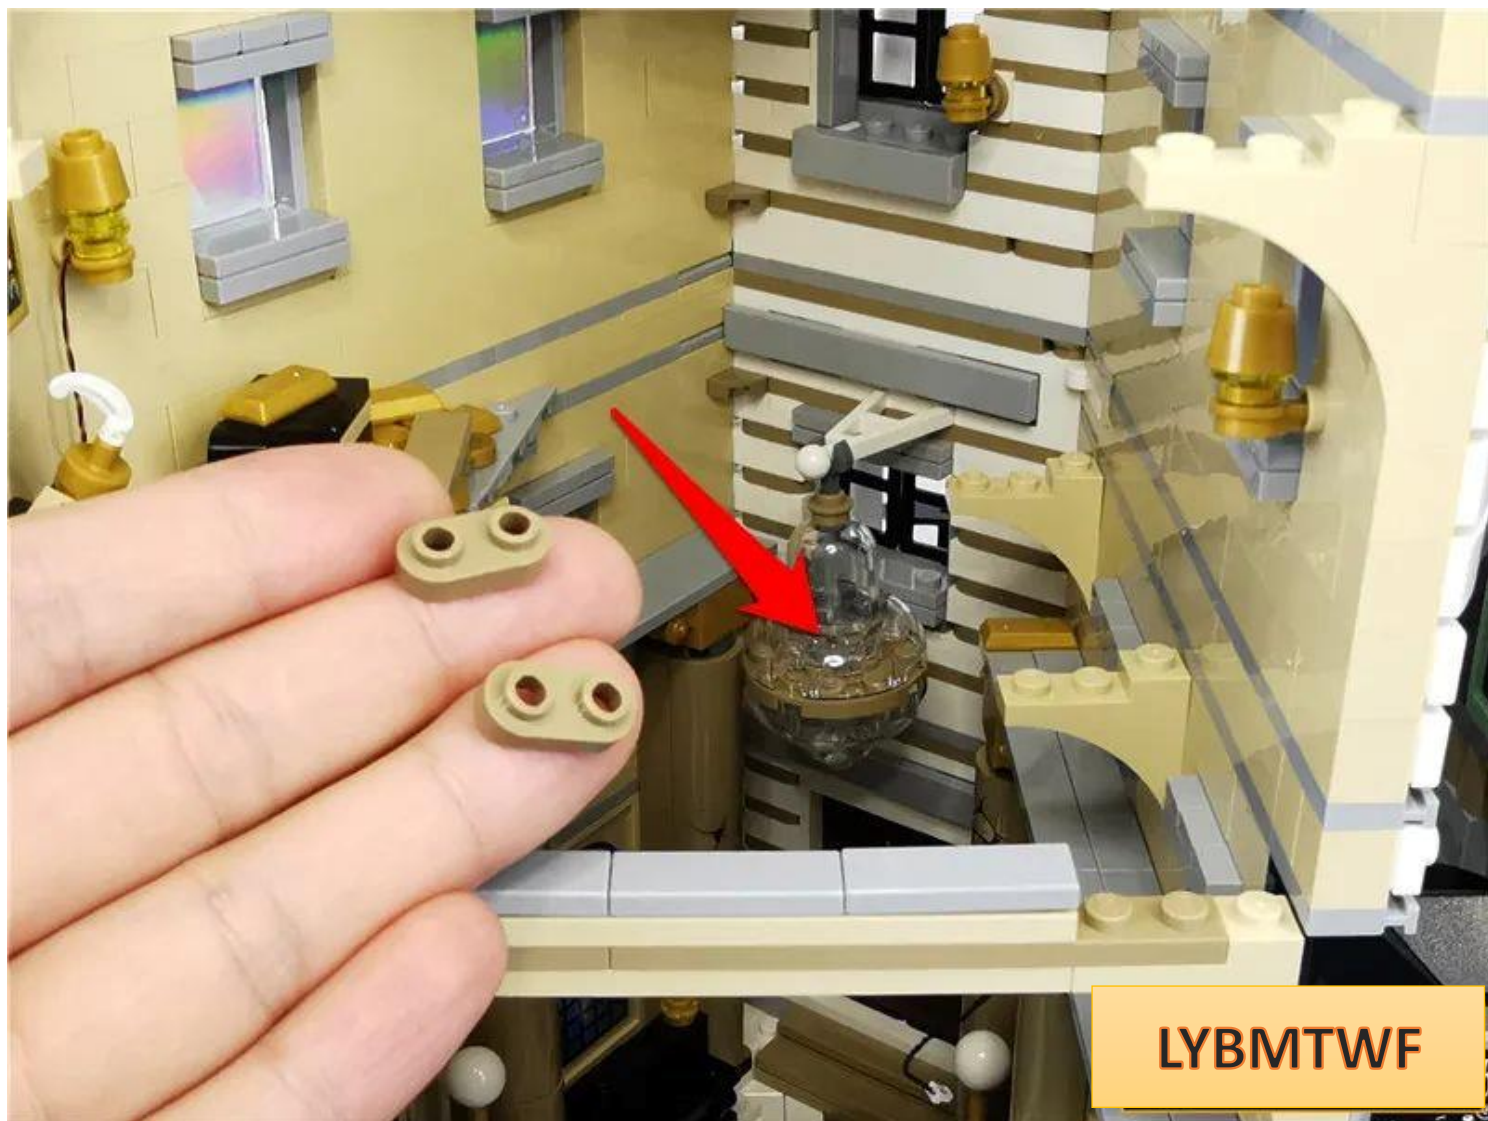


LYBMTWF



LYBMTWF


Take 2 pieces of double-sided tape and 2 pieces of 30cm warm **light** headlights

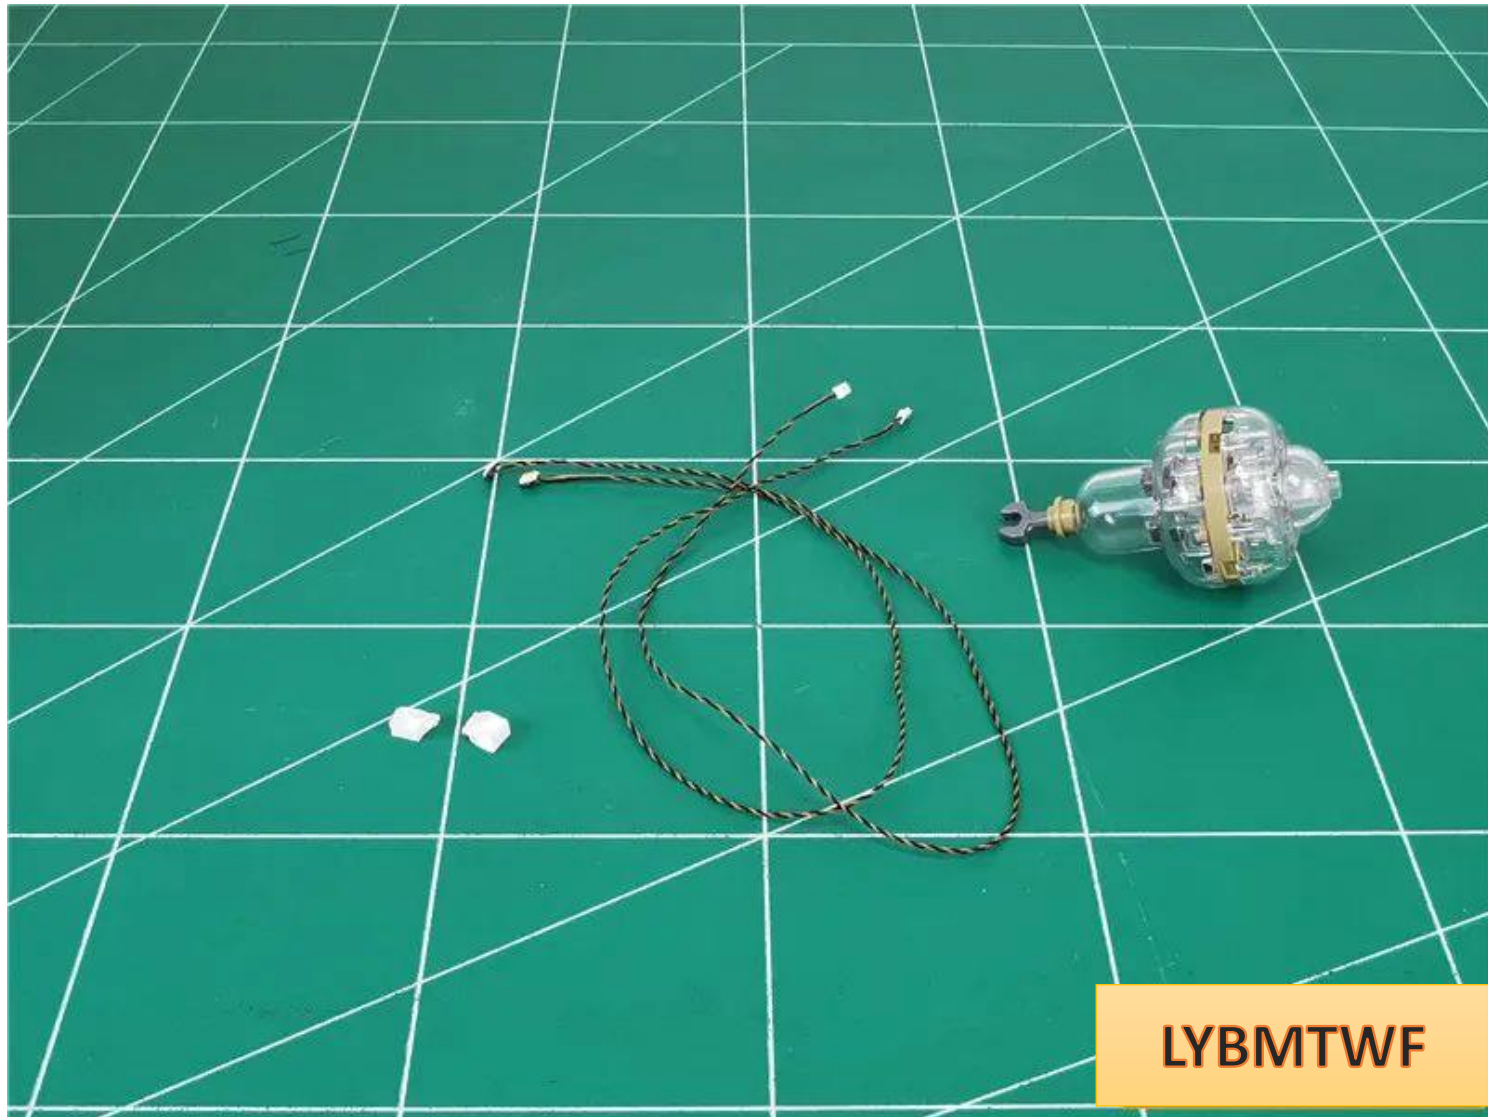


Break down the chandelier as follows




Take any 1 lamp particle and paste the double-sided tape on the back of the lamp particle.

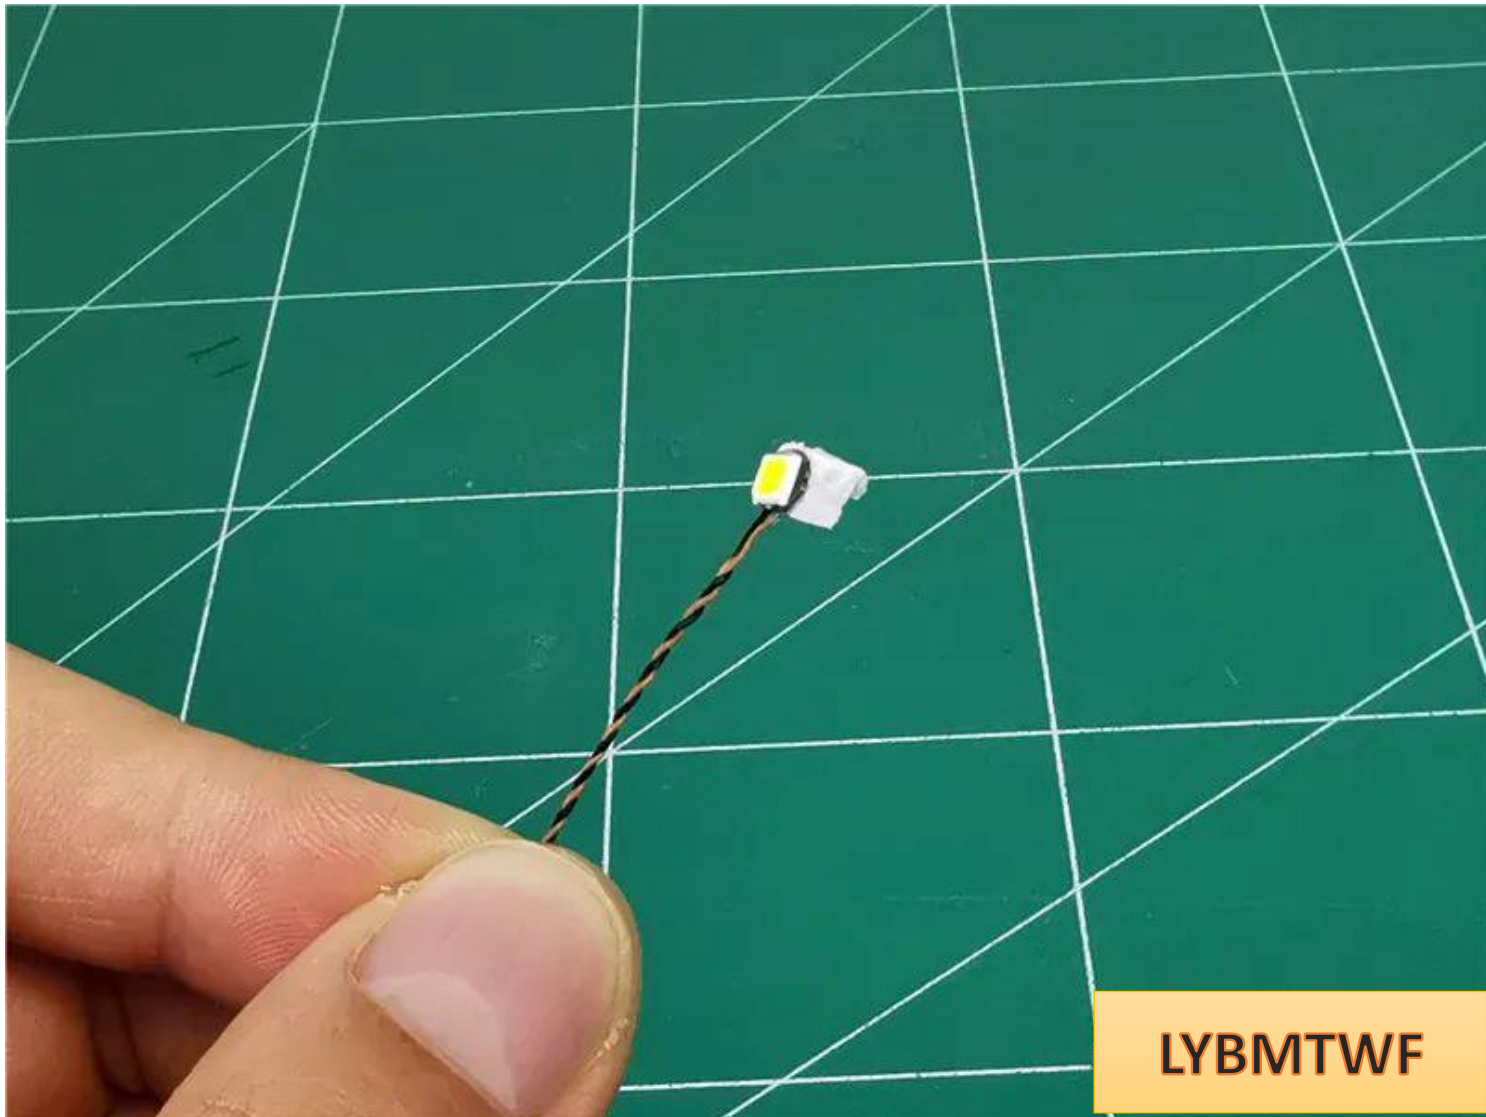


Take out the upper parts of the chandelier, paste the lamp particles into any gap, and pull the wires out along the gap.

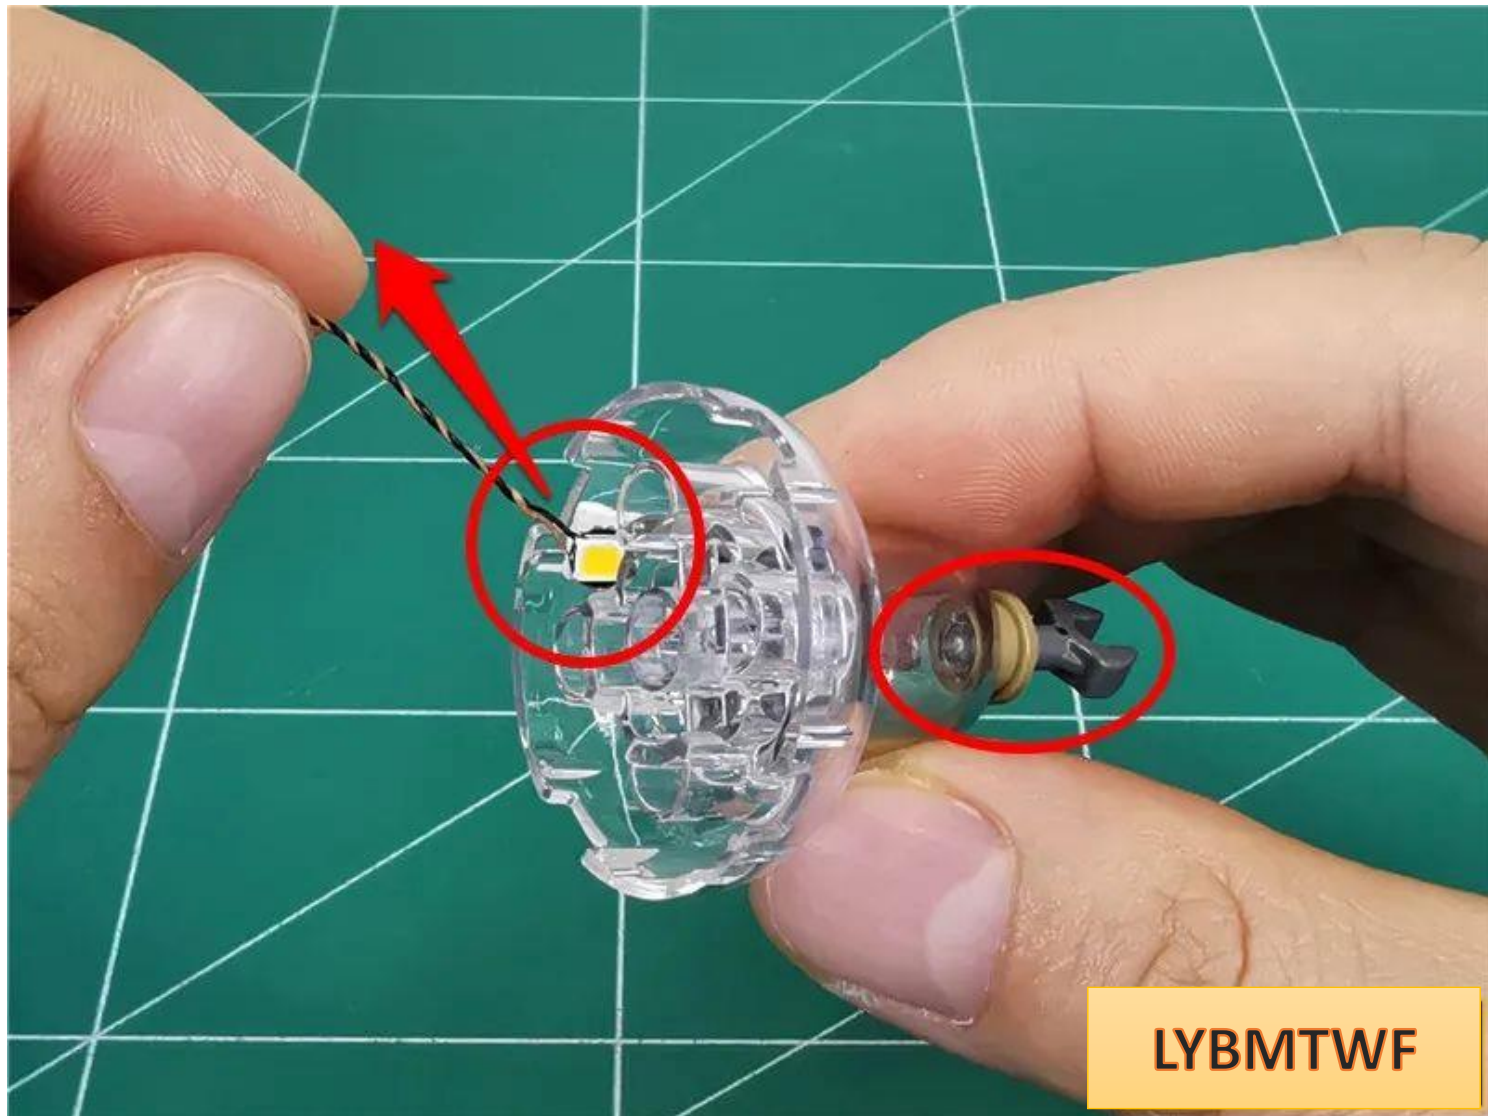


Restore parts and fix wires

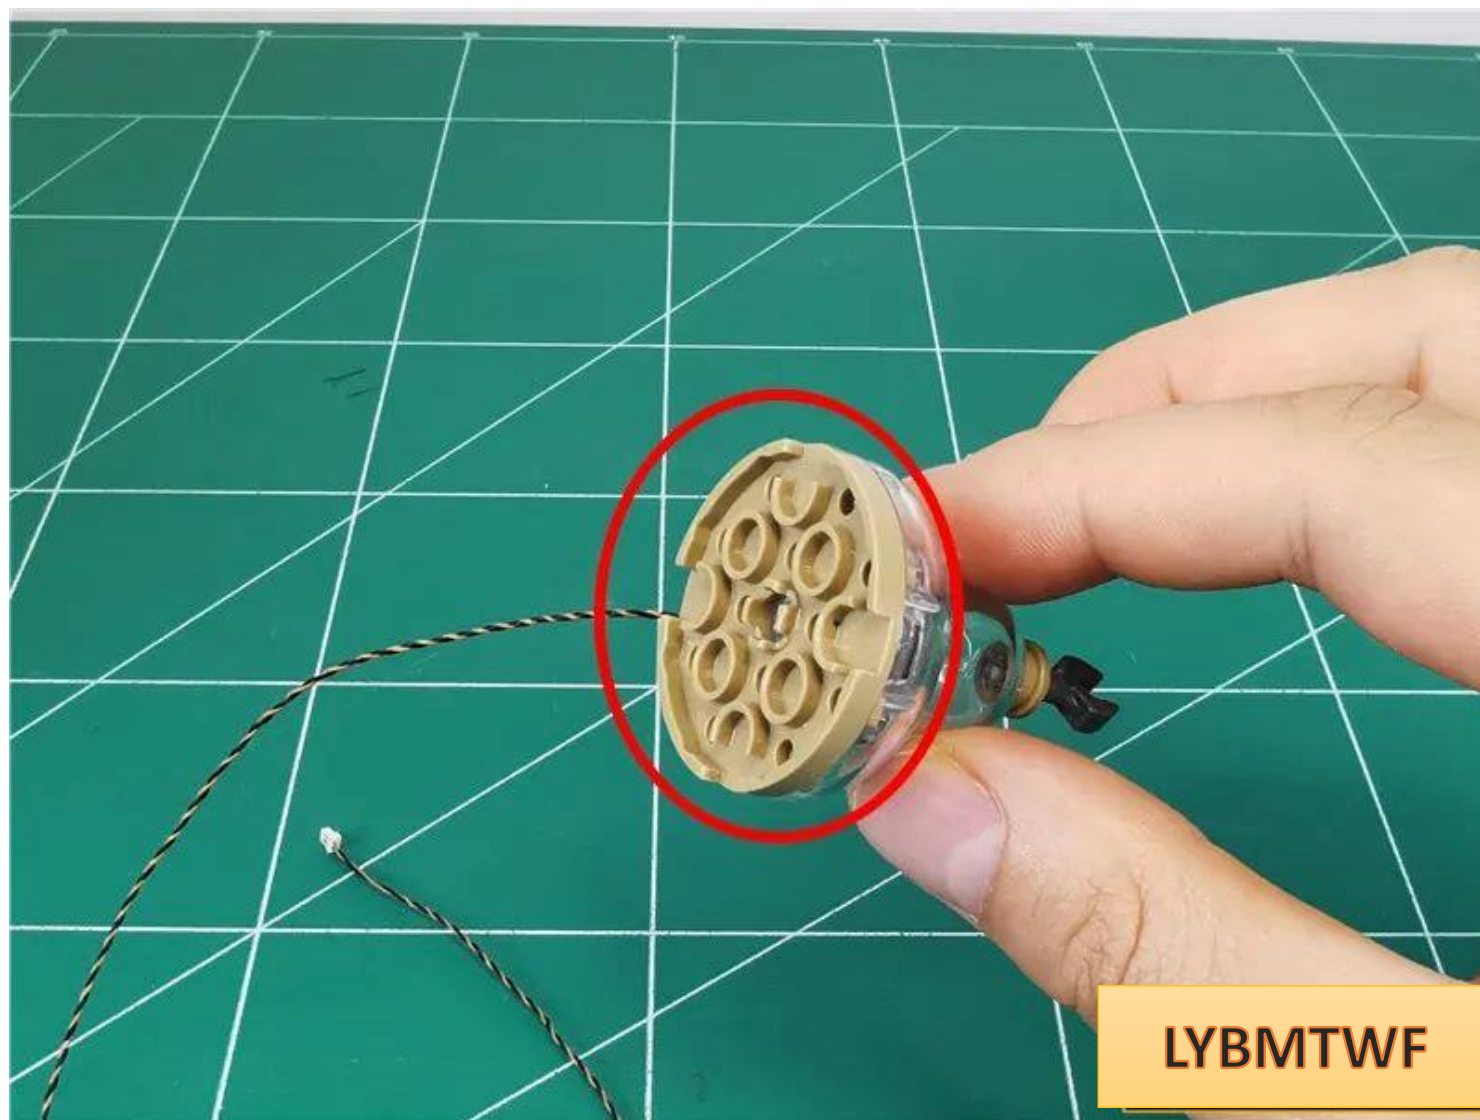

Take out the parts below the chandelier and paste the lamp beads in the same way

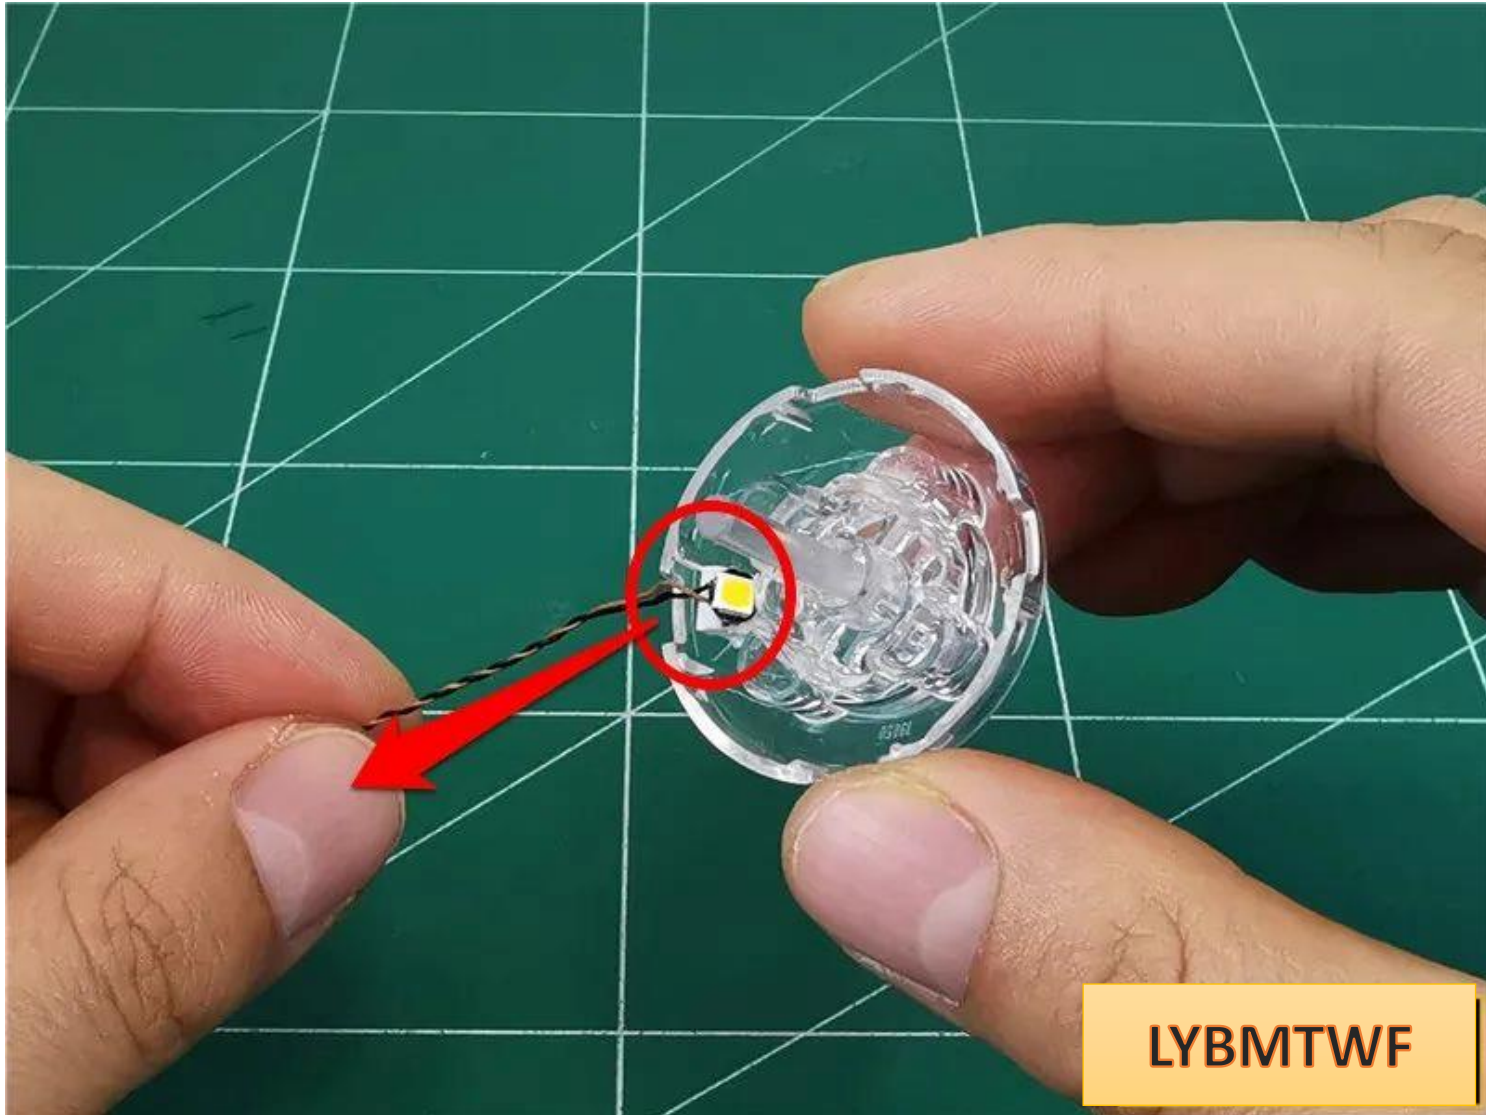


Put the chandelier together with the wires on the same side

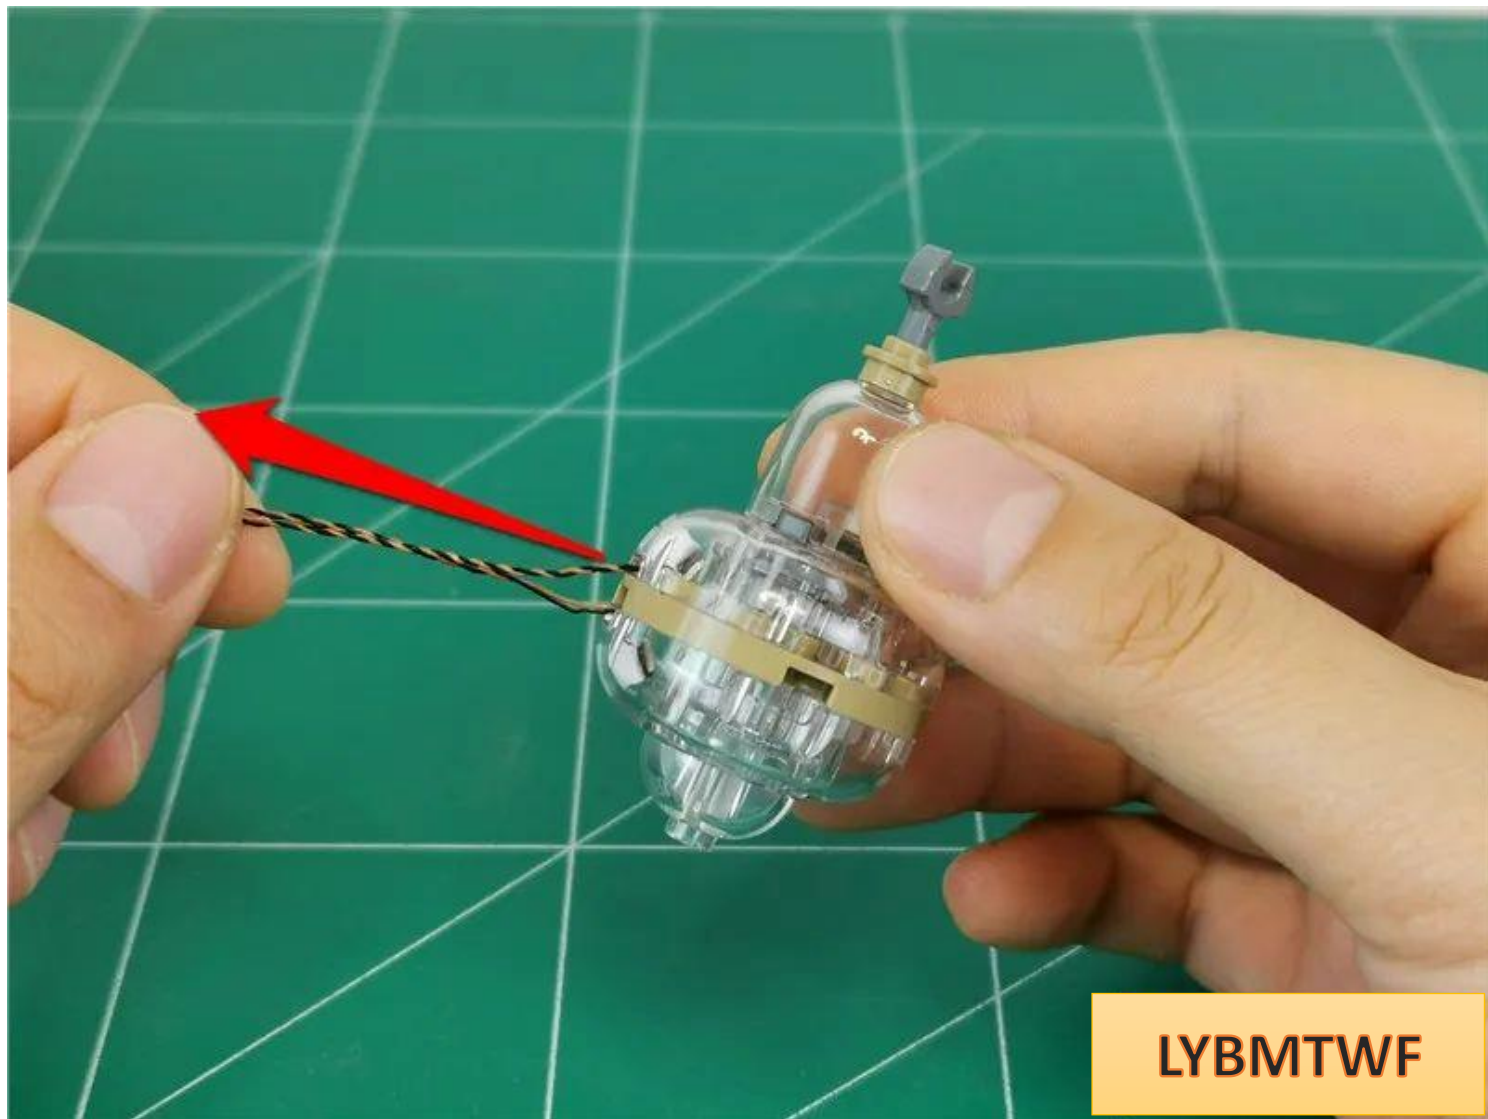

LYBMTWF

Turn the grapple so that the grapple is perpendicular to the wire

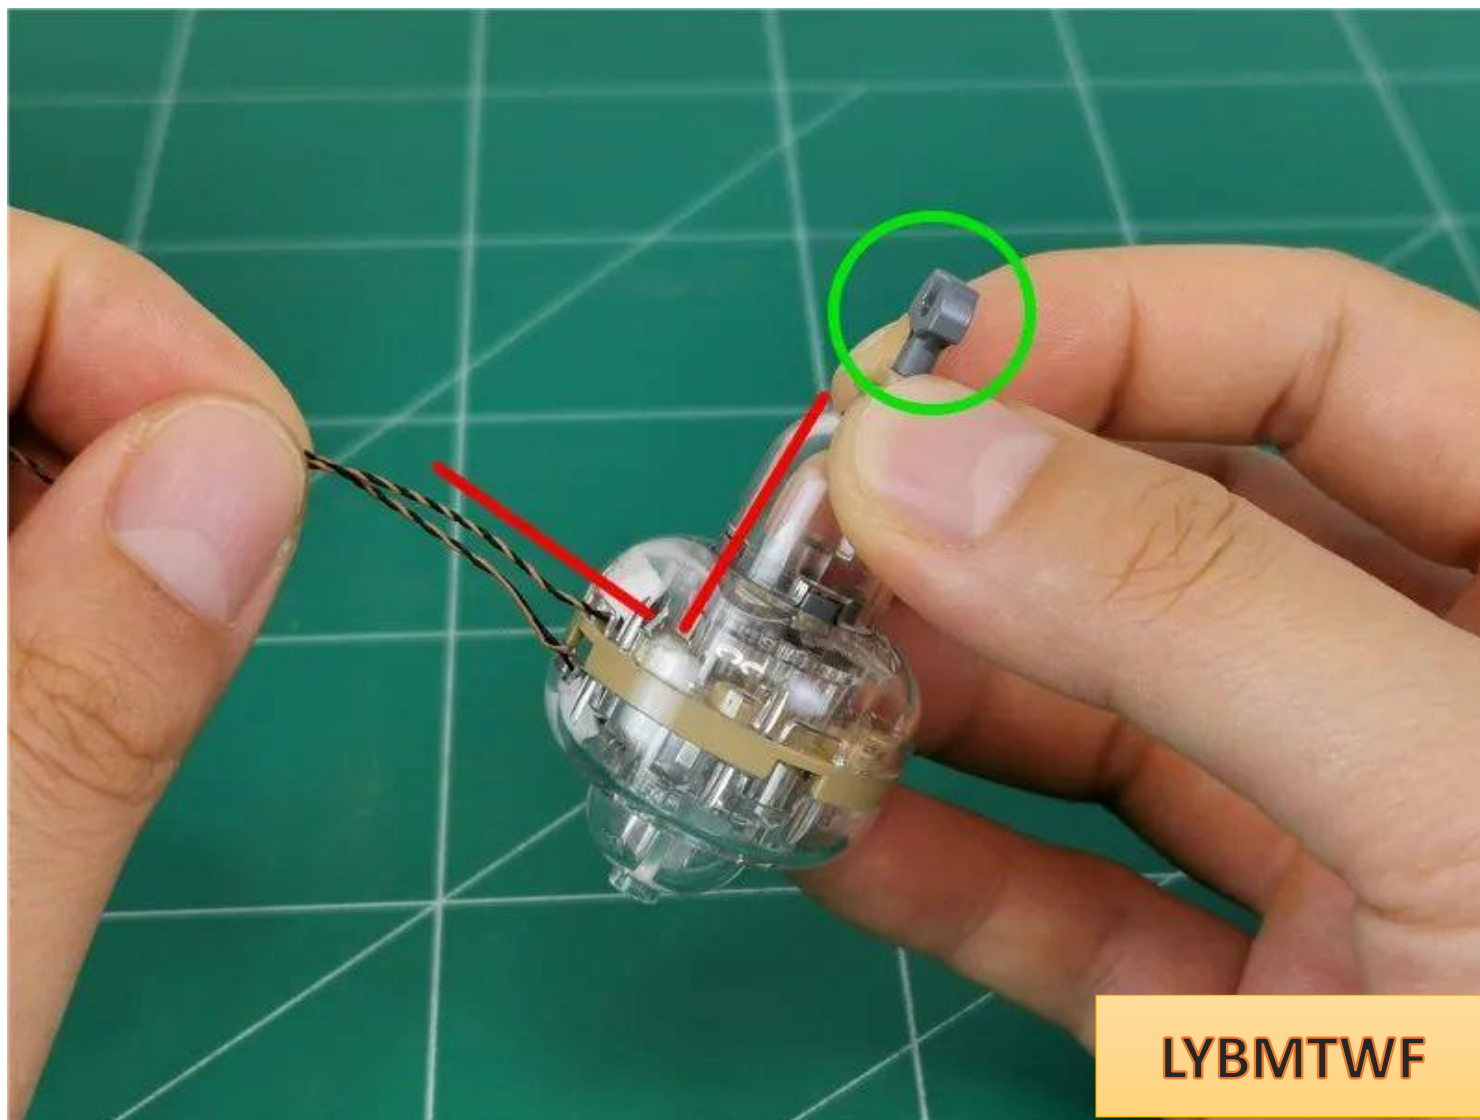


Bring the wire up and around the grapple part




Restore the chandelier with the wires at the back




Remove the wall light indicated by the arrow

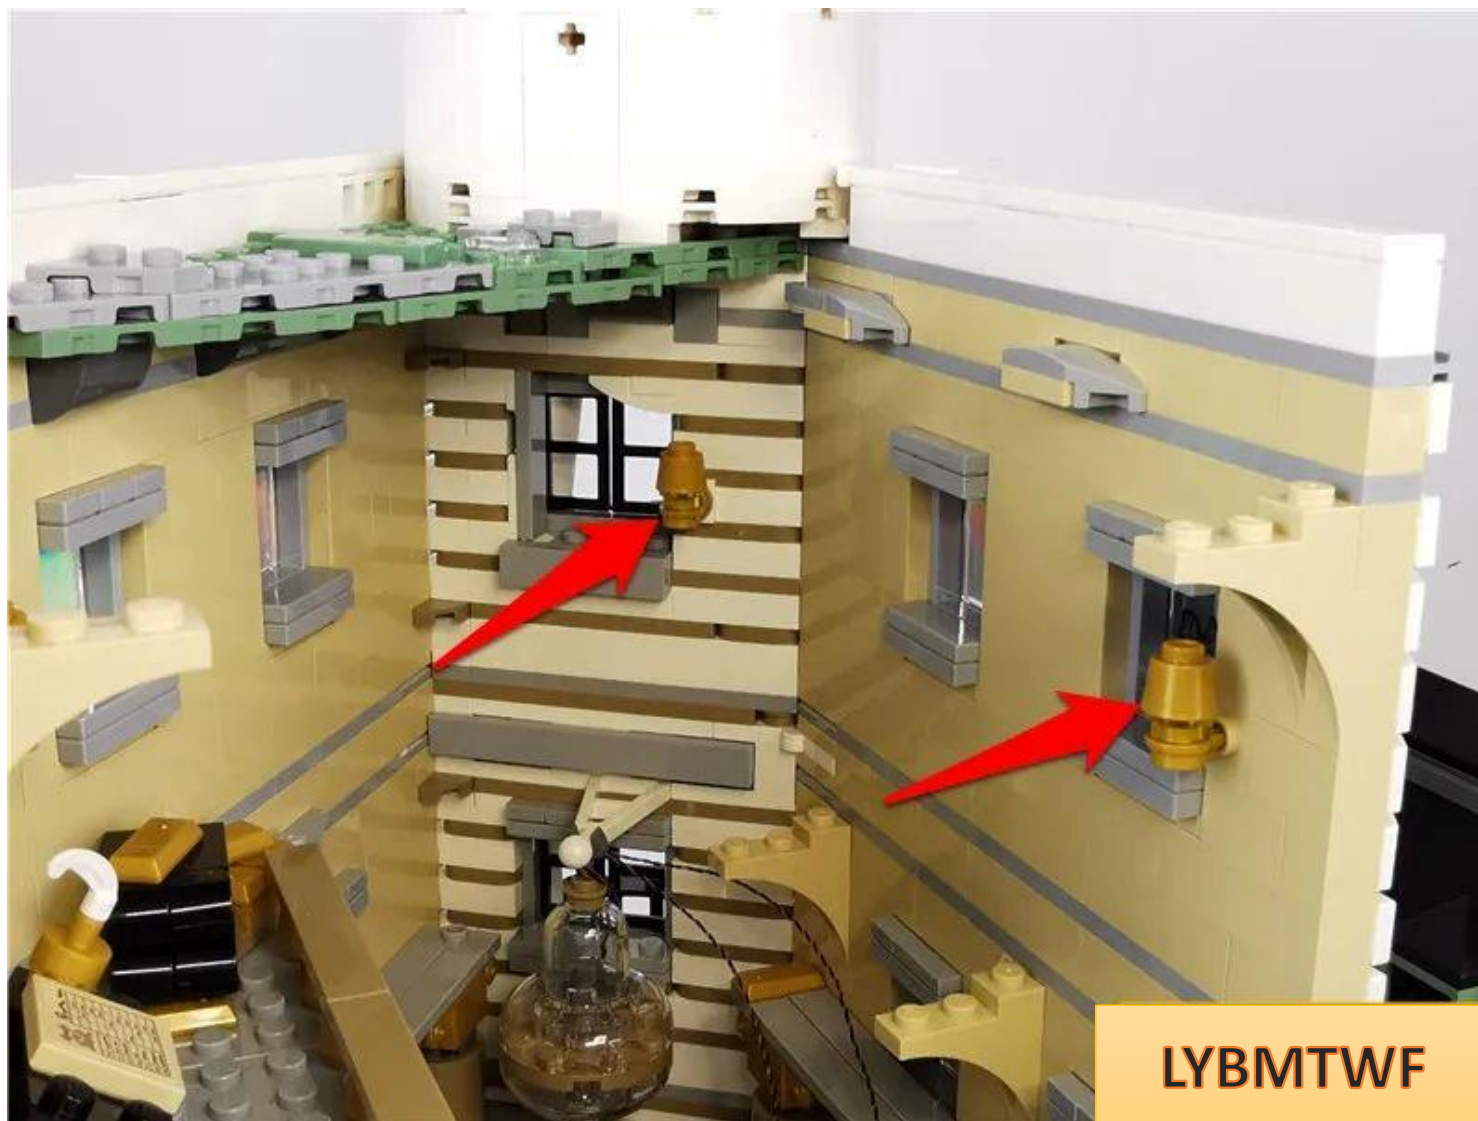

Take 2 15cm ordinary warm light bulbs and 2 hollow transparent yellow circles

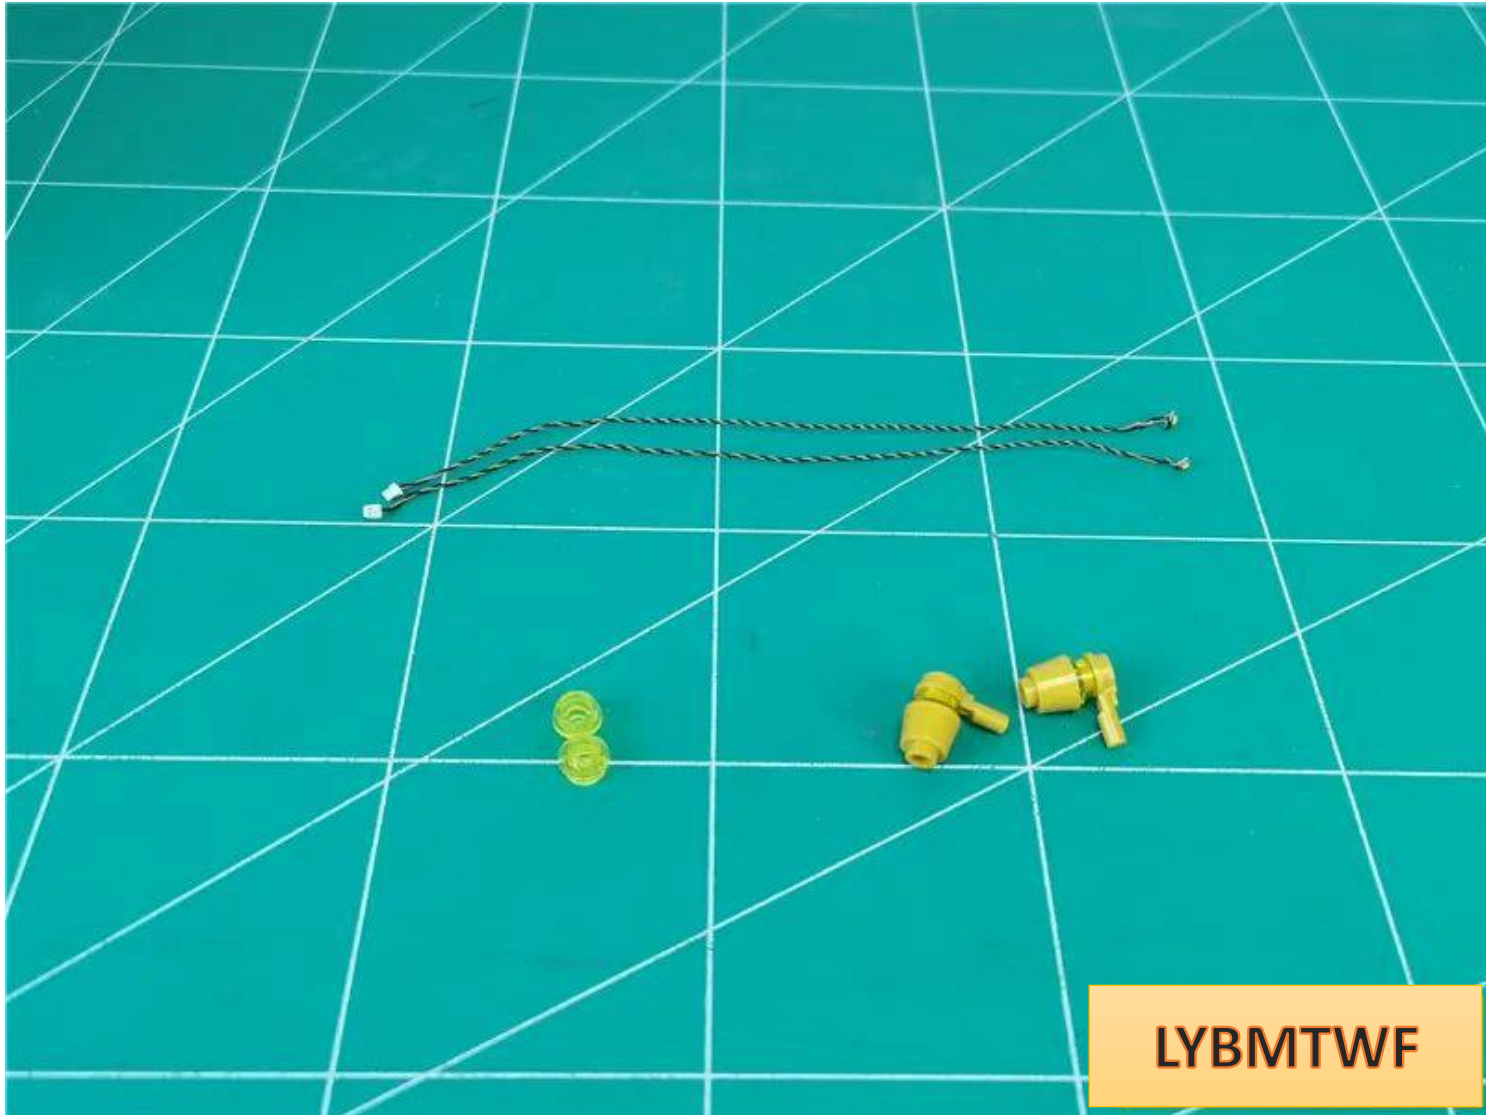

2 lamp particles

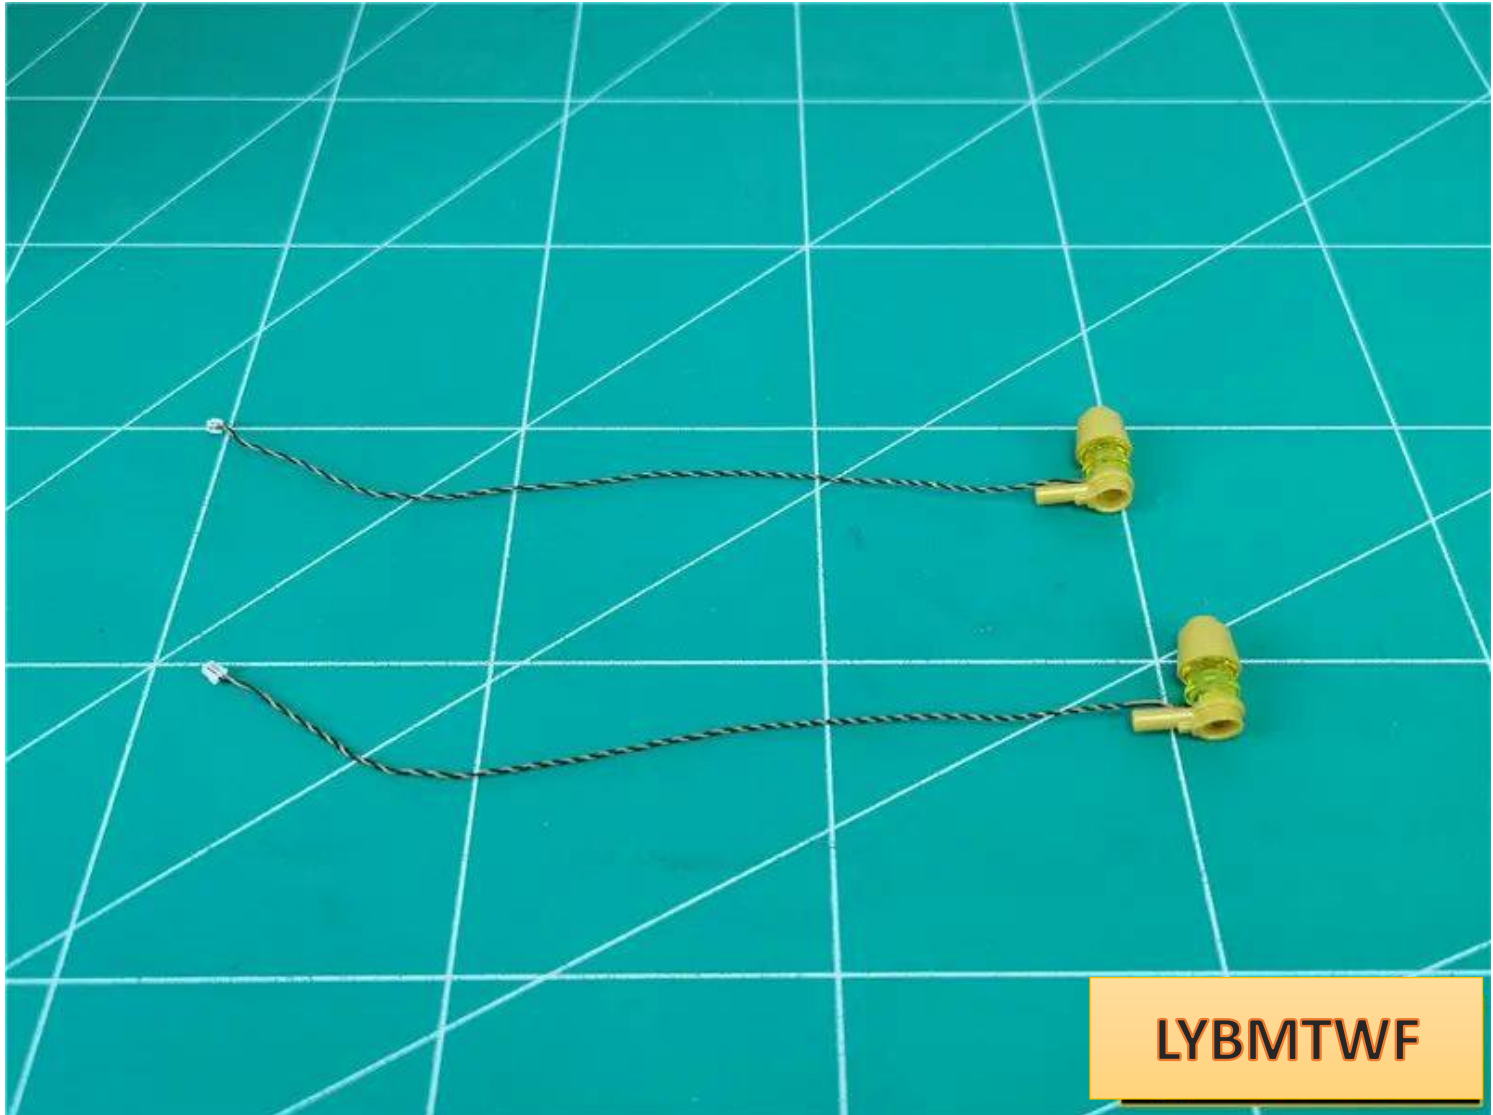


in the same way as before

Pull the wire under the bracket




LYBMTWF

Restore wall lamps in sequence

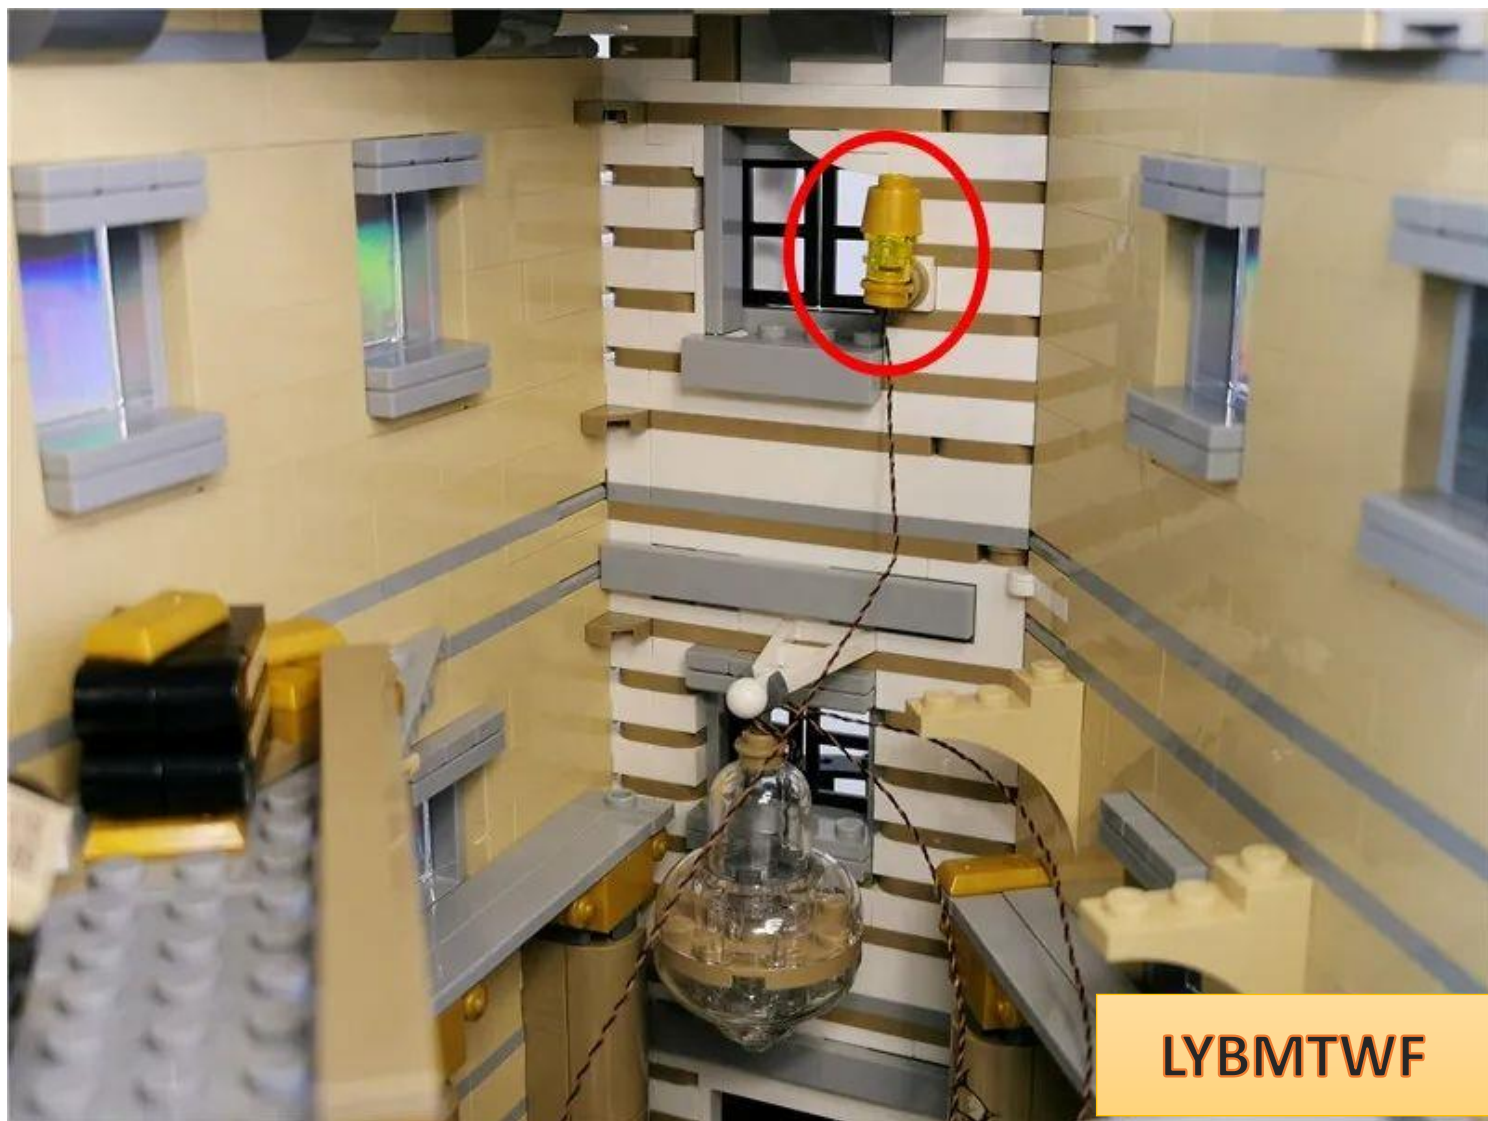


LYBMTWF

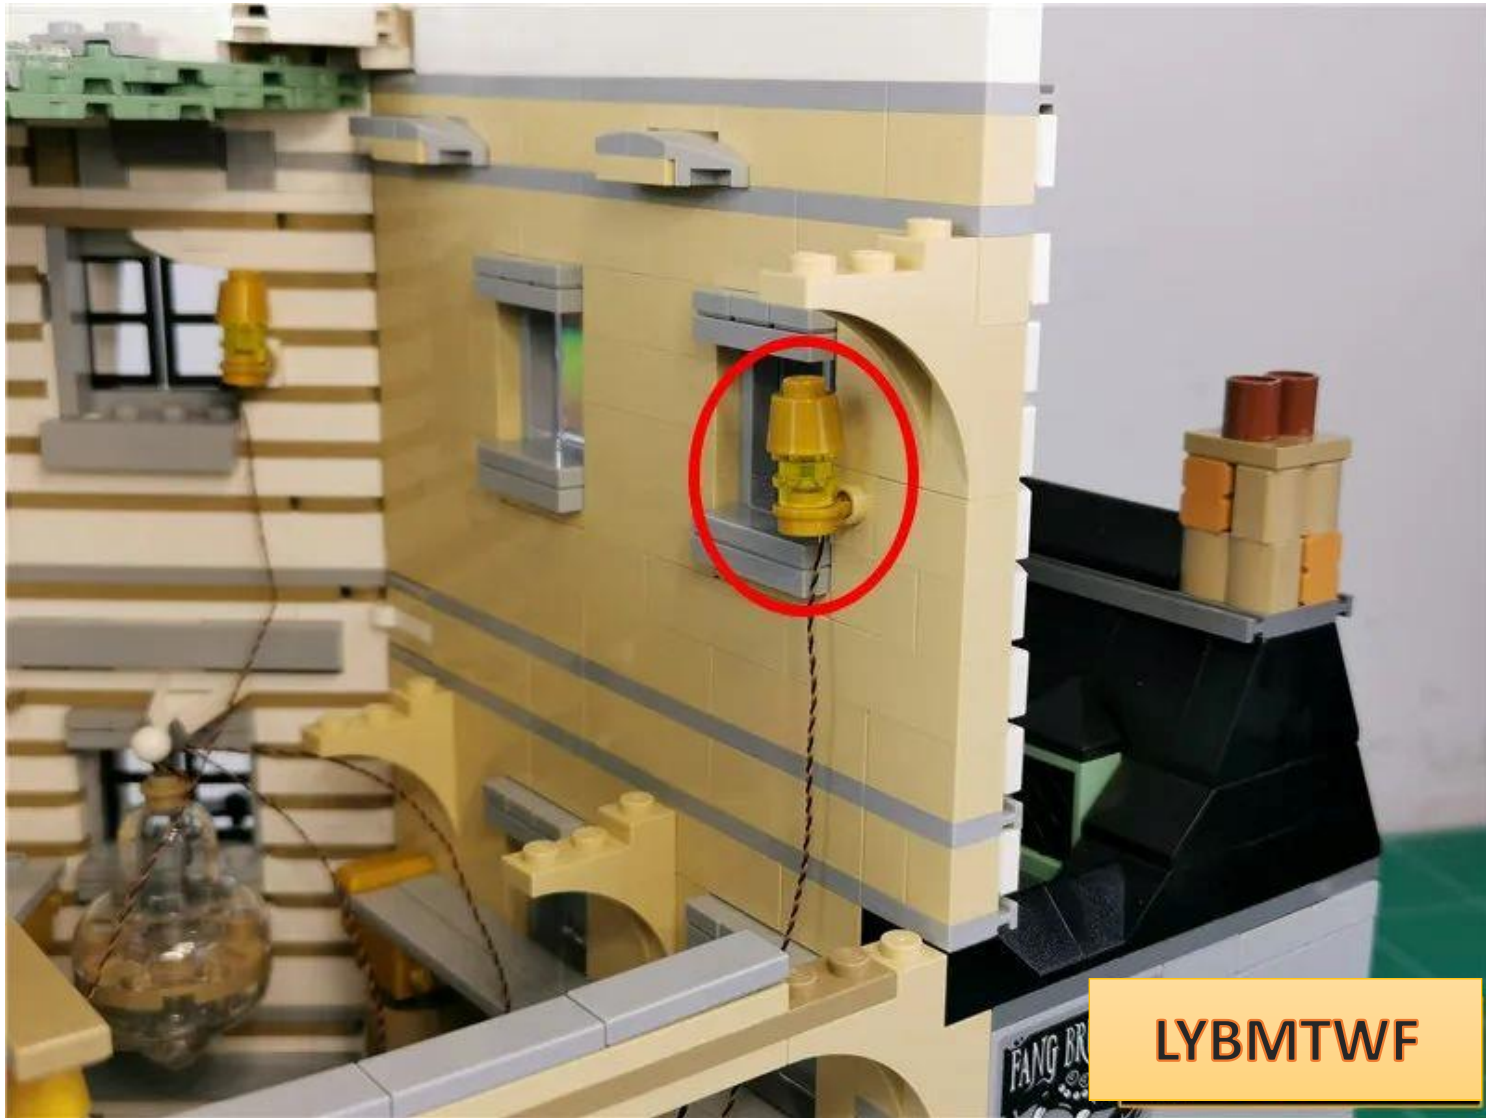


LYBMTWF

Remove the plate indicated by the arrow

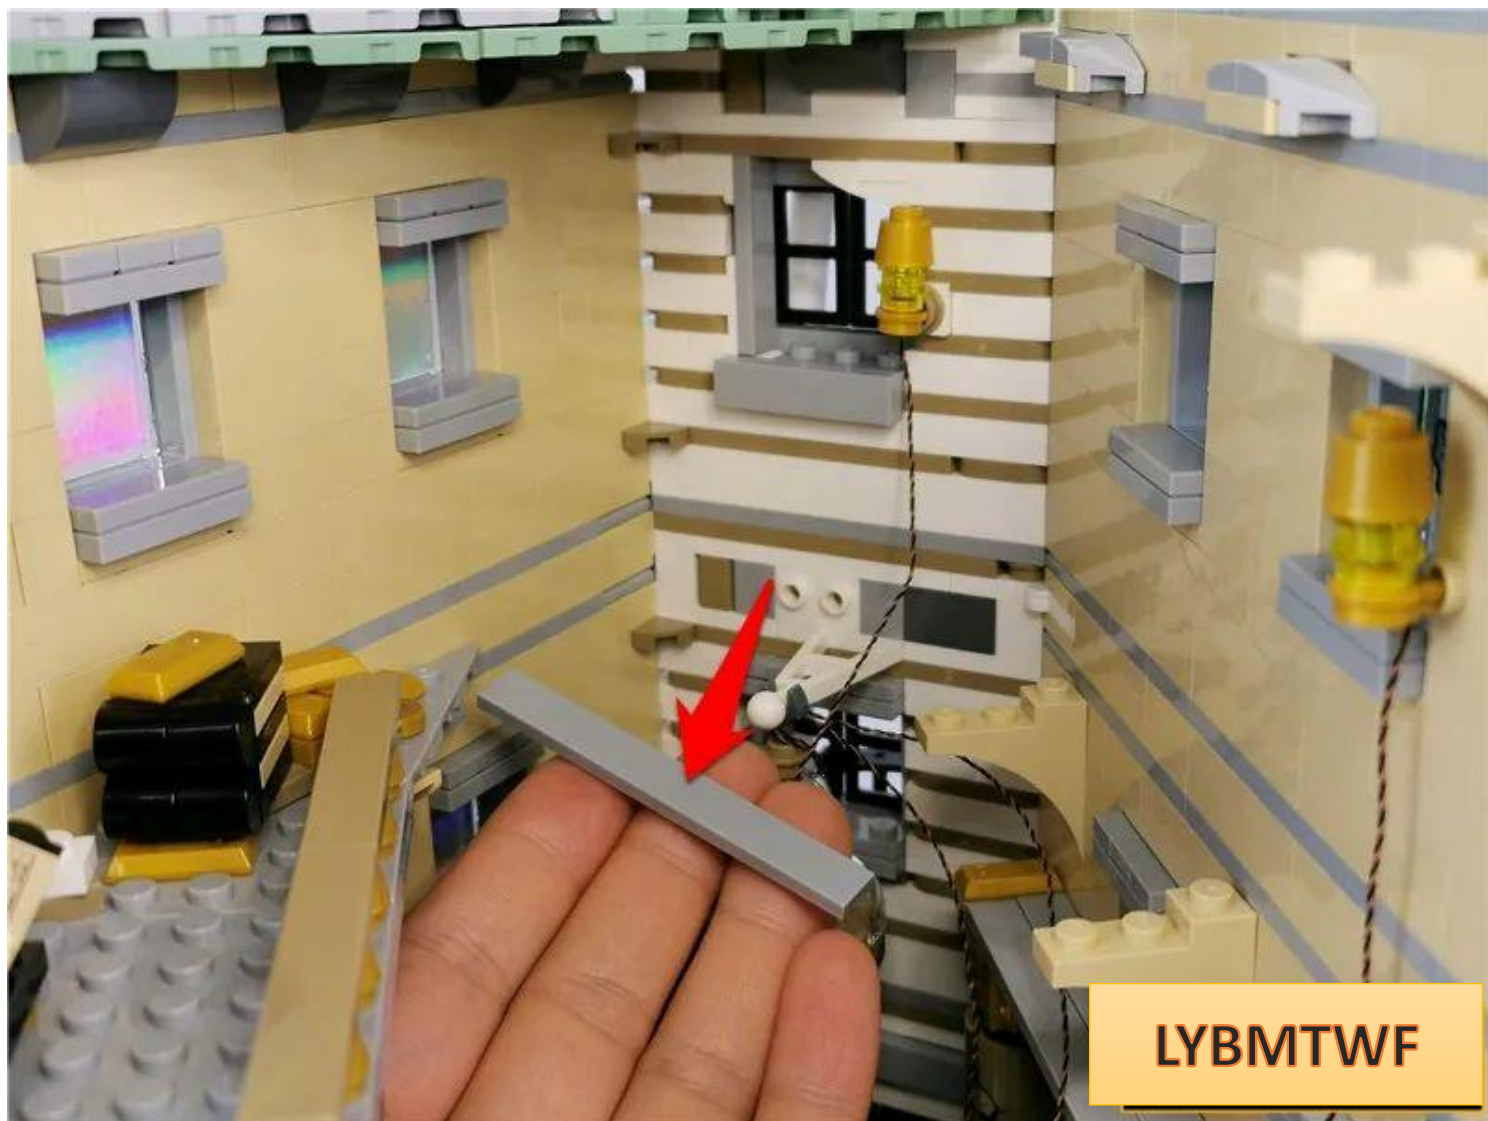

Place the wire against the wall and pull it underneath

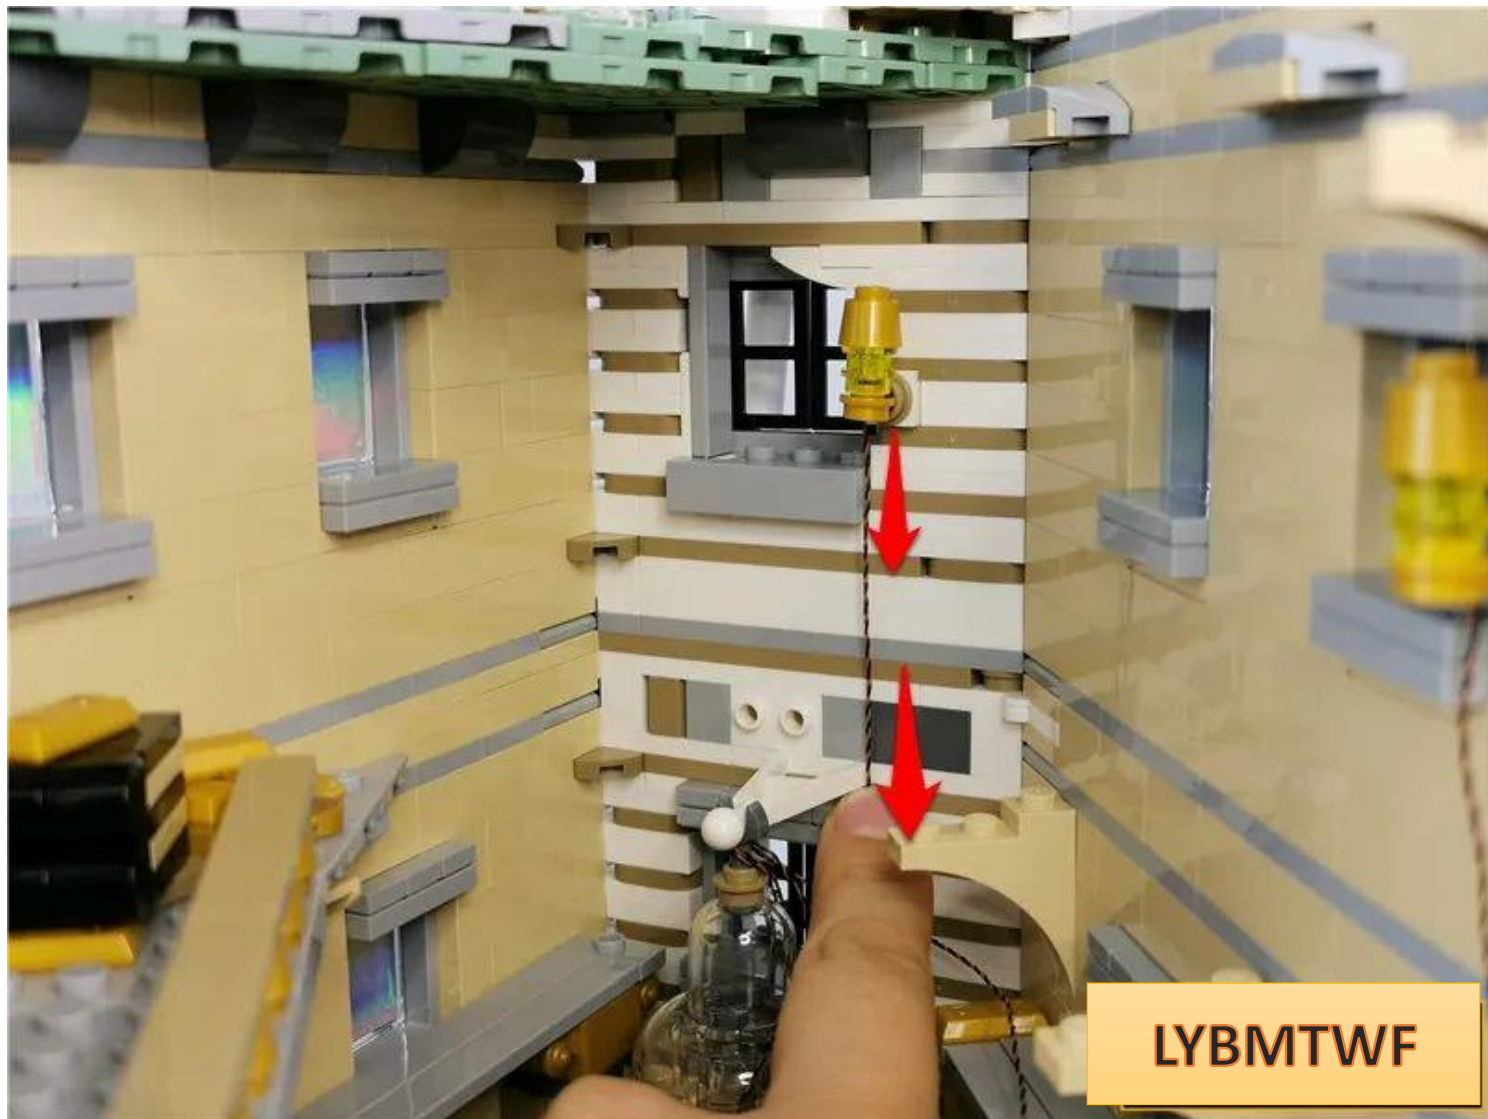


Restore the plate and fix the wires




LYBMTWF


Take another warm soft light strip and a 5cm connecting cable and connect them together

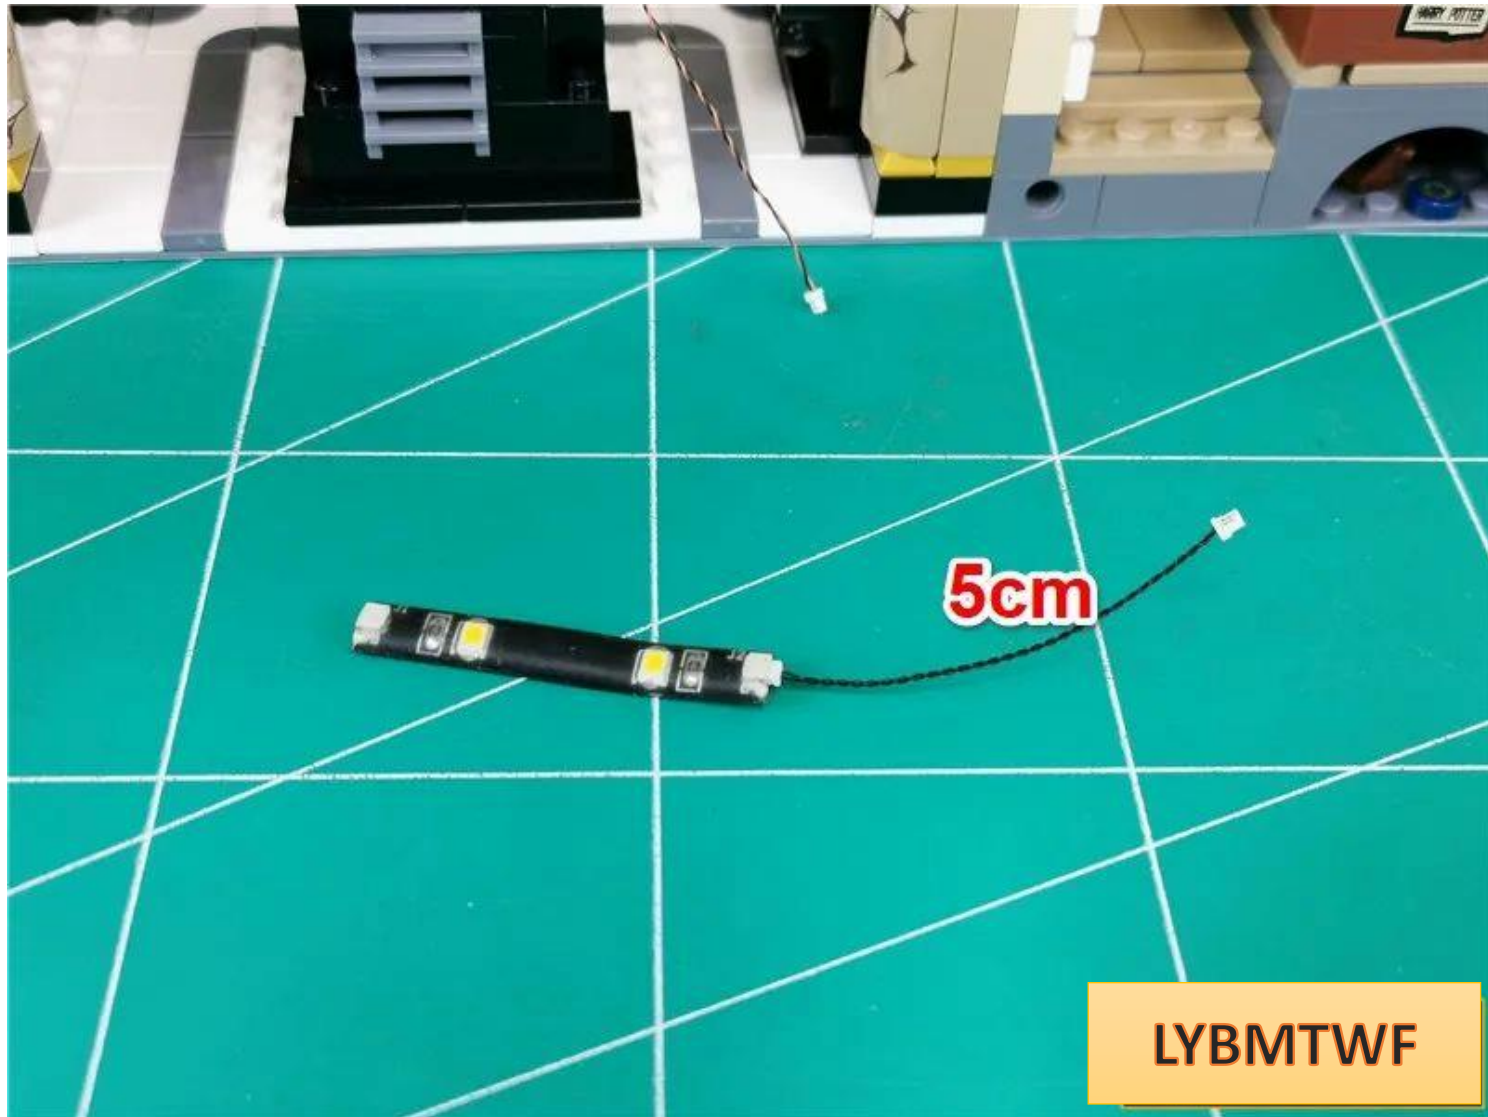


Insert the wall lamp wire into the empty socket of the light strip

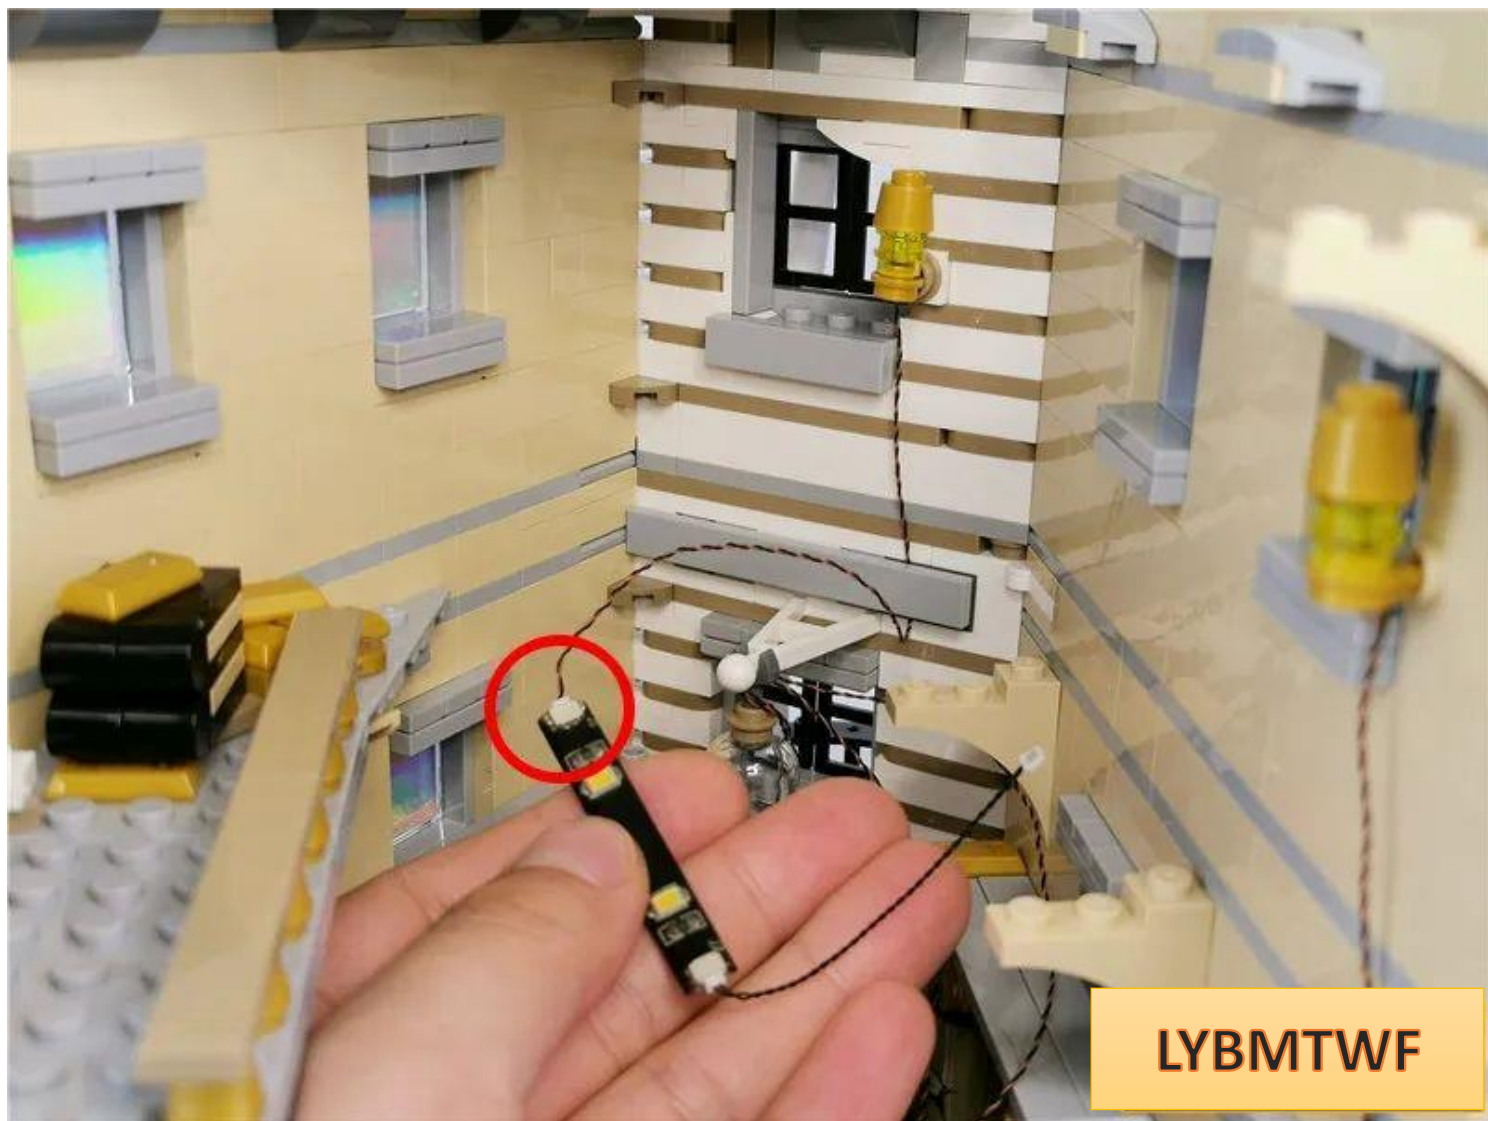

Pass the 3 wires along the angle shown in the figure

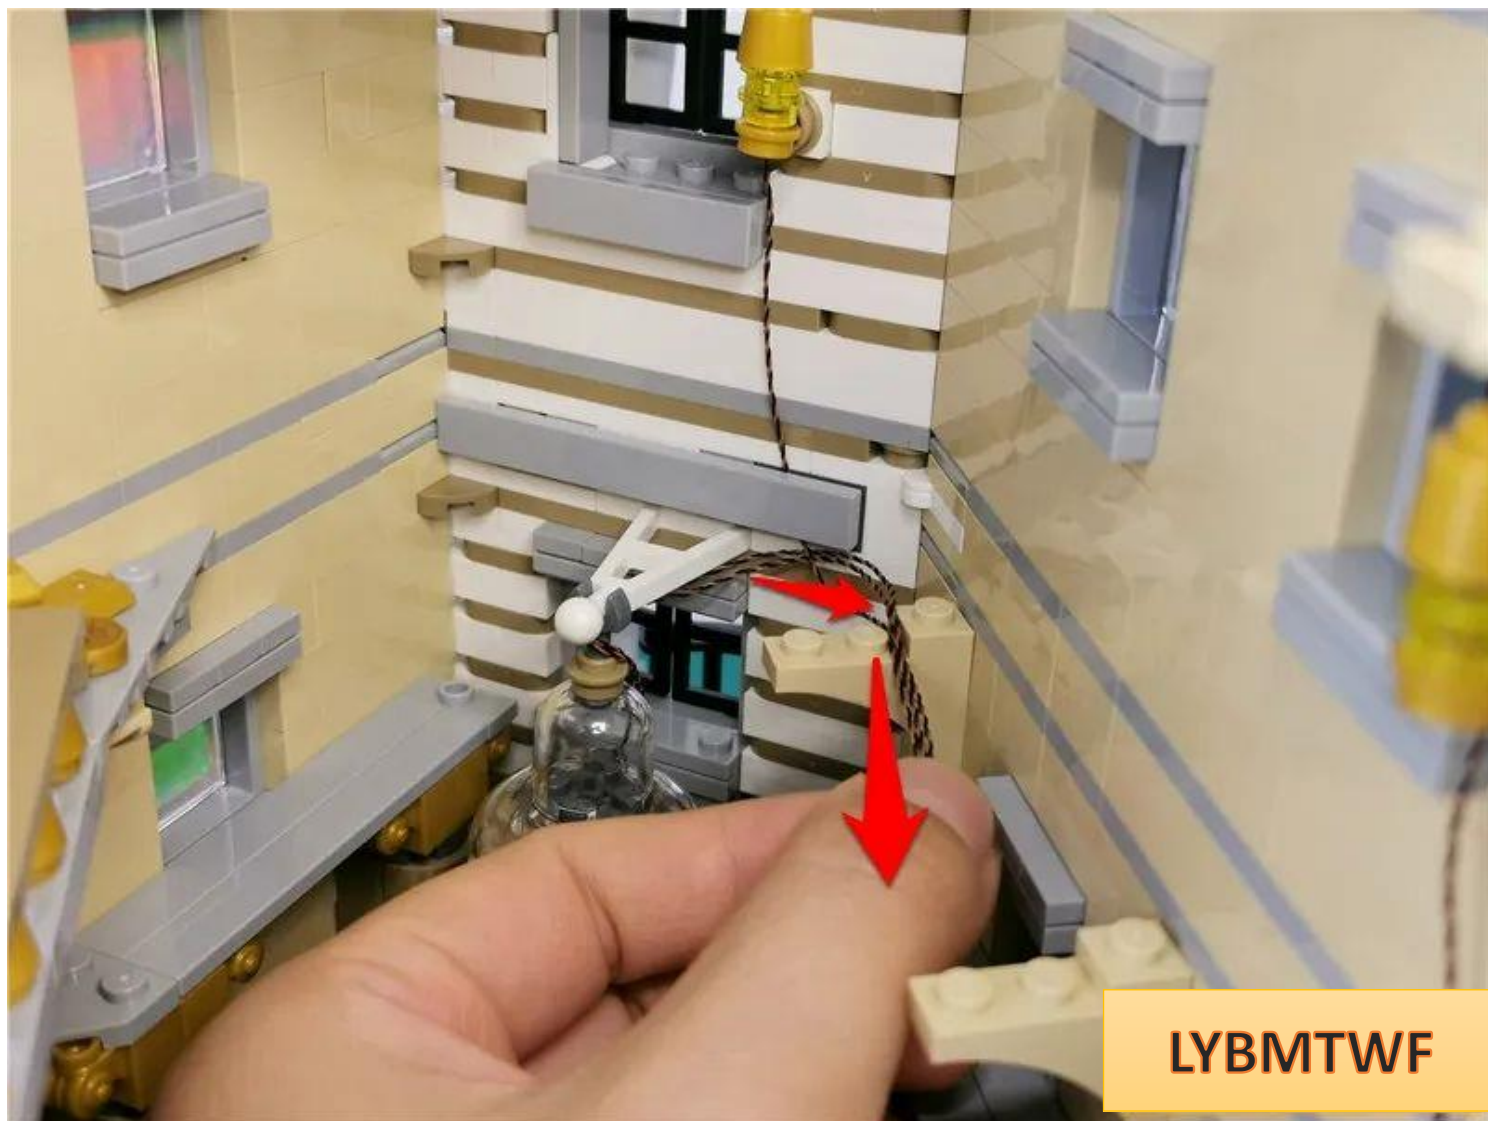


Restore parts and fix wires

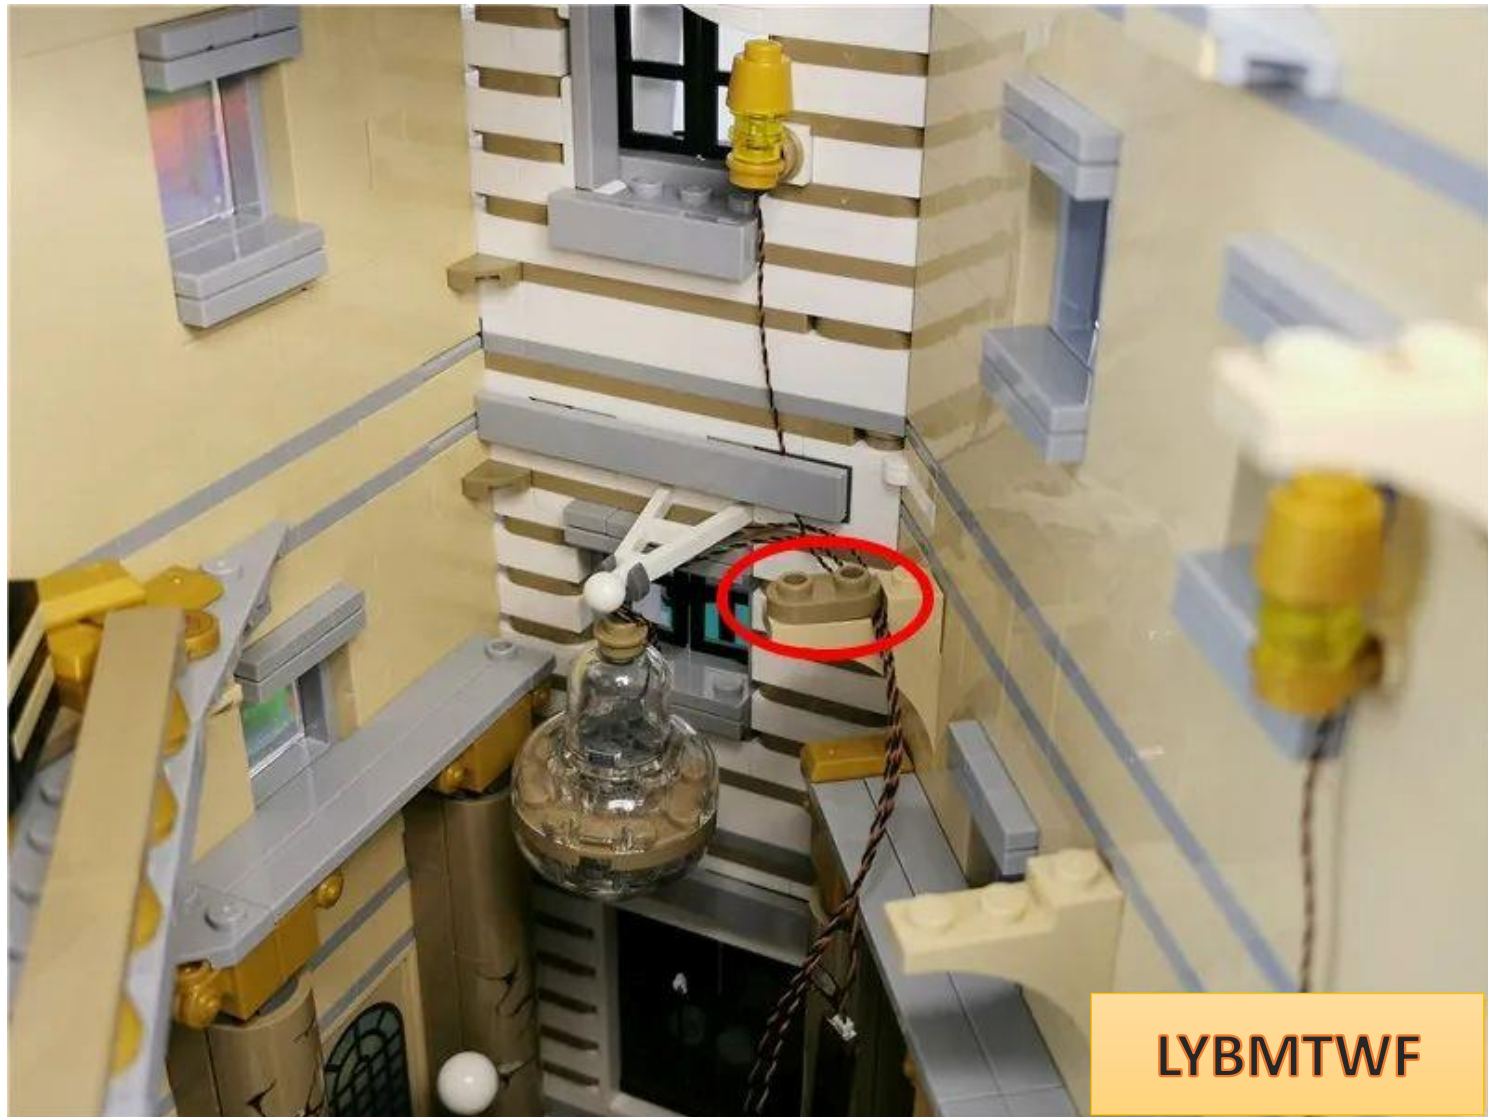

LYBMTWF

Pass the 2 longer, spare lamp chip wires along the angle shown in the figure.

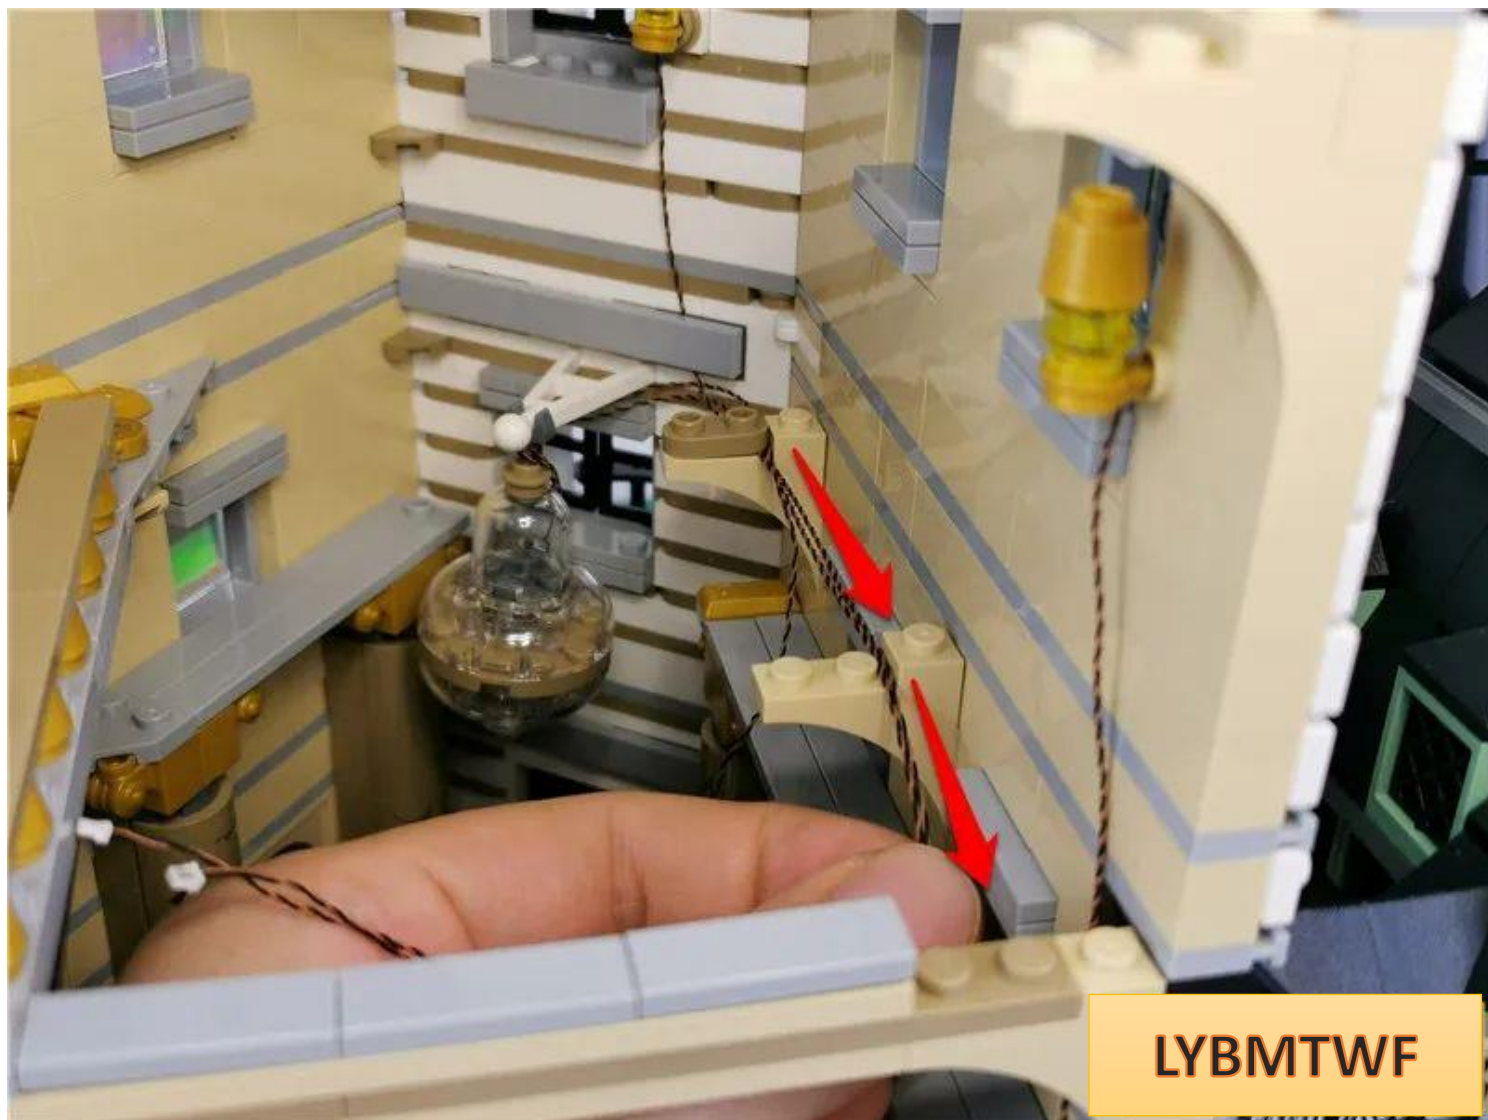

LYBMTWF

Restore parts and fix wires




Remove the parts indicated by the arrows in sequence







LYBMTWF

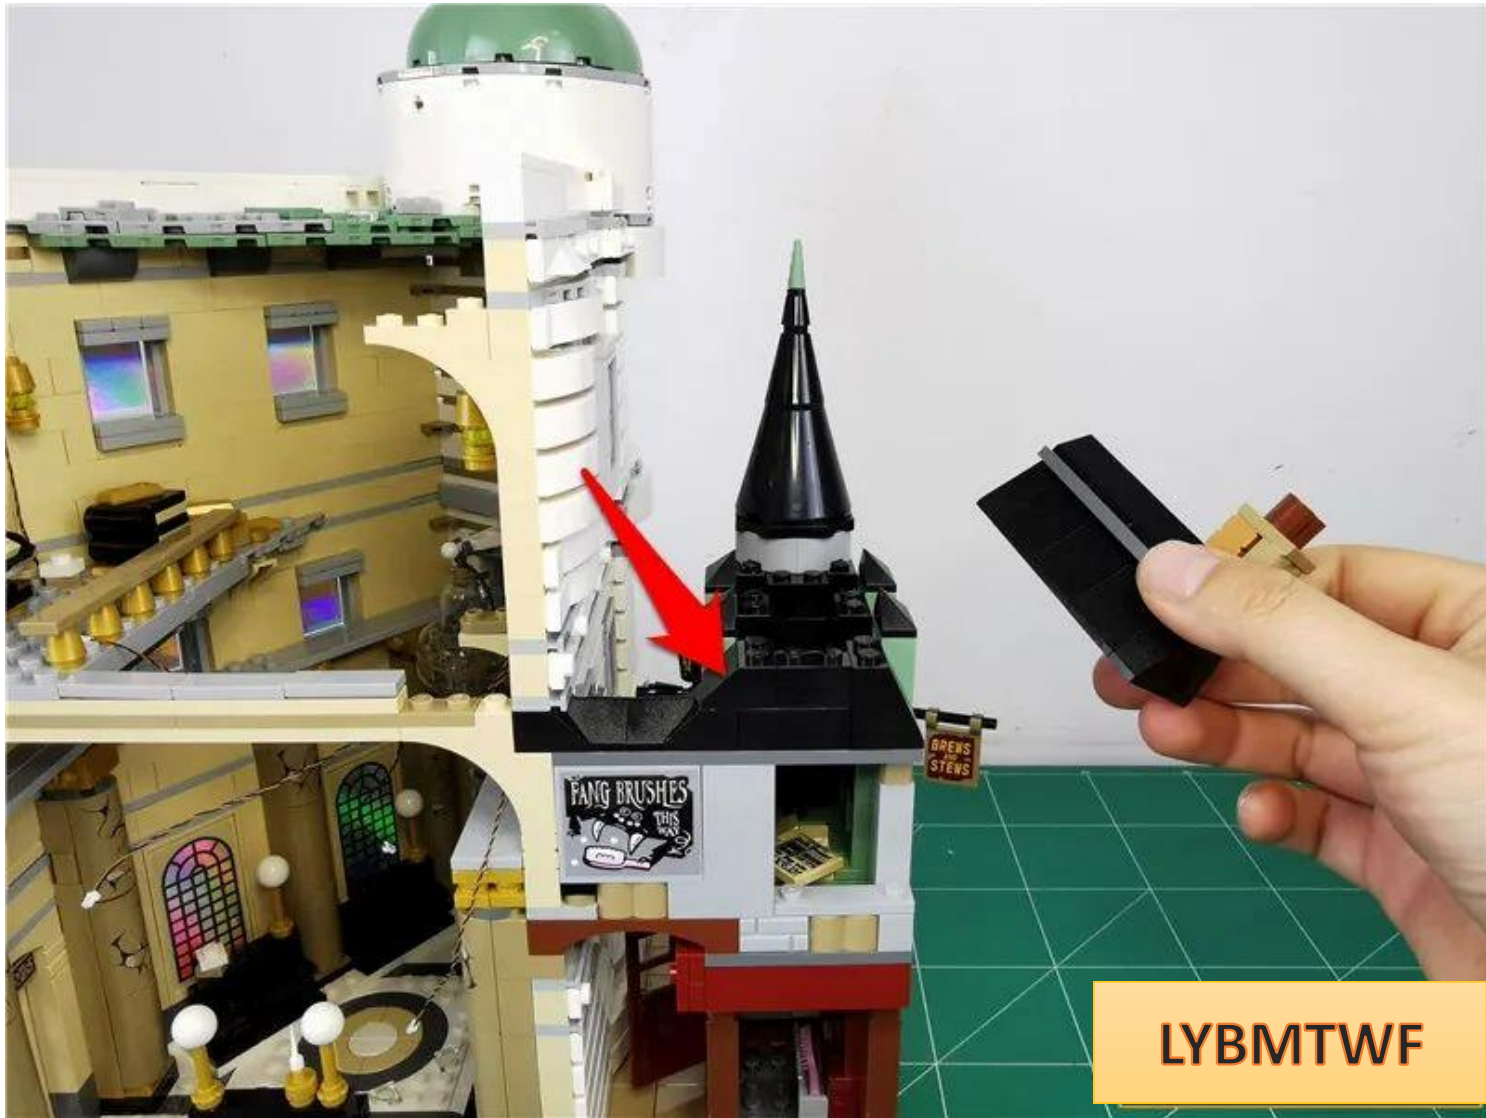


LYBMTWF

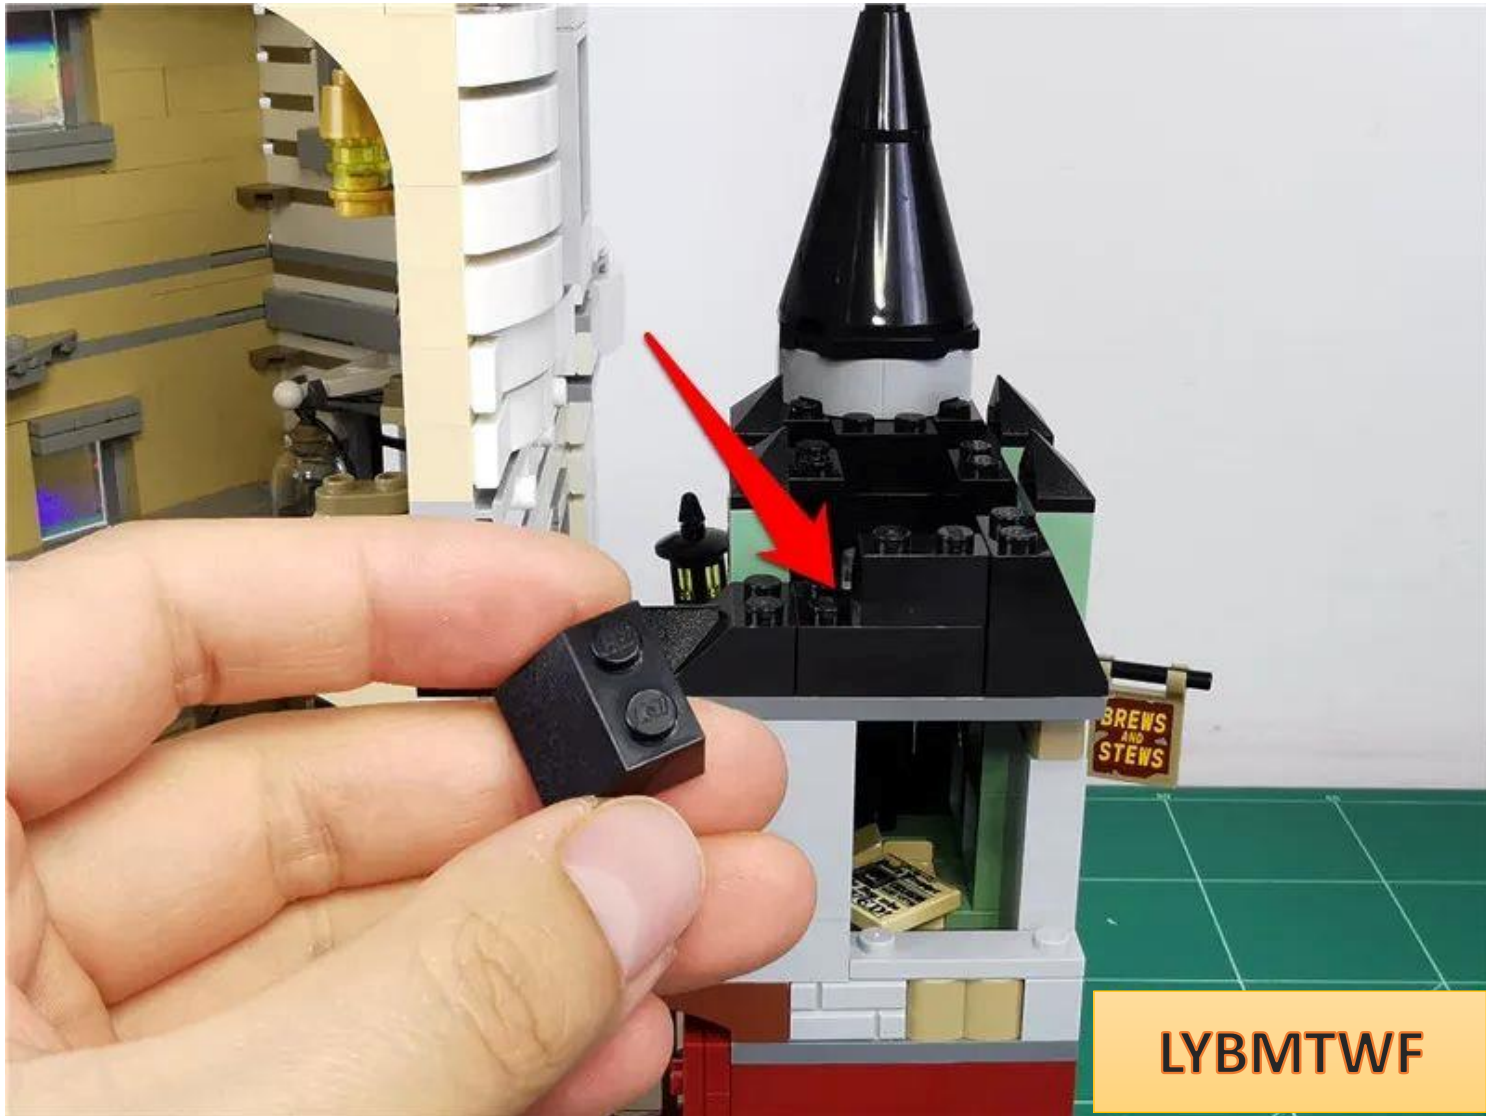

LYBMTWF

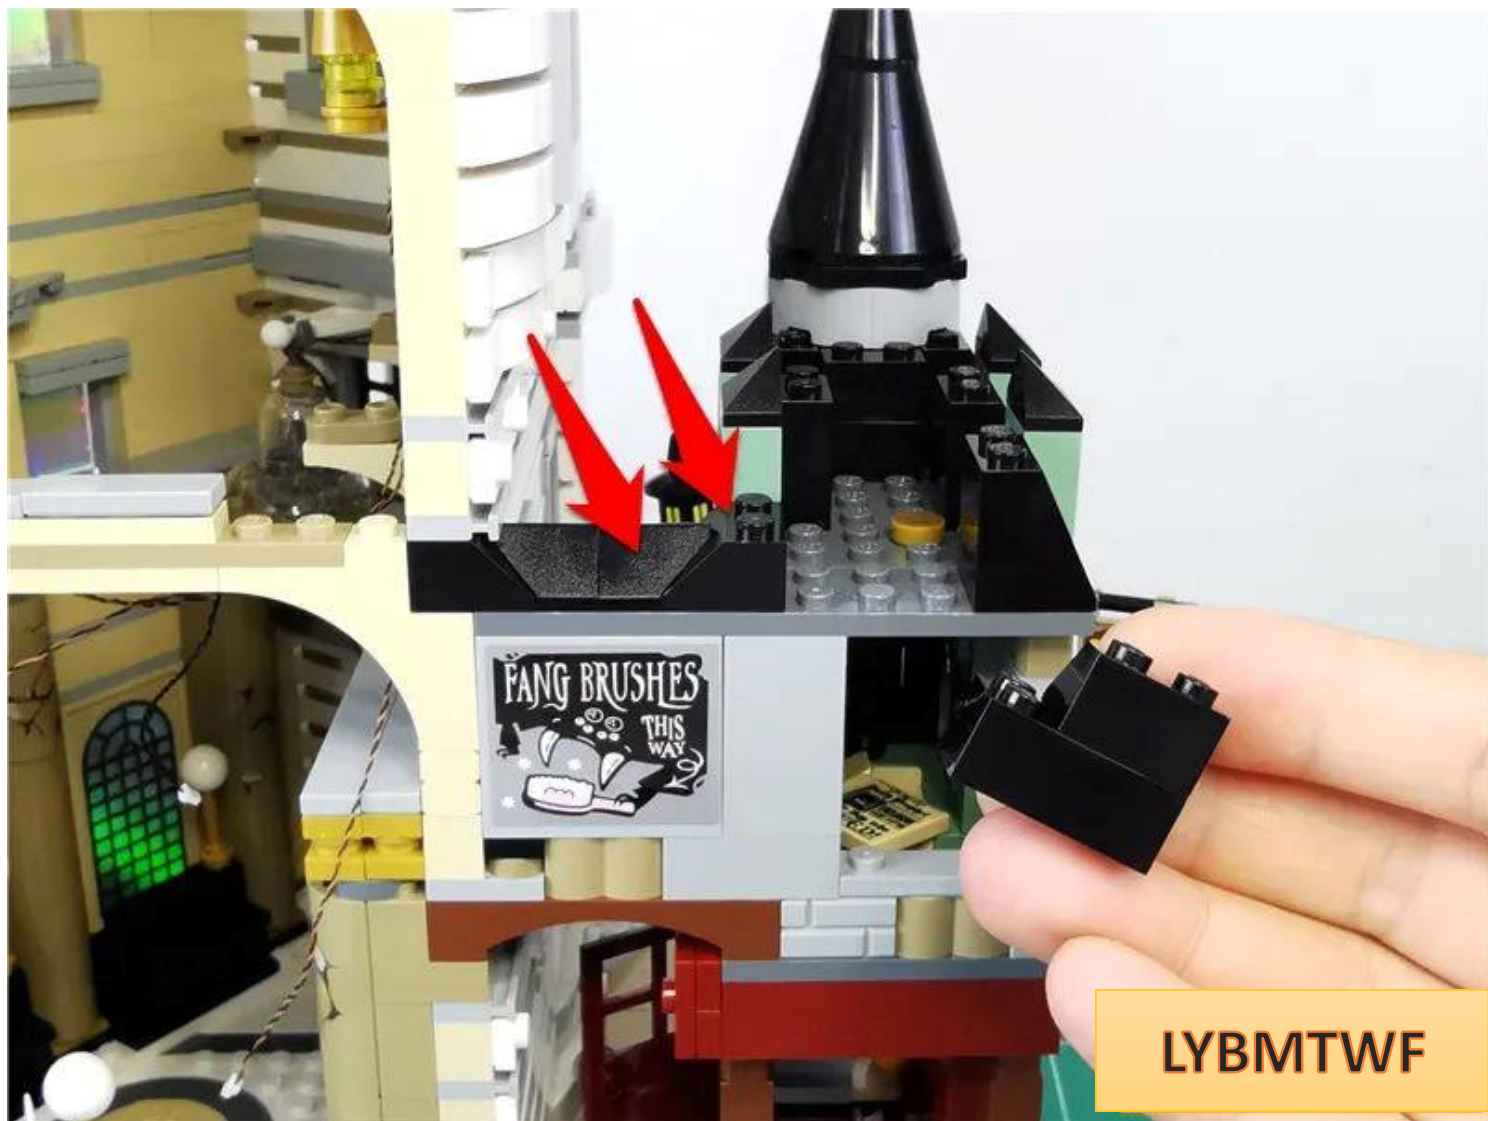


LYBMTWF

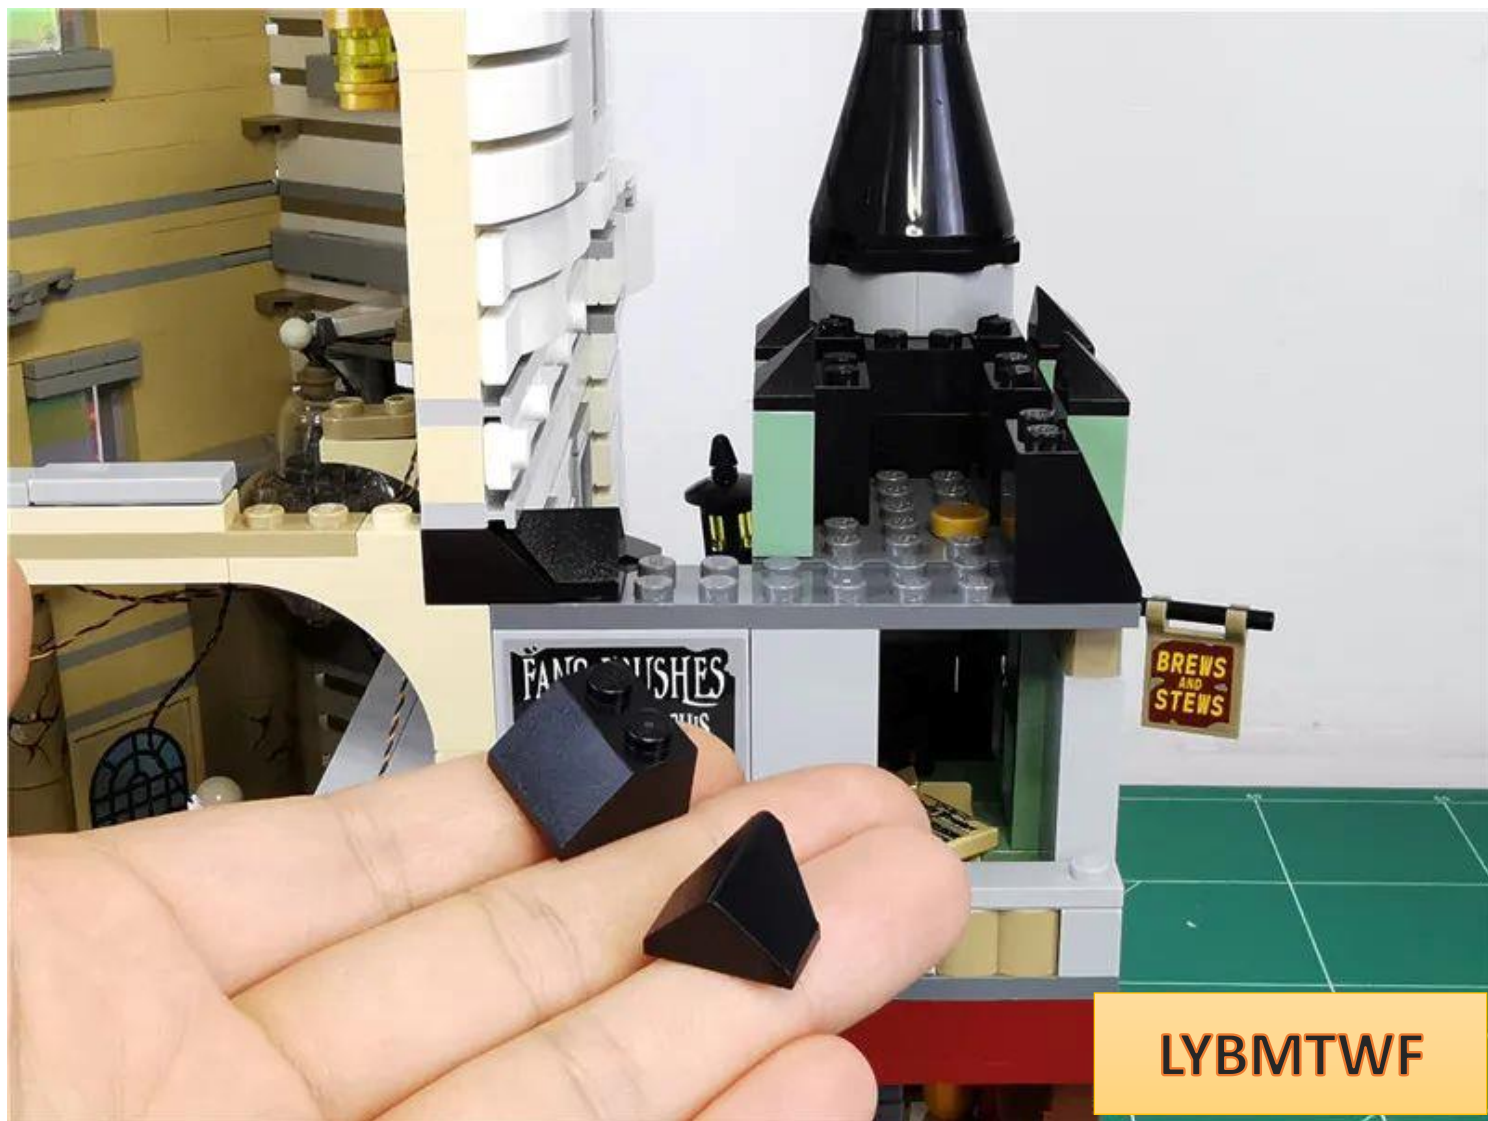


LYBMTWF


Take 1 15cm warm light headlamp particle and 1 hollow transparent round

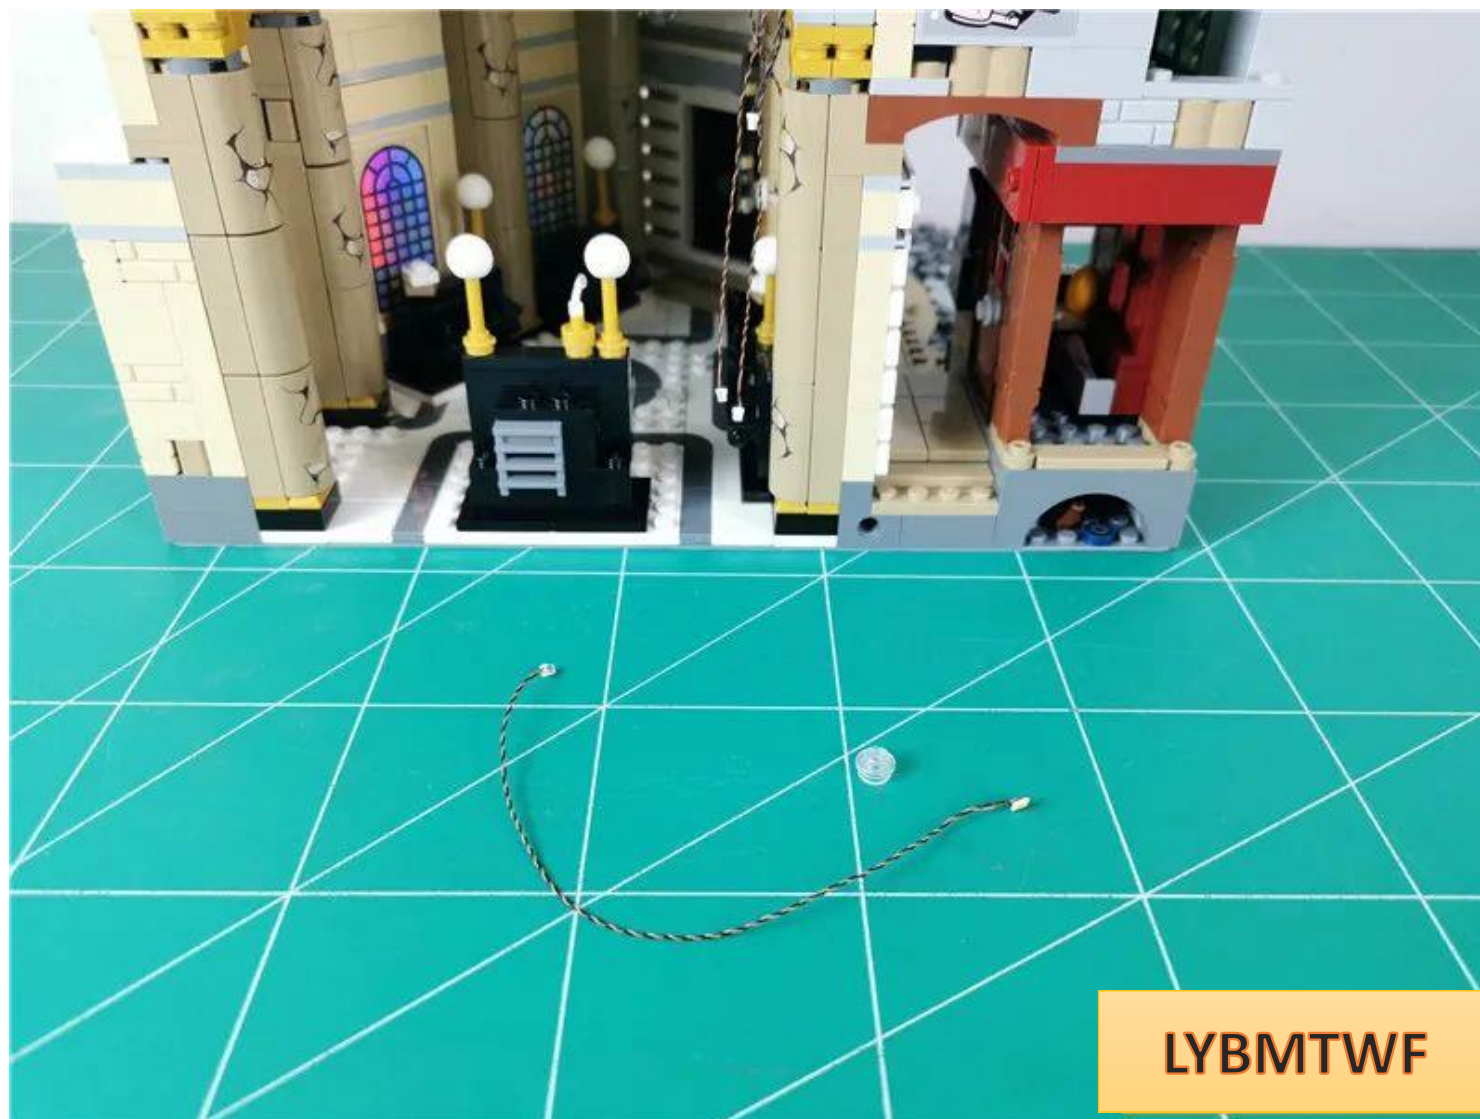

Bend the lamp grain 90 degrees, with the luminous side facing outwards

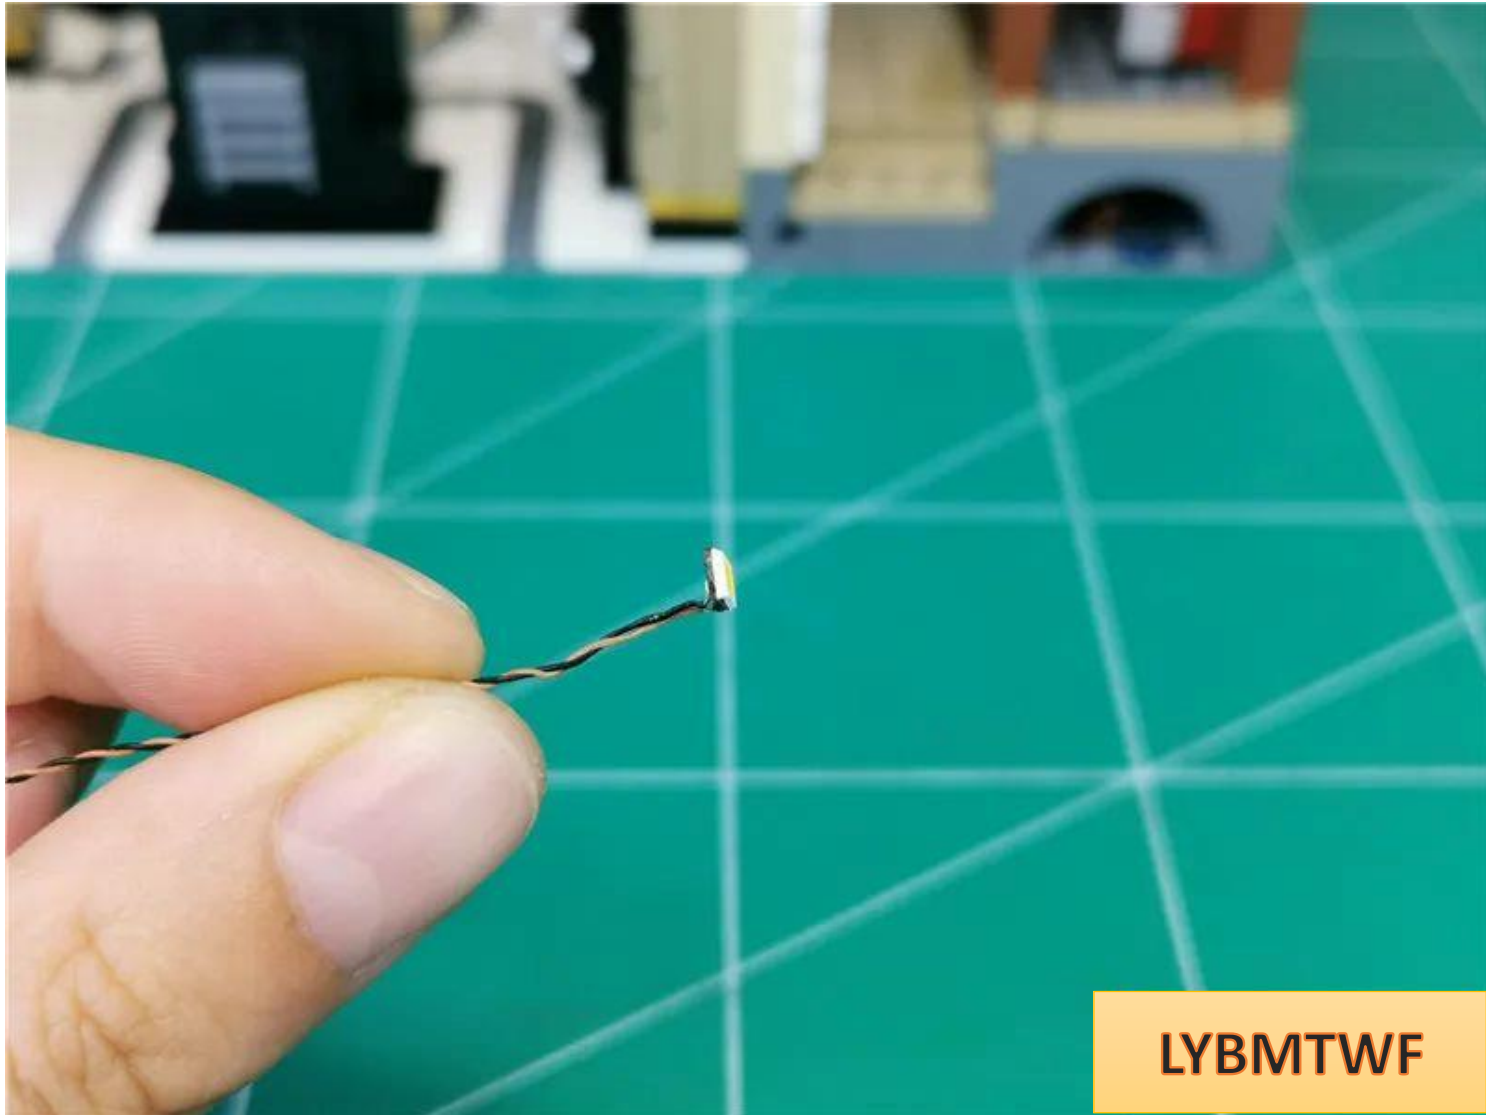


Pass the lamp plug through the hollow **round hole**.

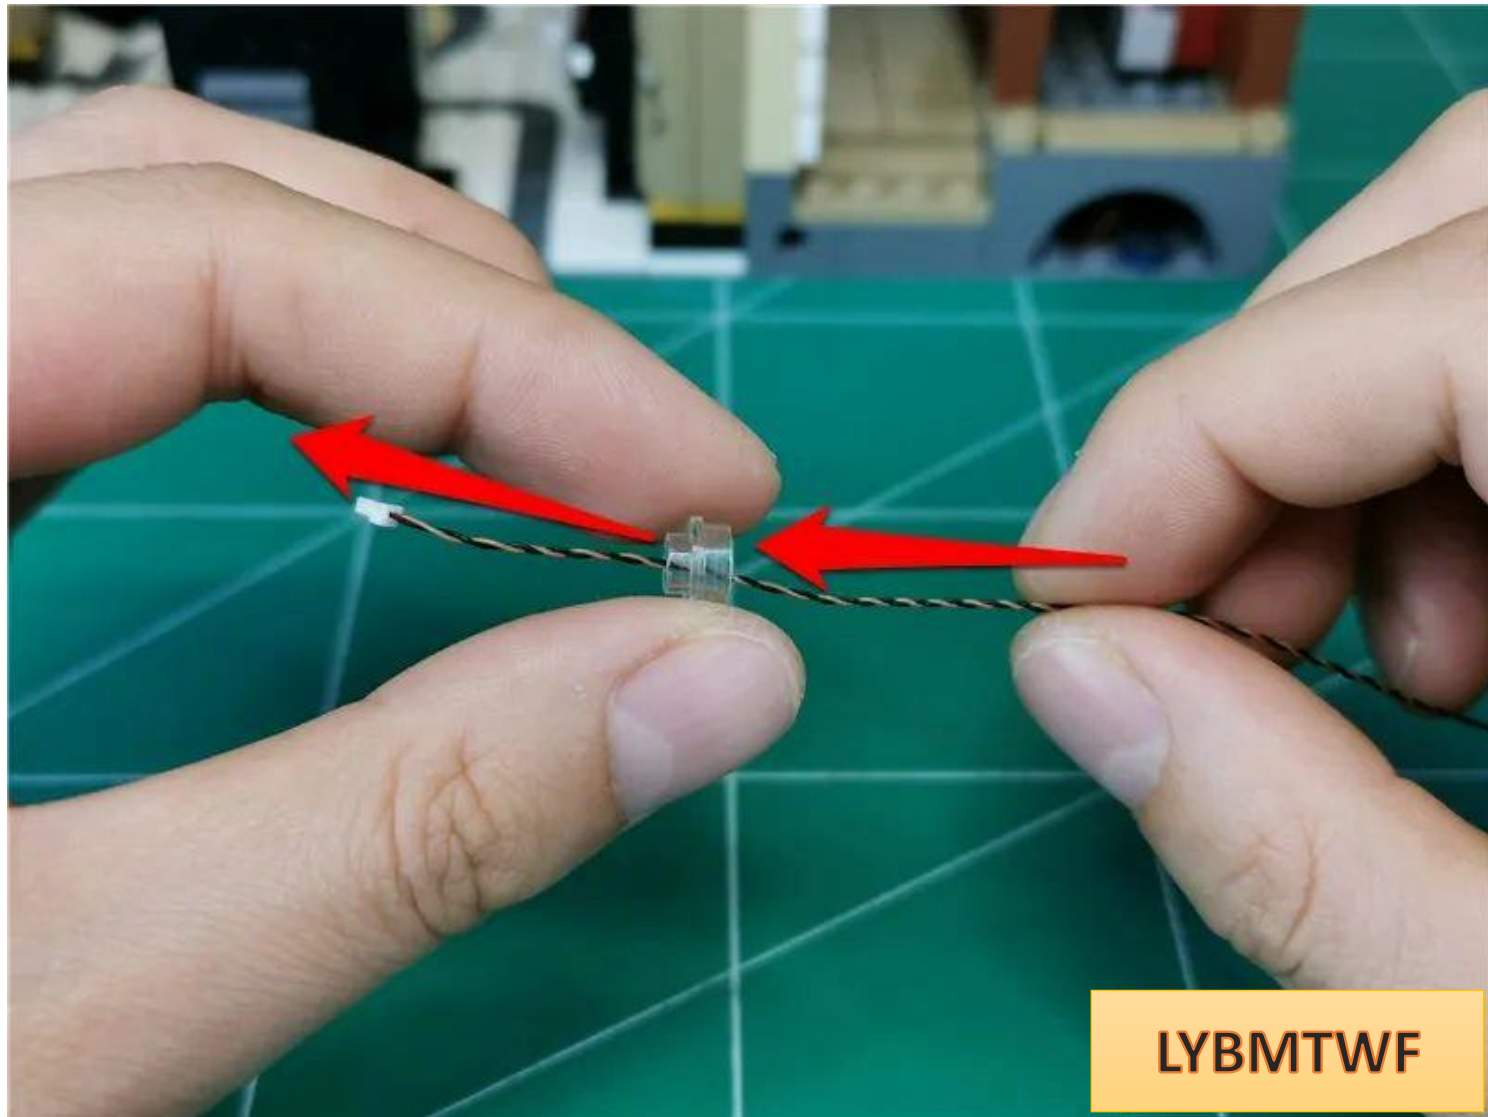


LYBMTWF


Wear it to the bottom so that the lamp particles are just in the center of the transparent circle

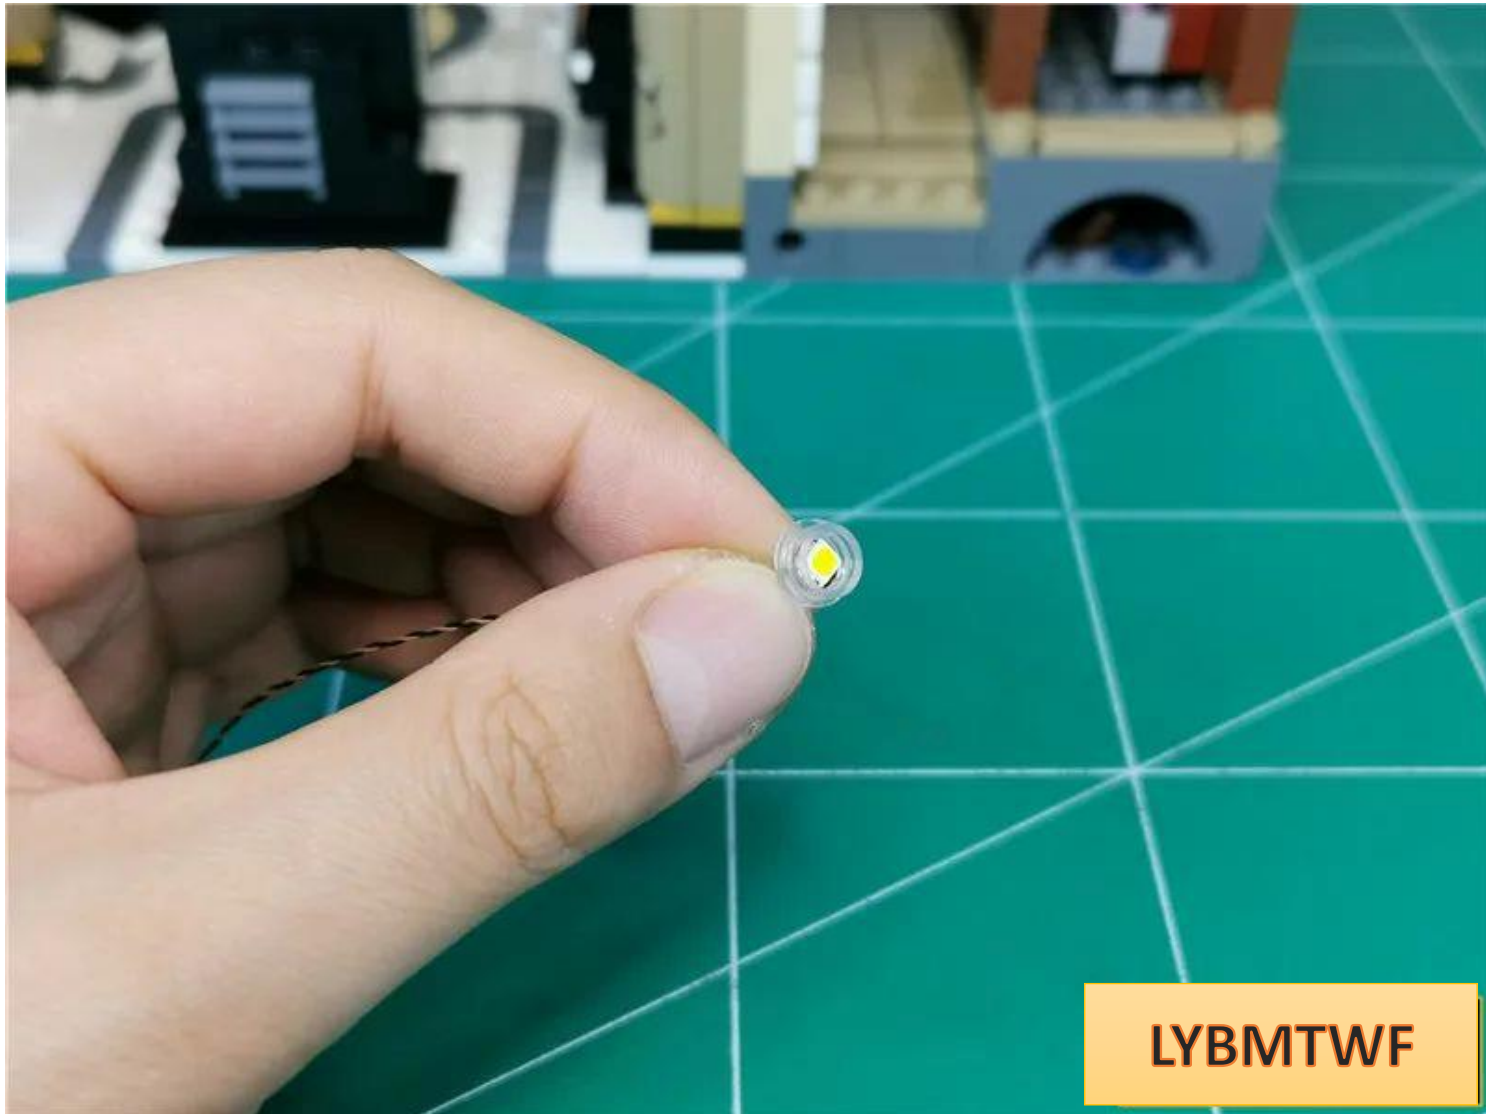

Install the lamp particles on the second floor of the store

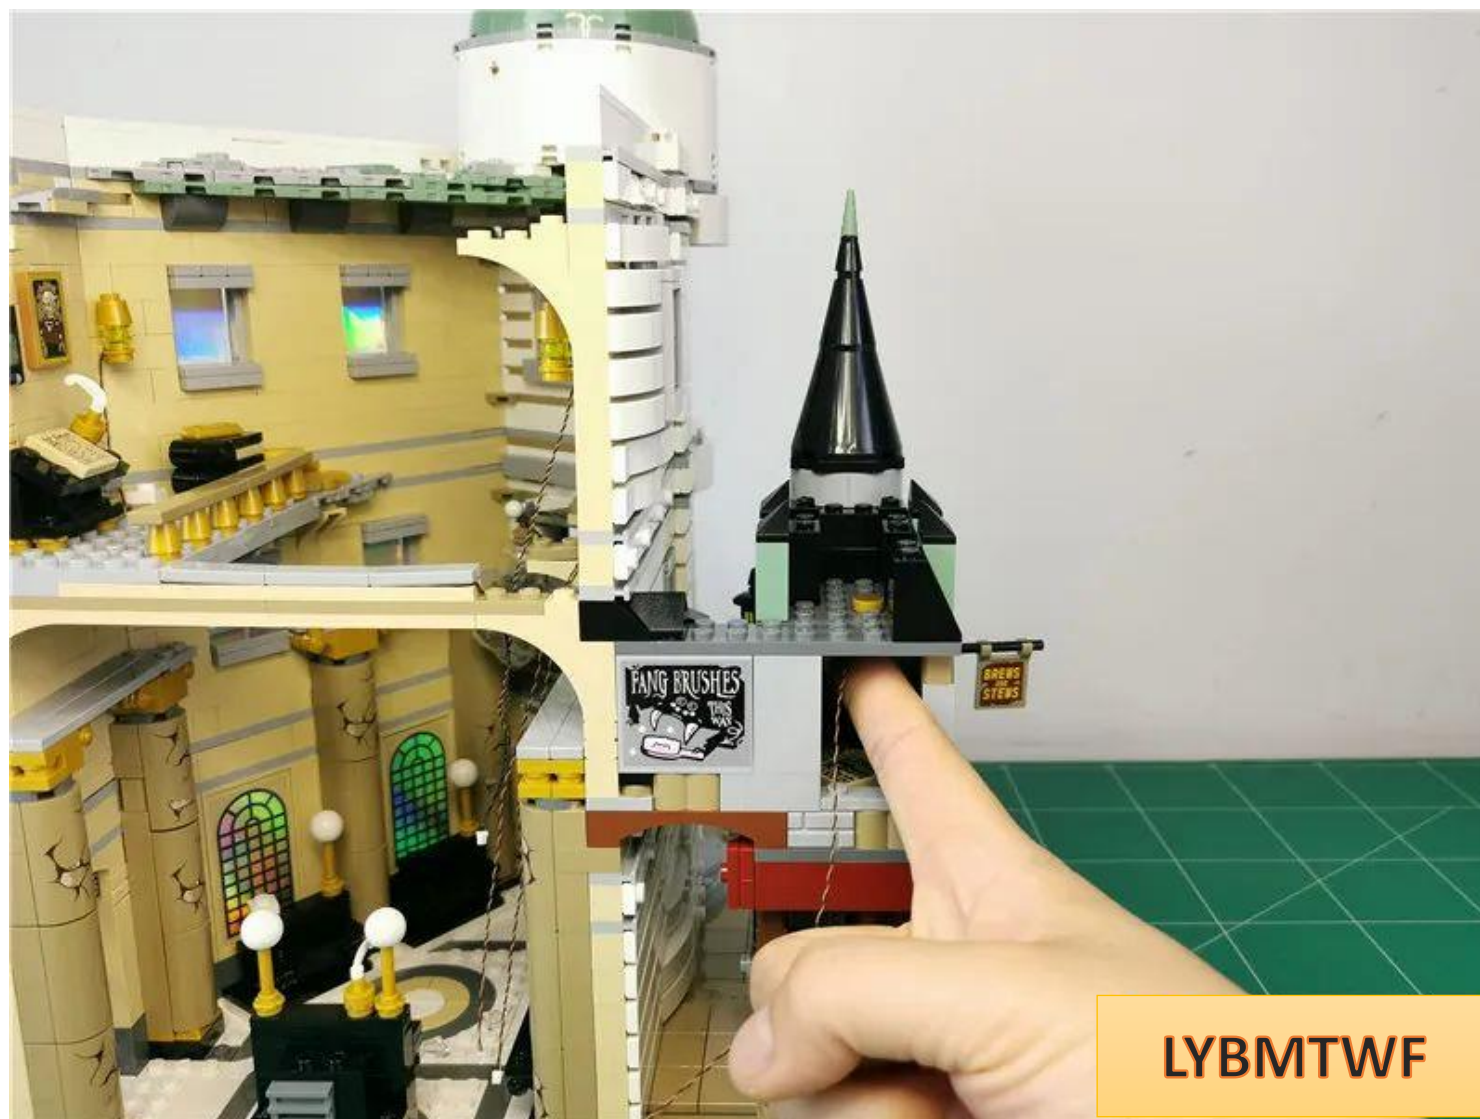


The specific location is as follows

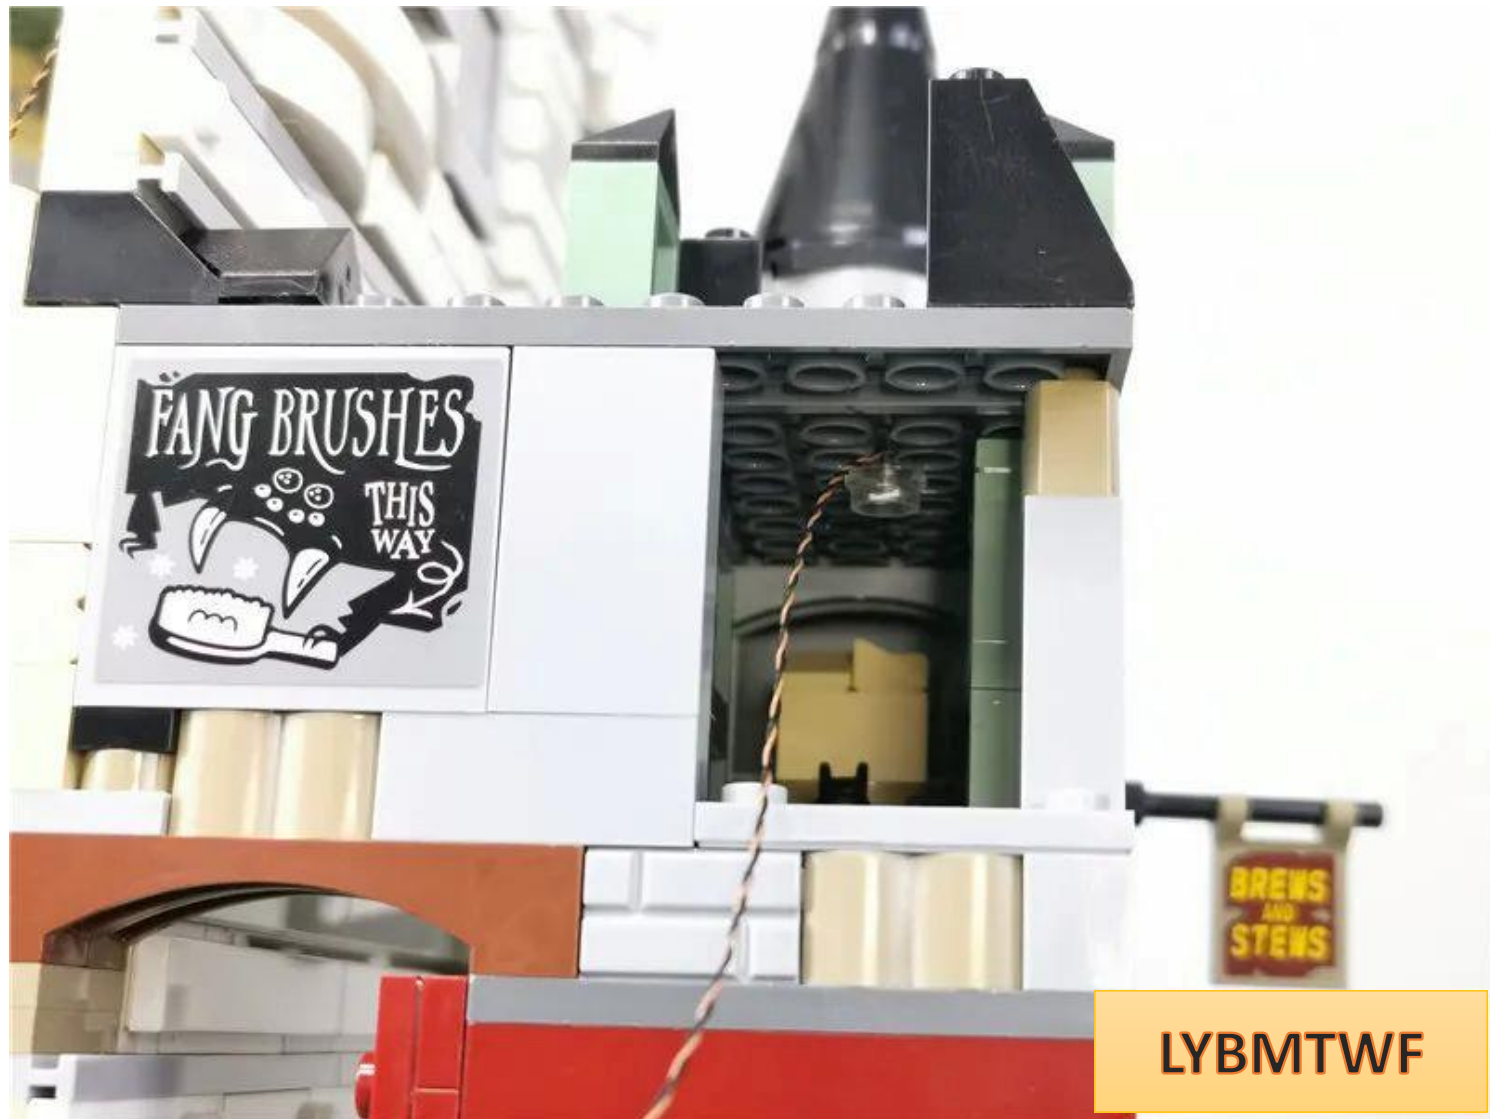


LYBMTWF

Pull the wire upward and around the raised particles as shown in the picture

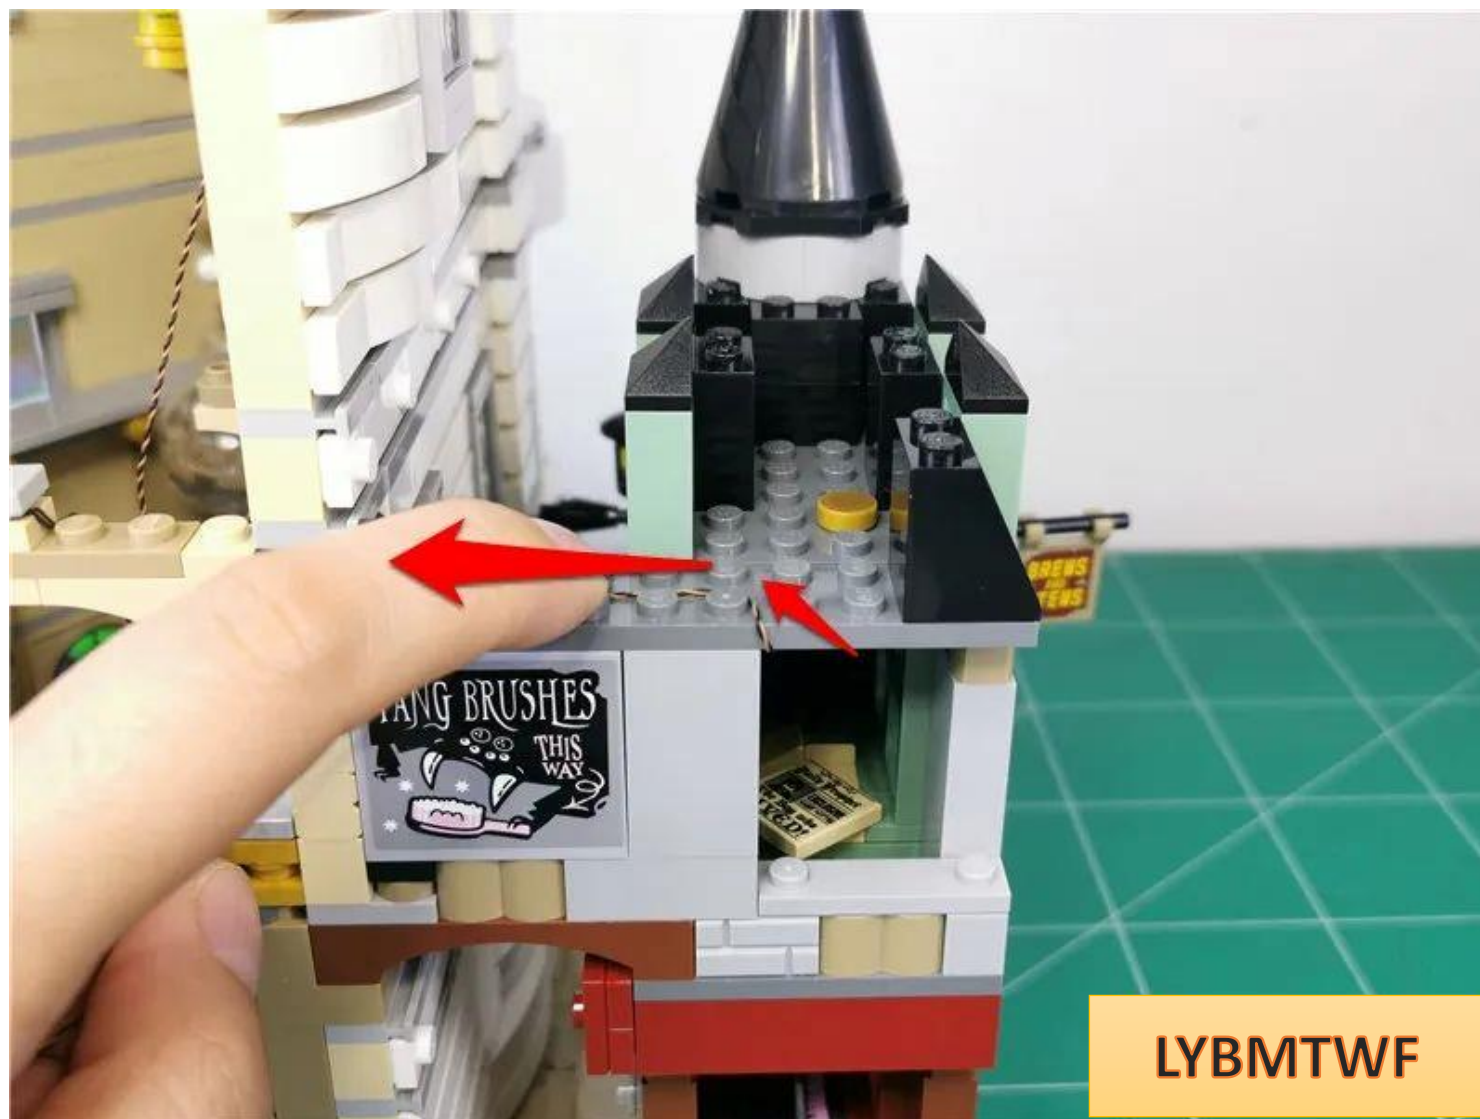


LYBMTWF


Restore parts and fix wires

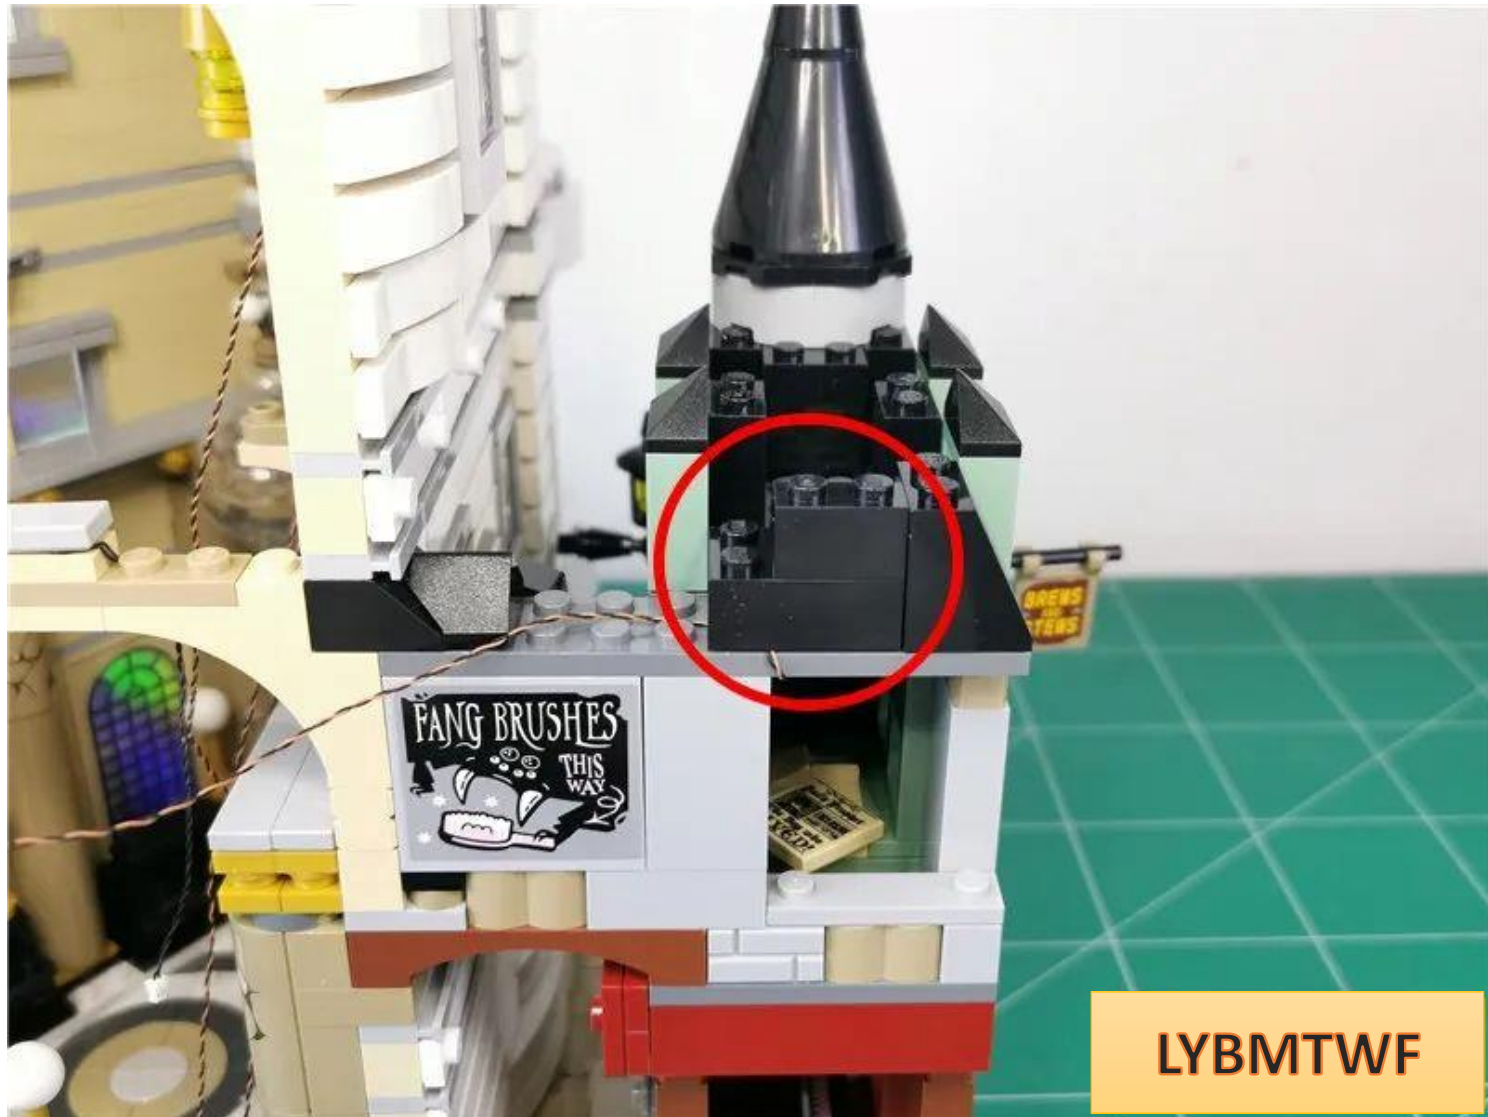

Remove the parts indicated by arrows

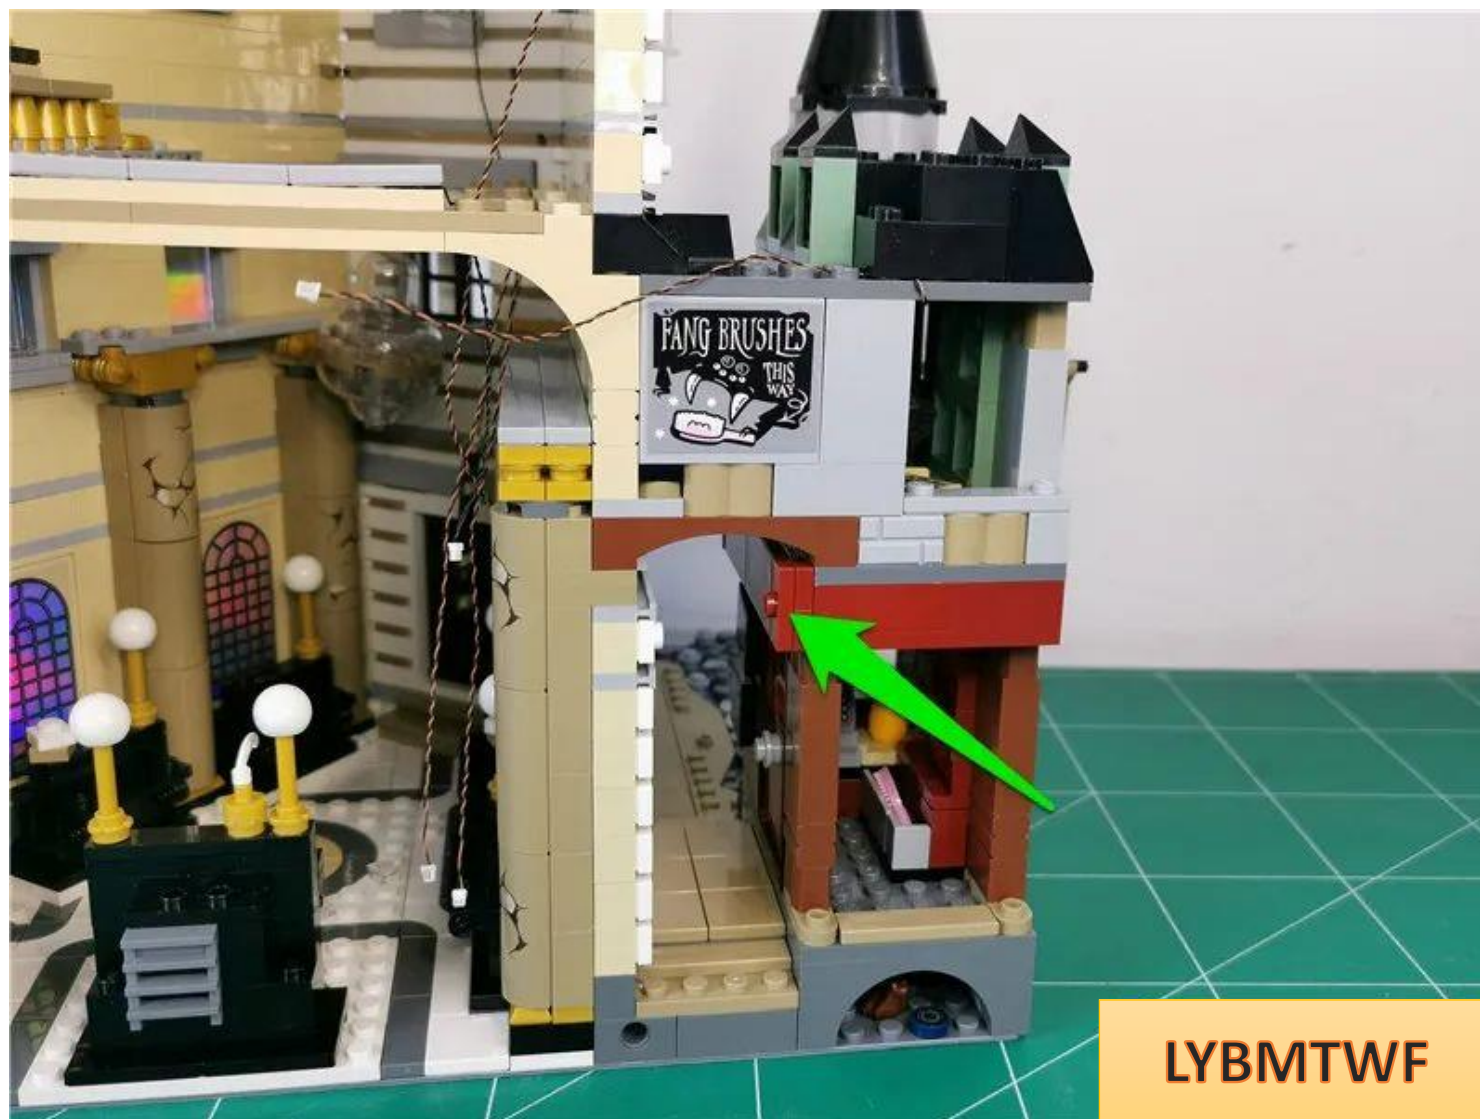


LYBMTWF

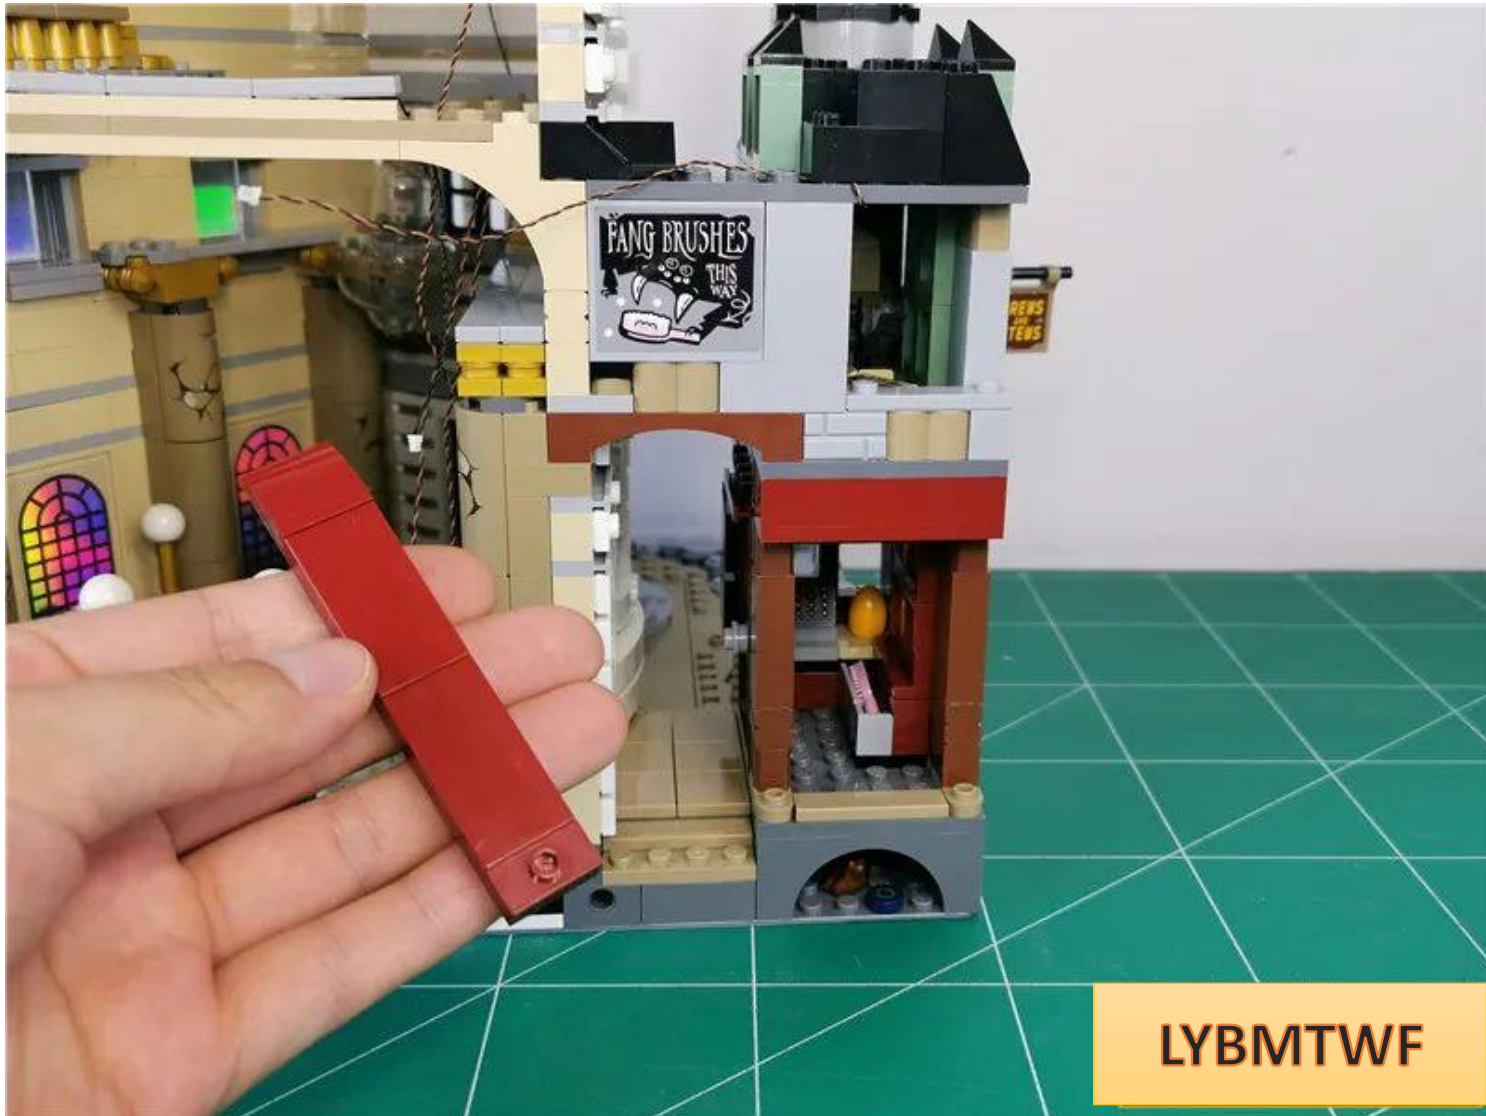


LYBMTWF

Take 1 30cm warm light headlamp particle and 1 hollow transparent round

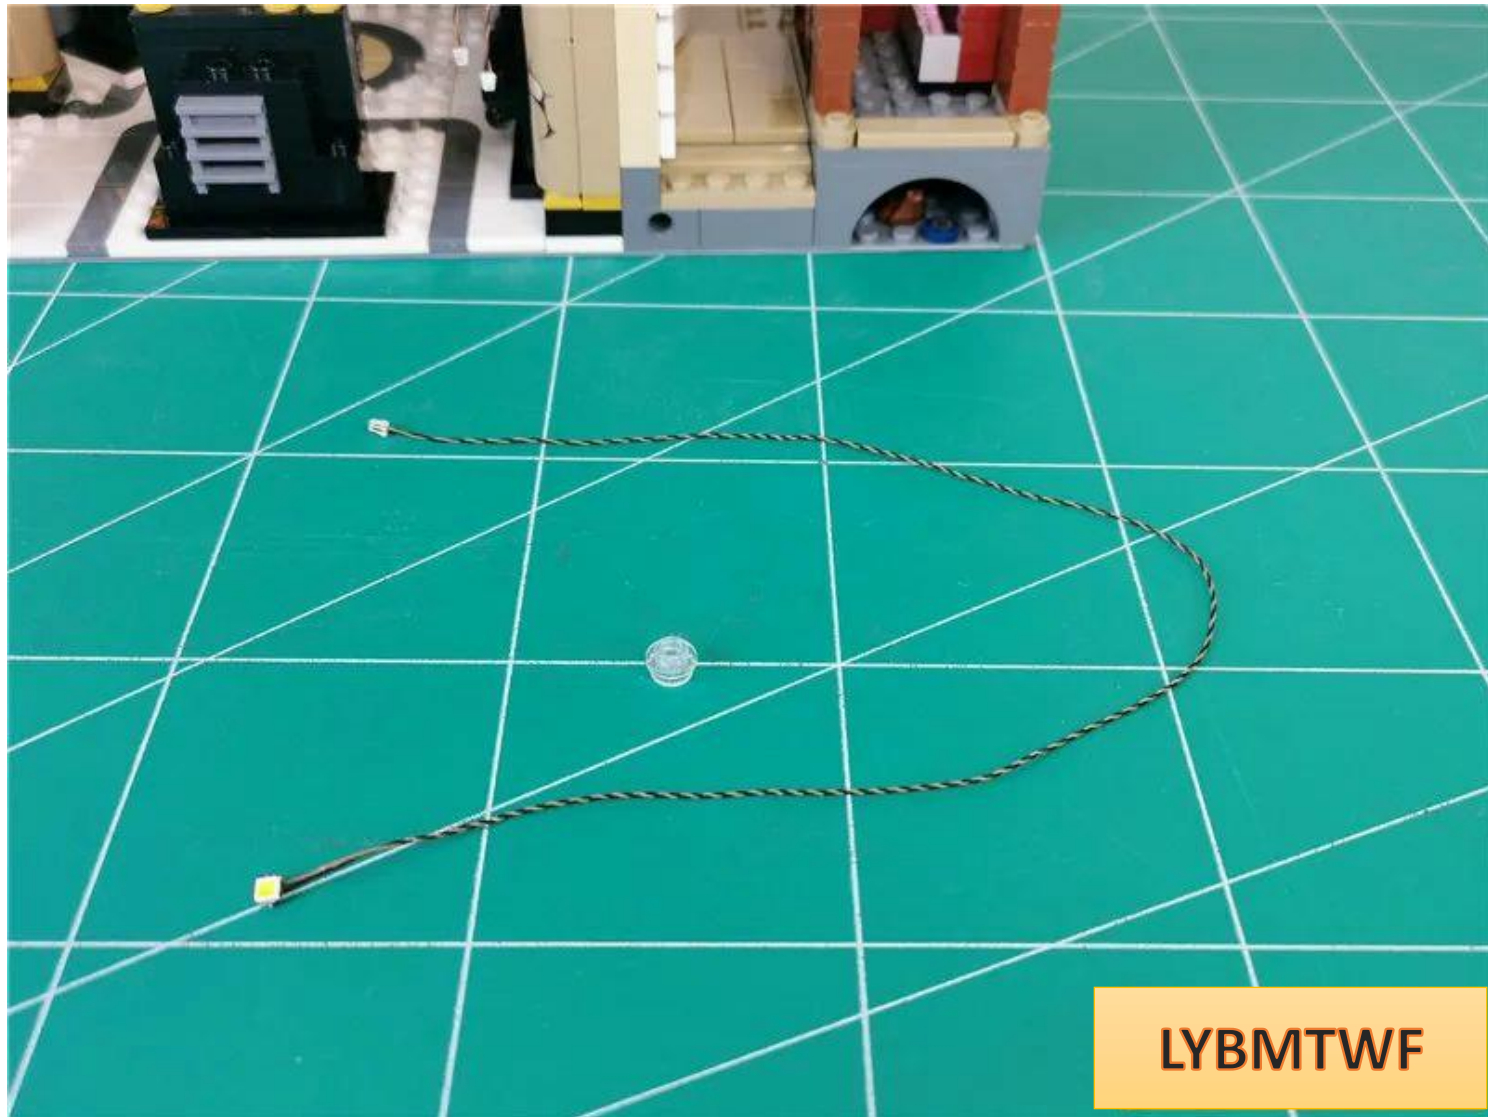


Install the lamp particles

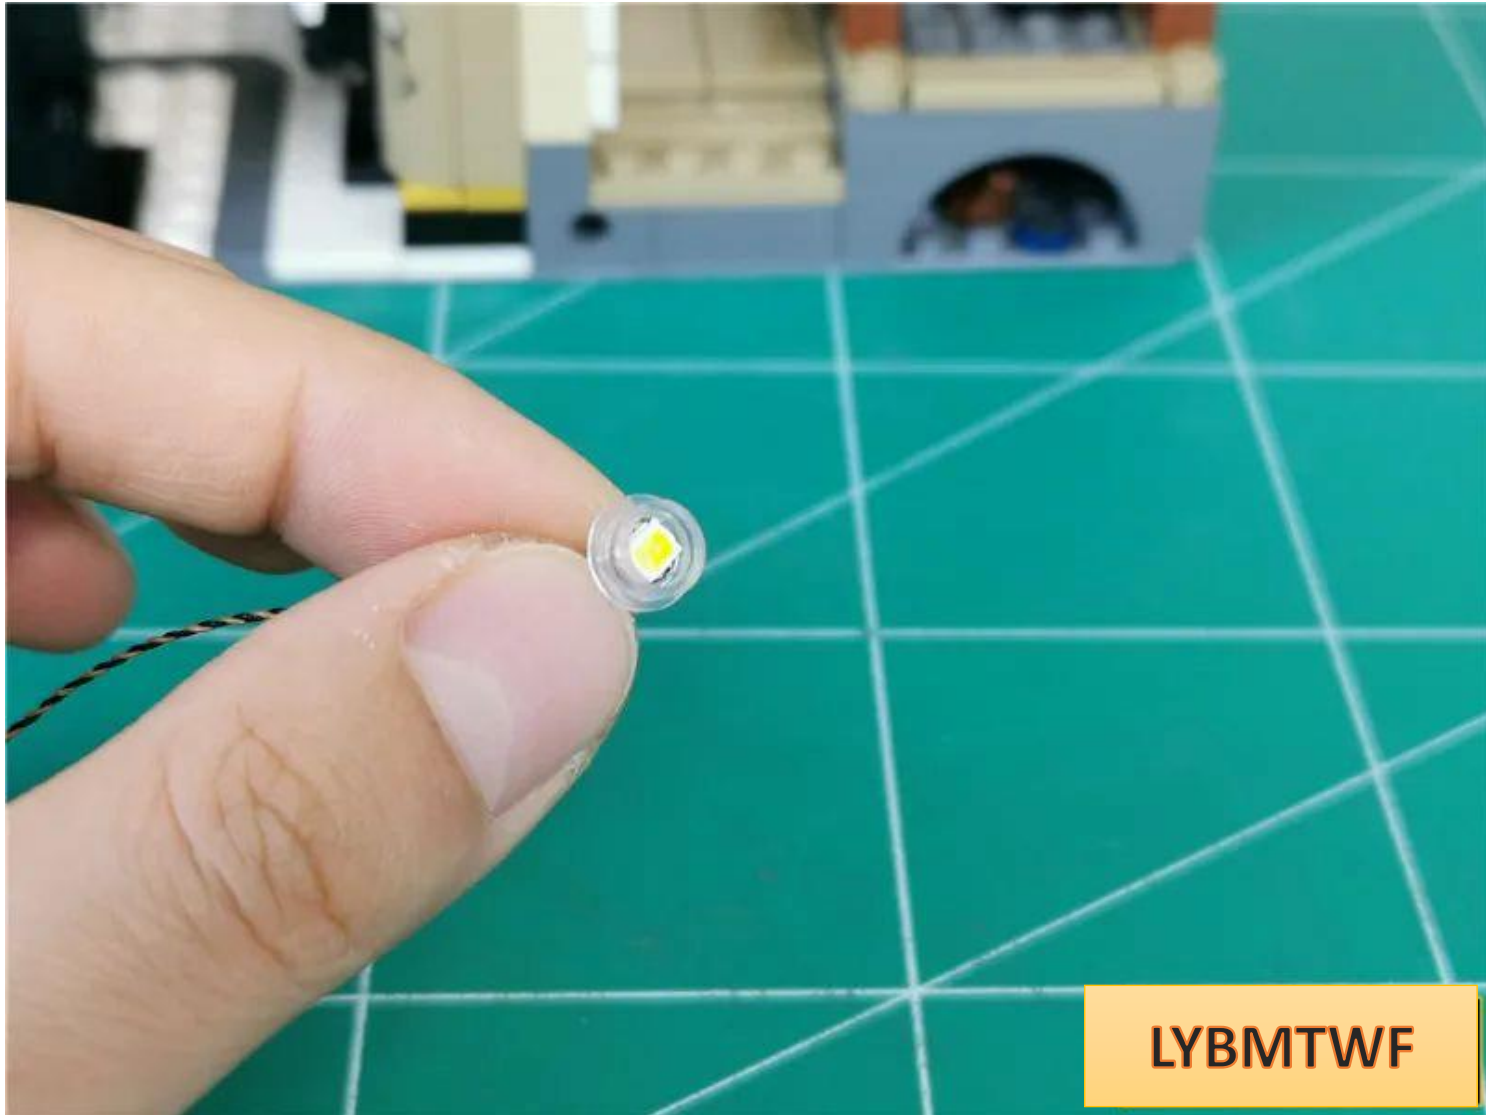


in the same way as before

Install the lamp particles on the first floor of the store

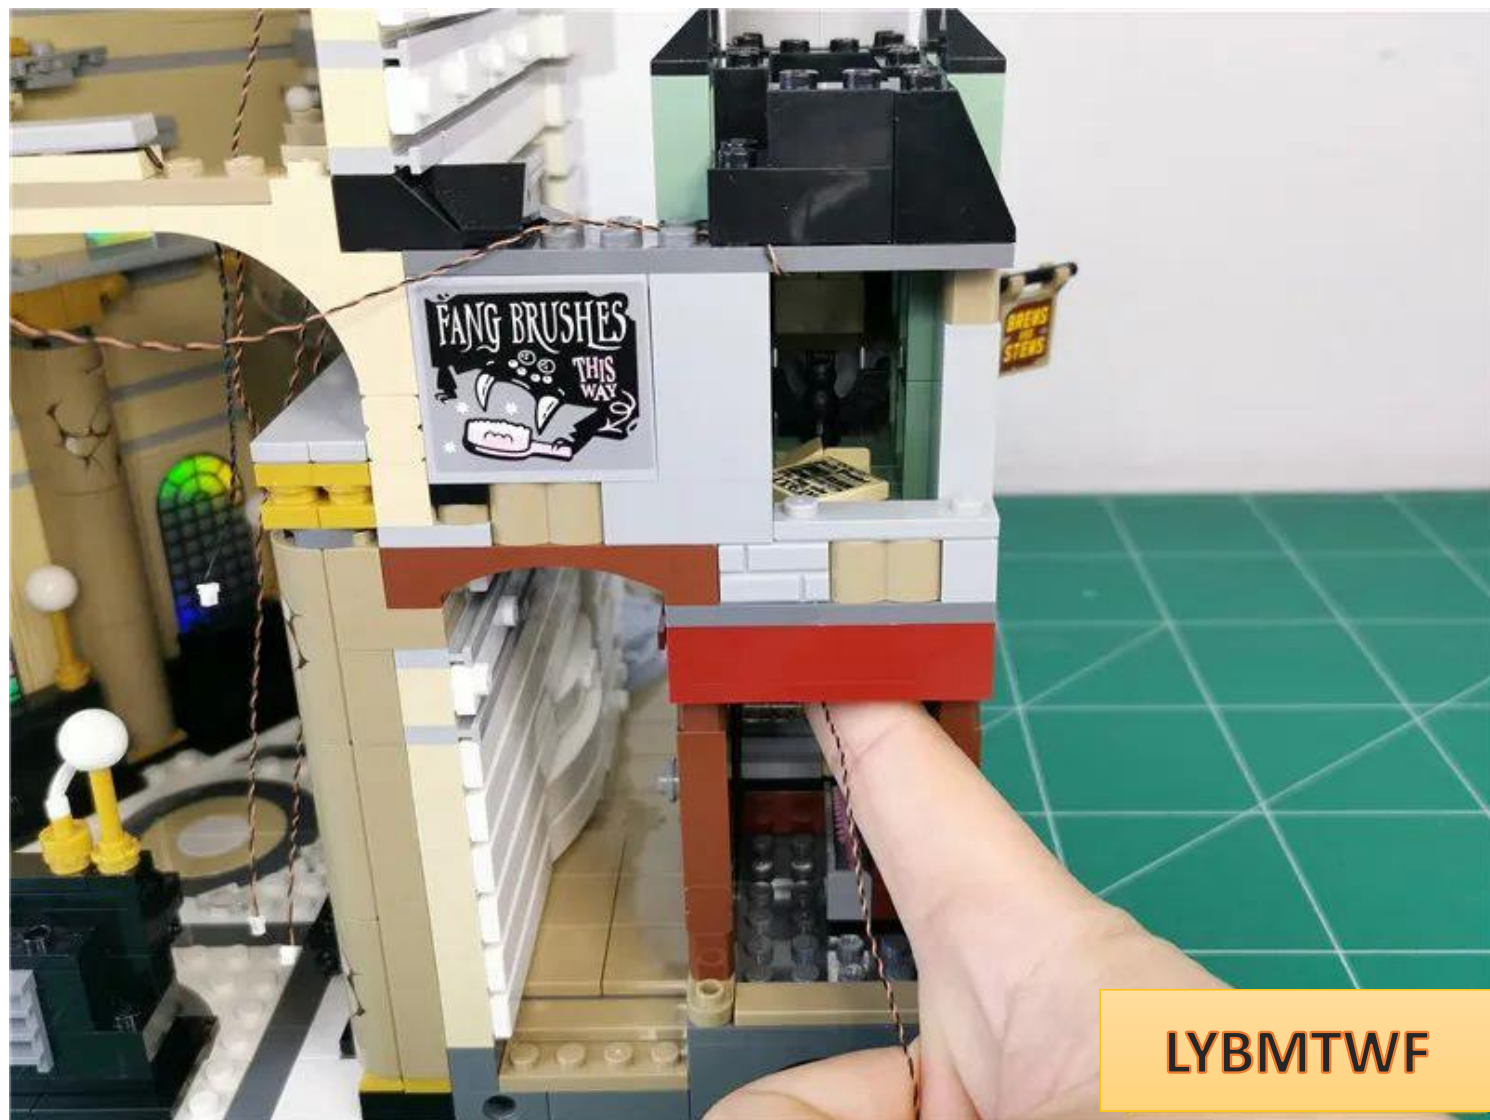


LYBMTWF

The specific location is as follows

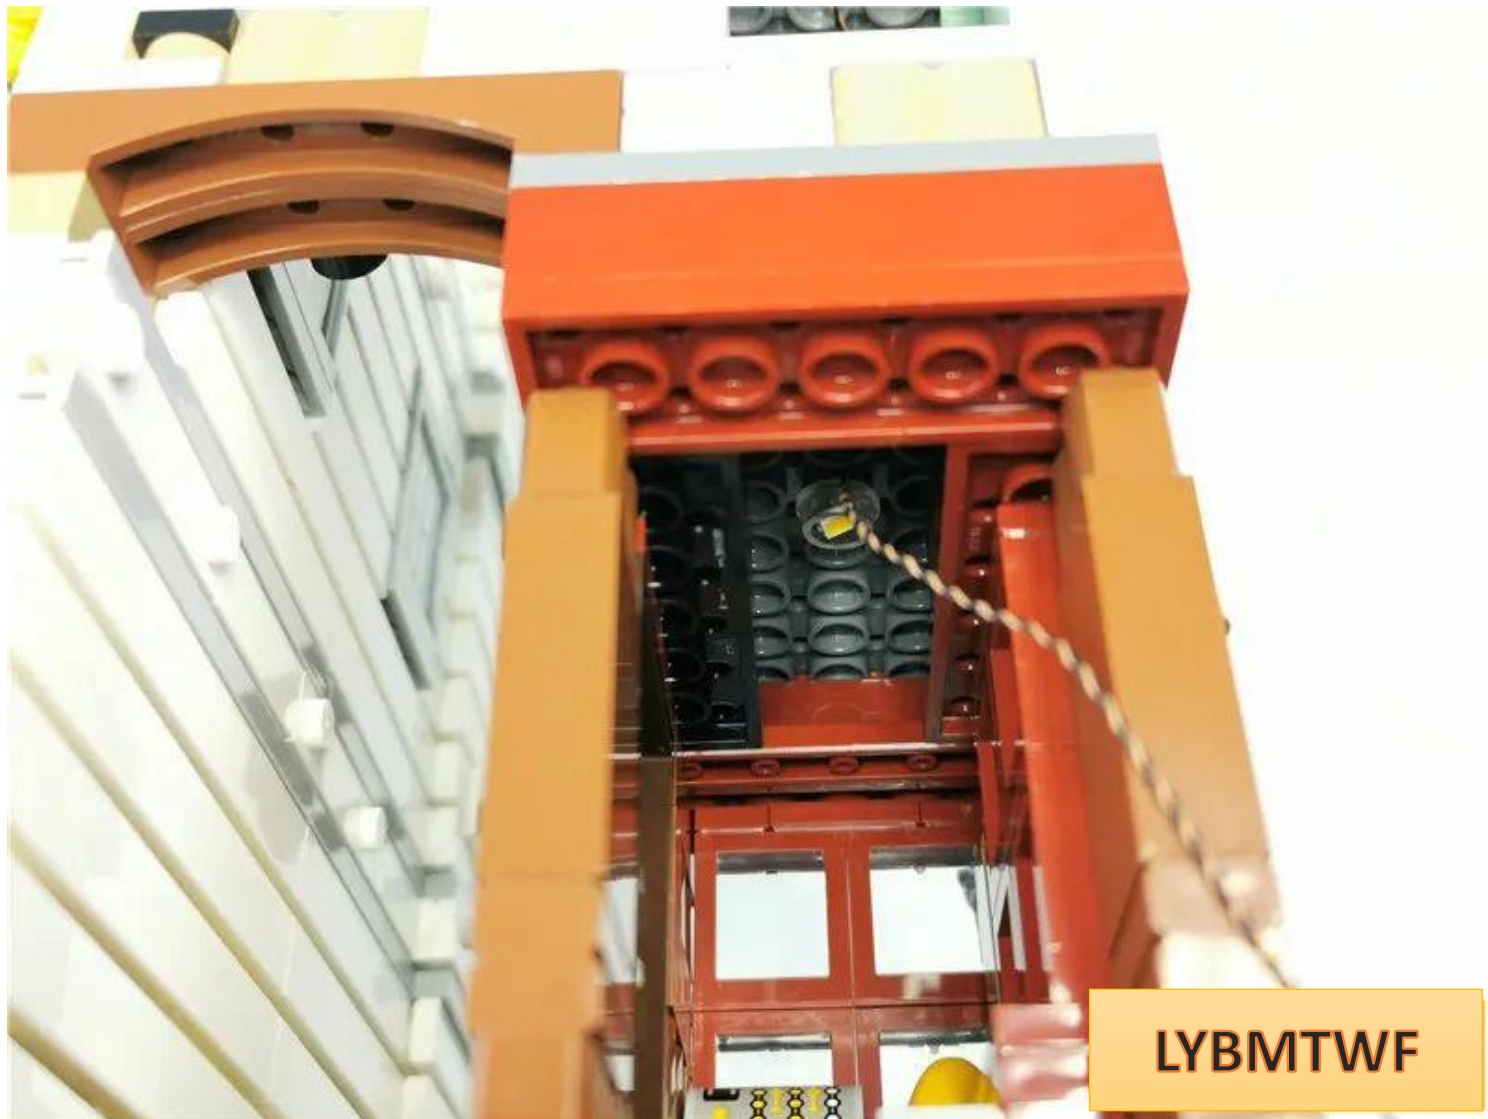


Pass the wire along the back of the part to the top

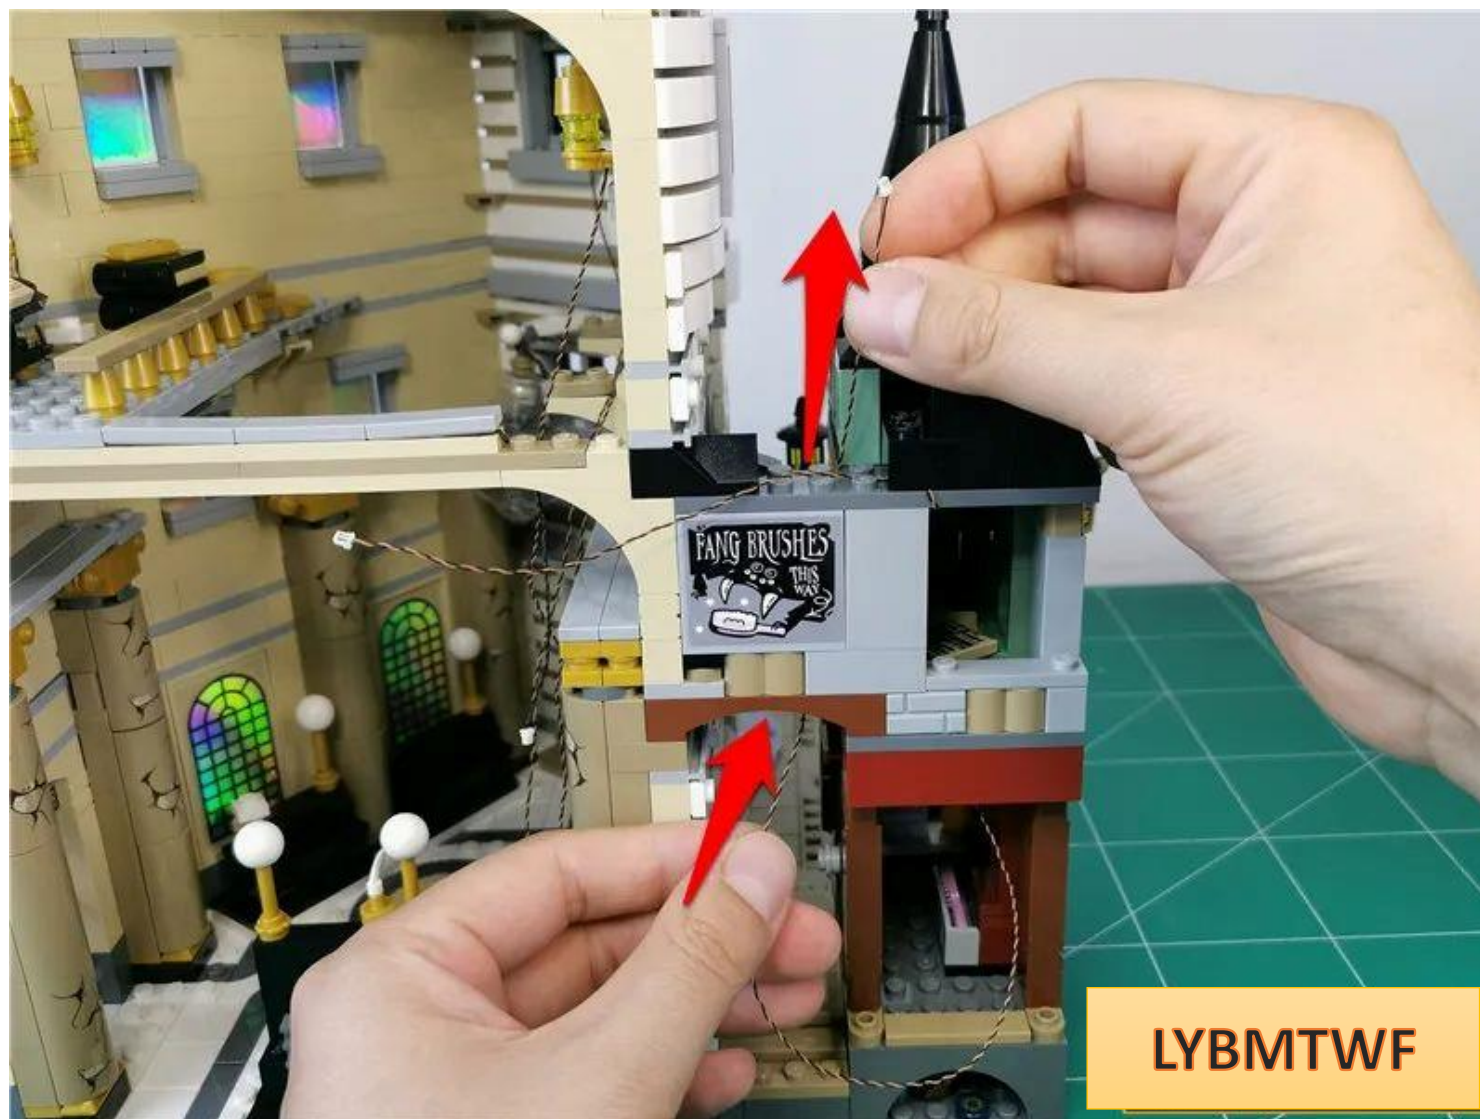


LYBMTWF

Tighten the wire from above

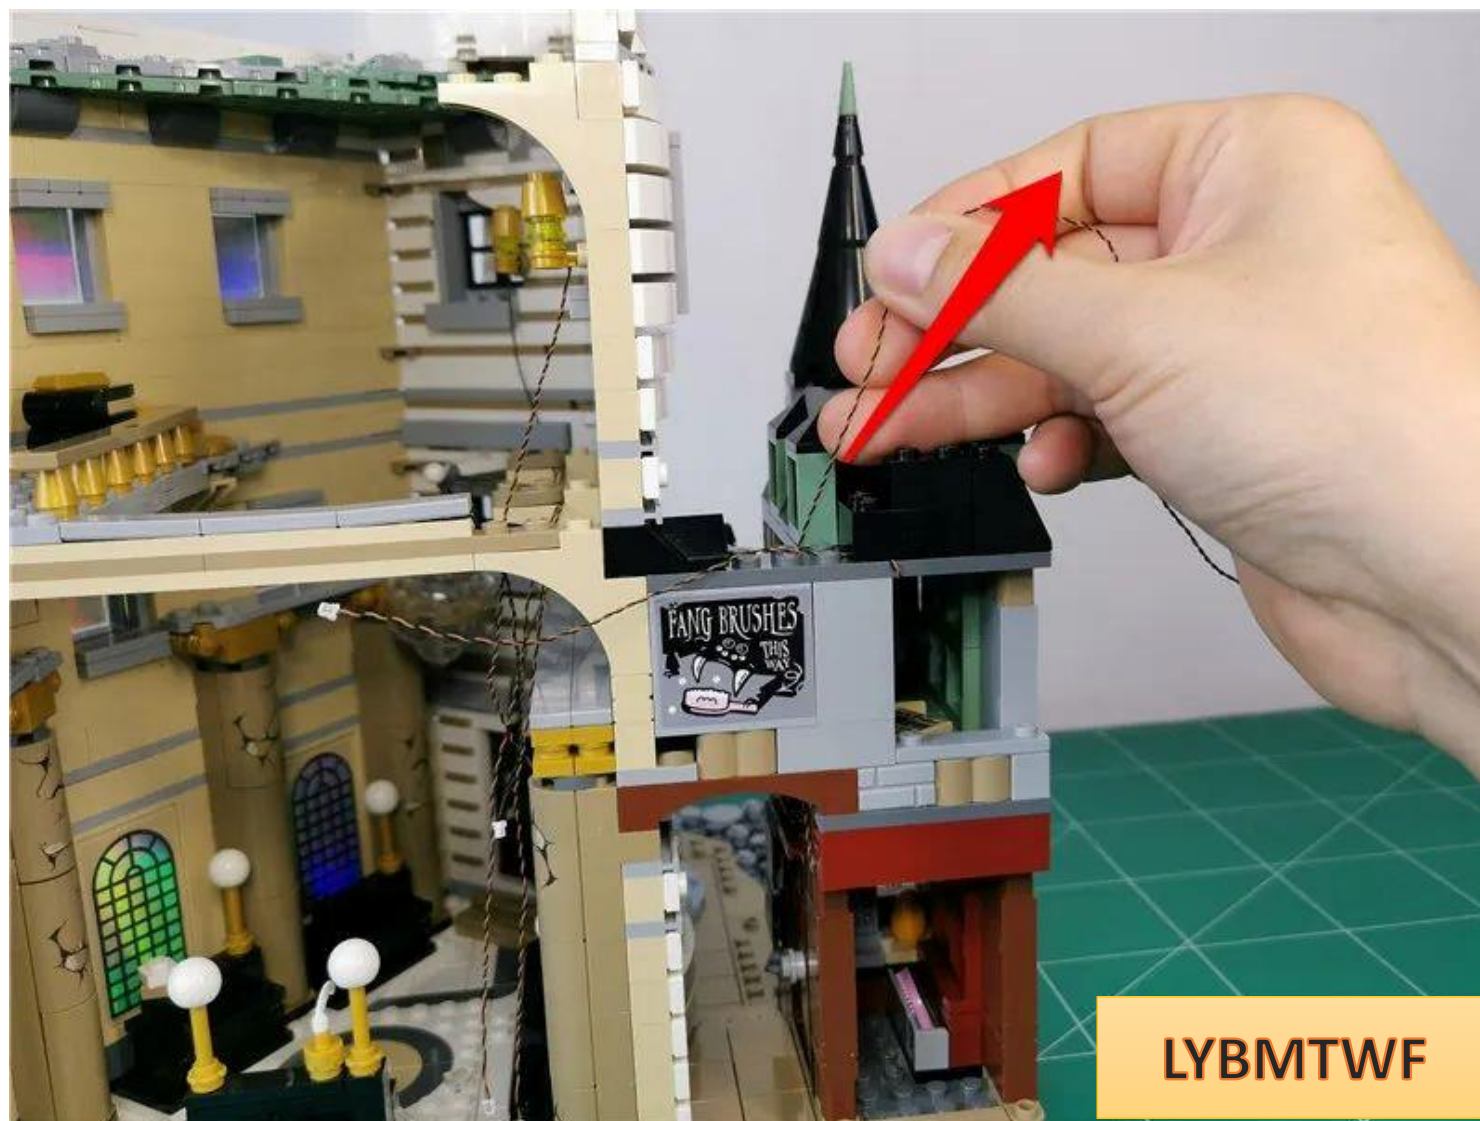


Pull the 2 wires along the gap between the raised particles to the left

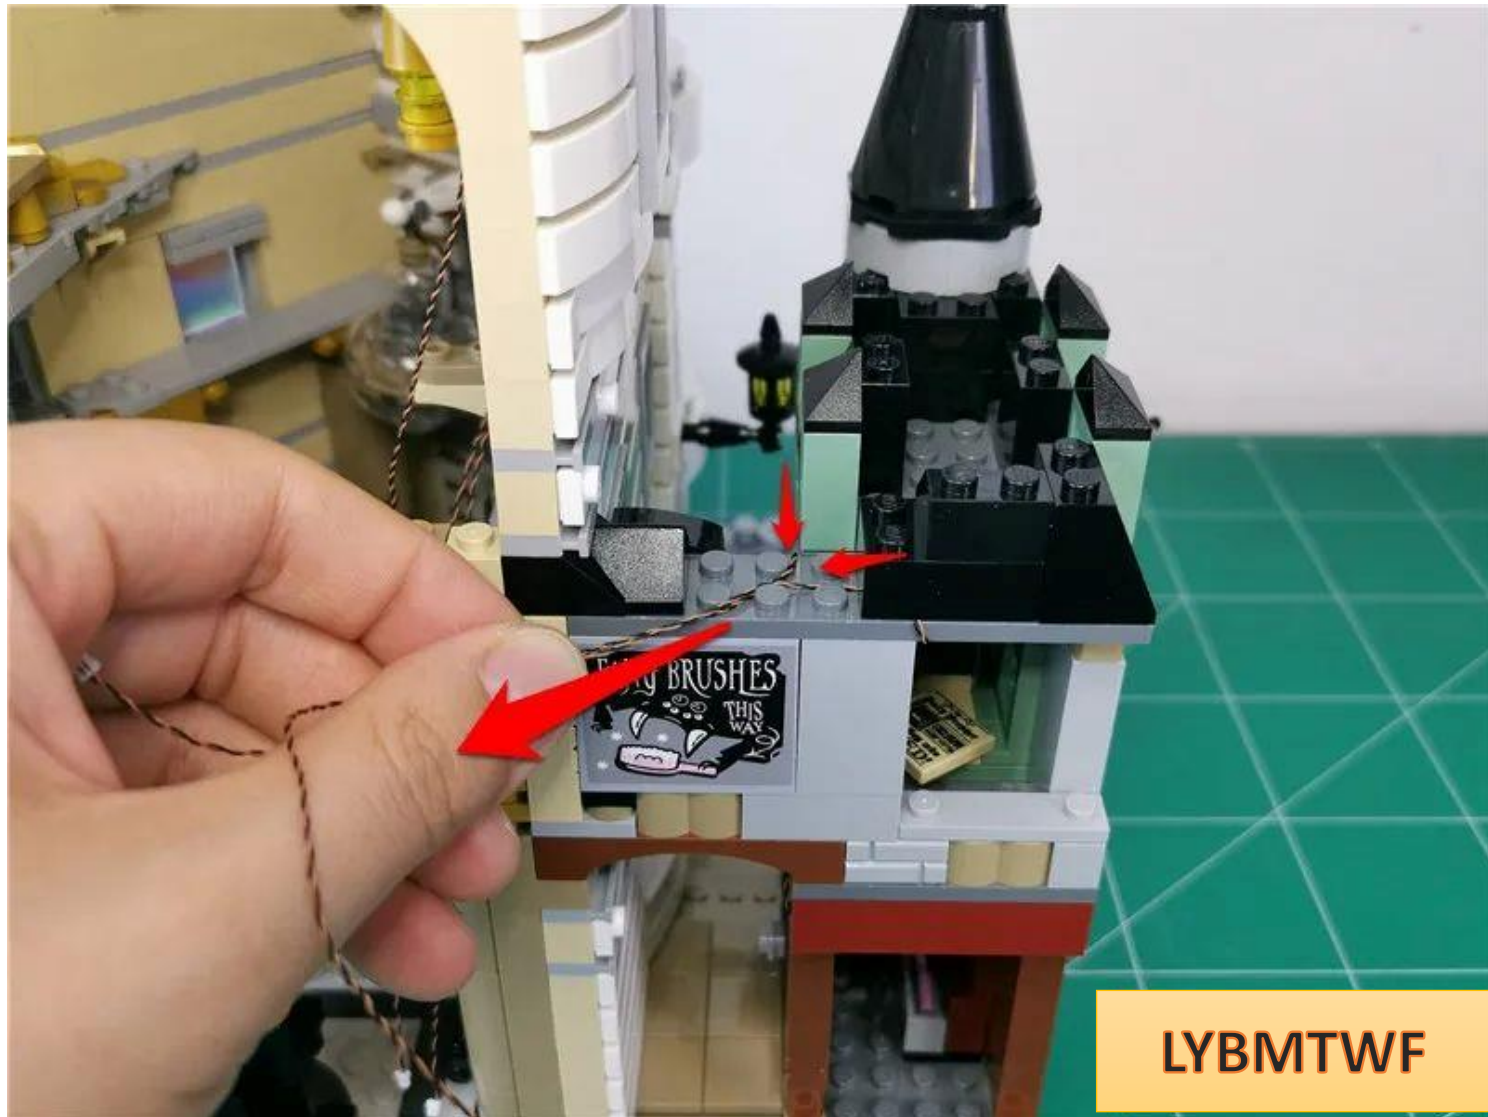



LYBMTWF

Restore parts and fix wires

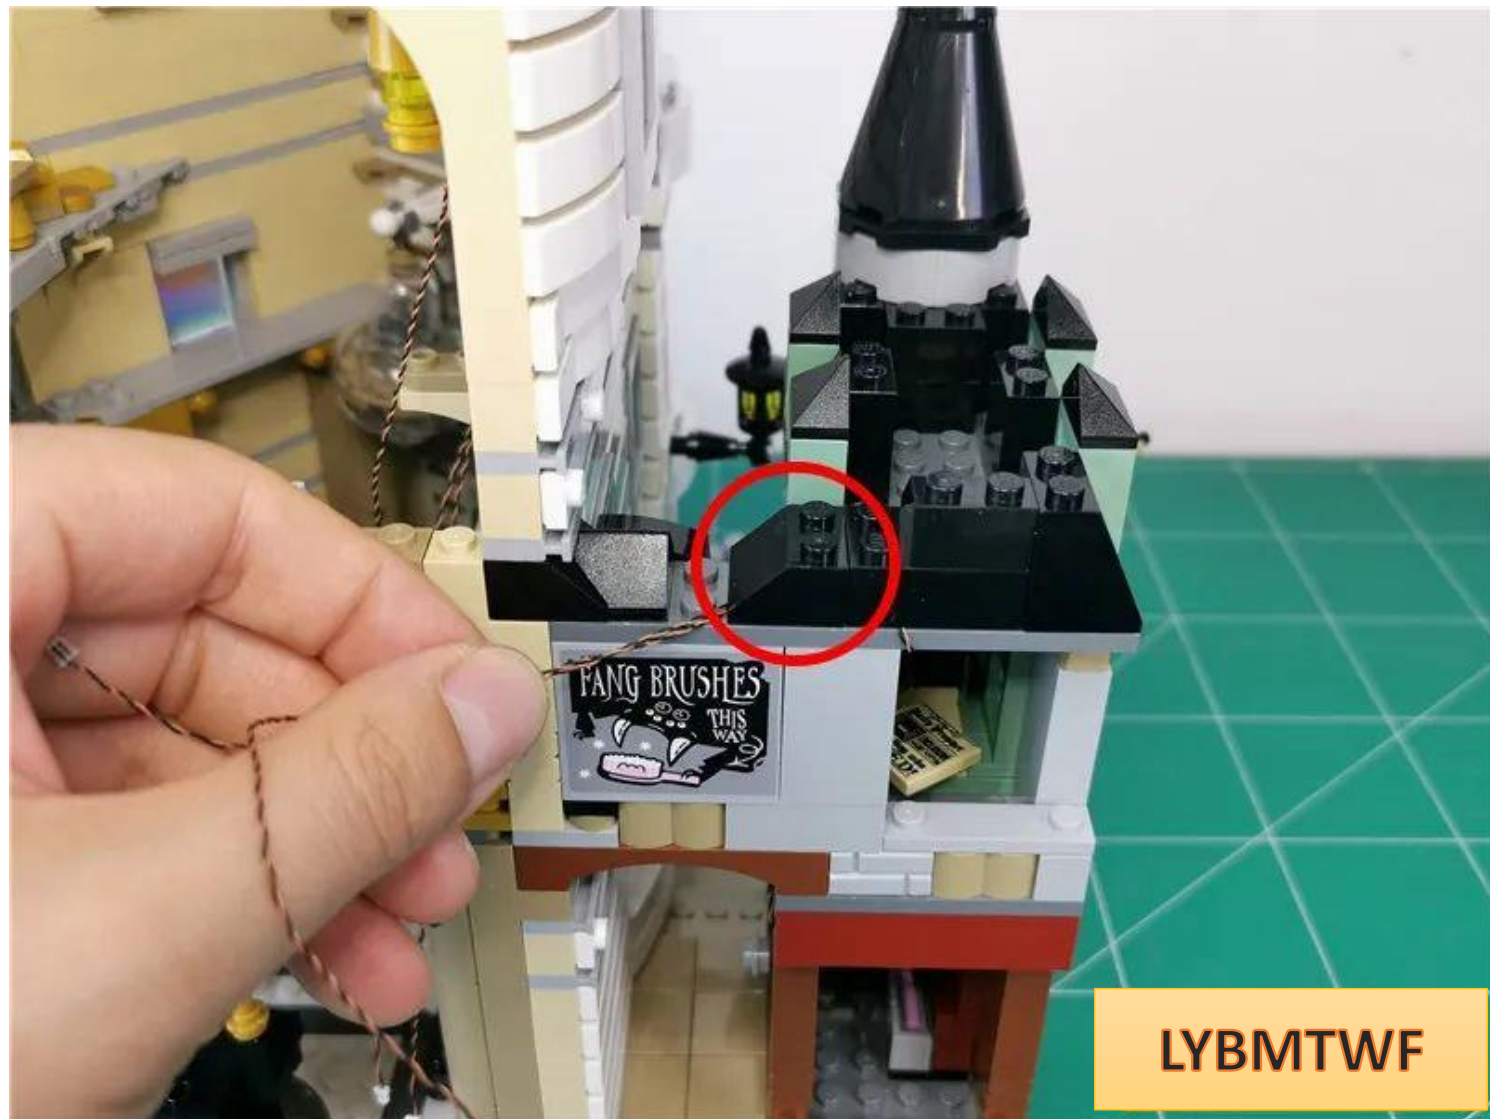


Restore the disassembled parts in sequence

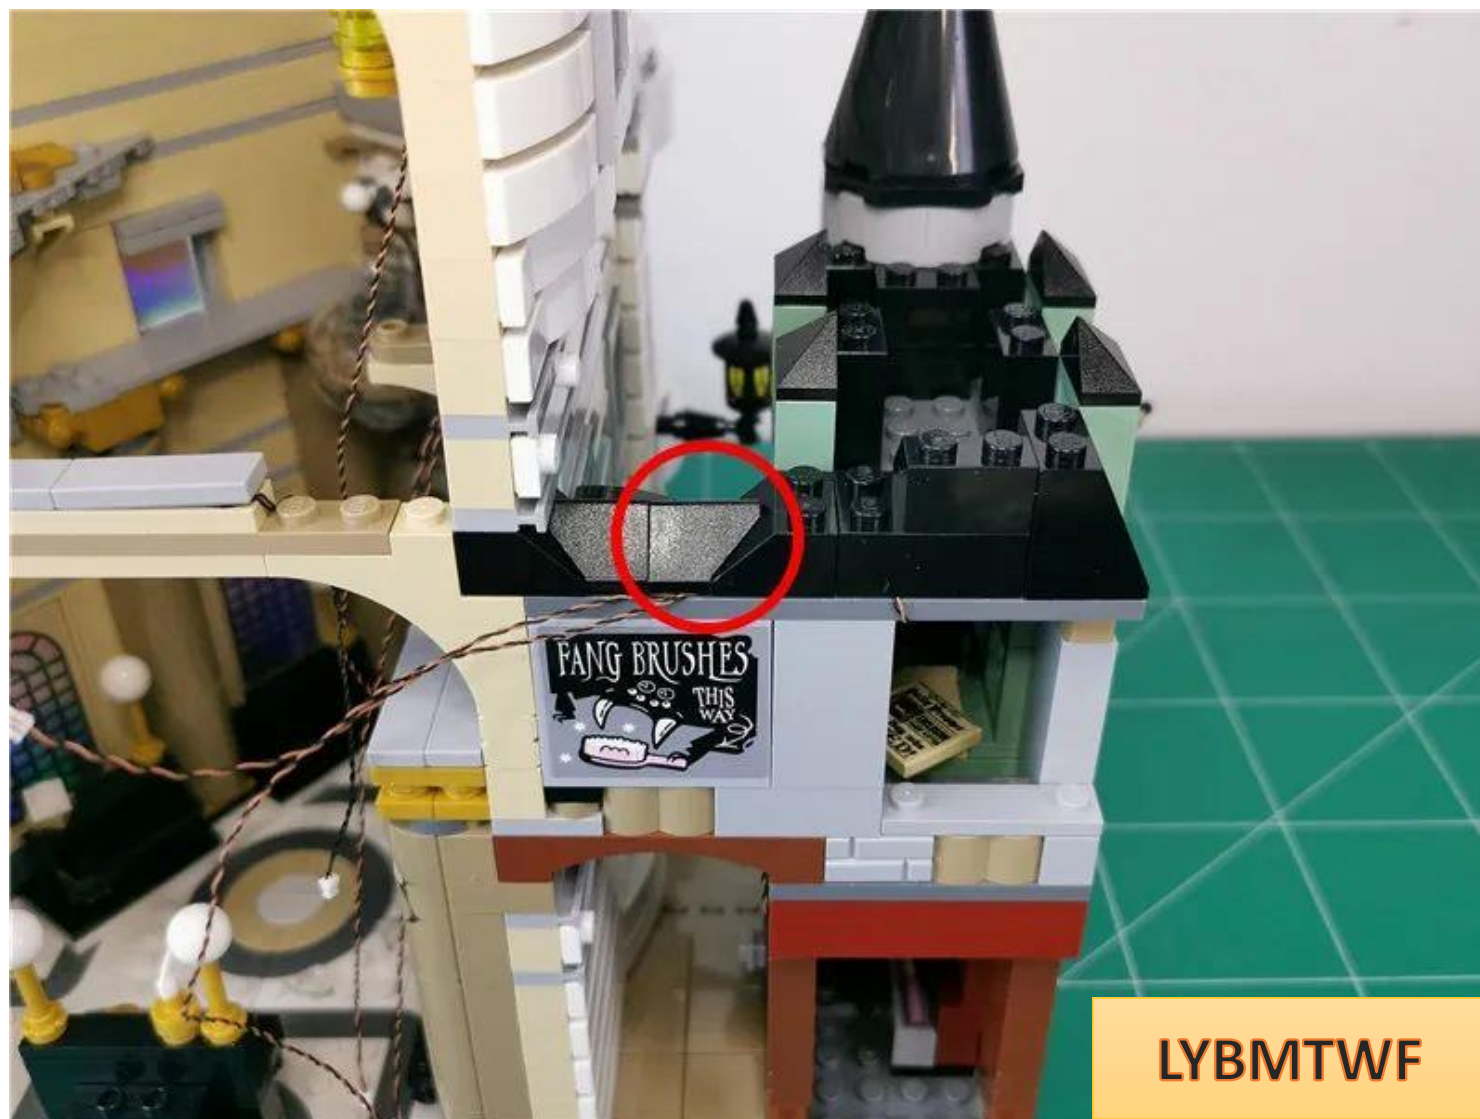


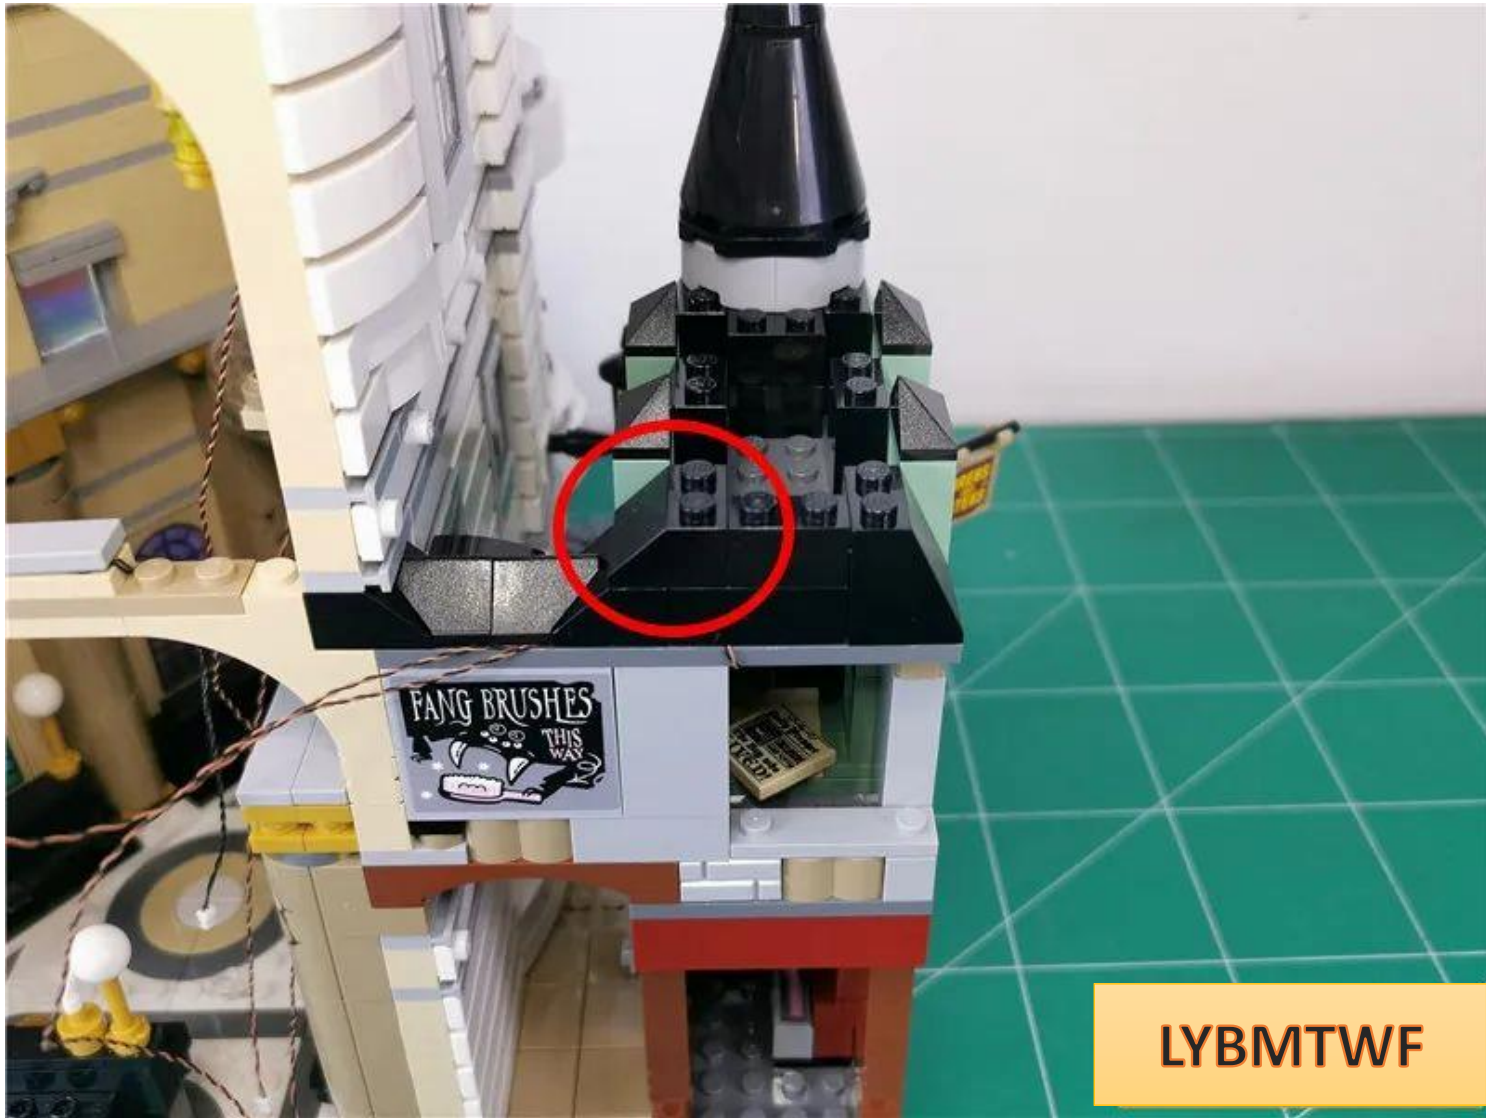


LYBMTWF

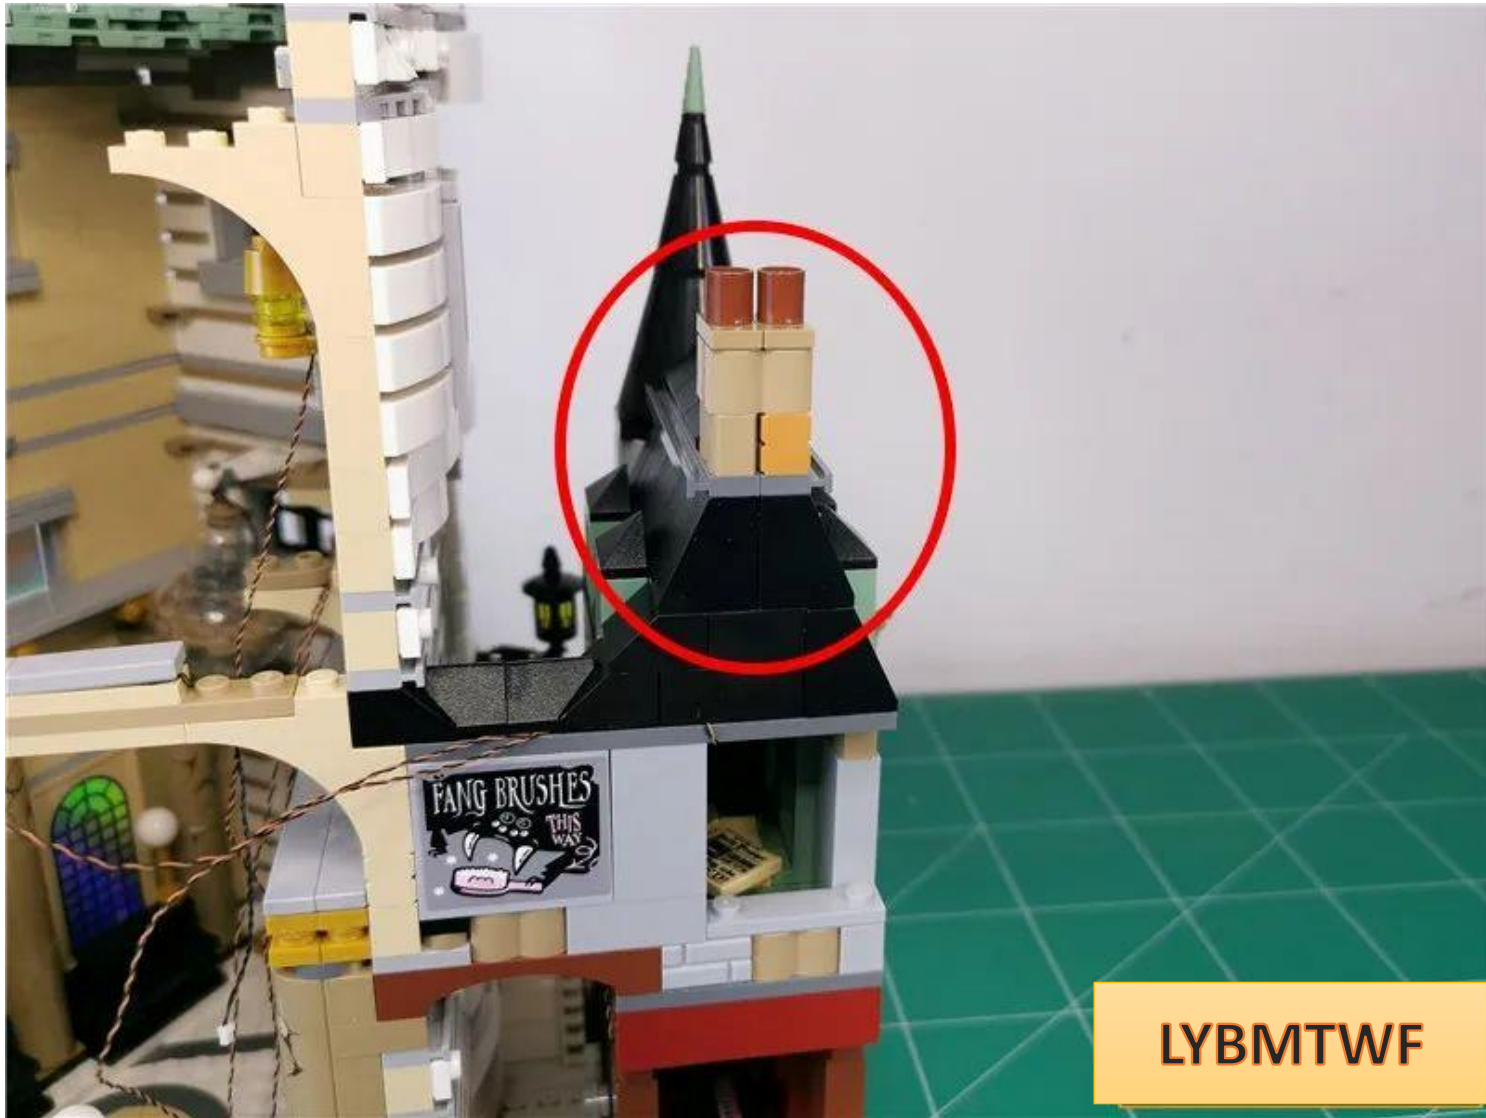

LYBMTWF

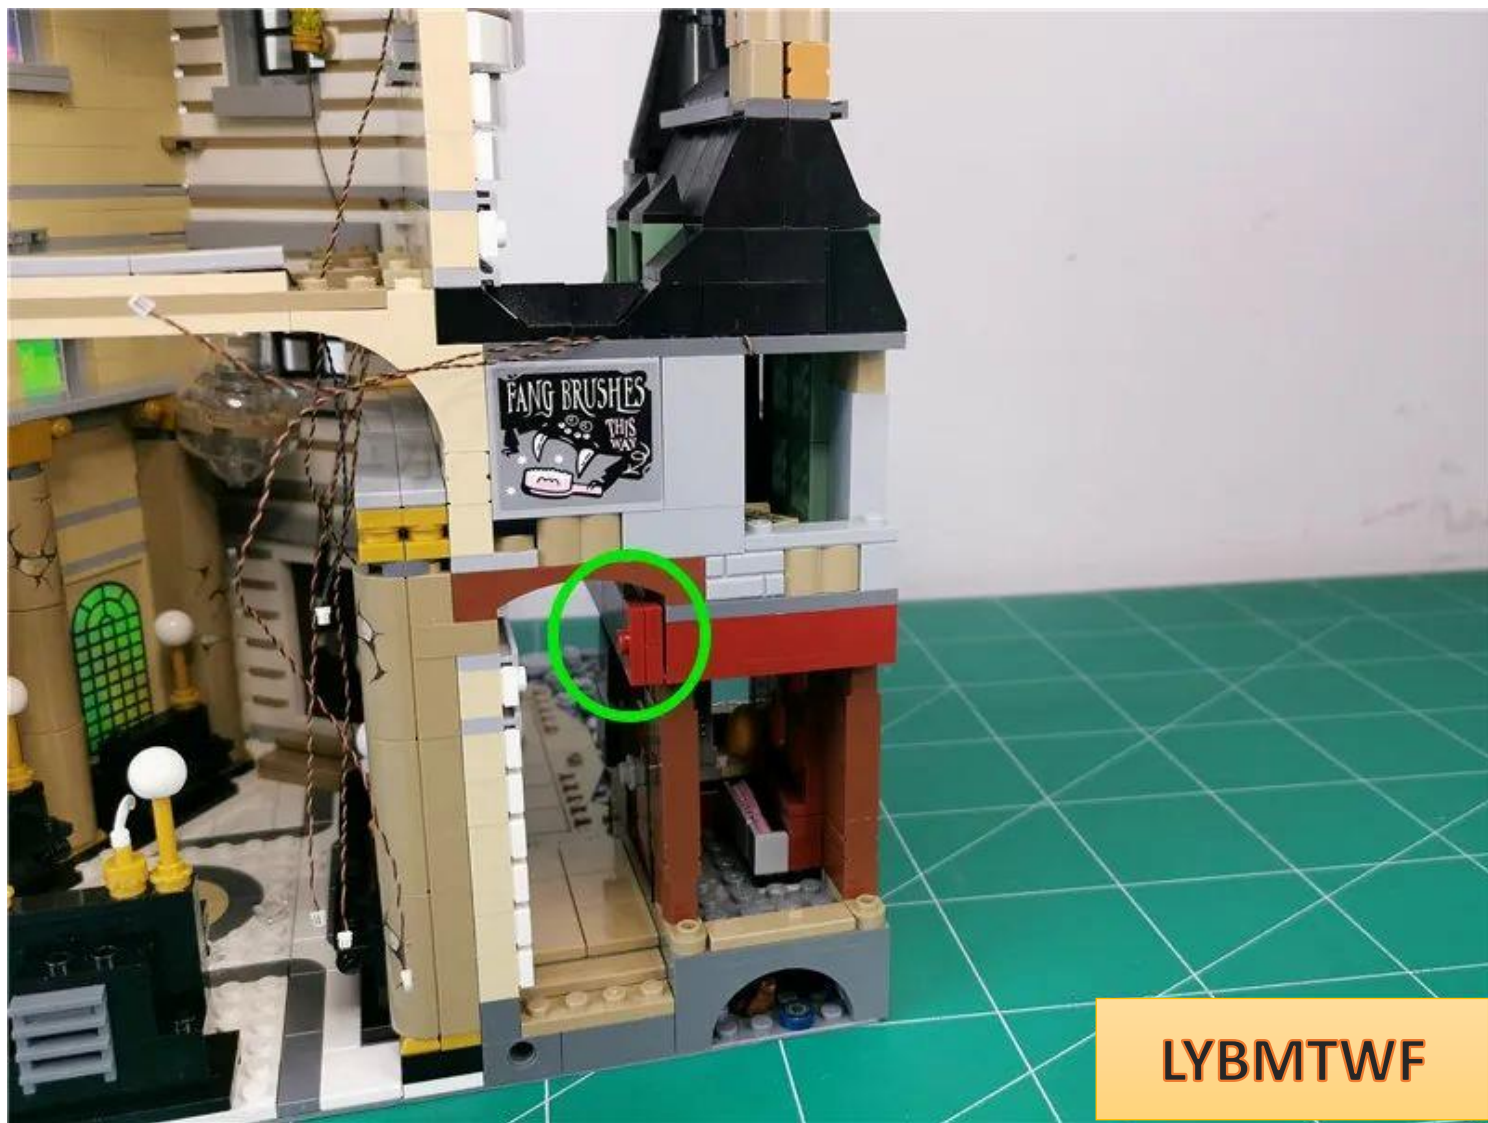


LYBMTWF

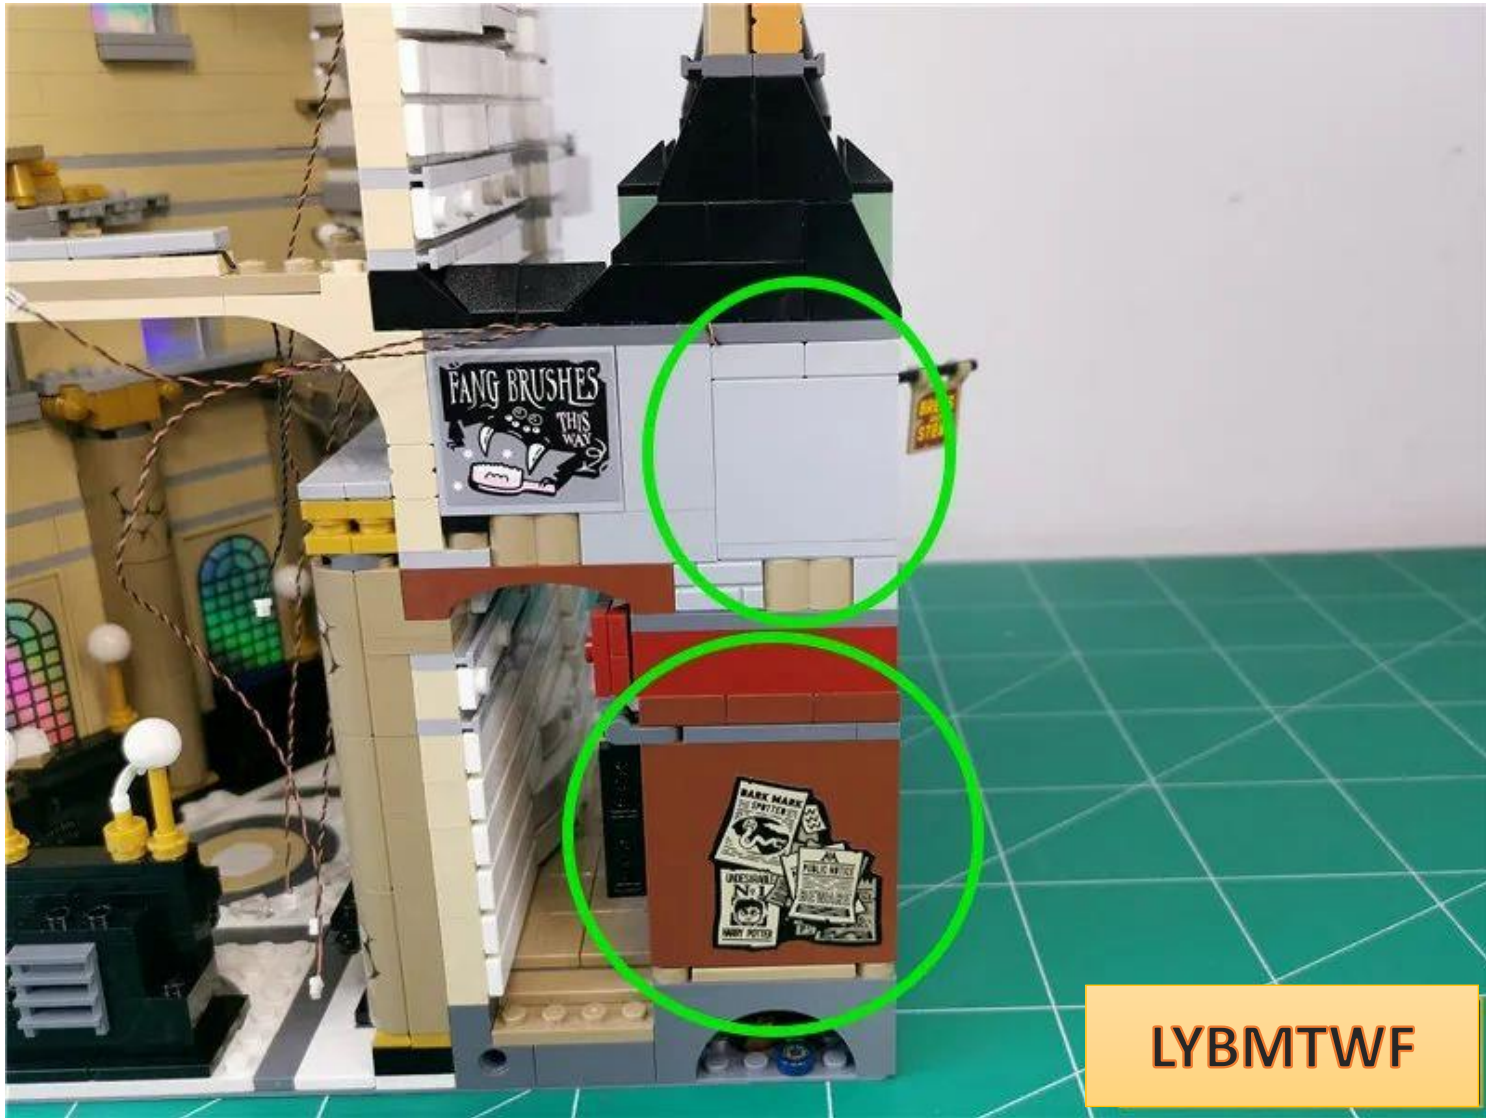


LYBMTWF

Make a gap at the position shown in the picture

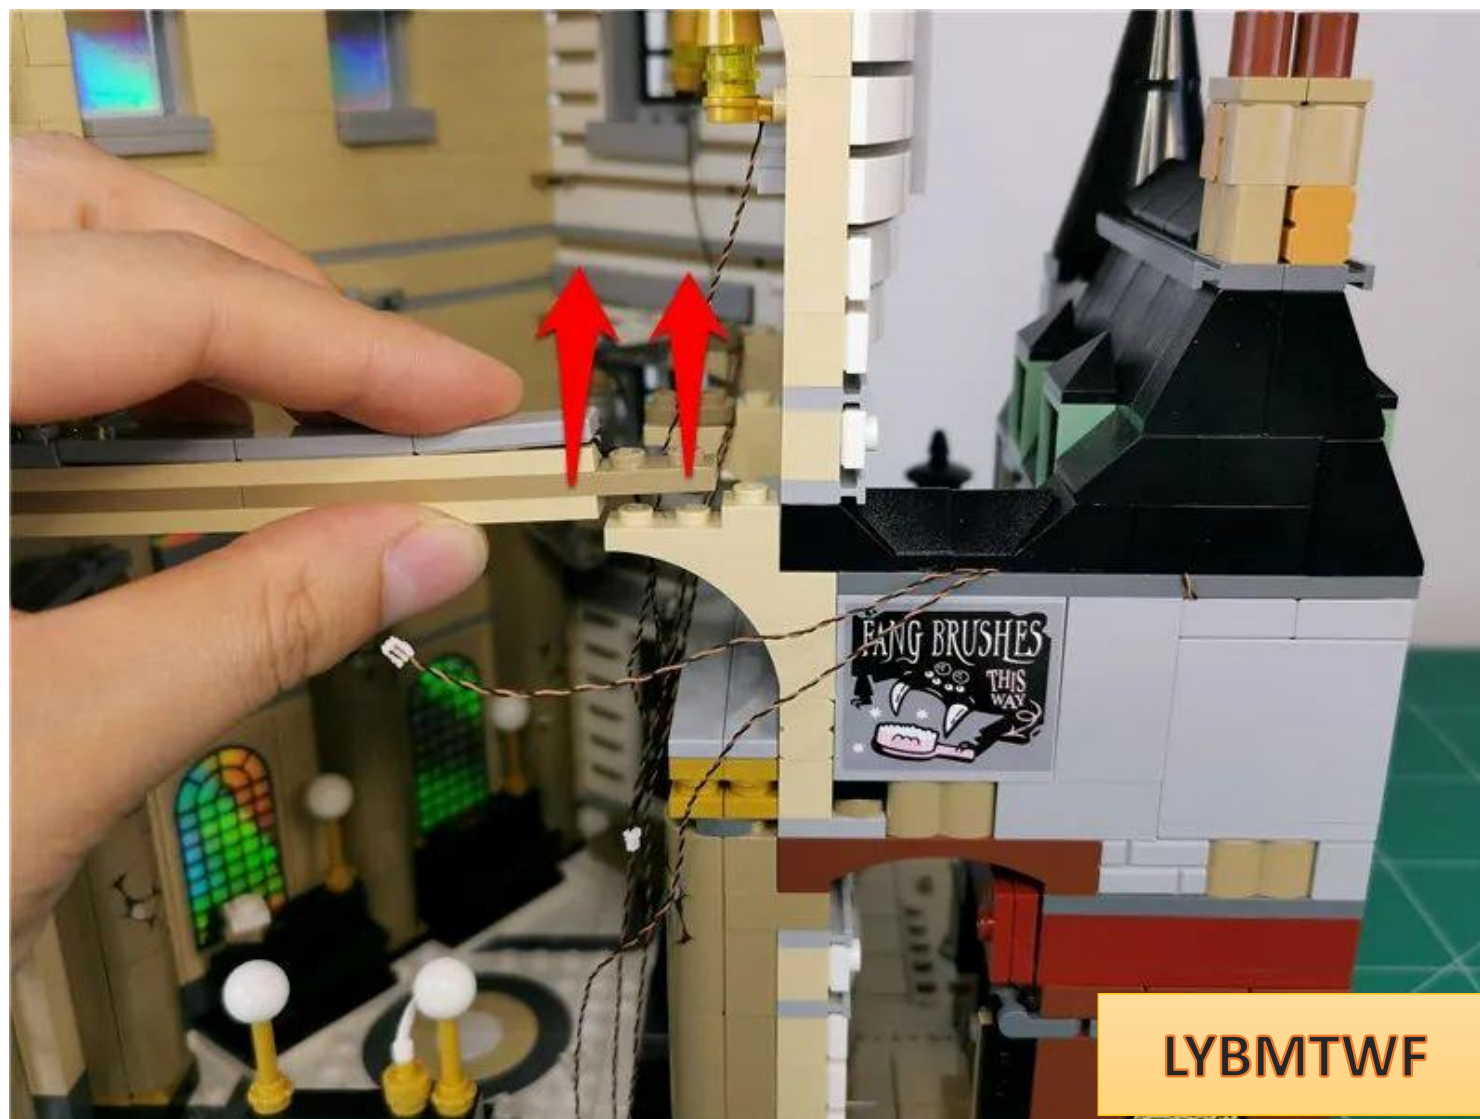


Pull the 2 wires close to the angle and bring them indoors

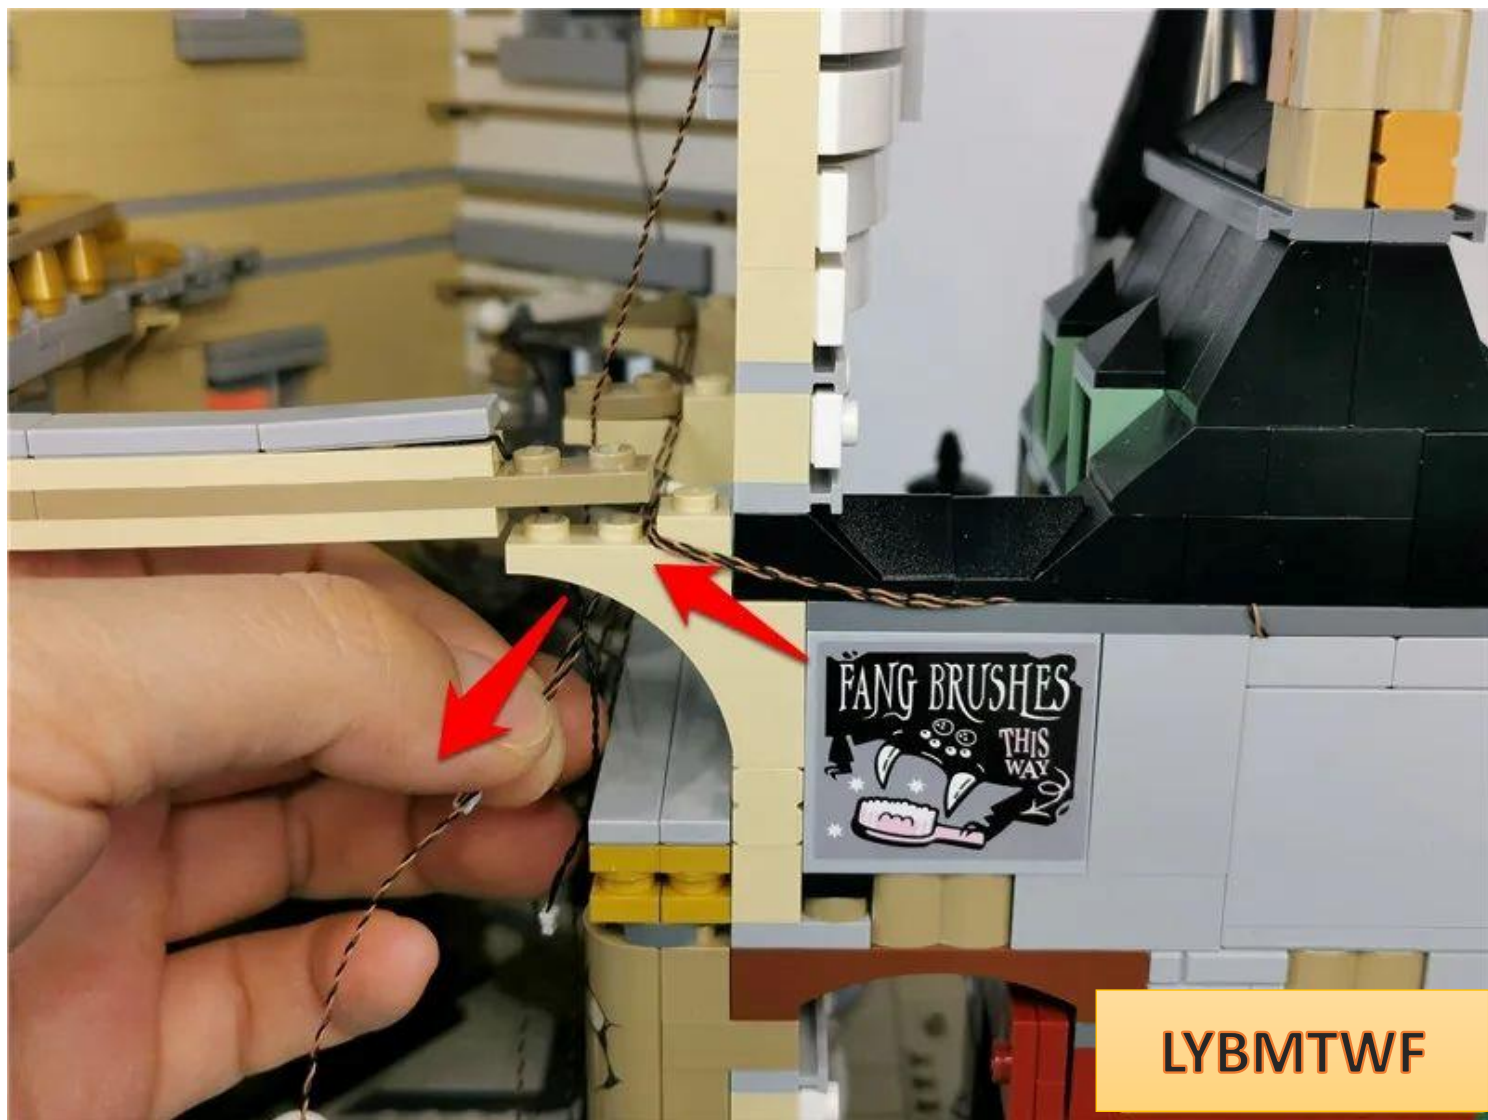


Restore gaps and fix wires




Pull the wall light wire down to the wall

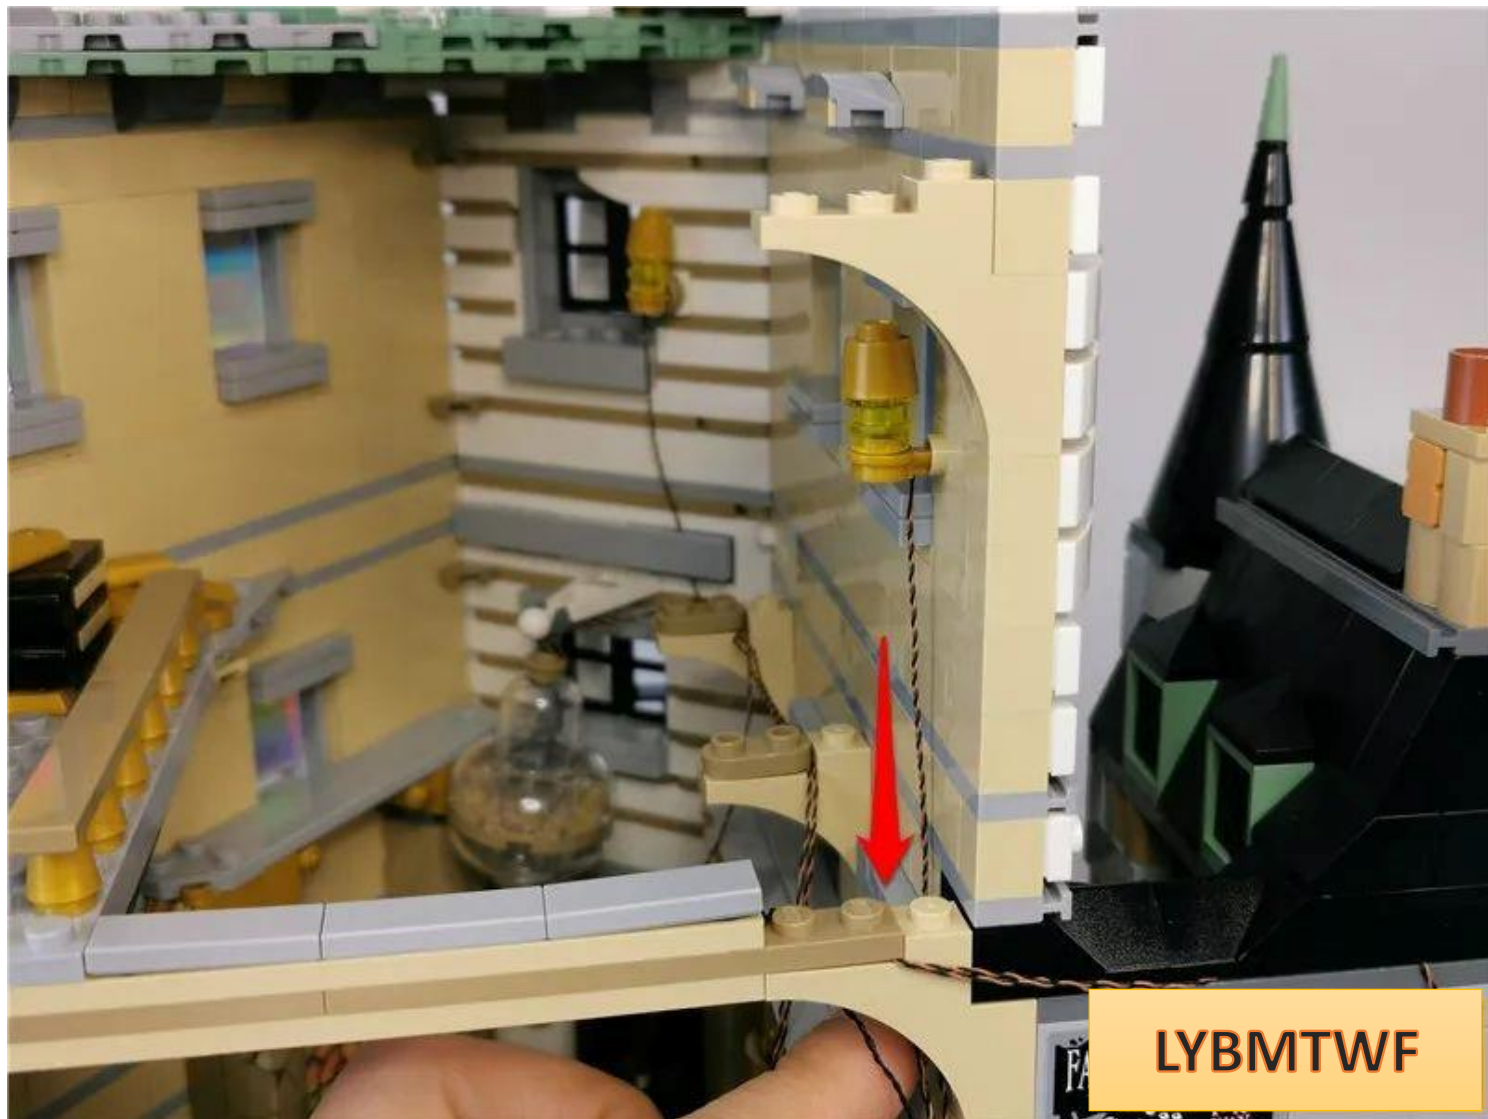

Restore parts and fix wires

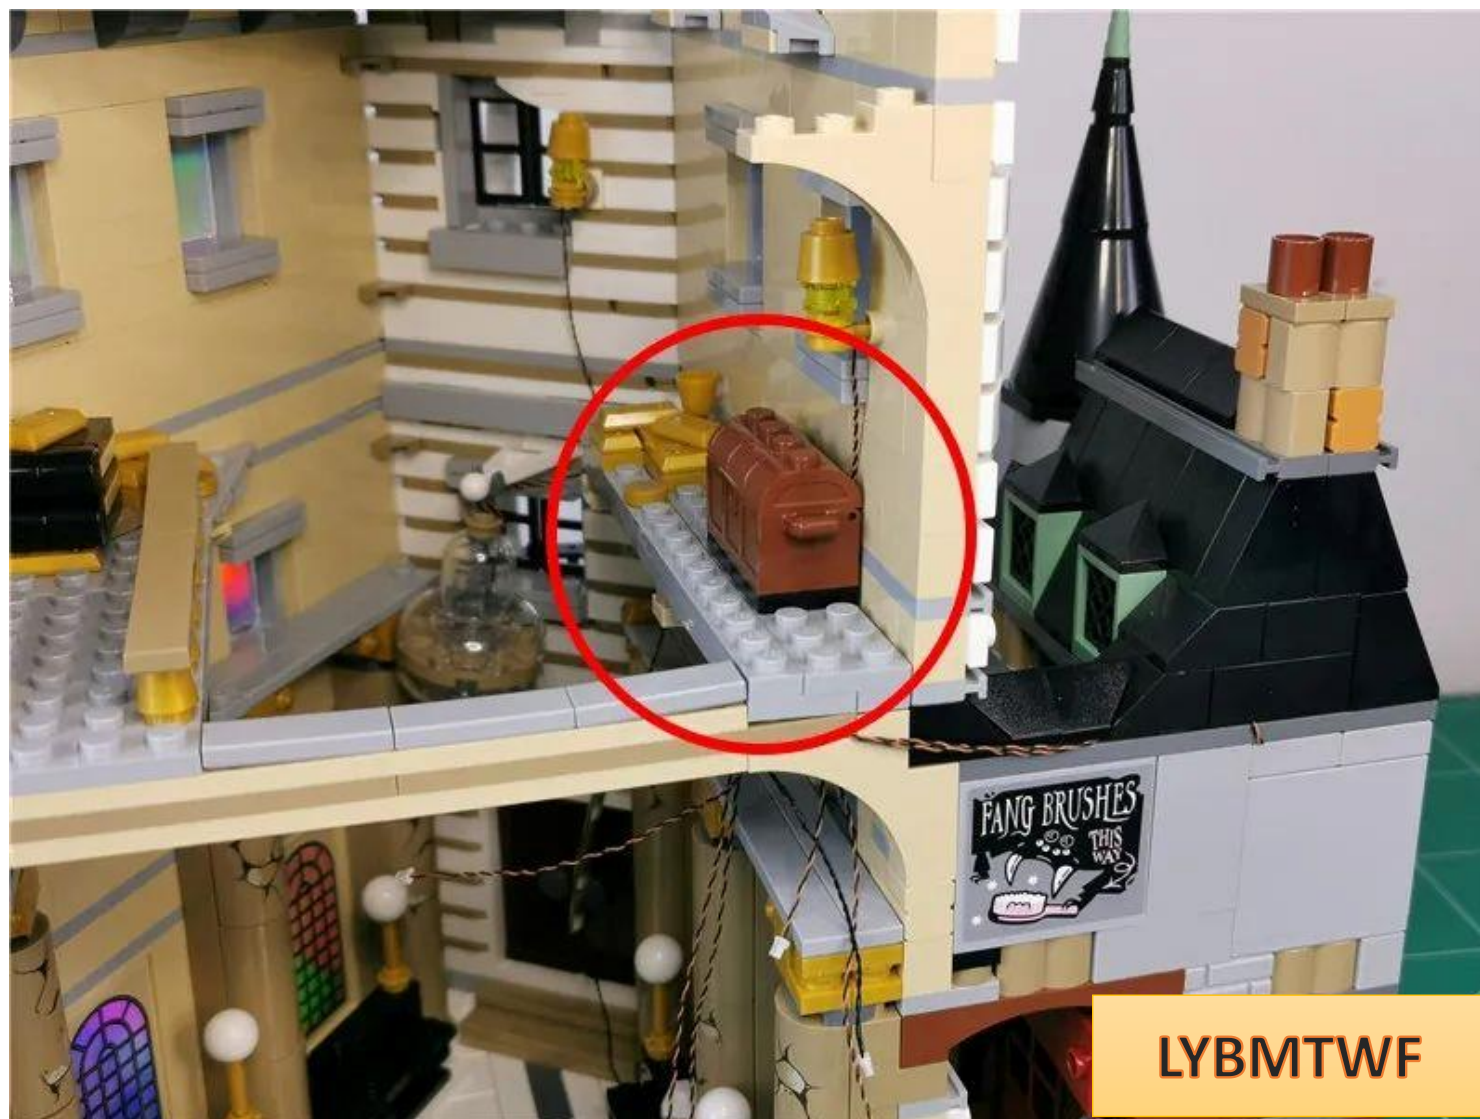


Find the spare warm light strip

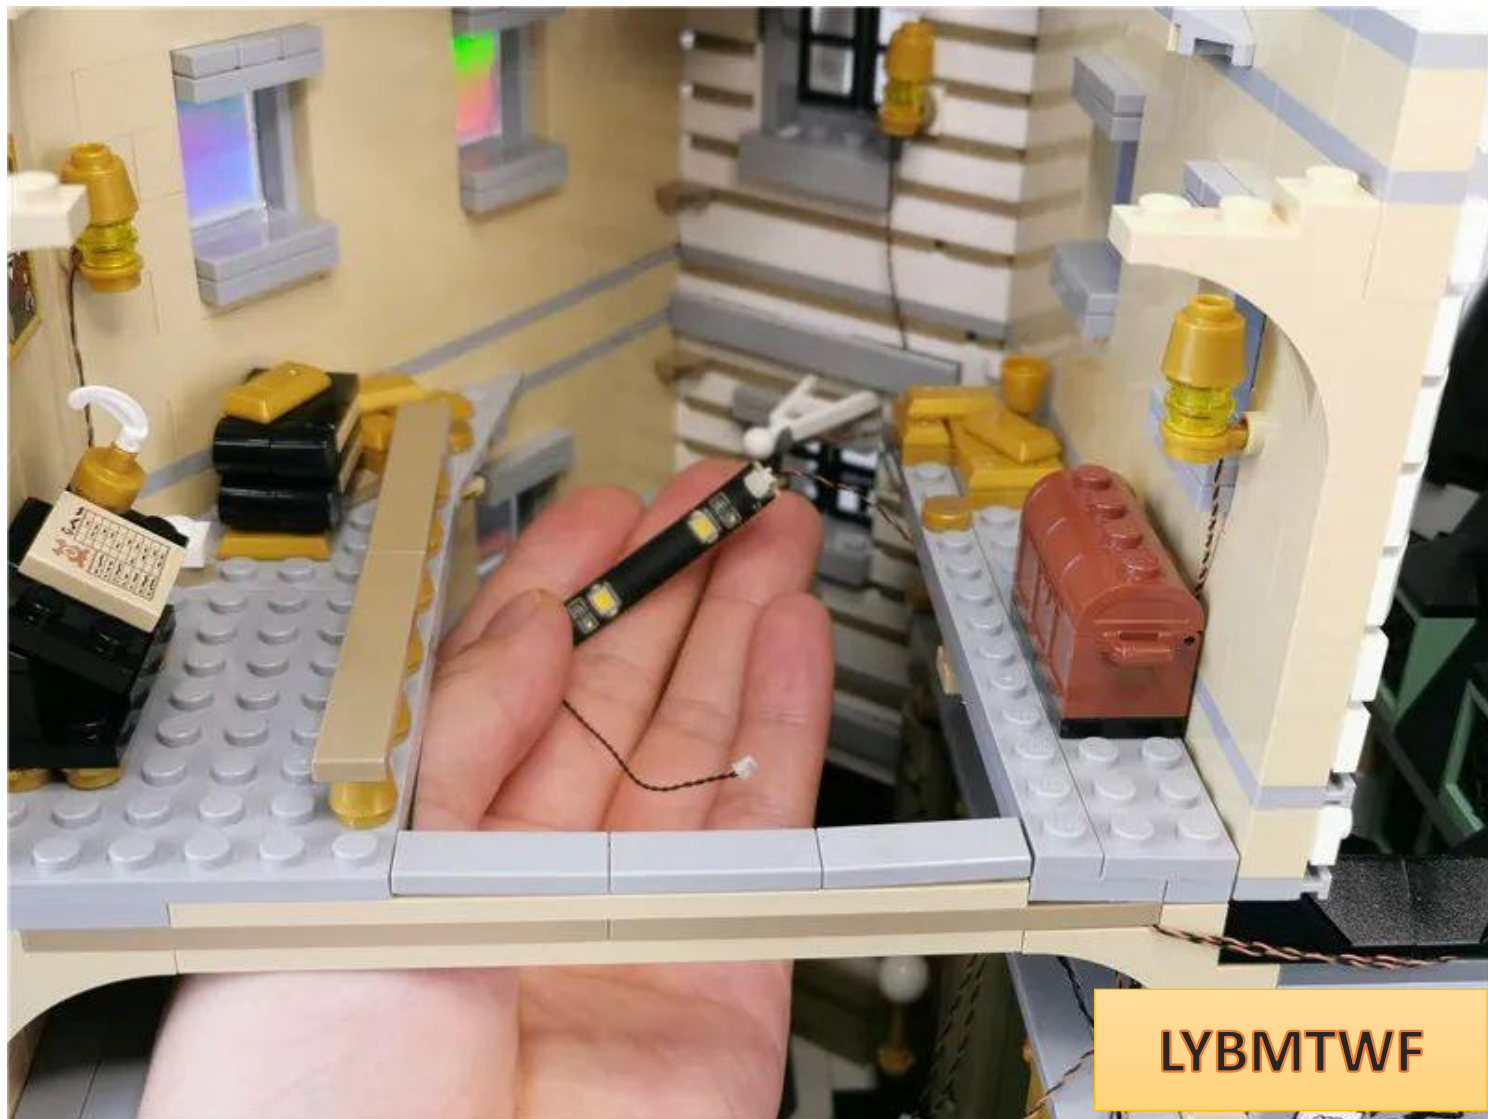


Paste the light strip to the position shown in the picture, with the connecting wire on your side



The specific location is as follows

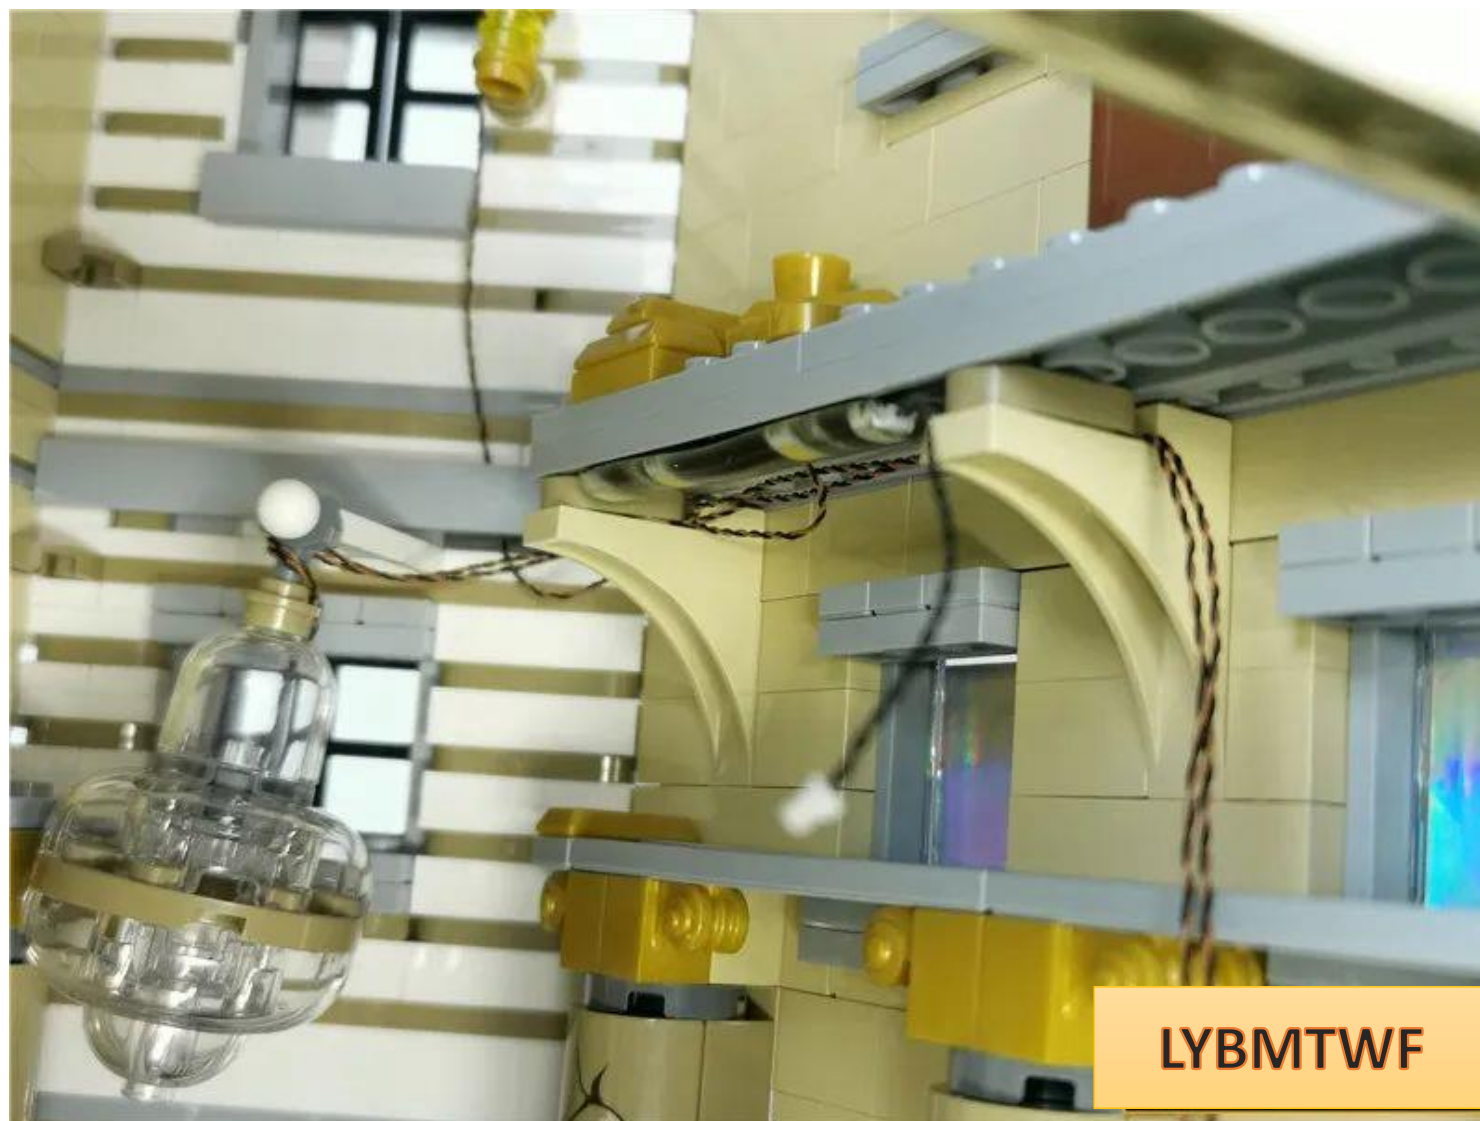

Open a gap slightly at the position shown in the picture

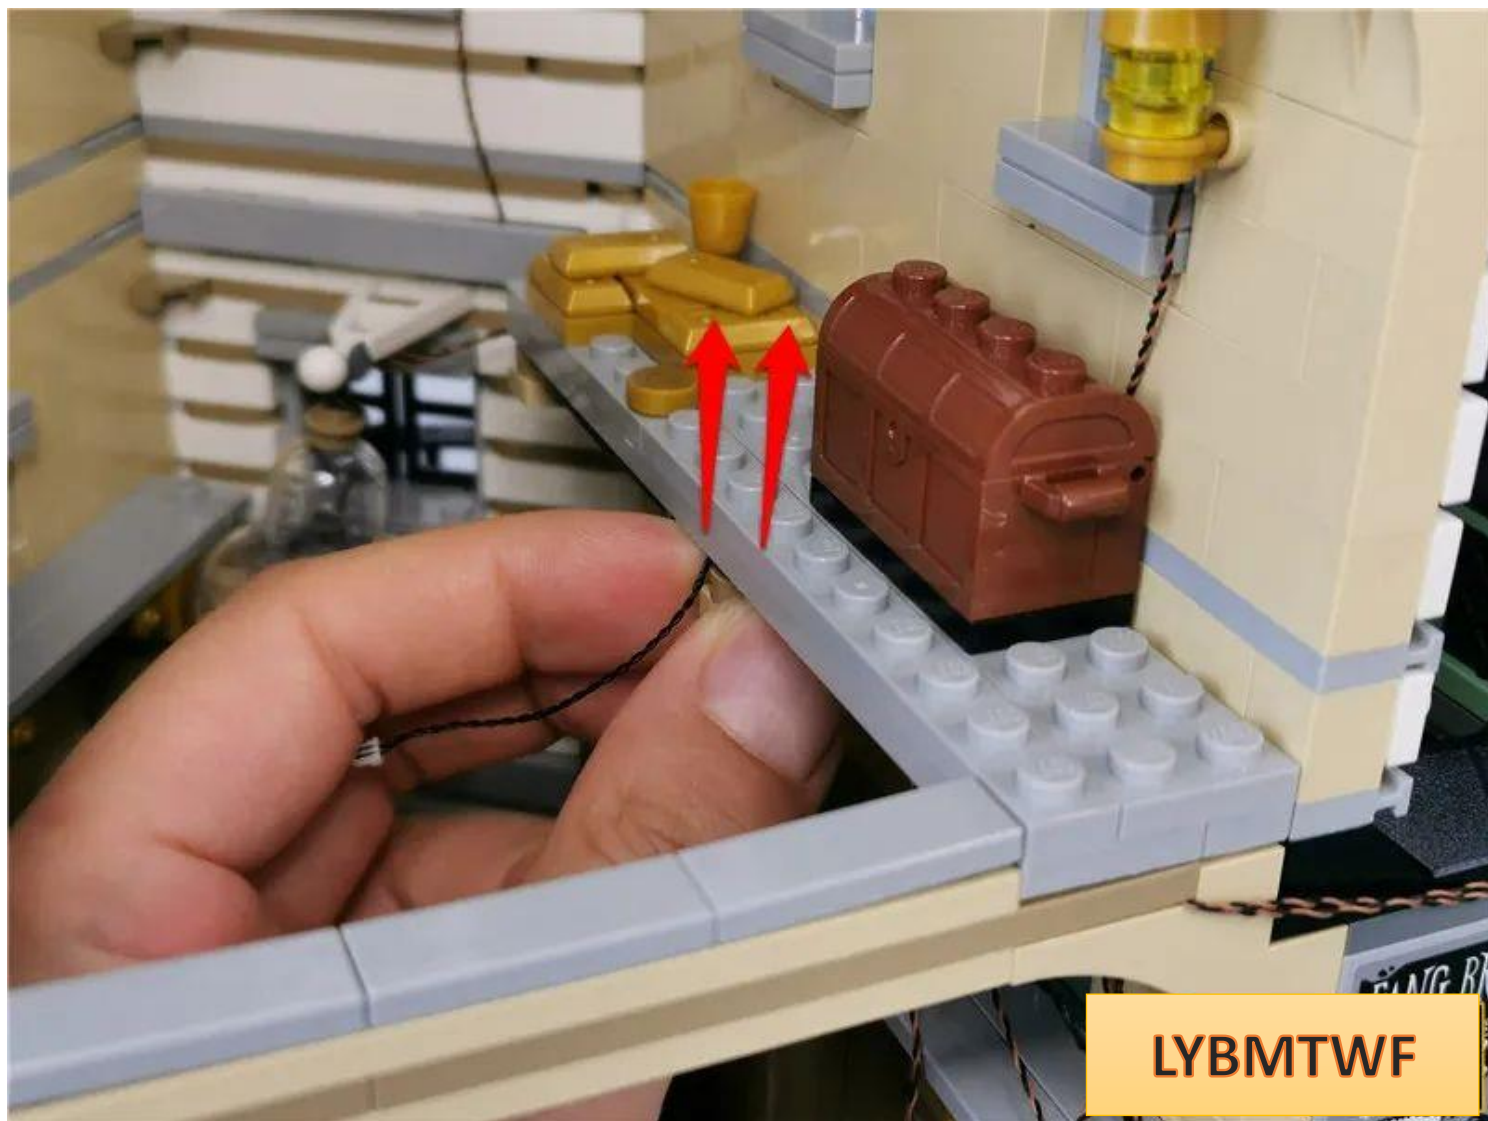

Pass the connecting wire through the gap




Restore gaps and fix connecting lines




LYBMTWF


Take a 30cm connecting cable, an 8-socket cable, and insert the cable into **the 8-socket side socket.**

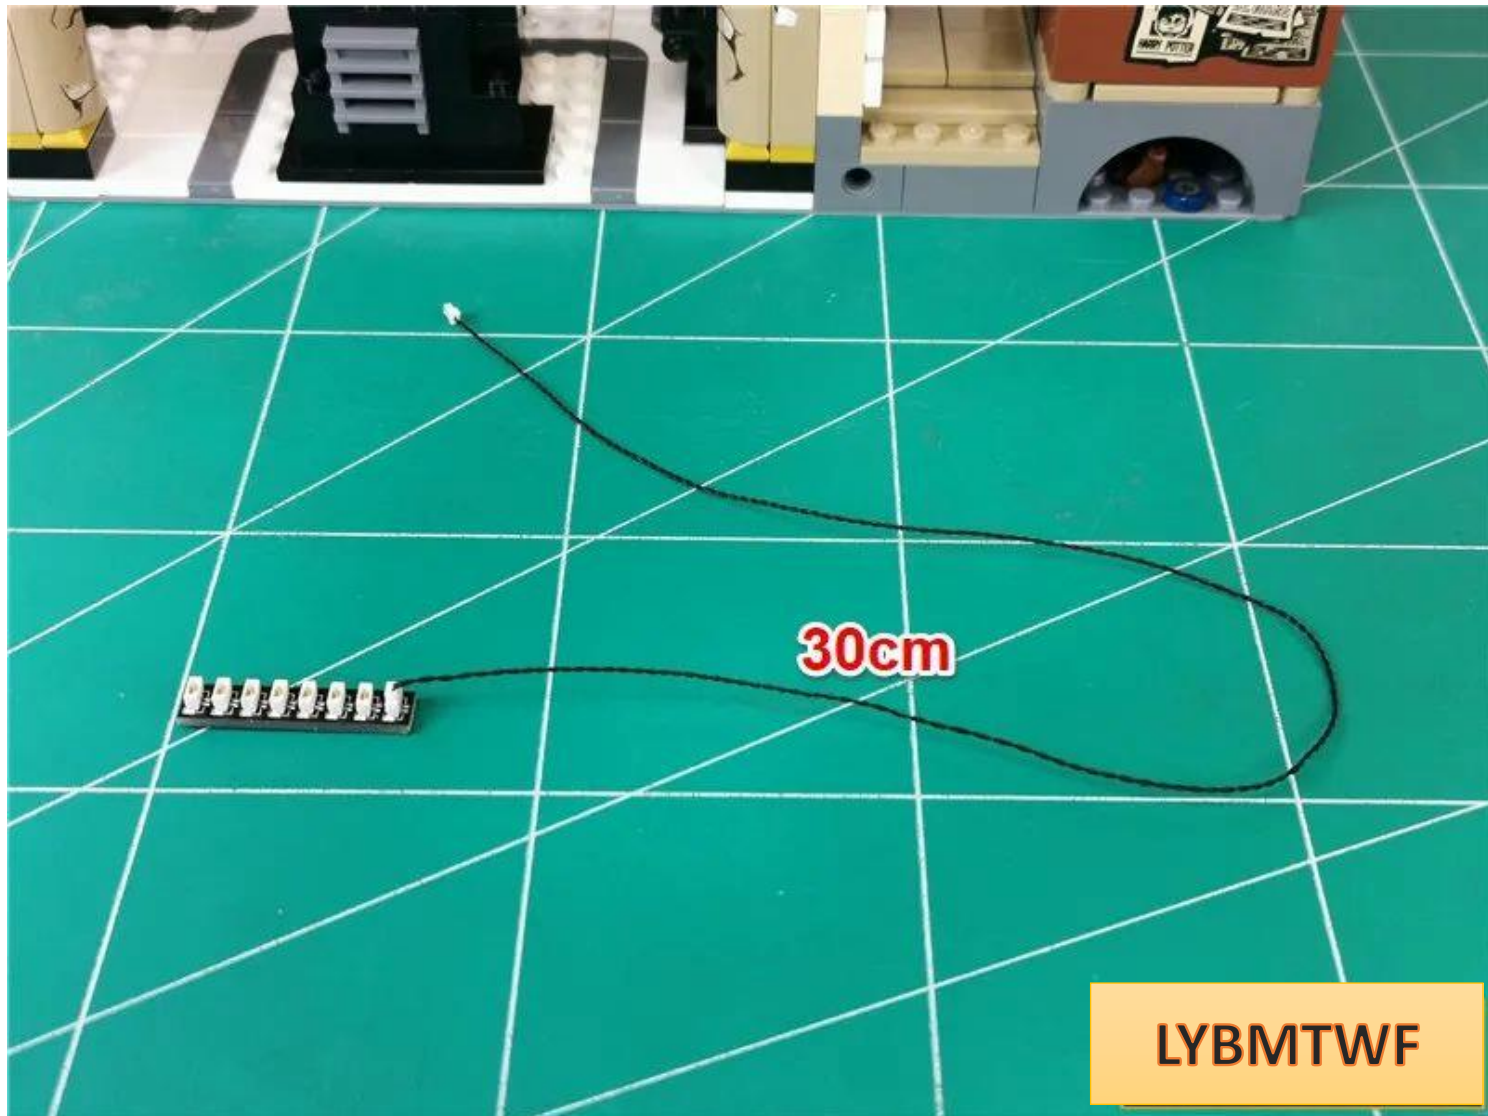


Plug the 5cm cable into the 8-seat side socket

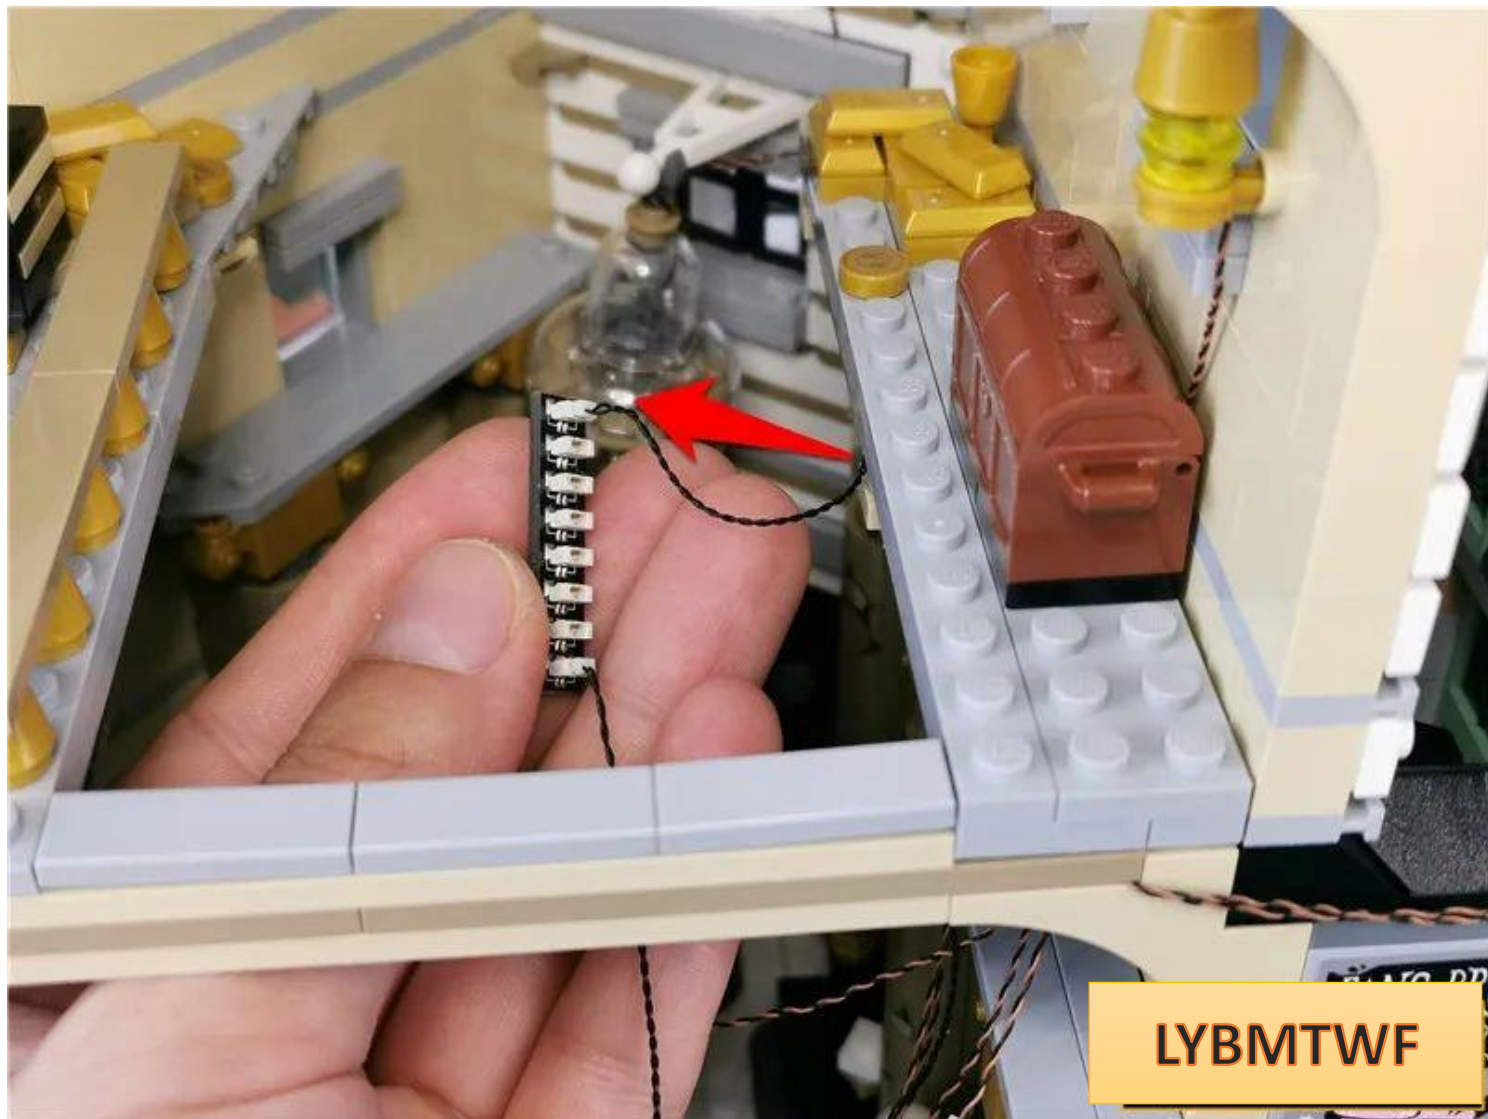


Insert all the remaining 6 wires into the 8-socket

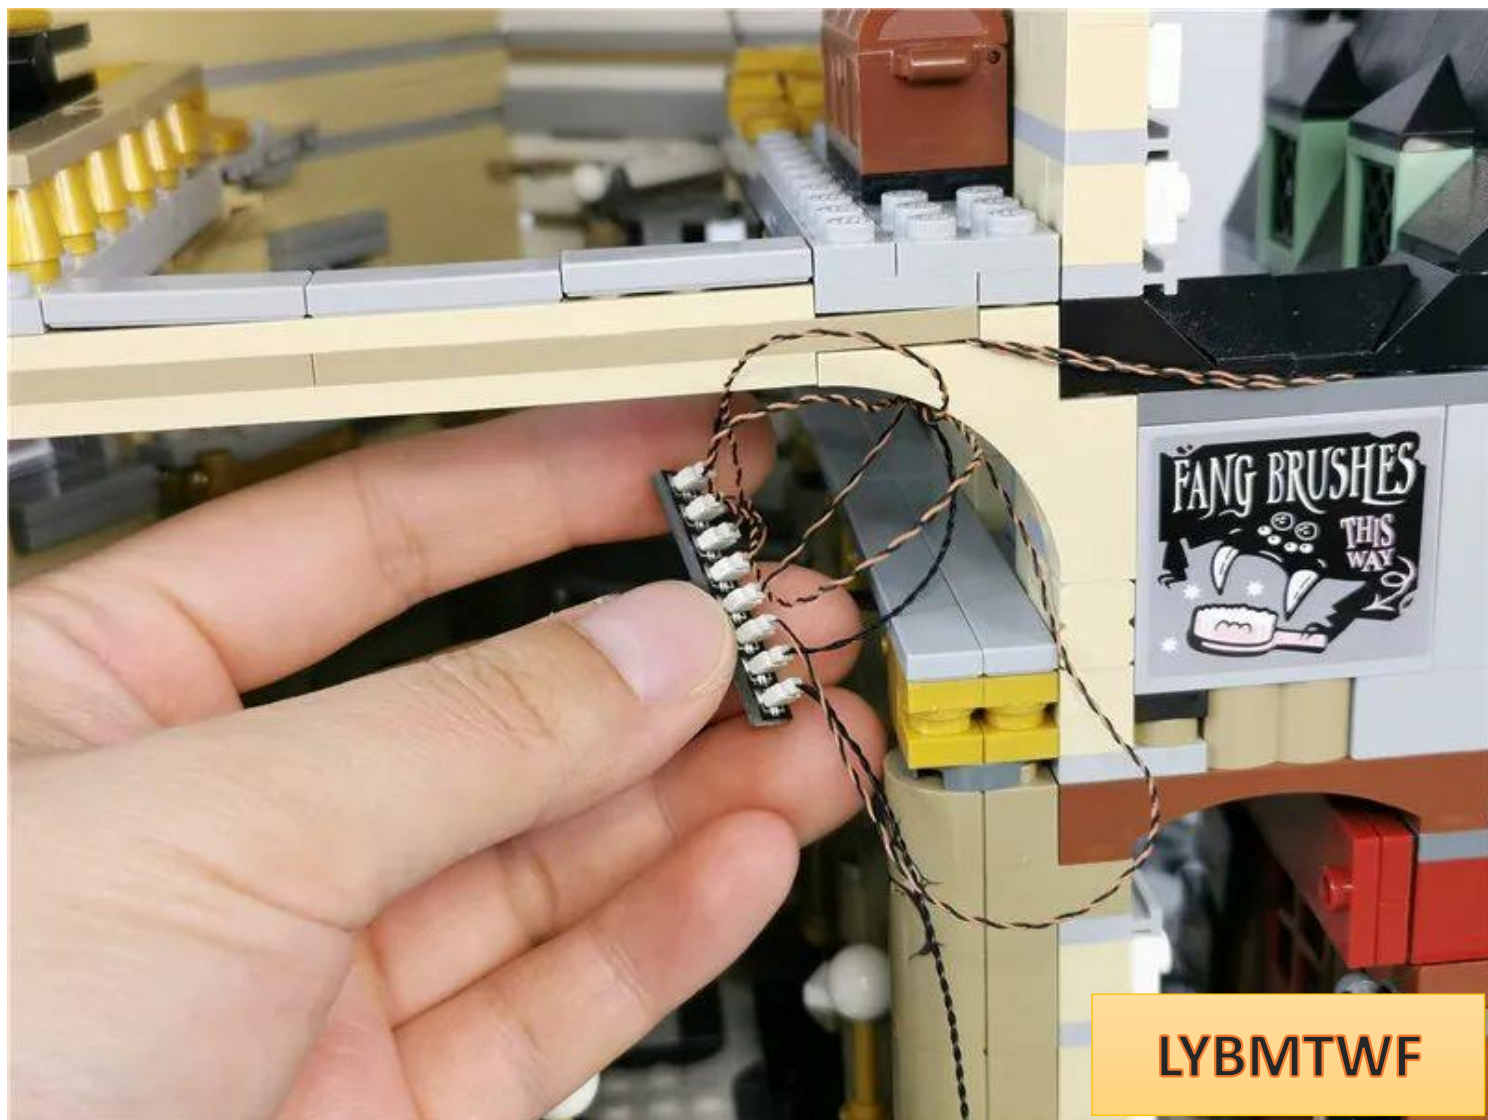


Plug the cable from the 8-seat connector into the 12-seat connector that is connected to the power supply.

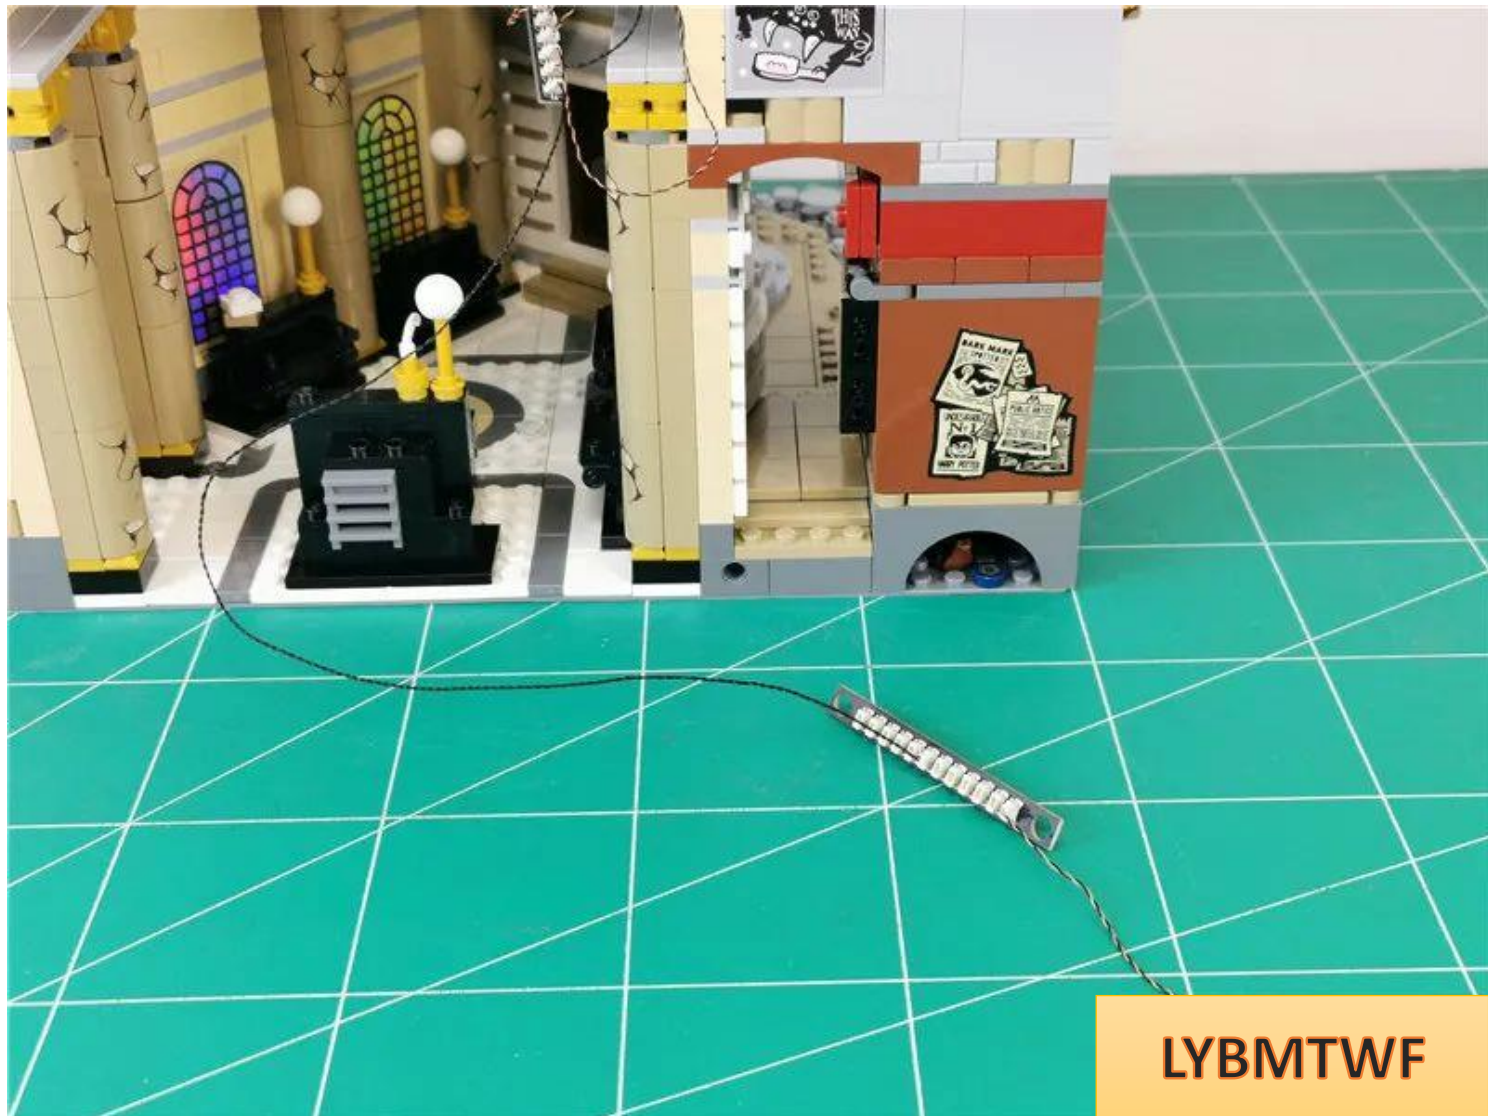


Turn on the power and test that the light lights up normally

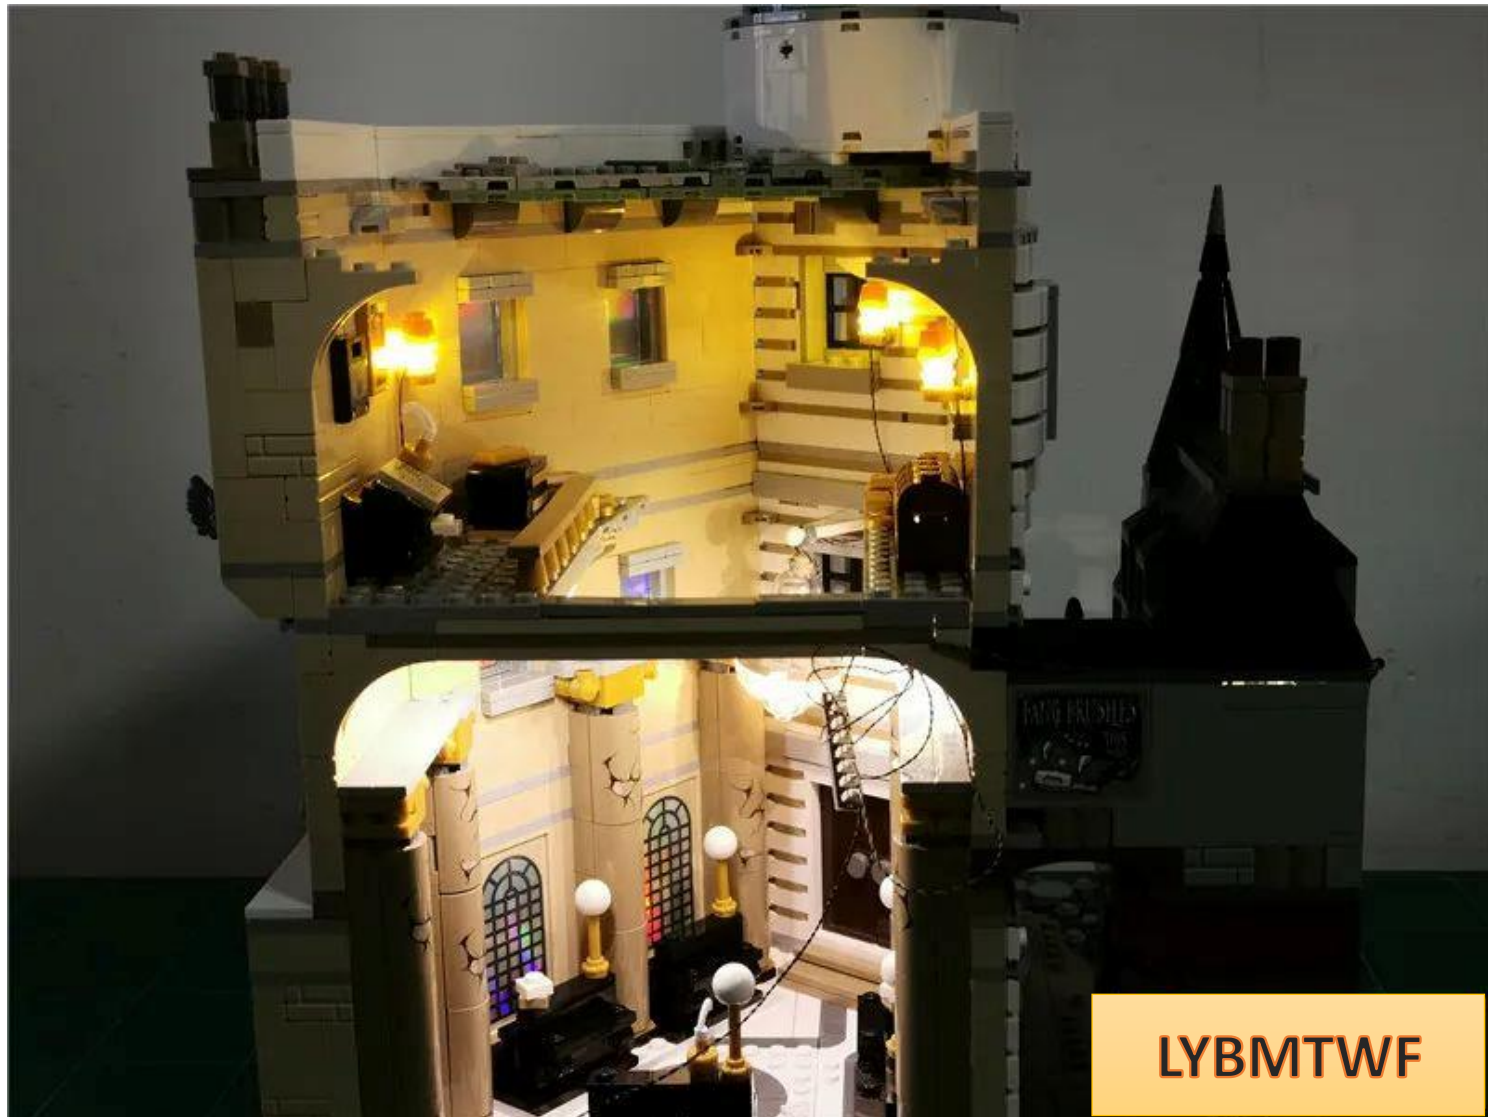


After the test is completed, turn off the power, unplug the connection cable, and **leave the 12-seater on the power supply.**

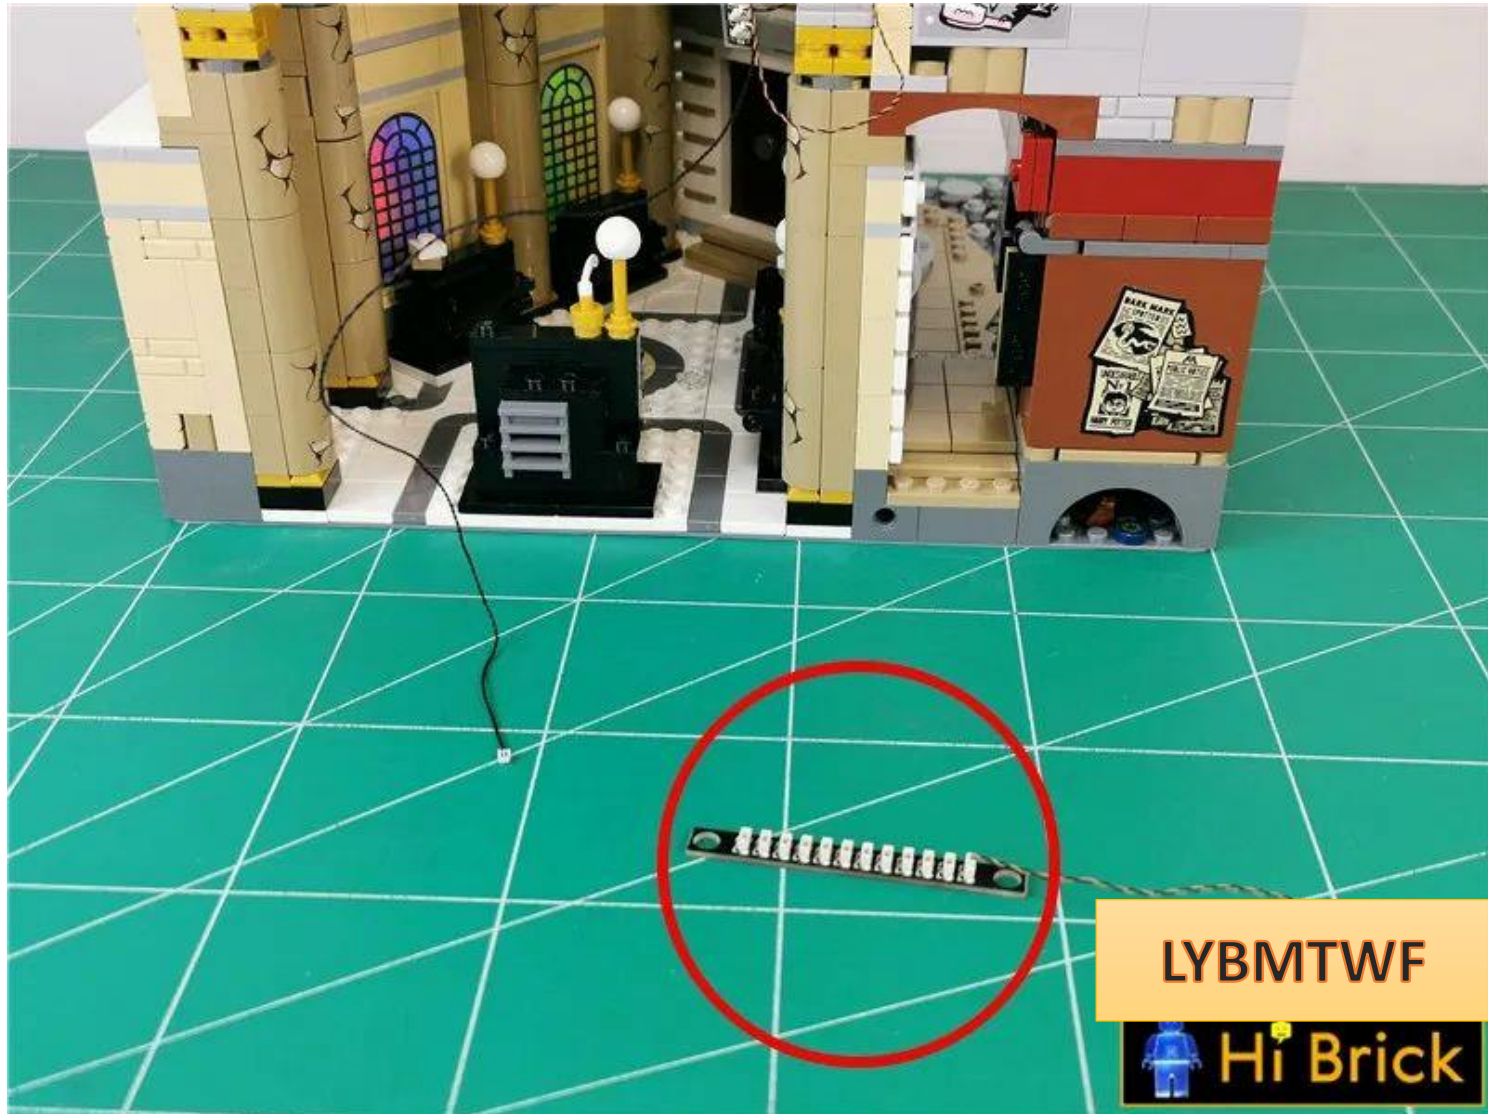


Tear off the 8 seat backing tape

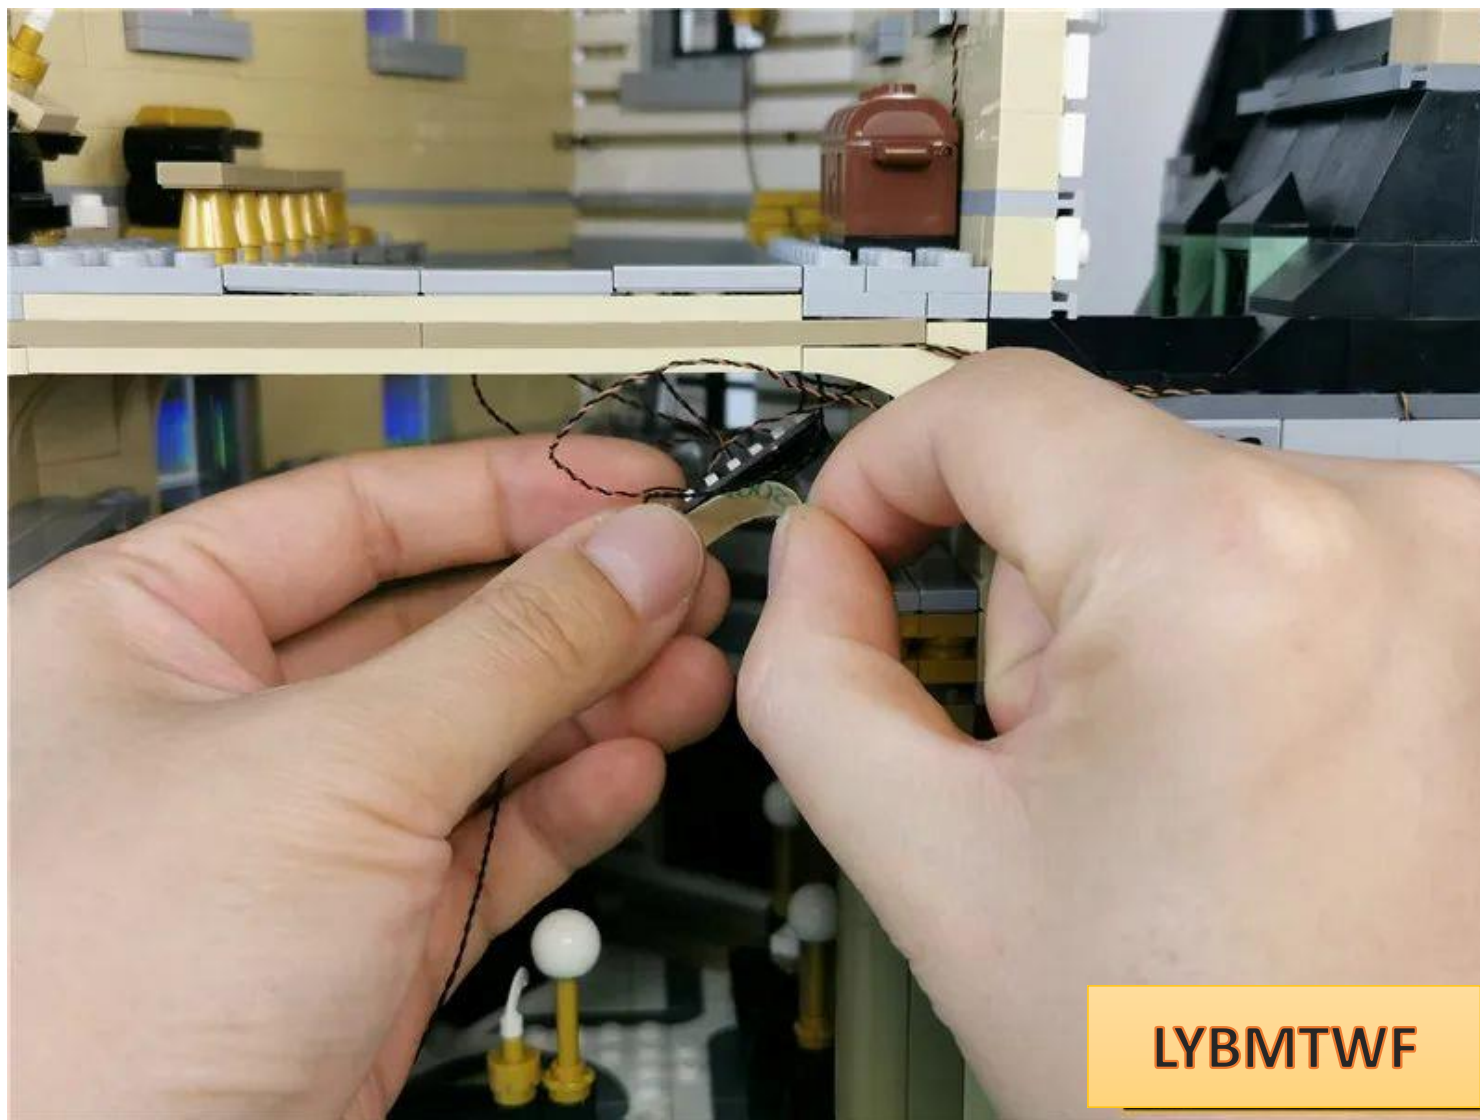


Paste 8 seats to the position shown in the picture, **with the free connecting wire on the outside**

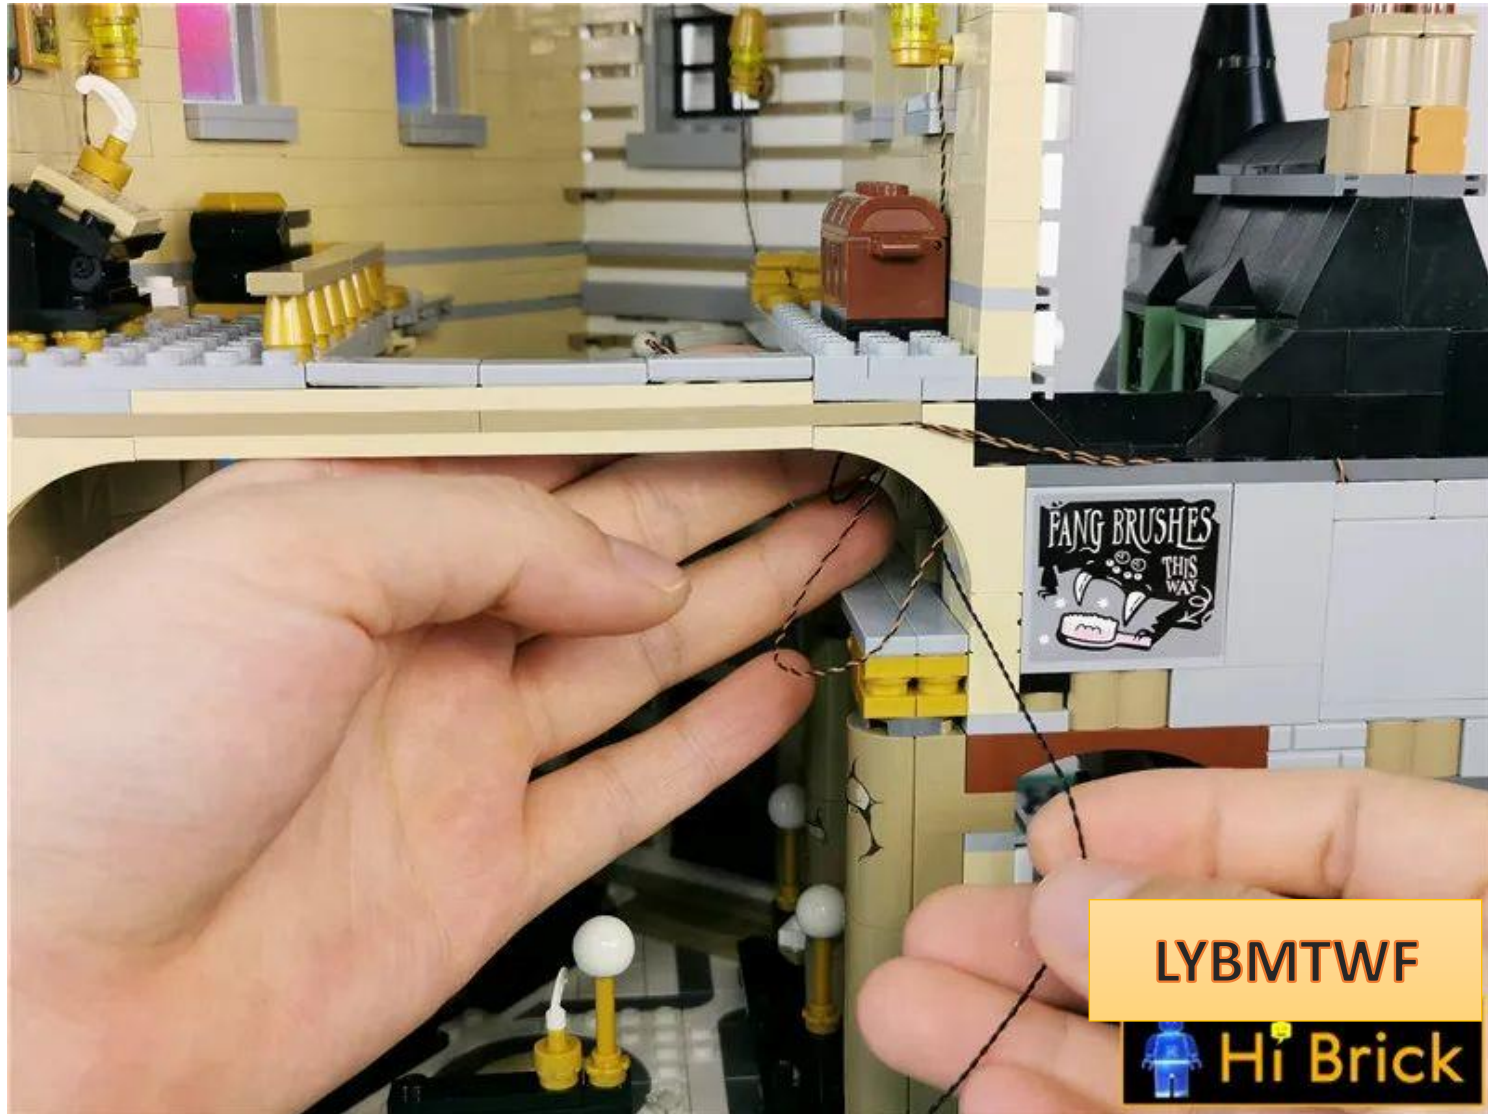


The specific location is as follows

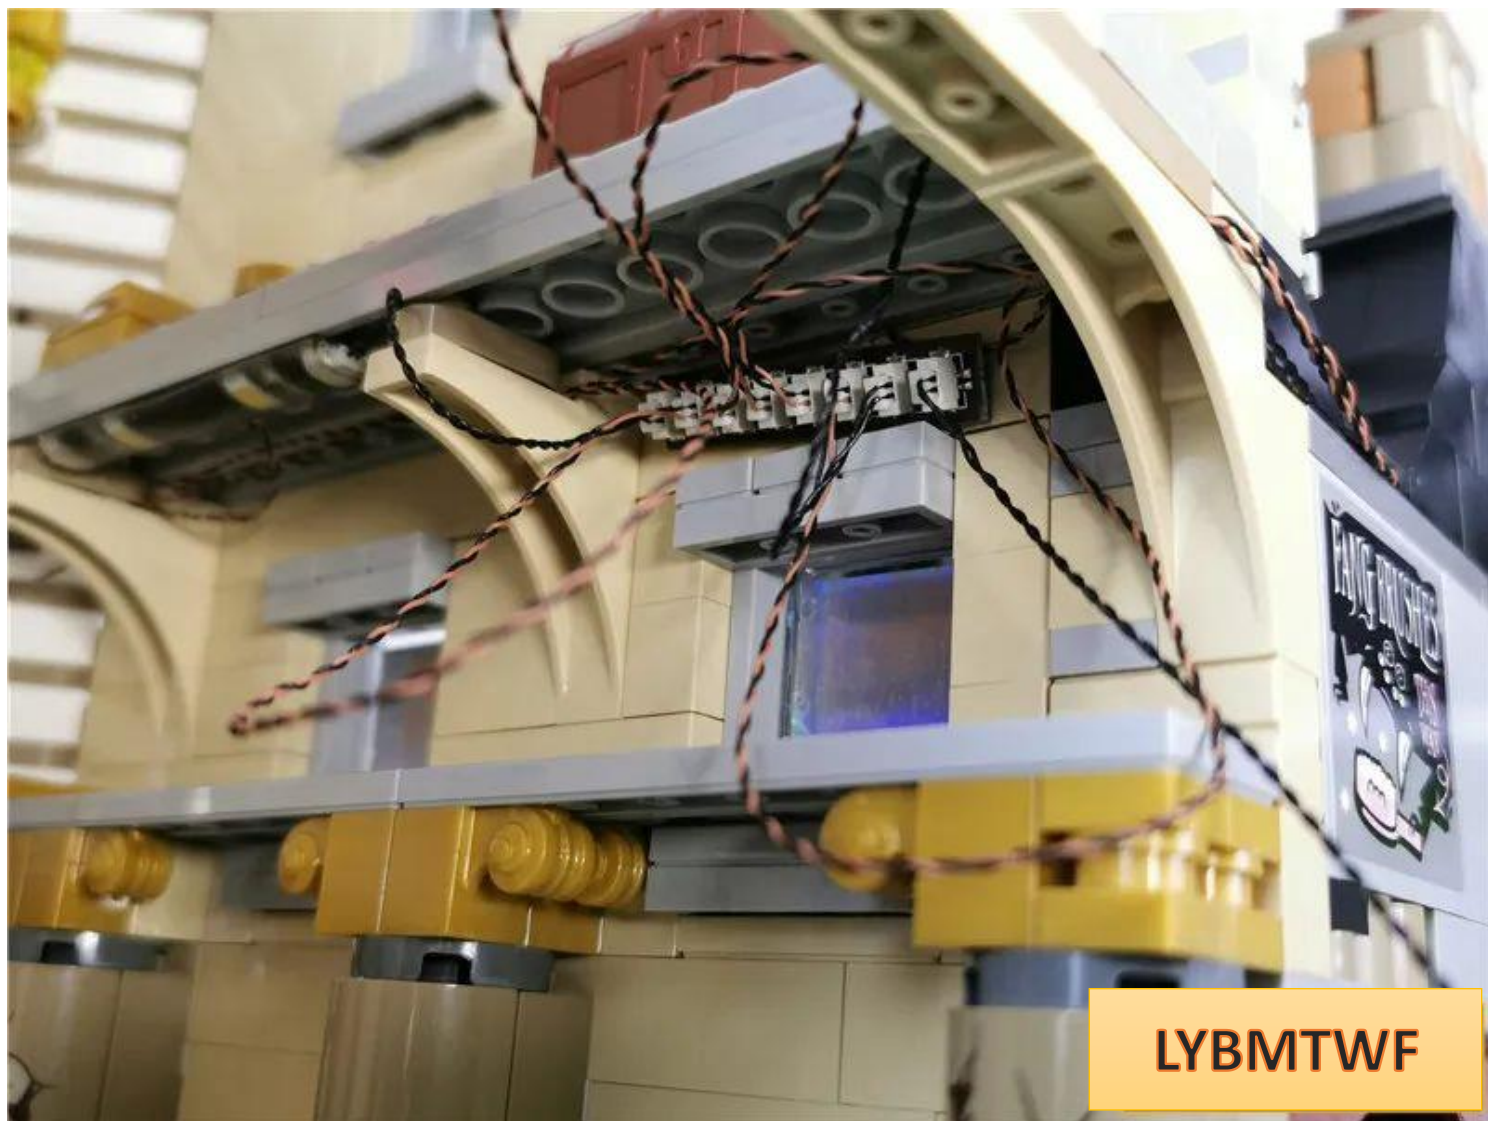


Remove the parts indicated by arrows

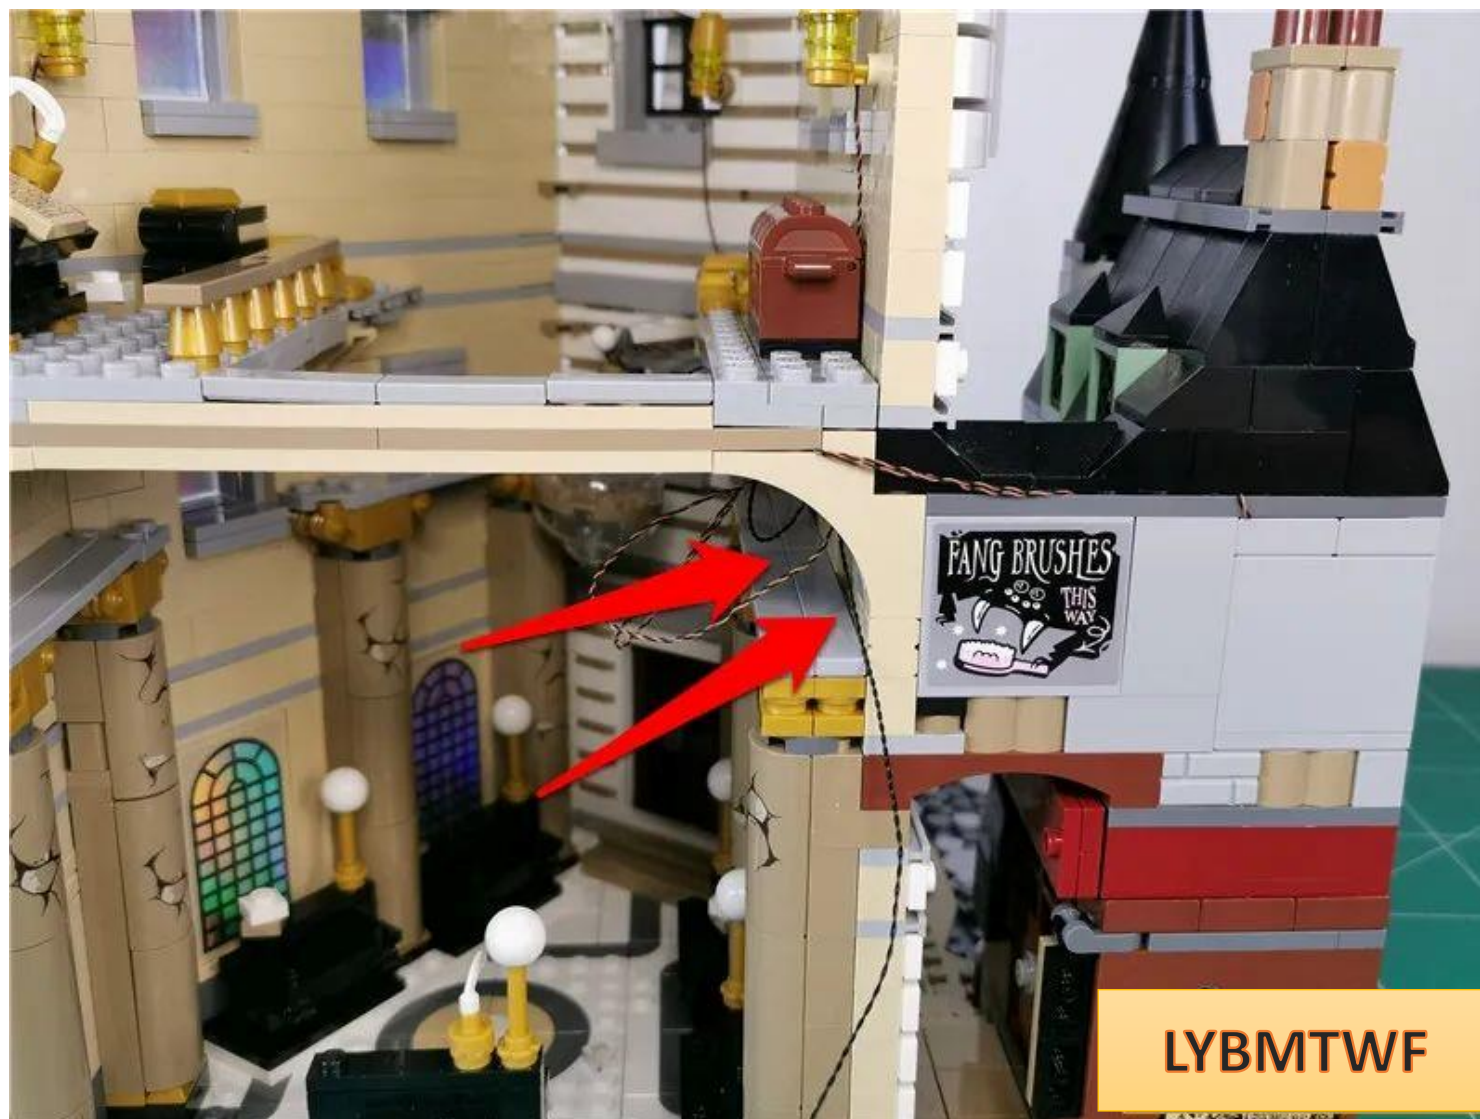

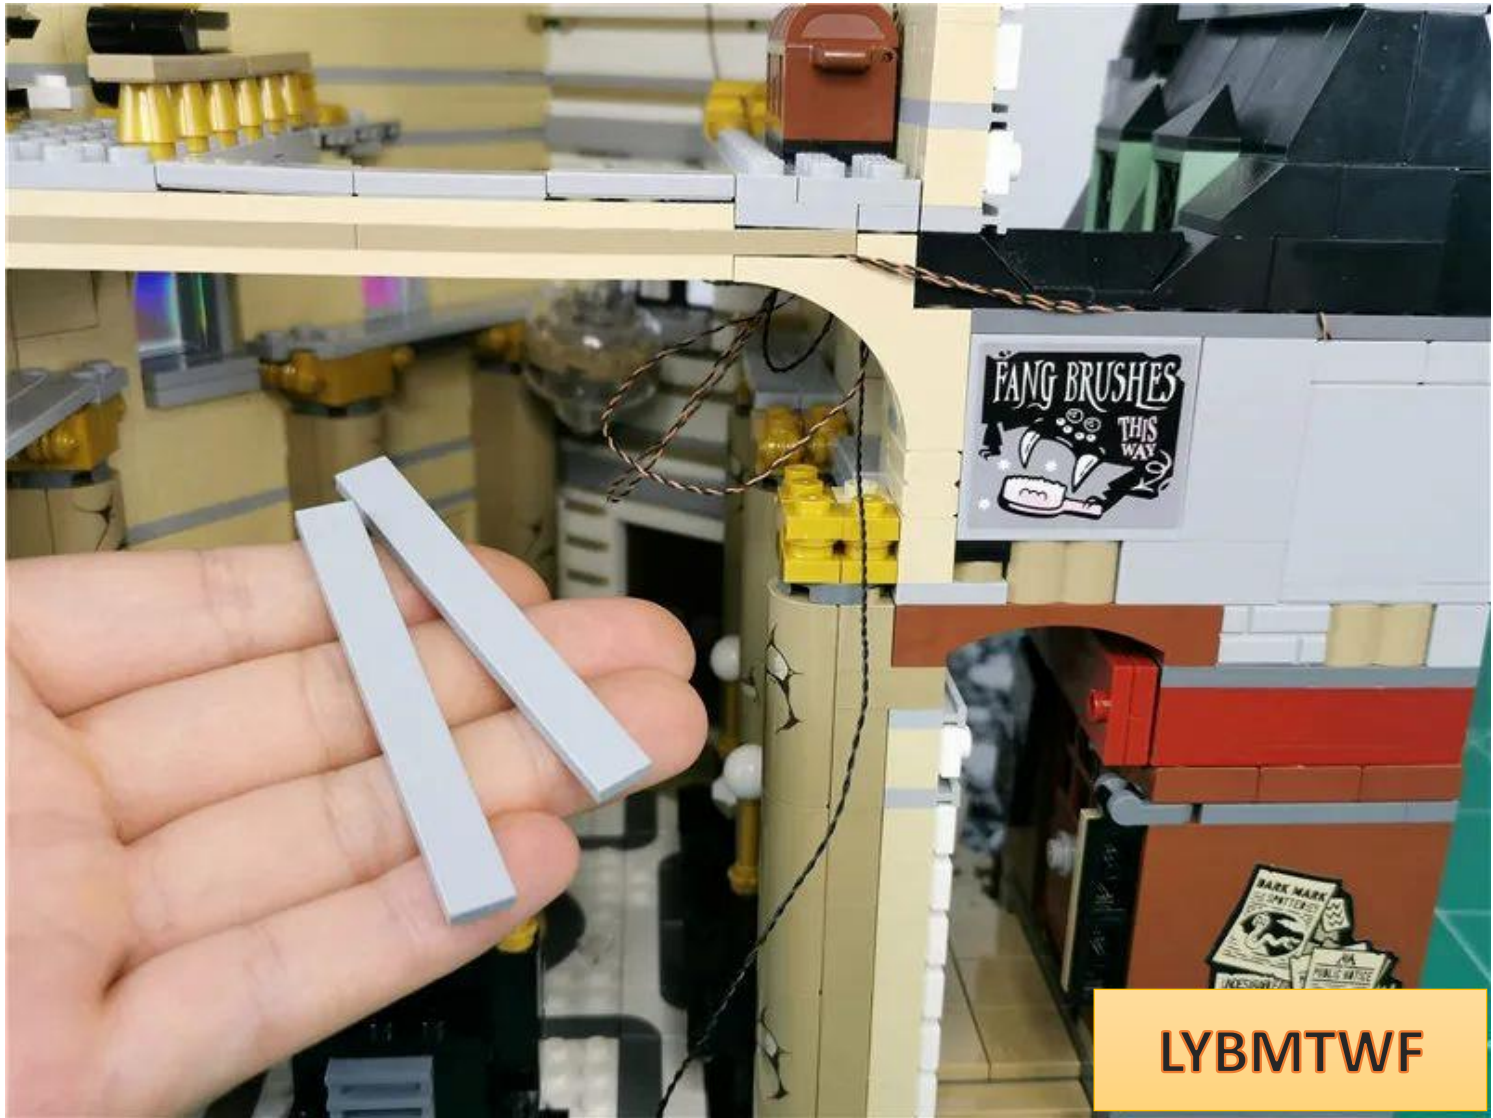


LYBMTWF


Place the cable against the wall and pull it down

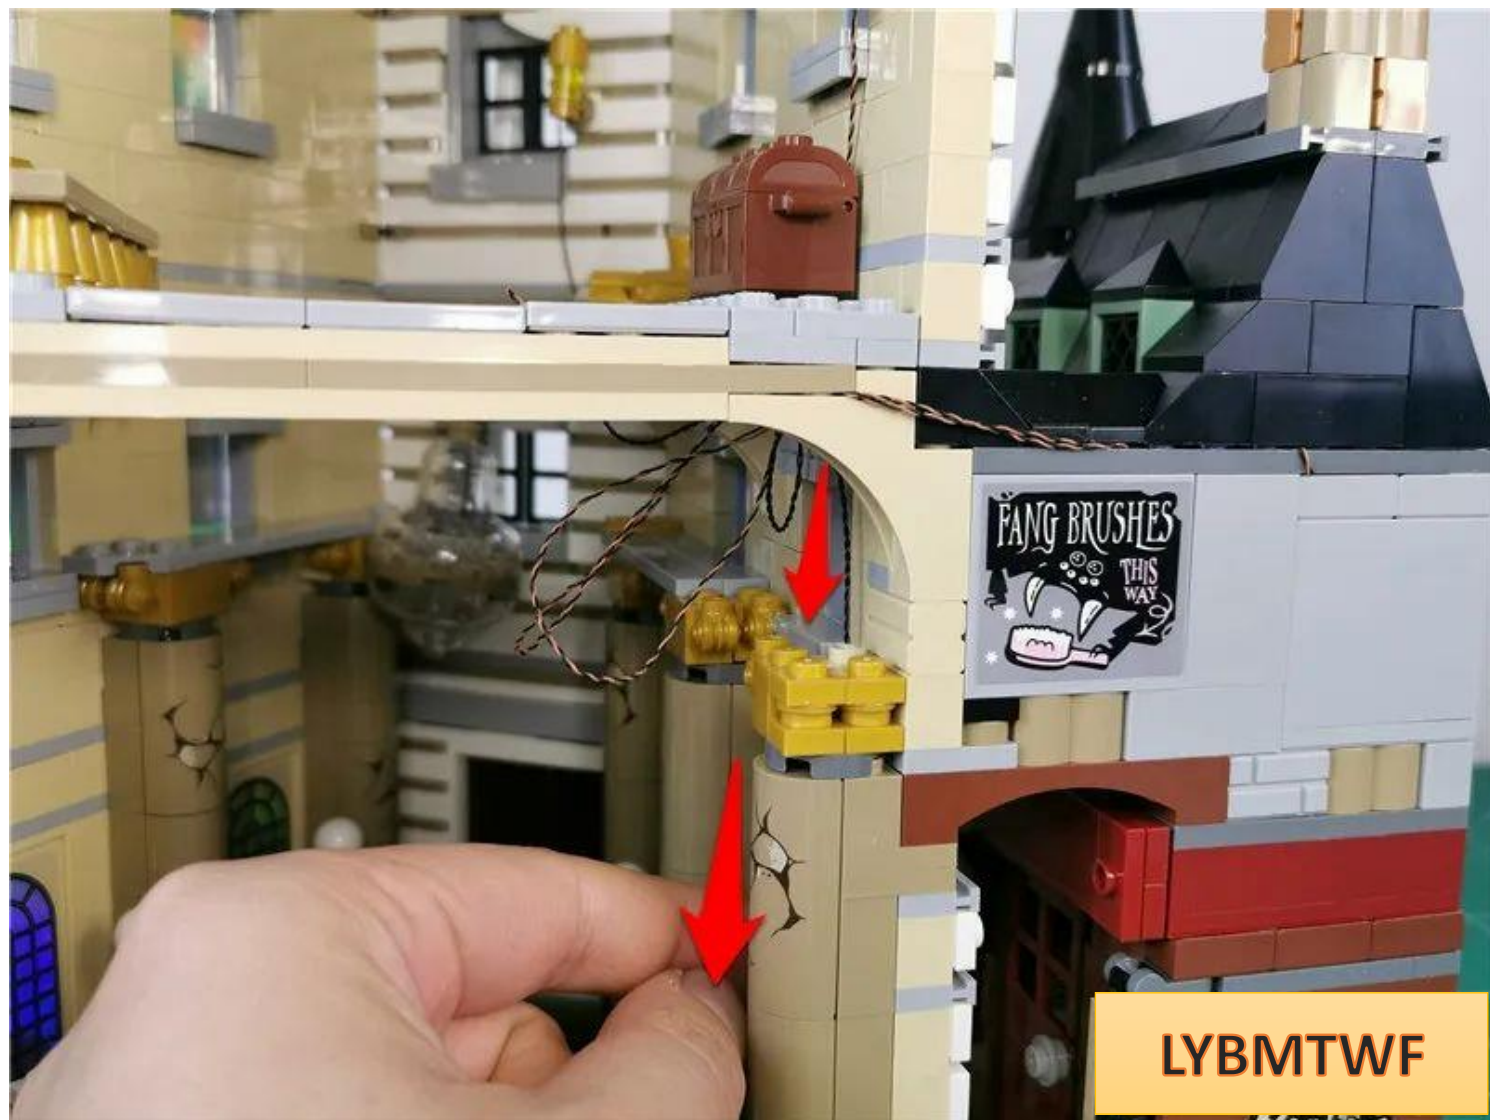


Restore the gray tablet and fix the connecting cables

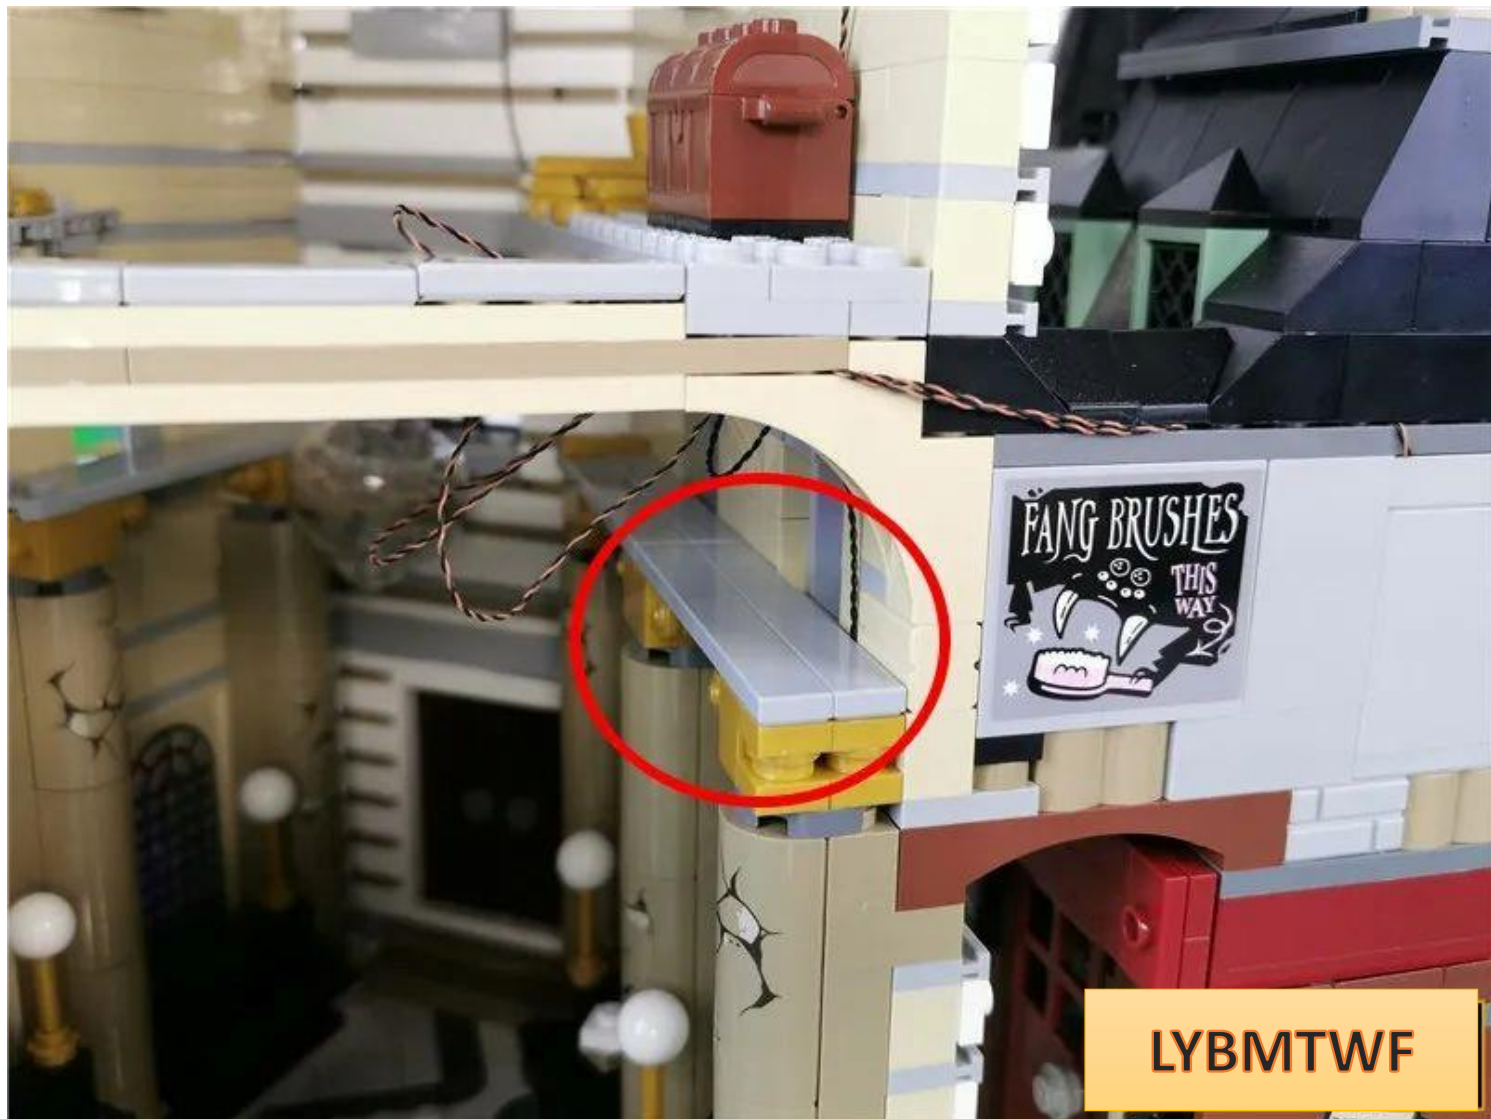

Twist the excess wires together appropriately

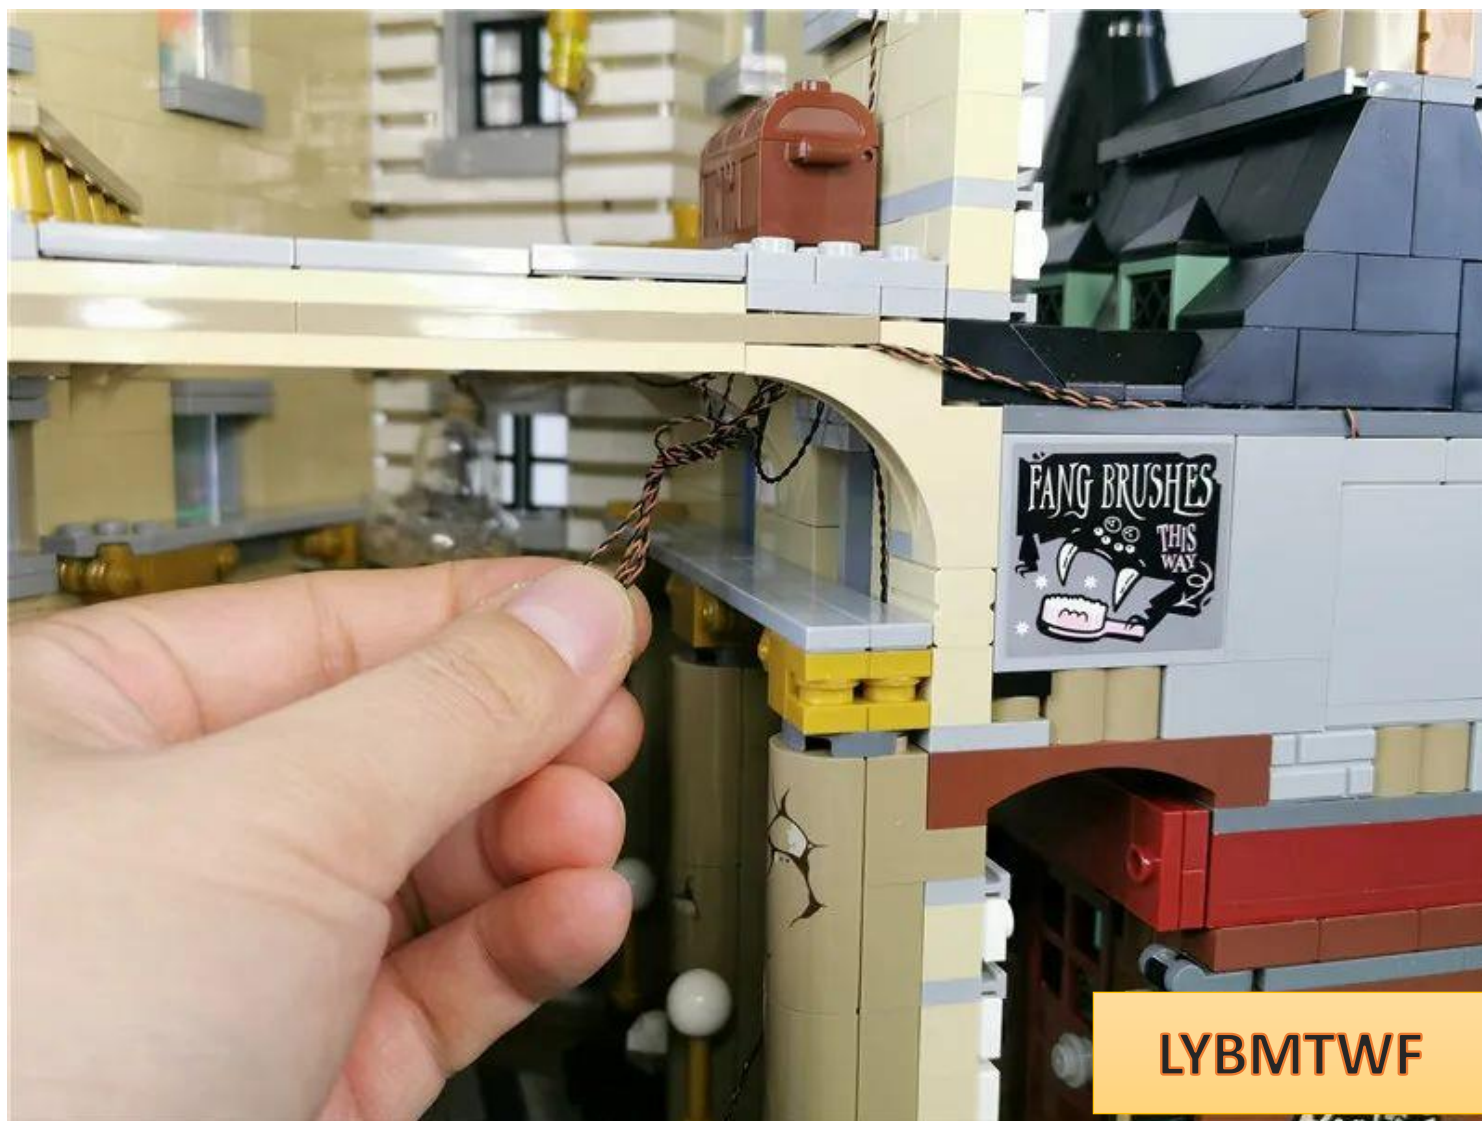


Adhere the wires to the back of the part

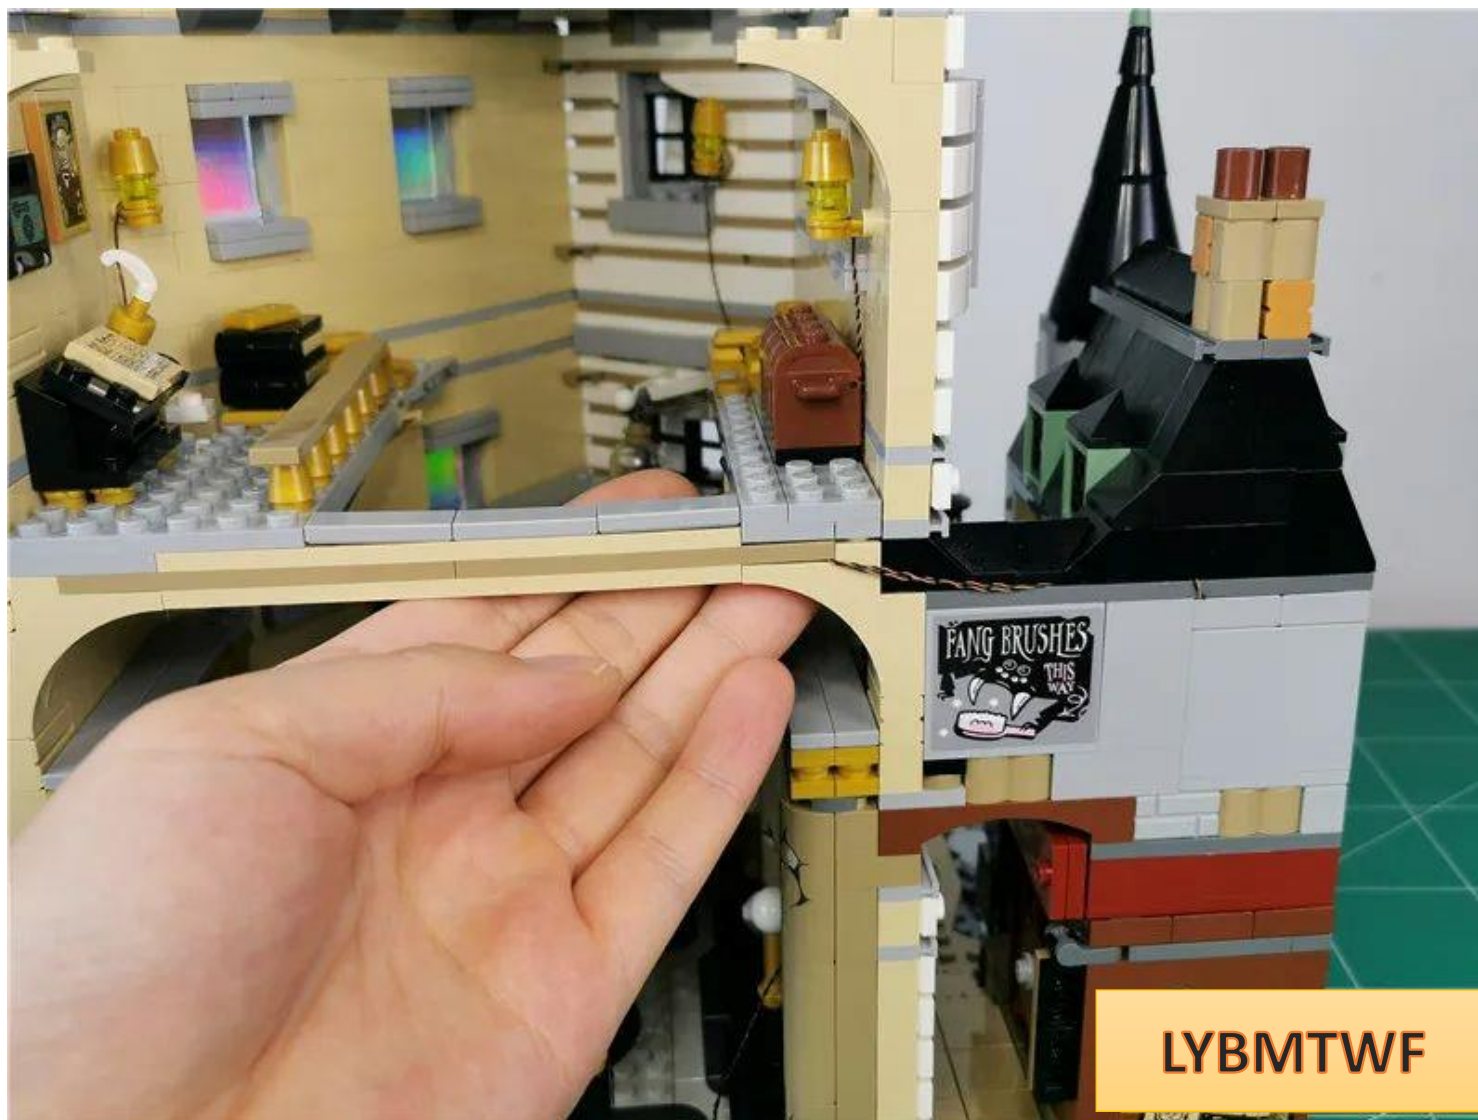



LYBMTWF

Place the excess wires on both sides of the light bar under the parts

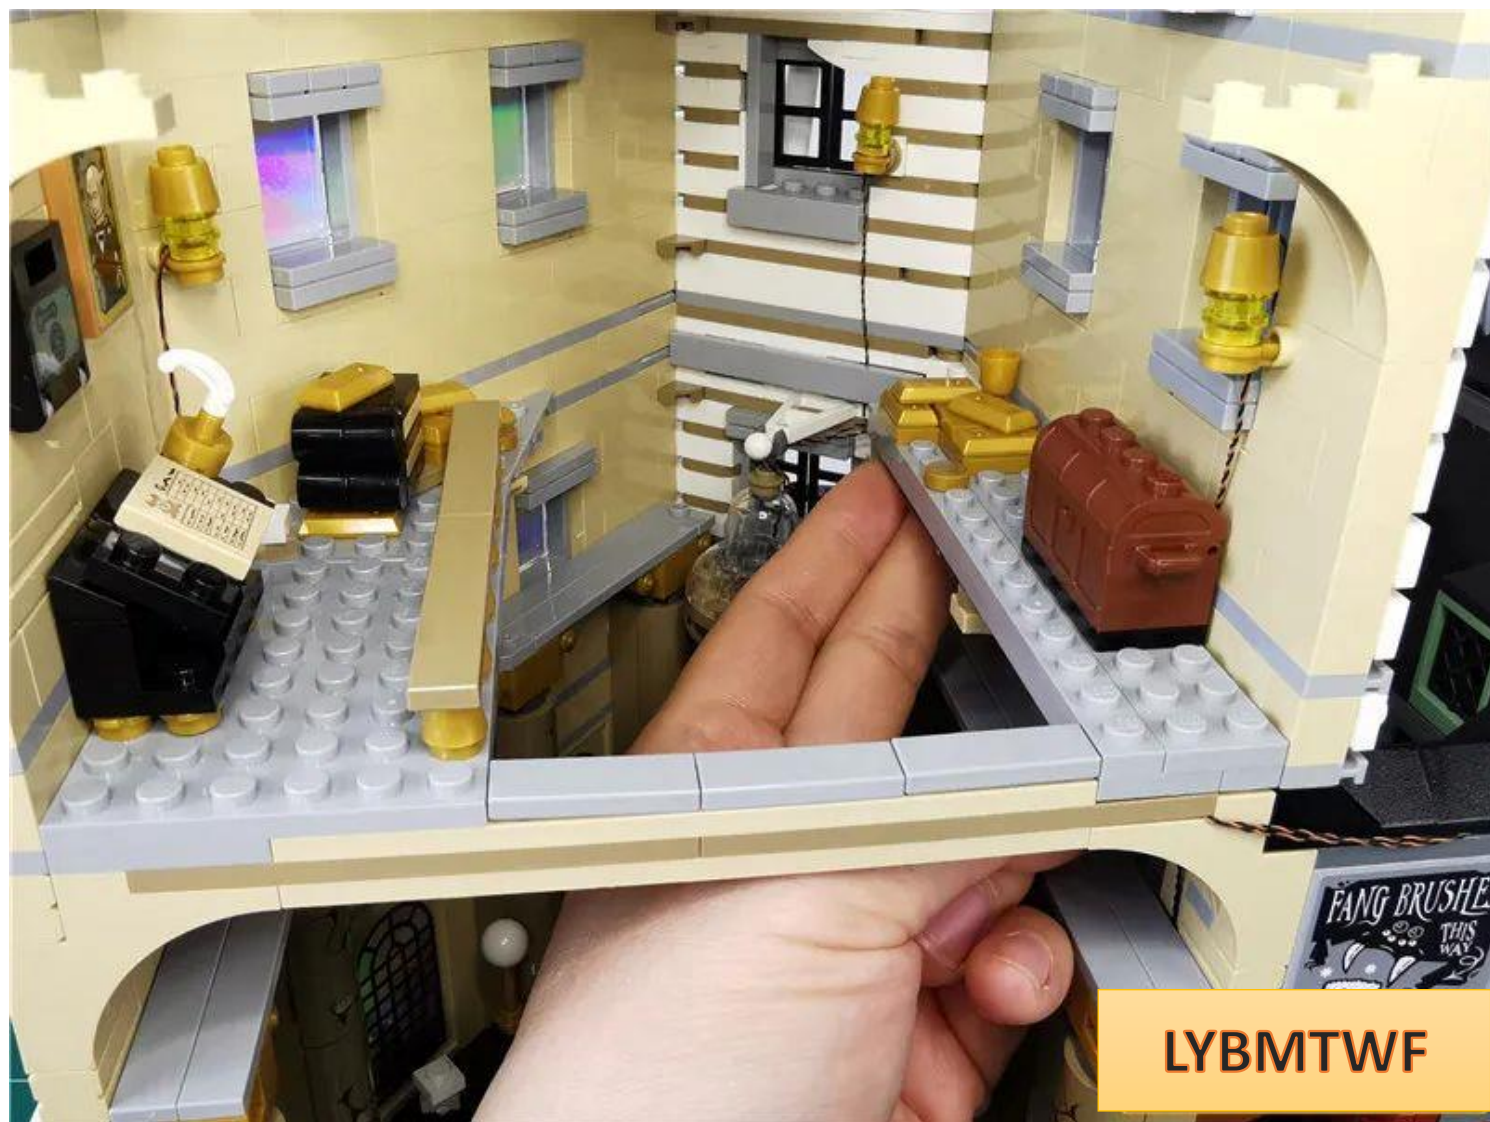


Remove the parts indicated by the arrows in sequence

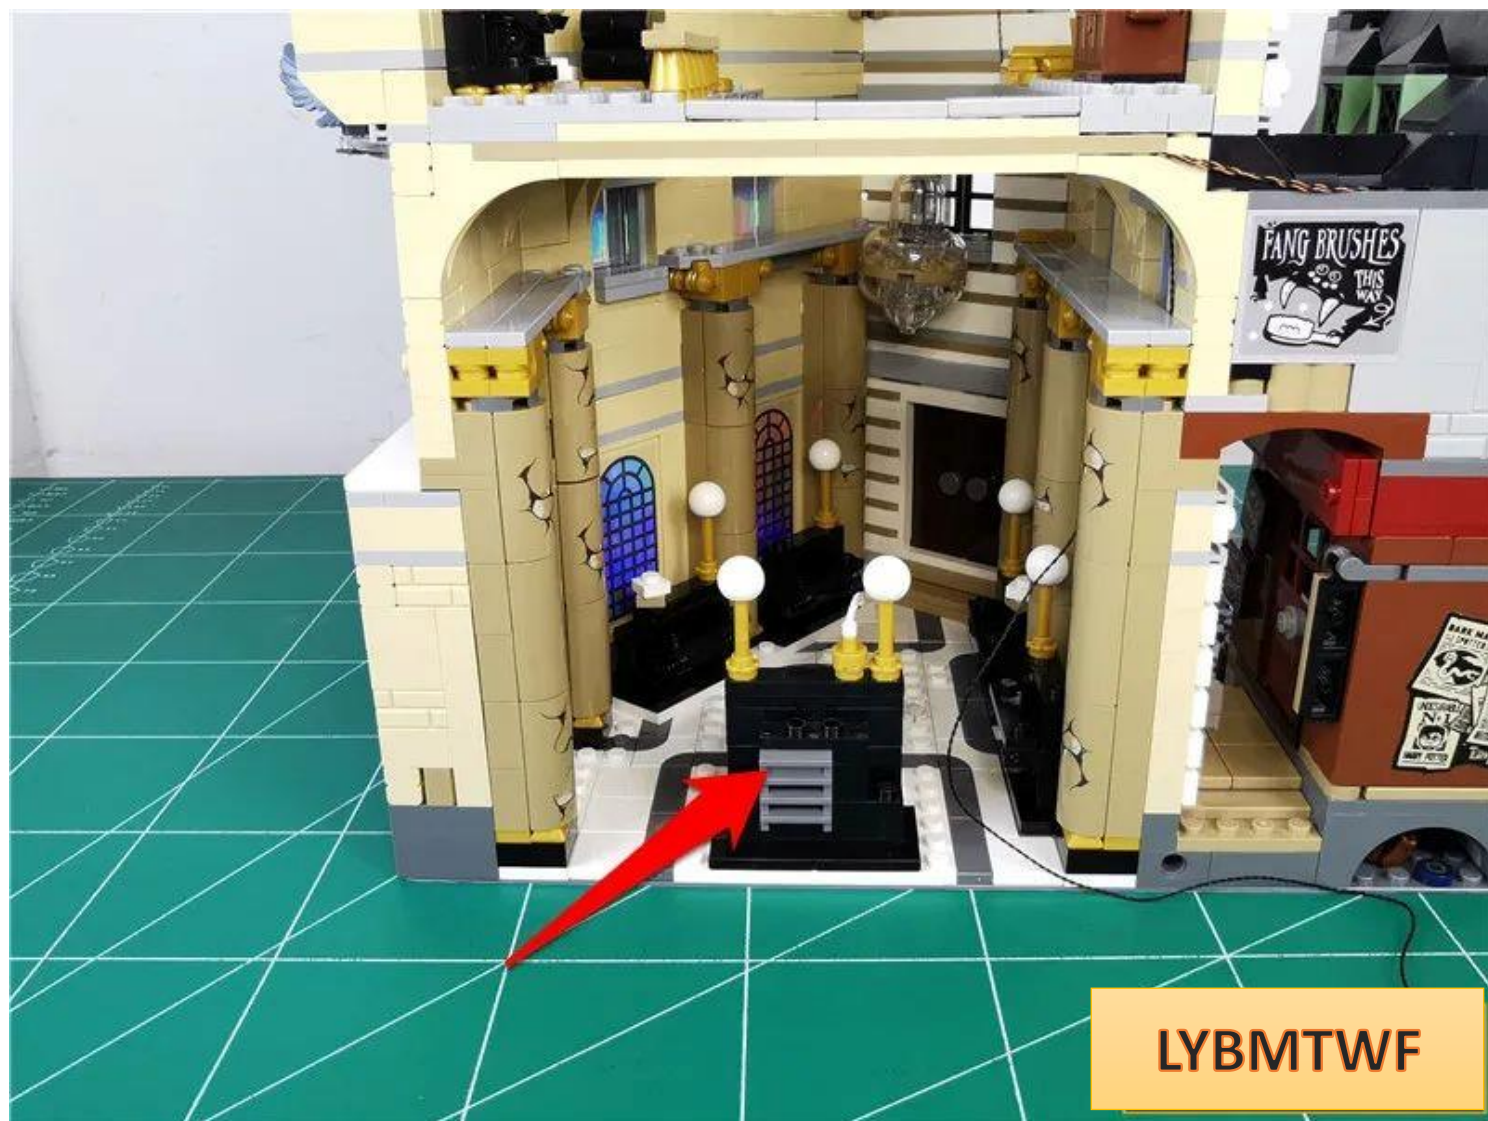

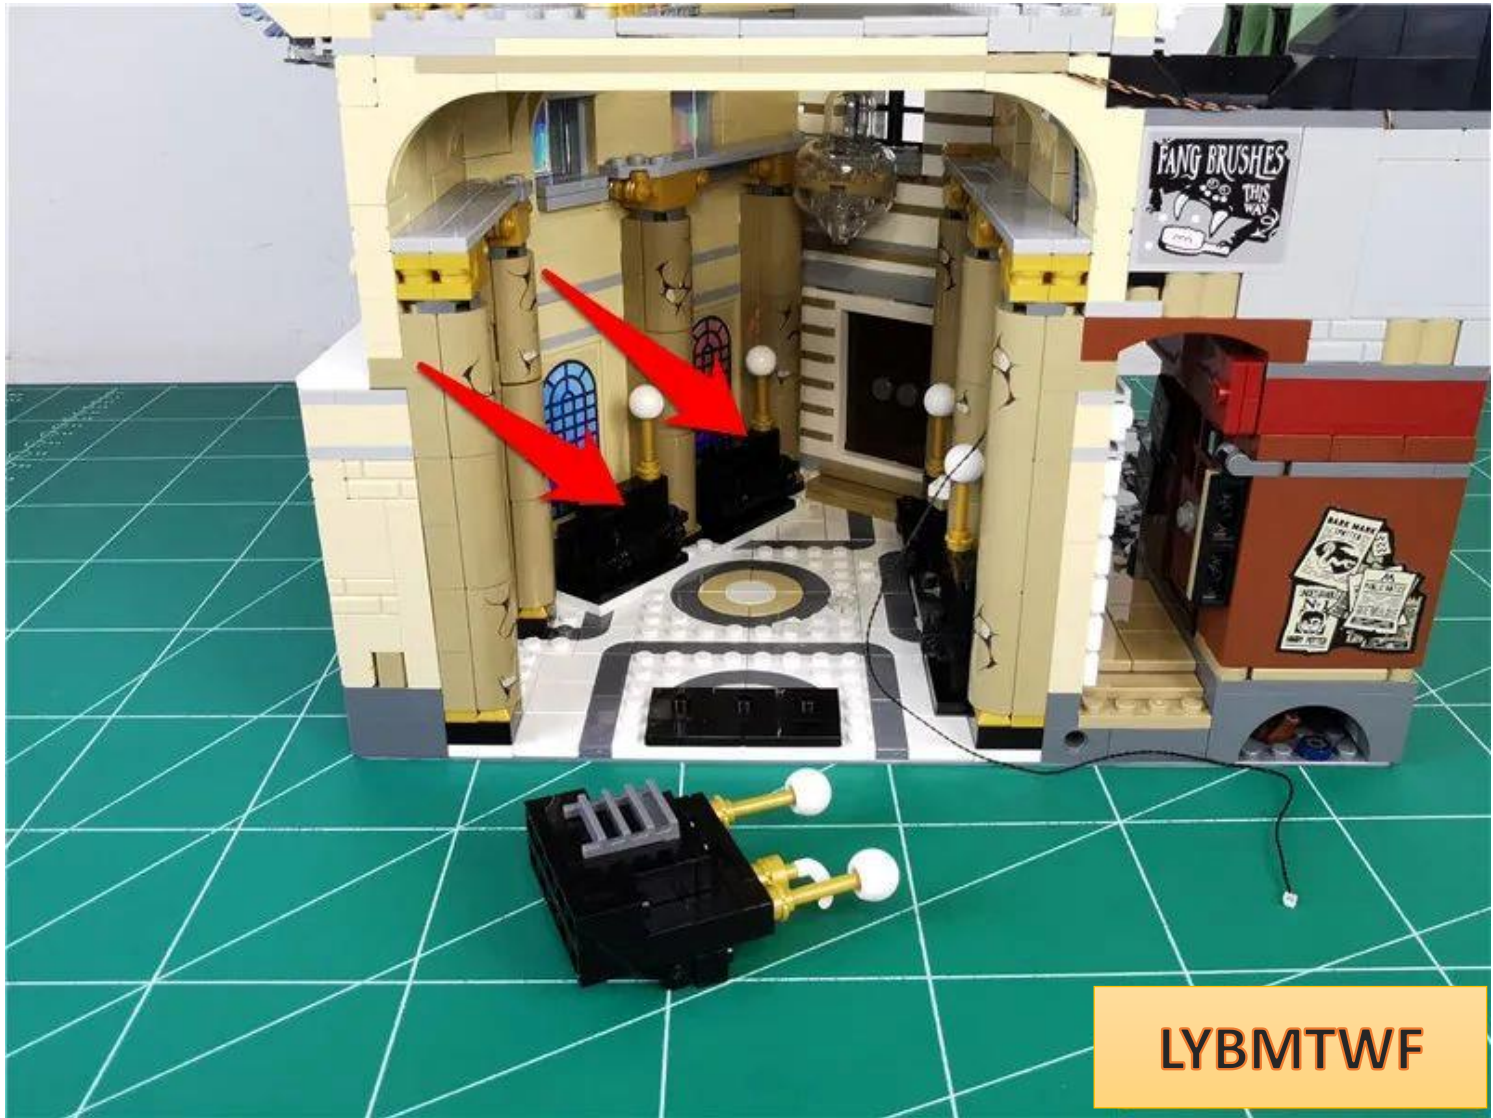

LYBMTWF

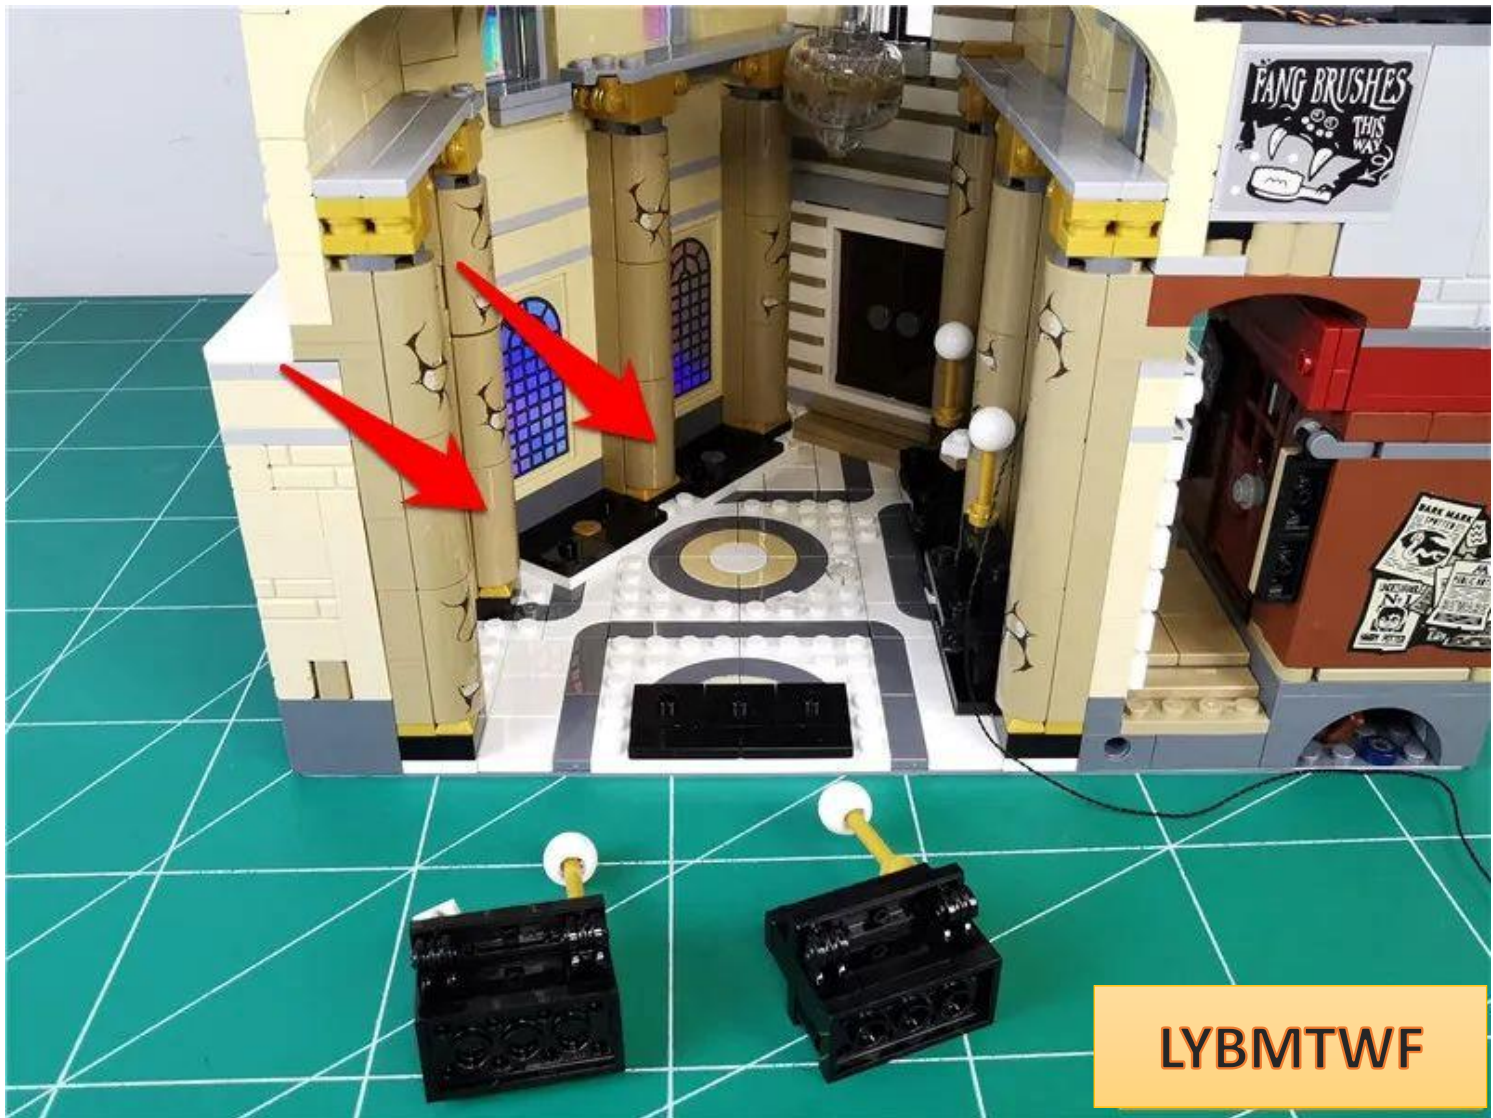


LYBMTWF



LYBMTWF

Take 2 30cm ordinary warm light bulbs and 2 hollow transparent circles

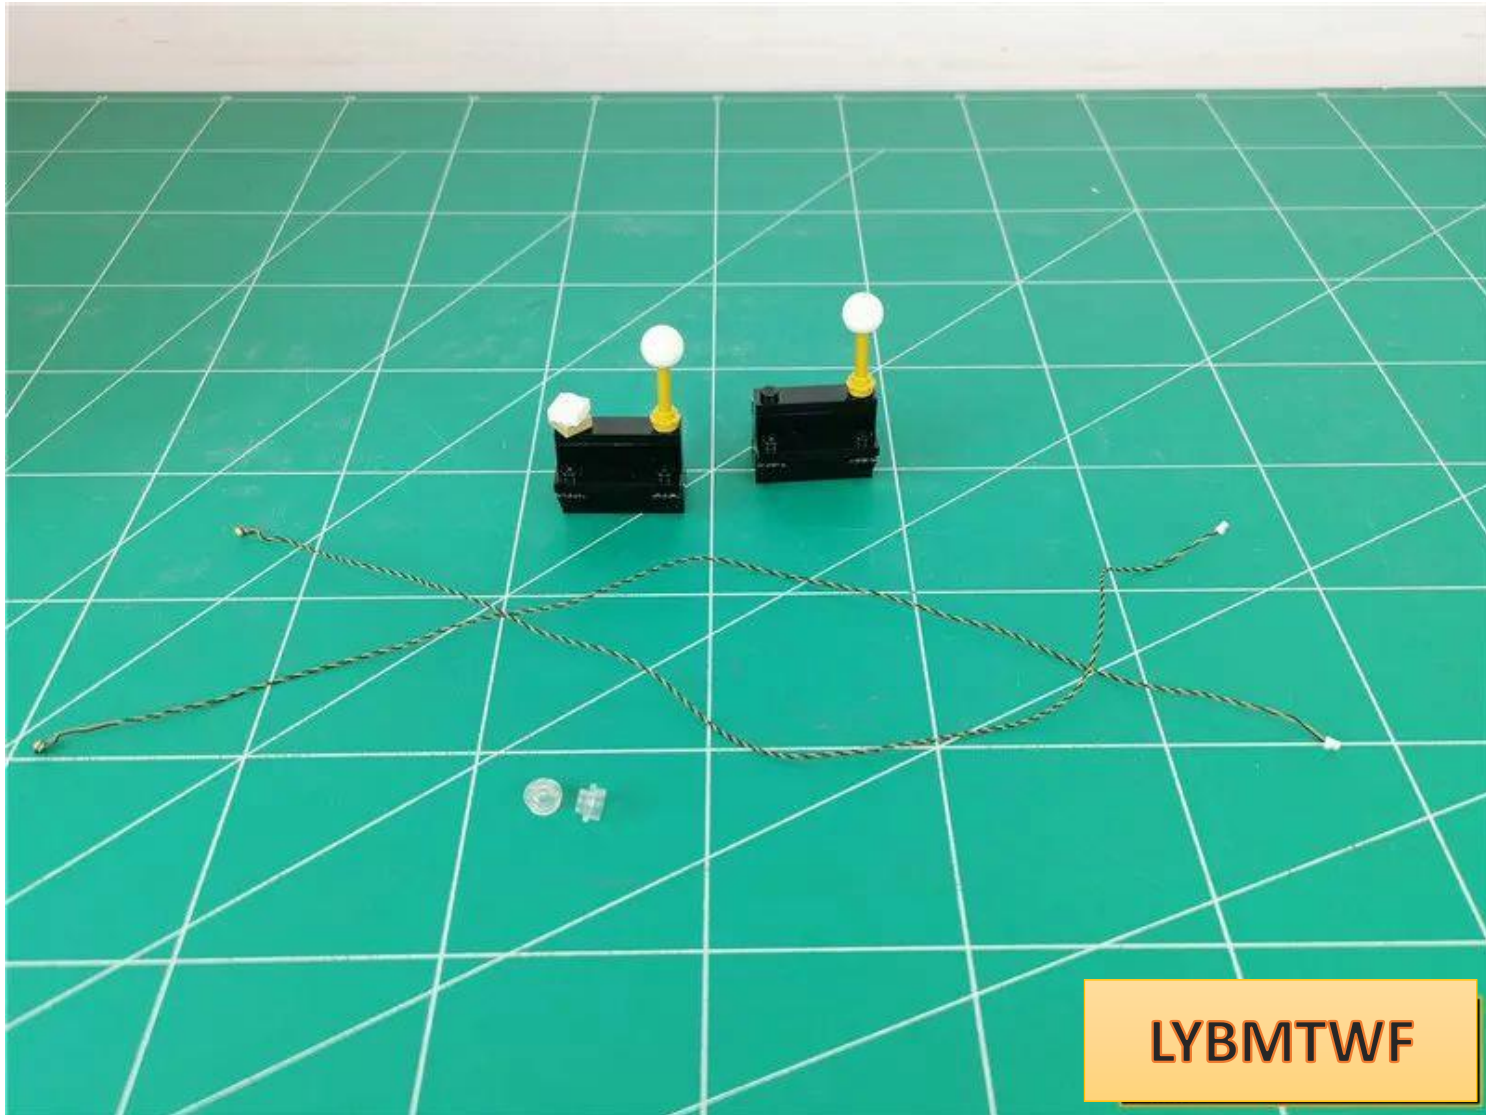

LYBMTWF

Break down the counter as follows




Remove the lampshade




LYBMTWF

Install the hollow transparent circle onto the gold pillar, **being careful not to push the gold pillar out.**

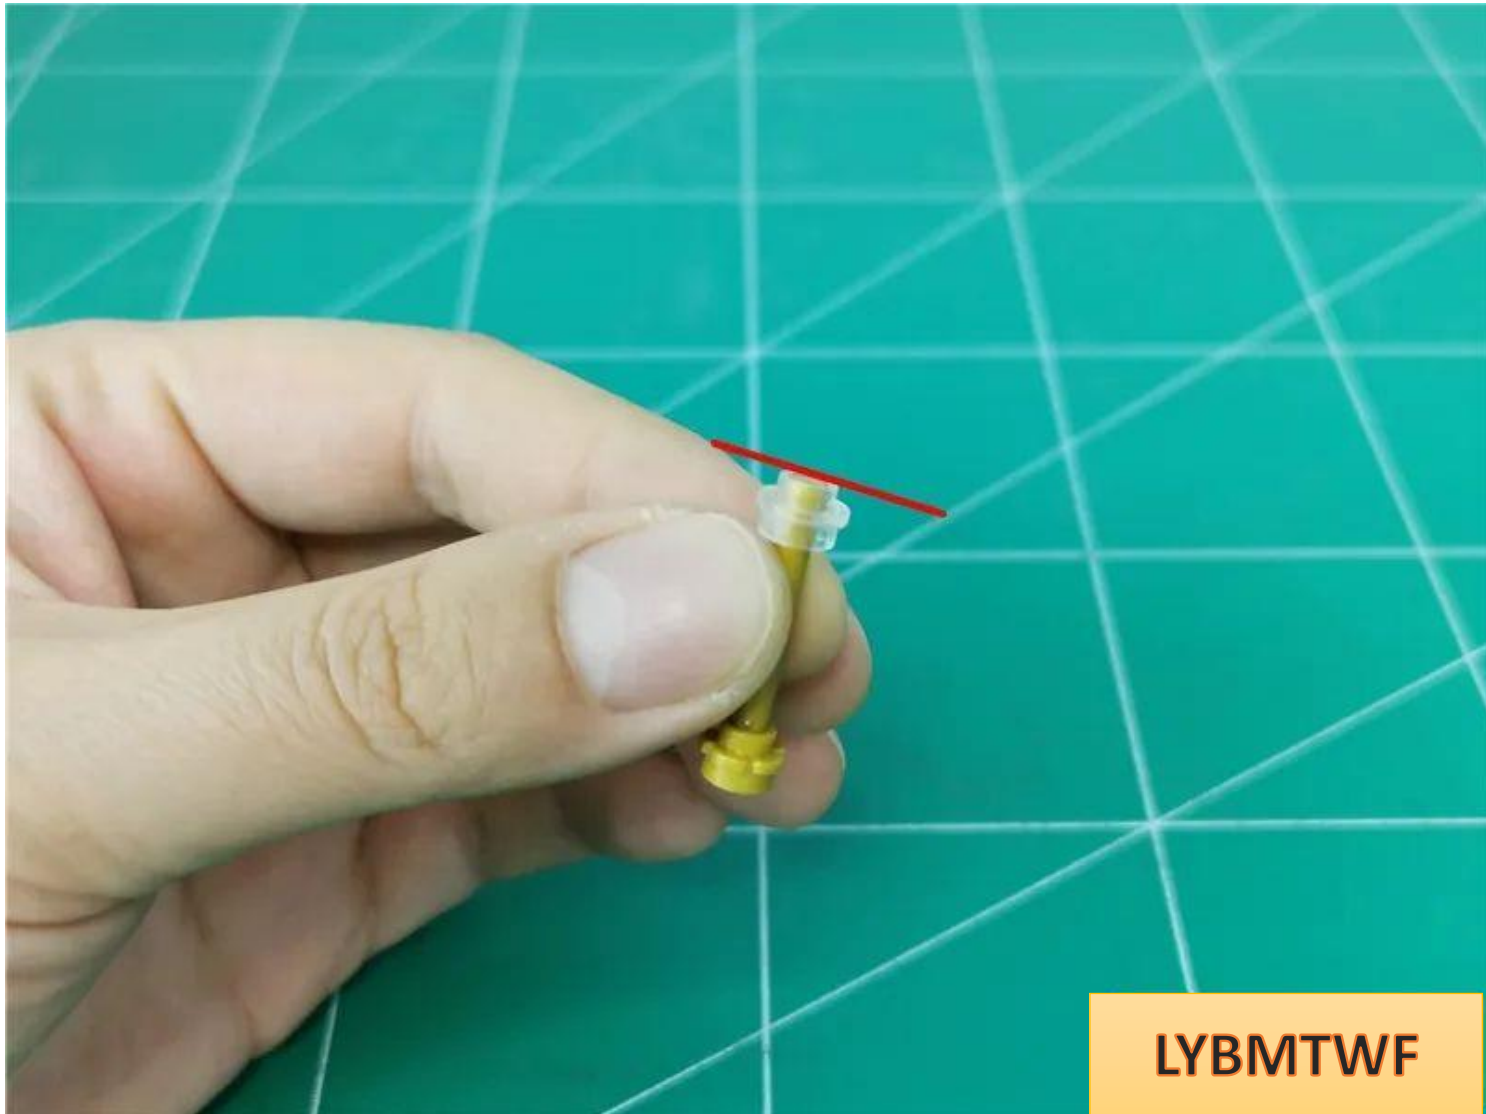


Place the luminous side of the lamp particles facing outward and attach it to the protrusion

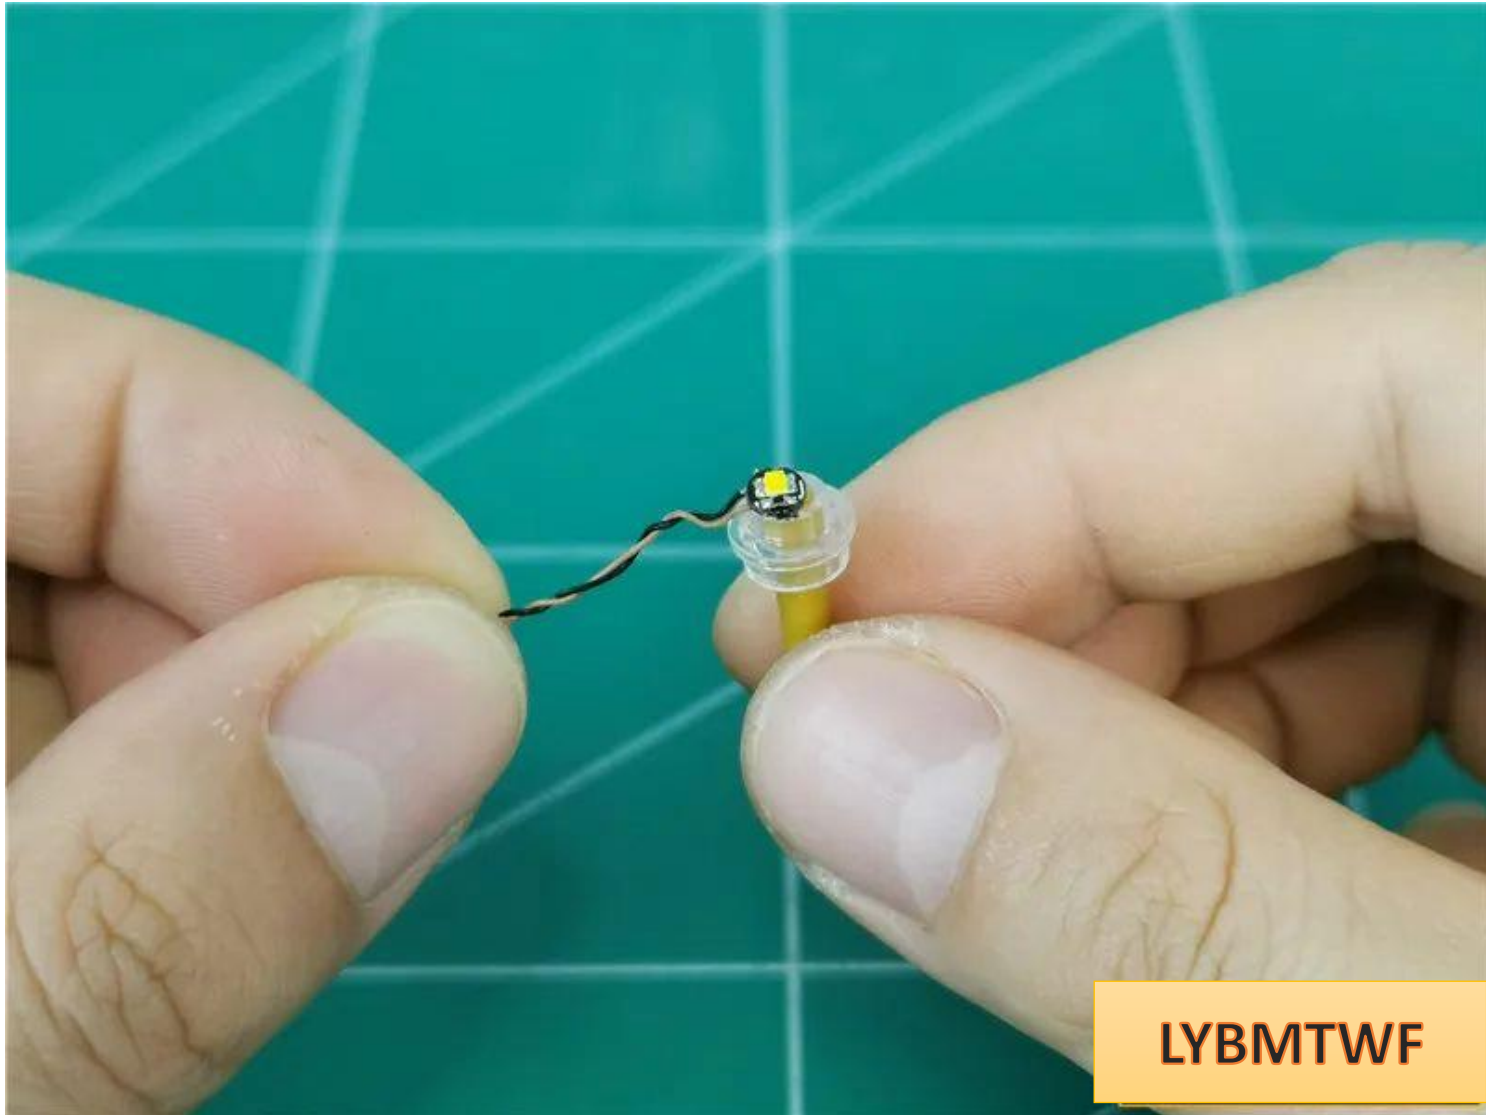


LYBMTWF

Install the white lampshade and fix the lamp particles

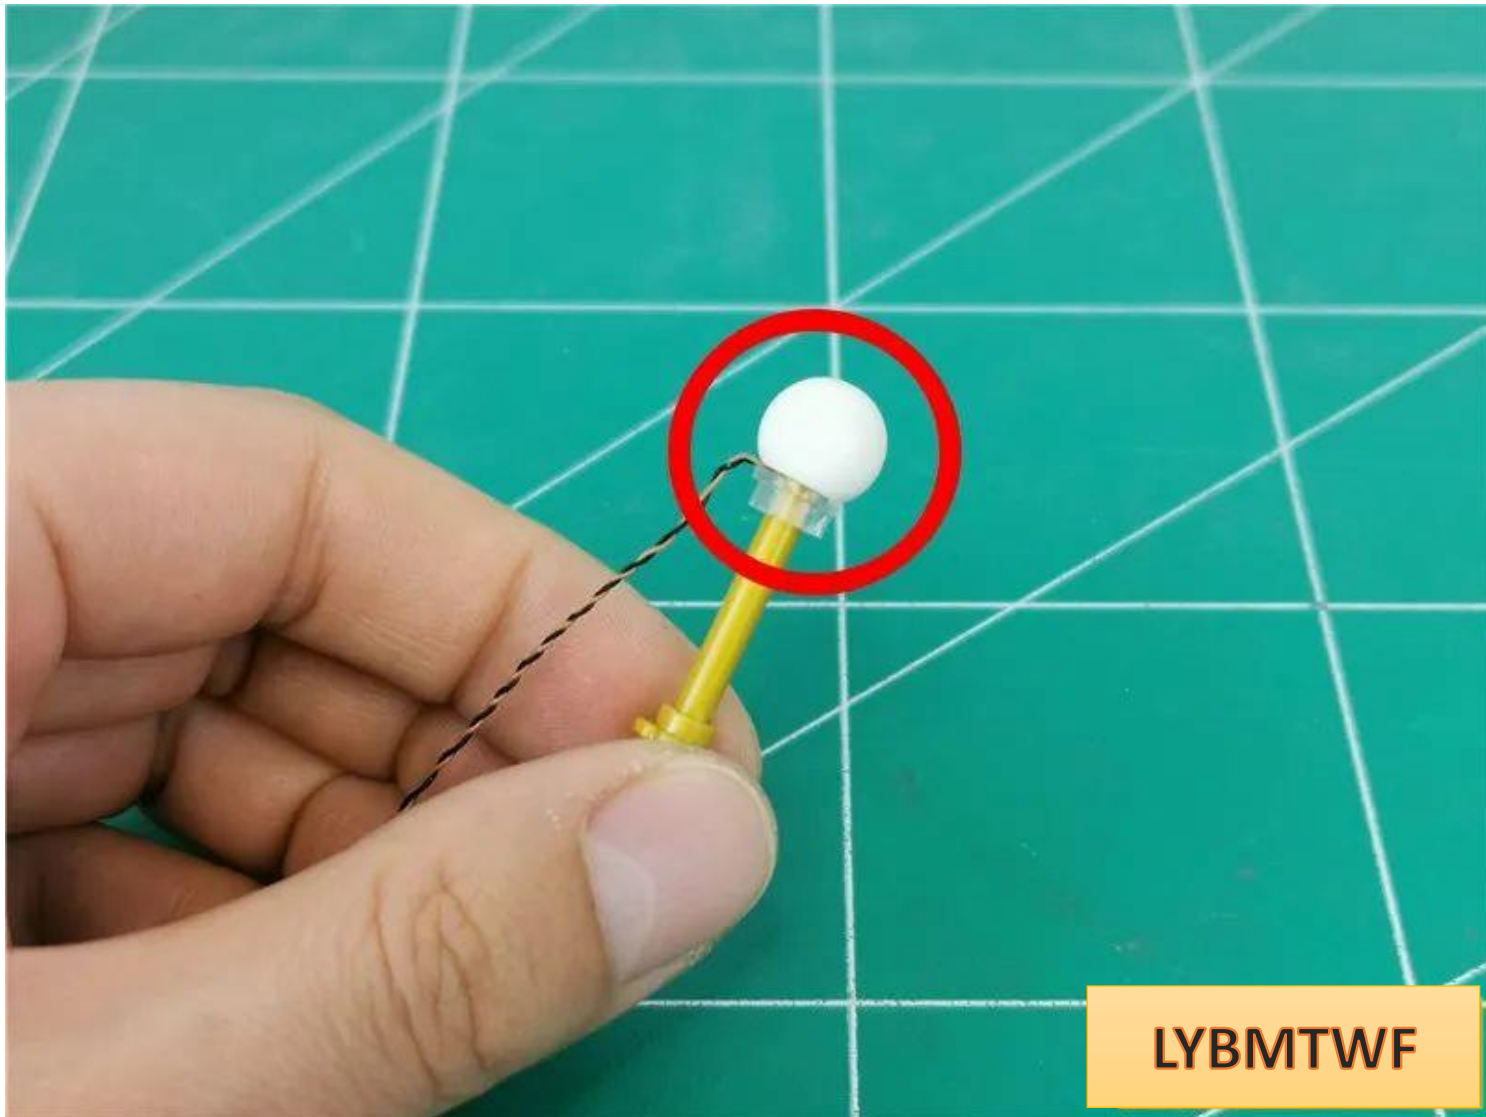


LYBMTWF


Install another desk lamp in the same way

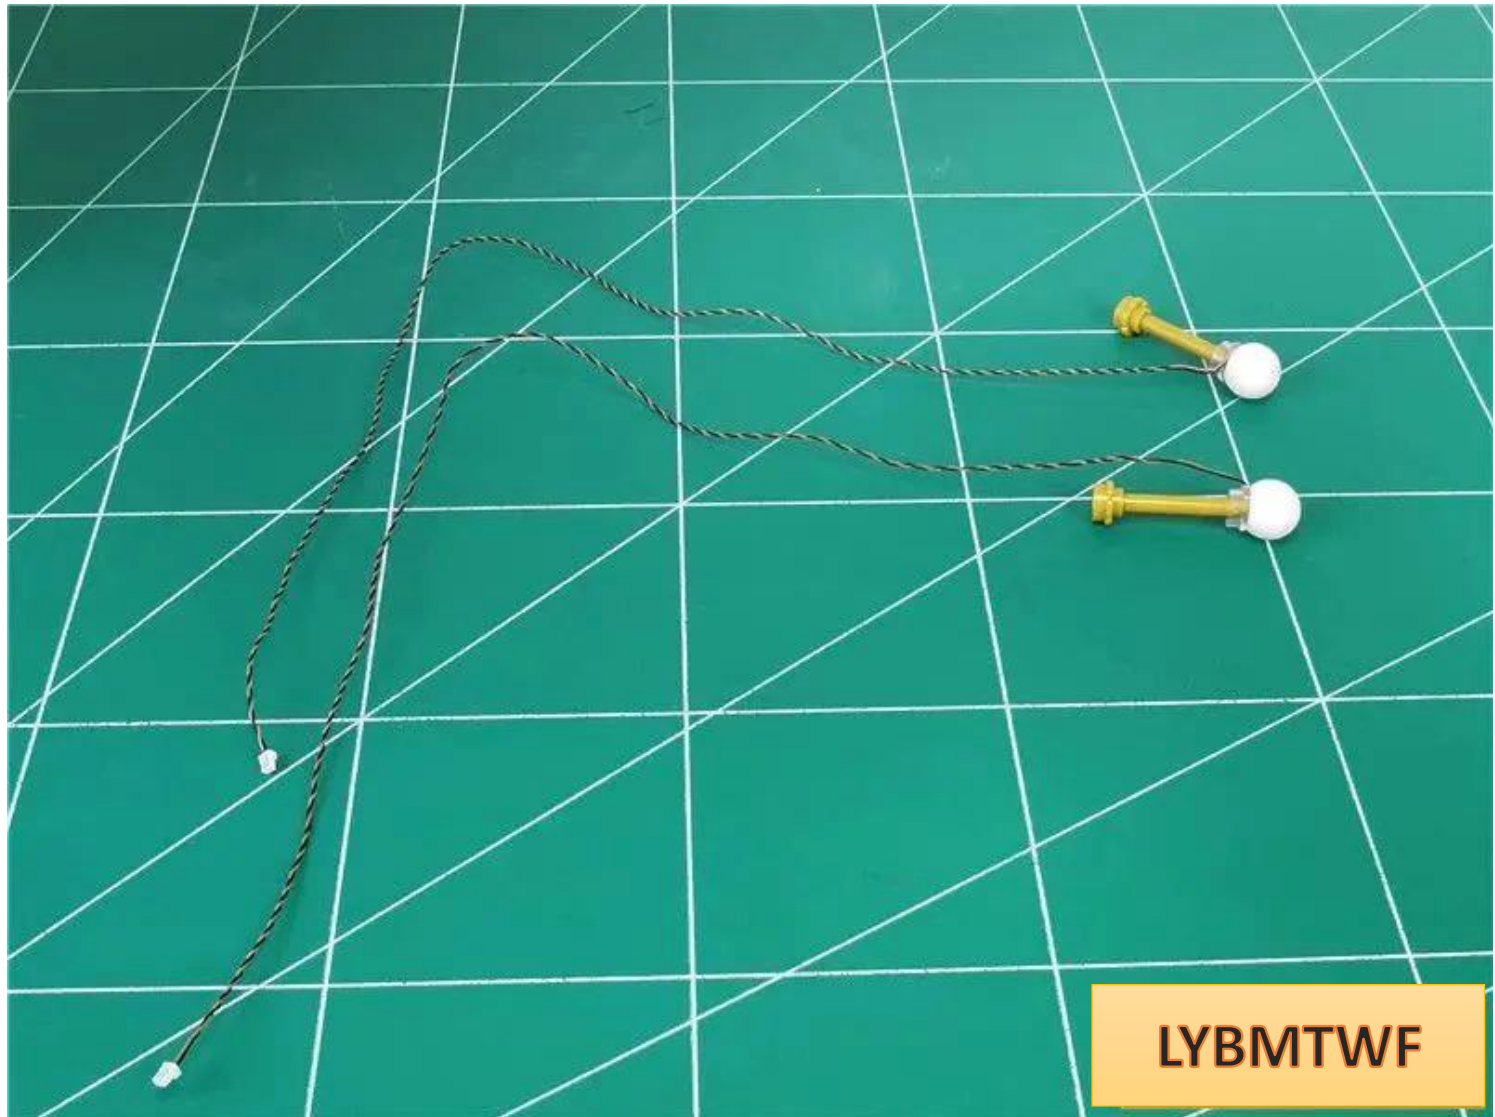

Take any table lamp and restore it, with the wire facing the back of the counter (note the direction of the counter)

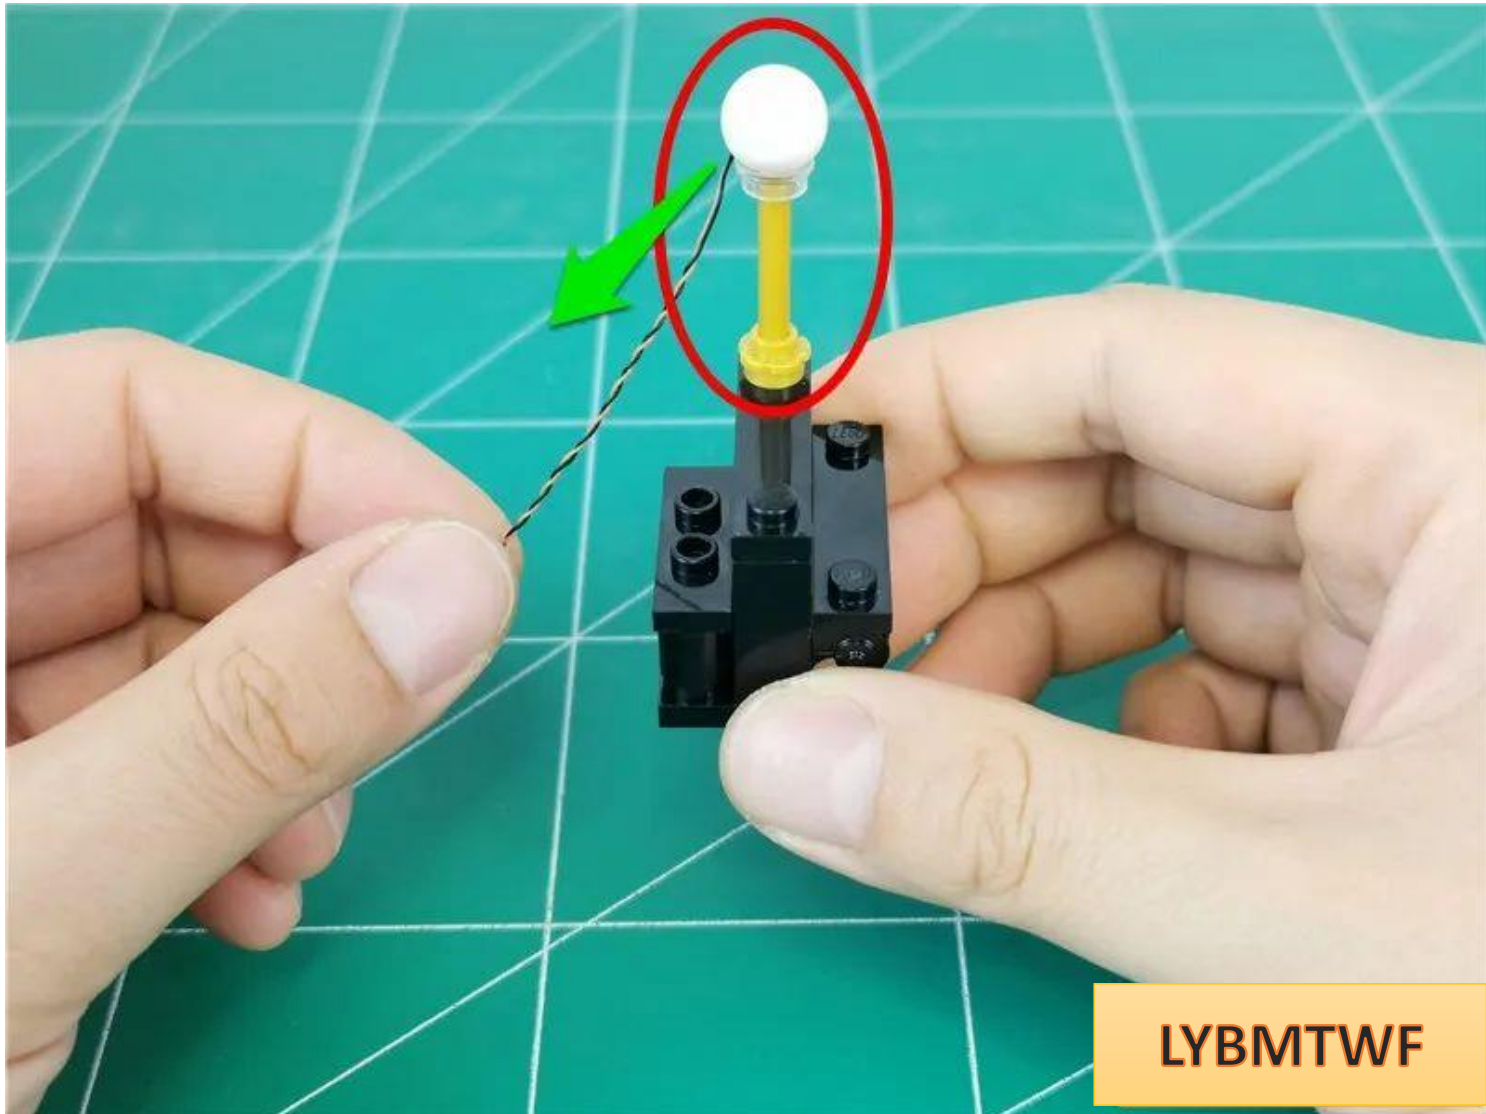


Remove the parts indicated by arrows

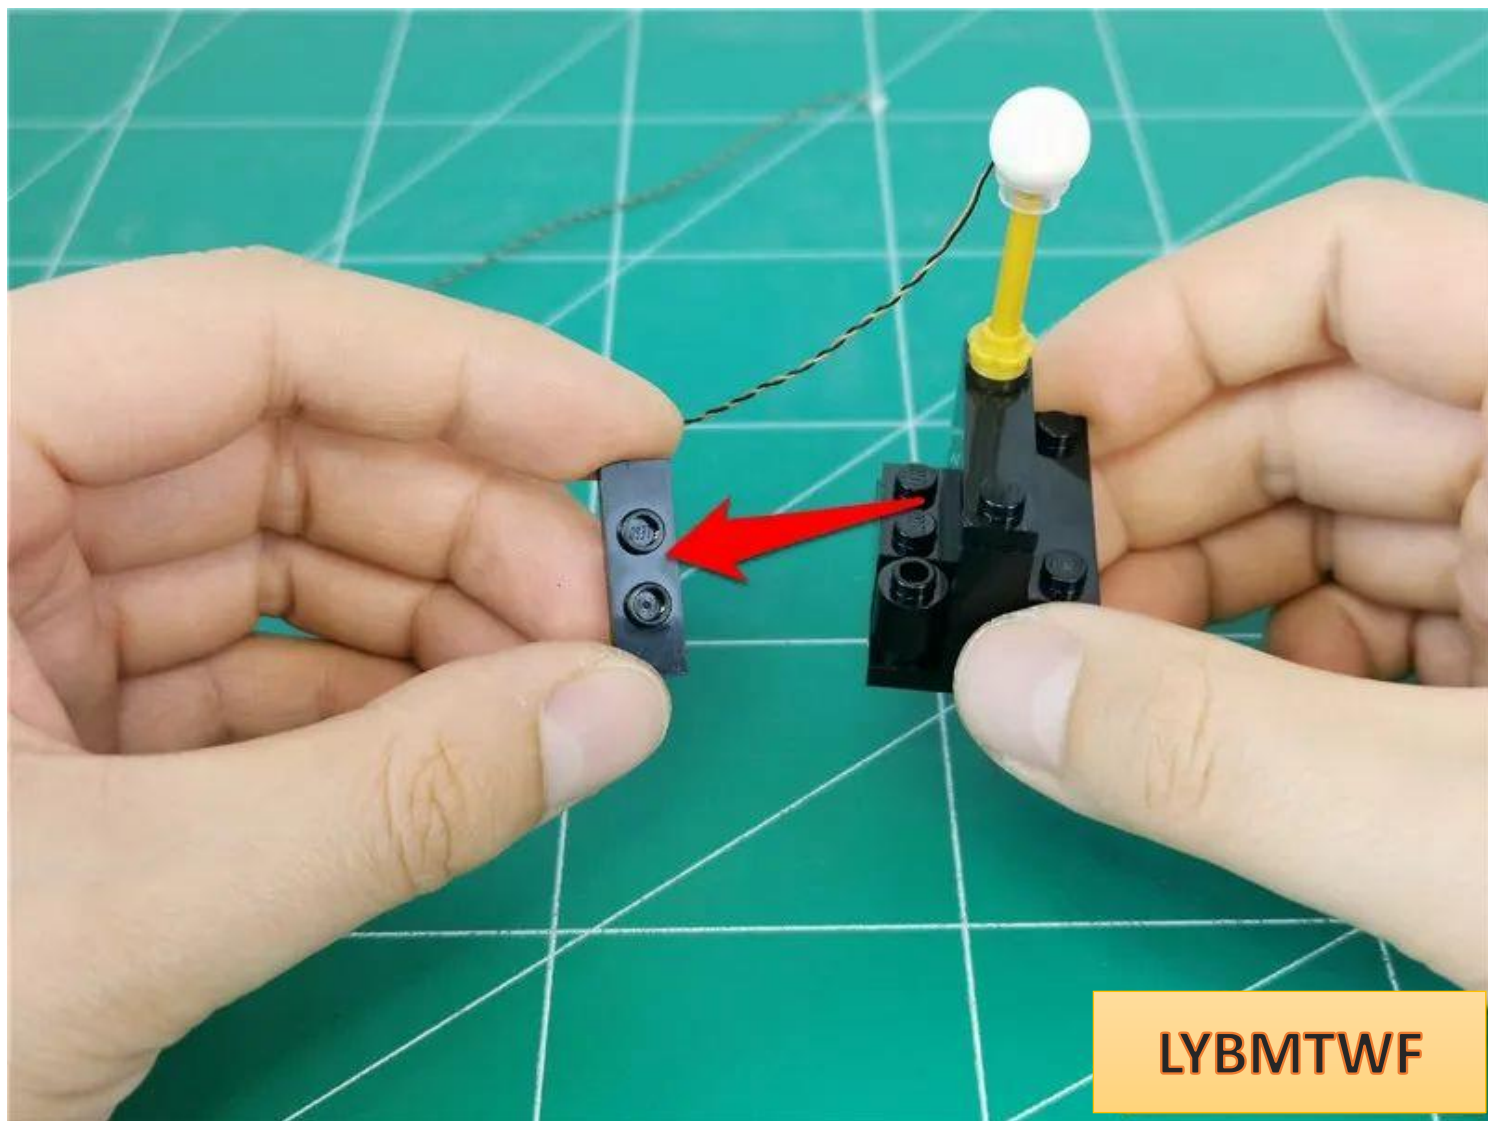


LYBMTWF

Fit the wire to the part and pass it along the angle

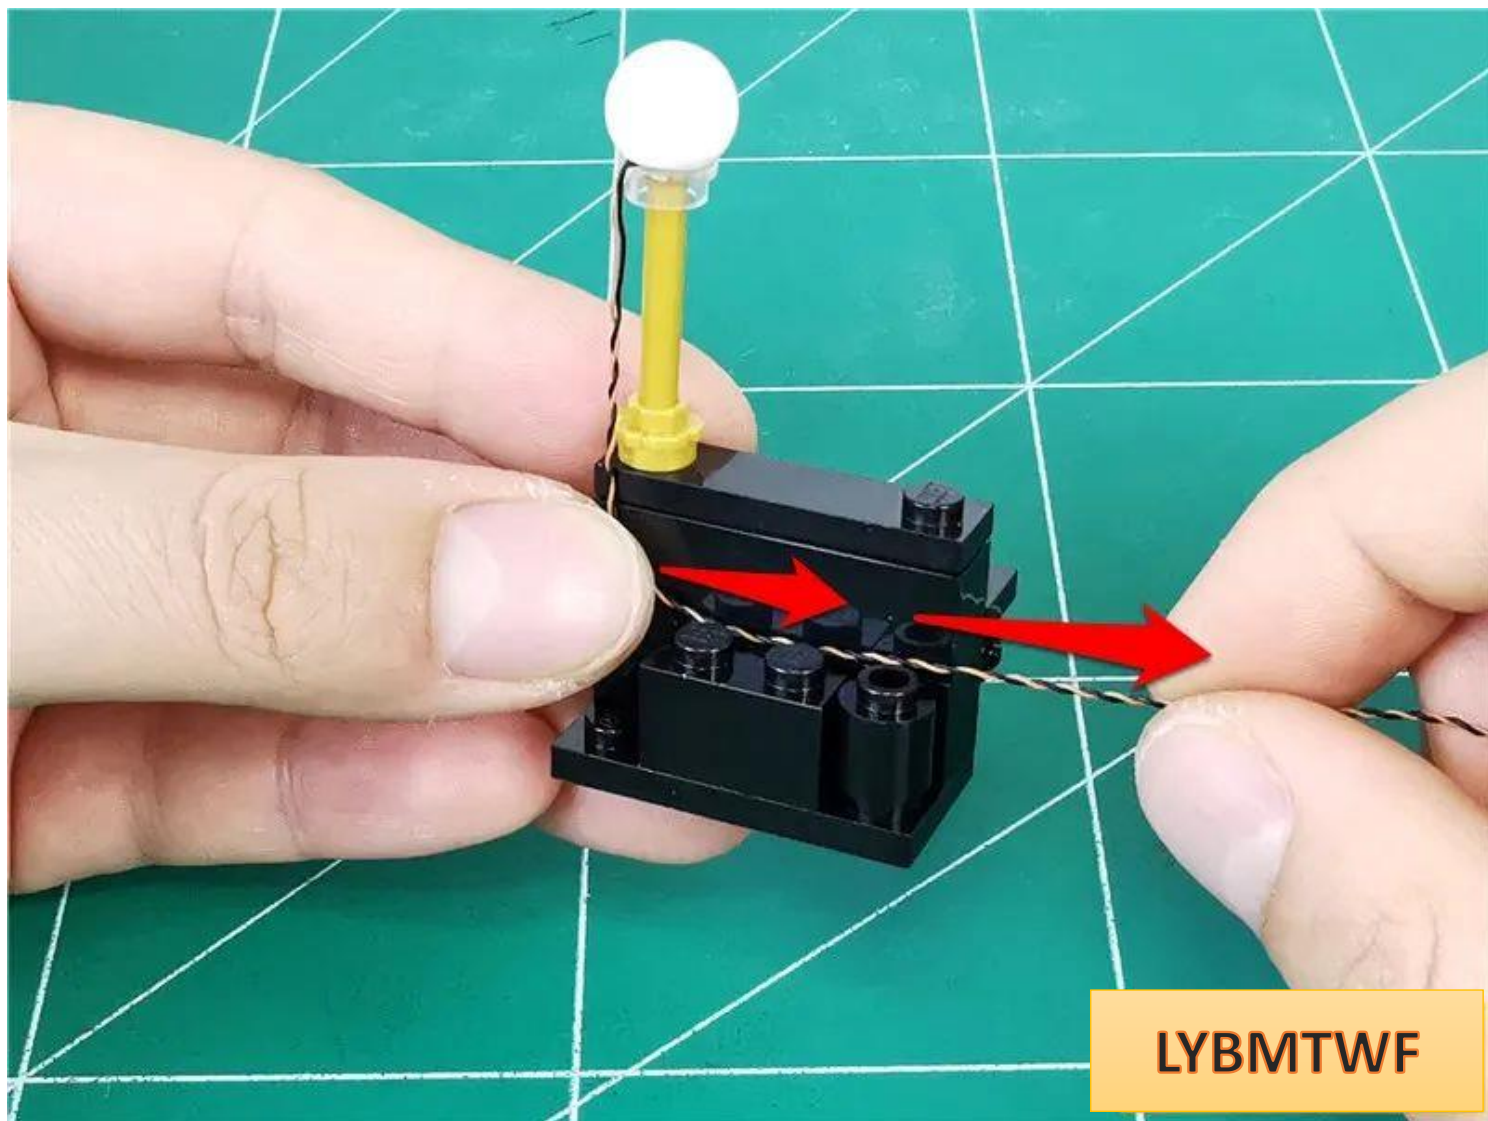



Restore parts and fix wires

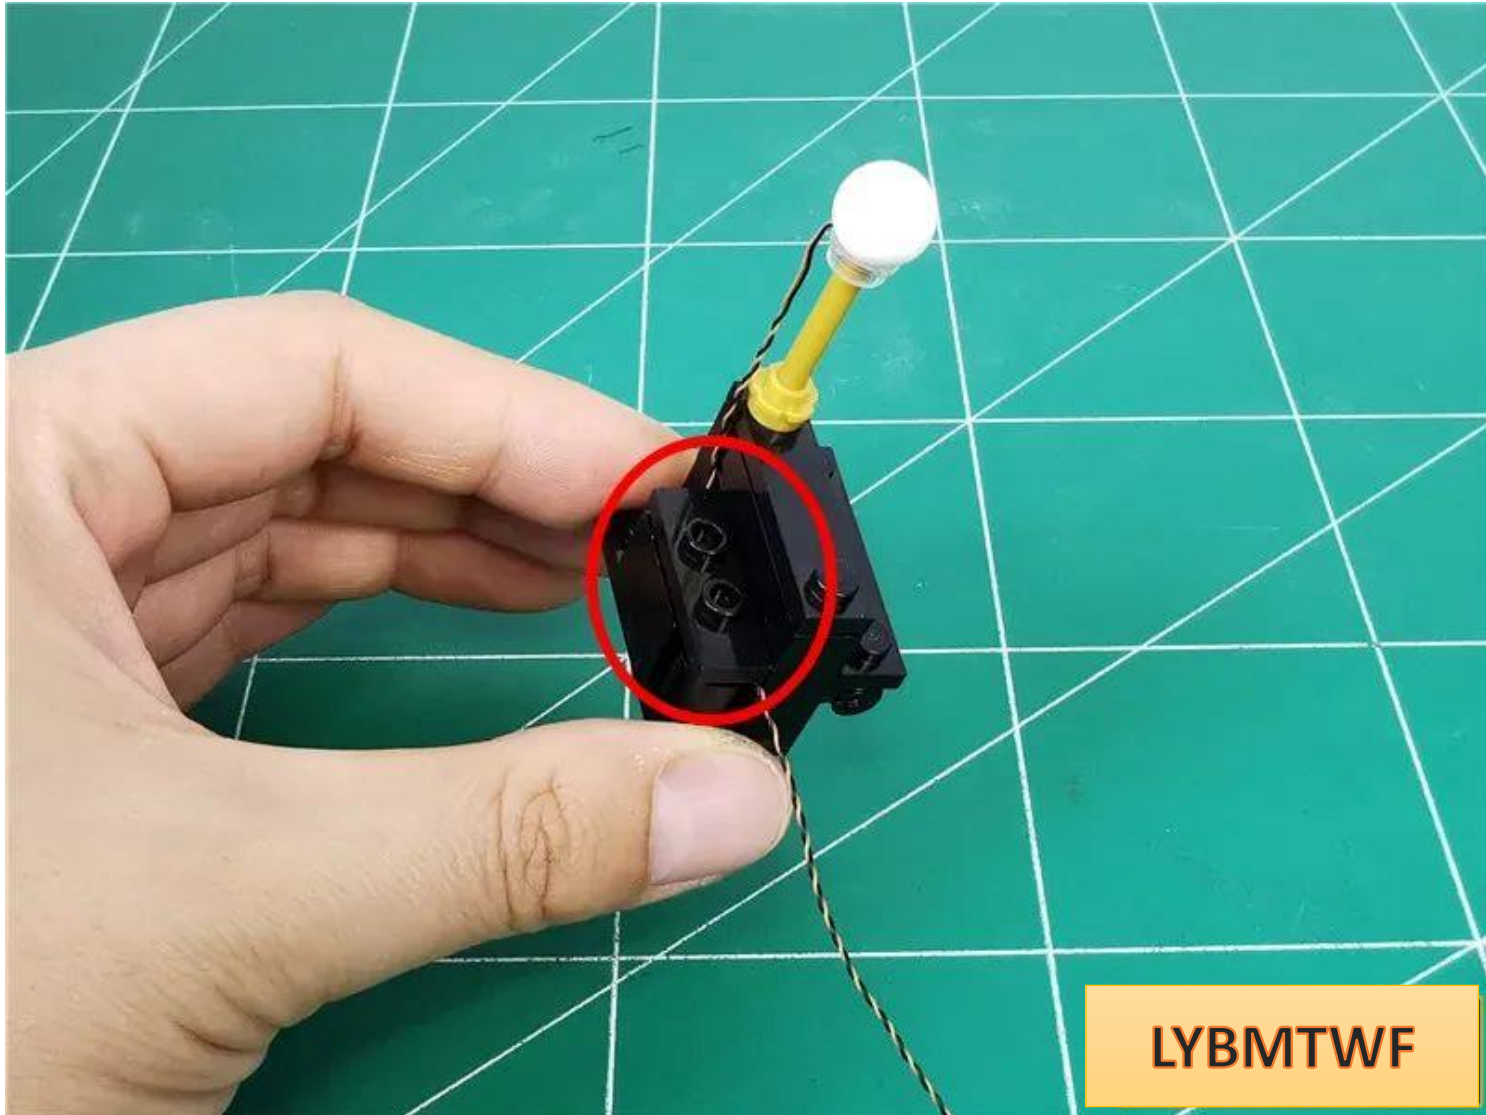


LYBMTWF

Use the same method to restore another desk lamp and organize the wires

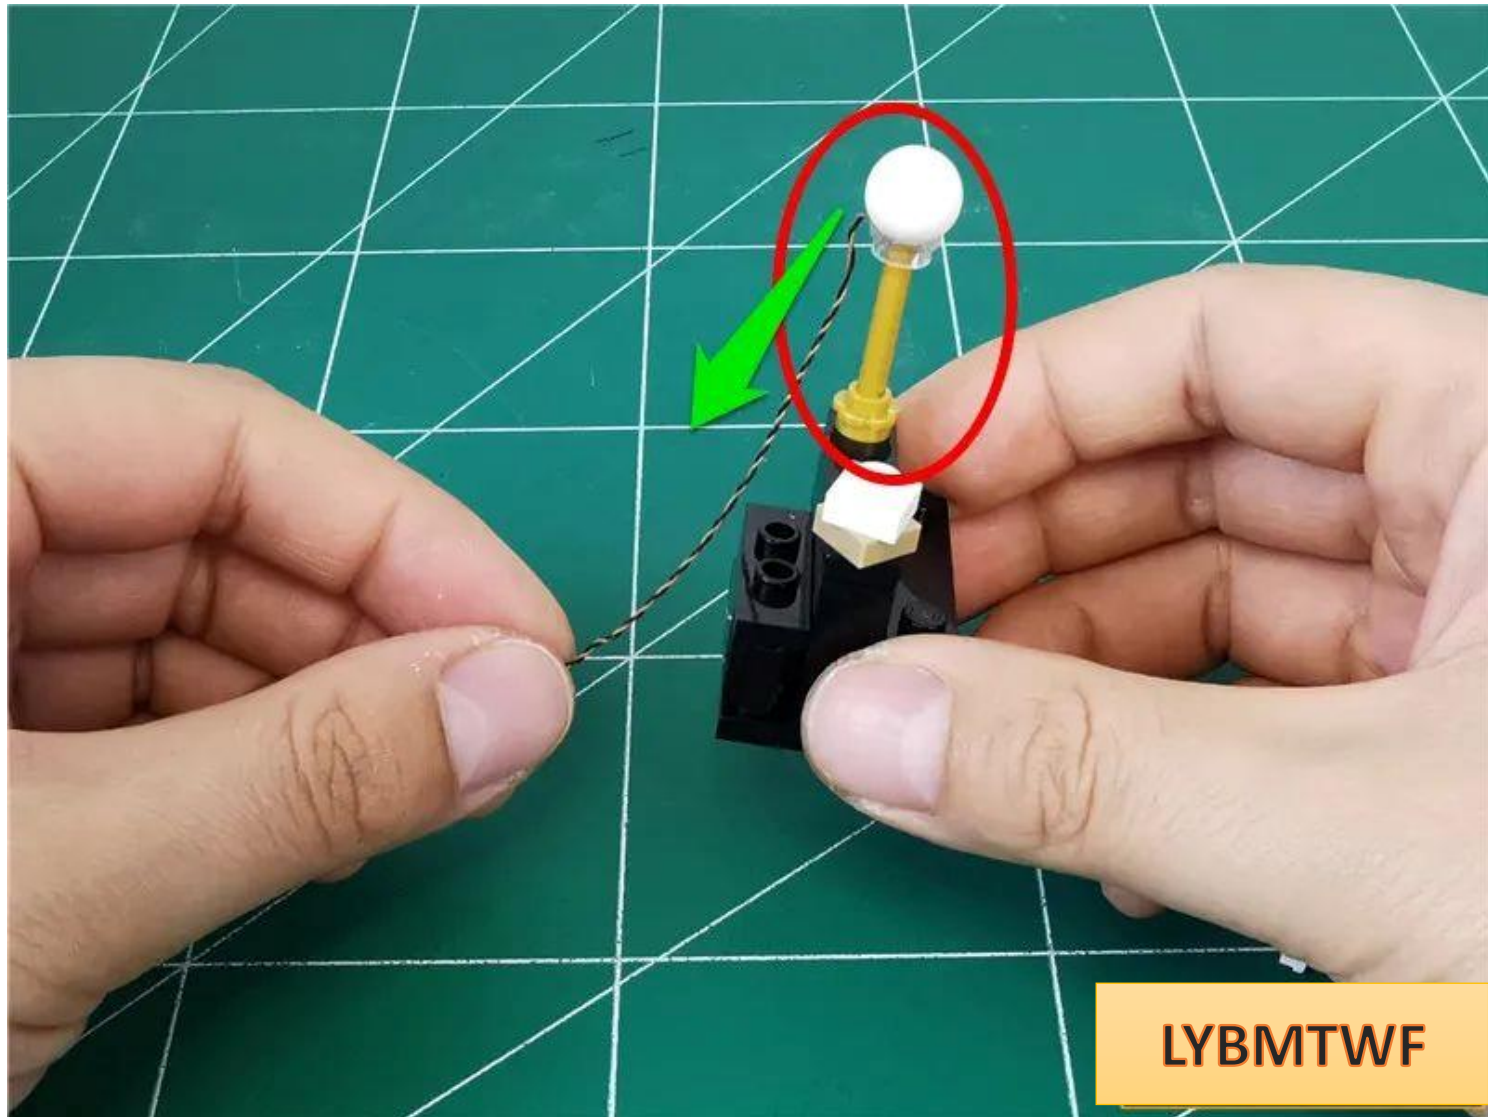


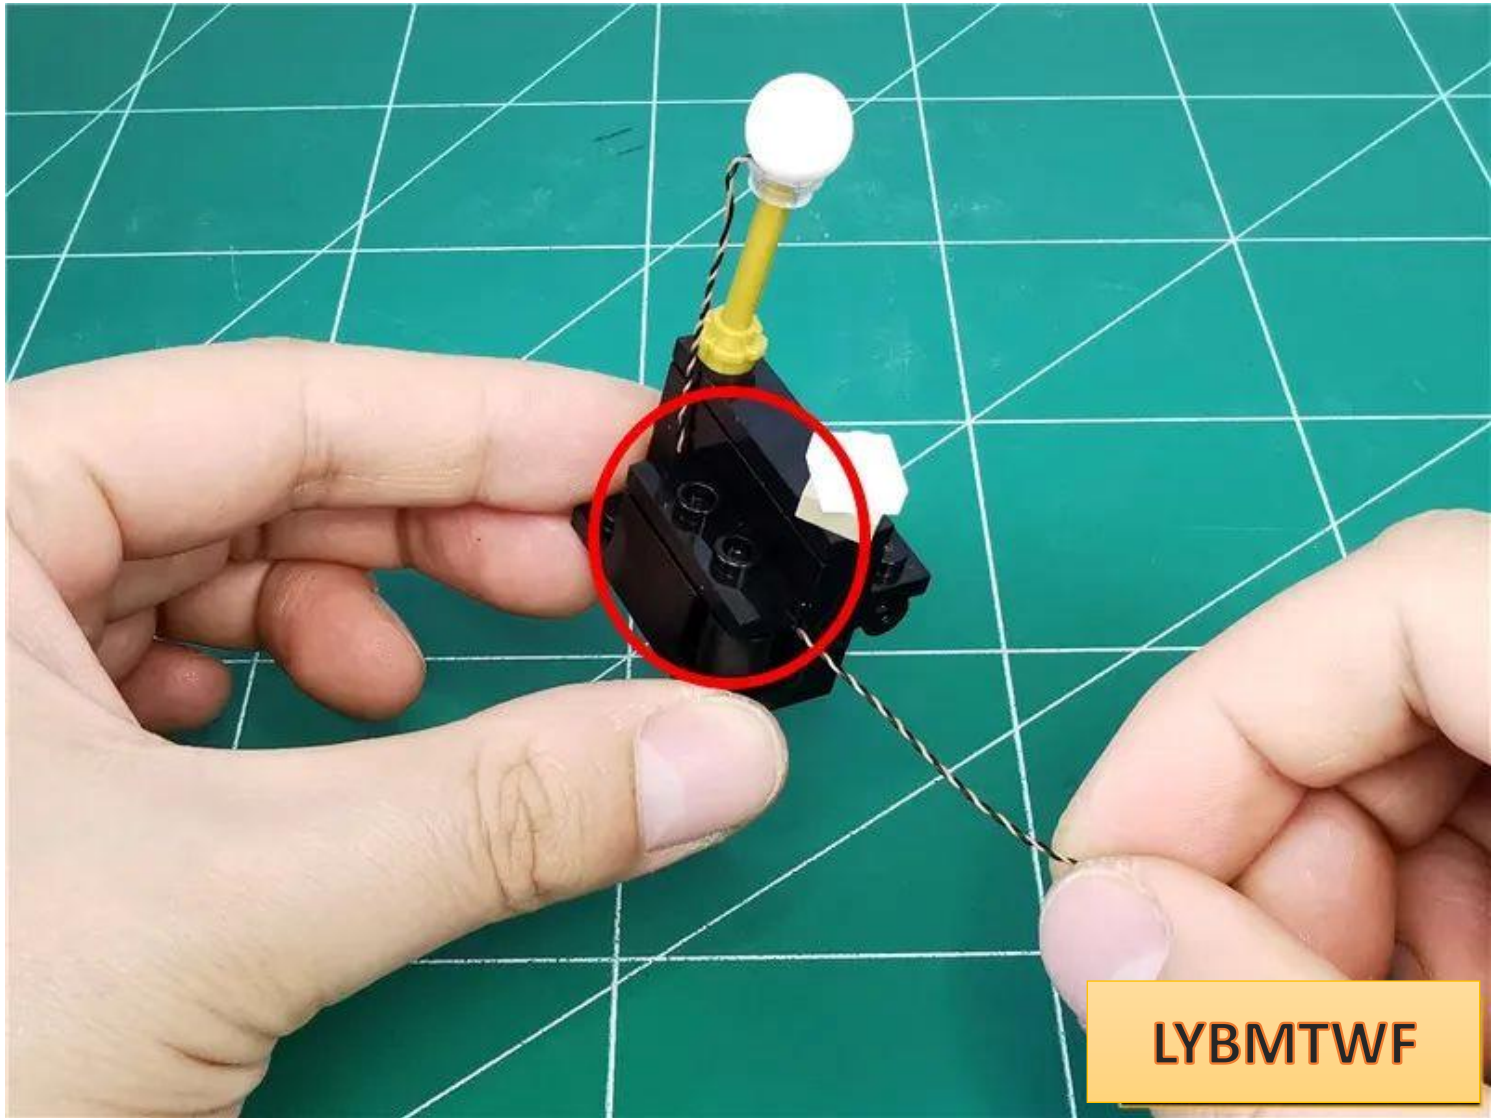

Prepare to restore the counter shown in the circle

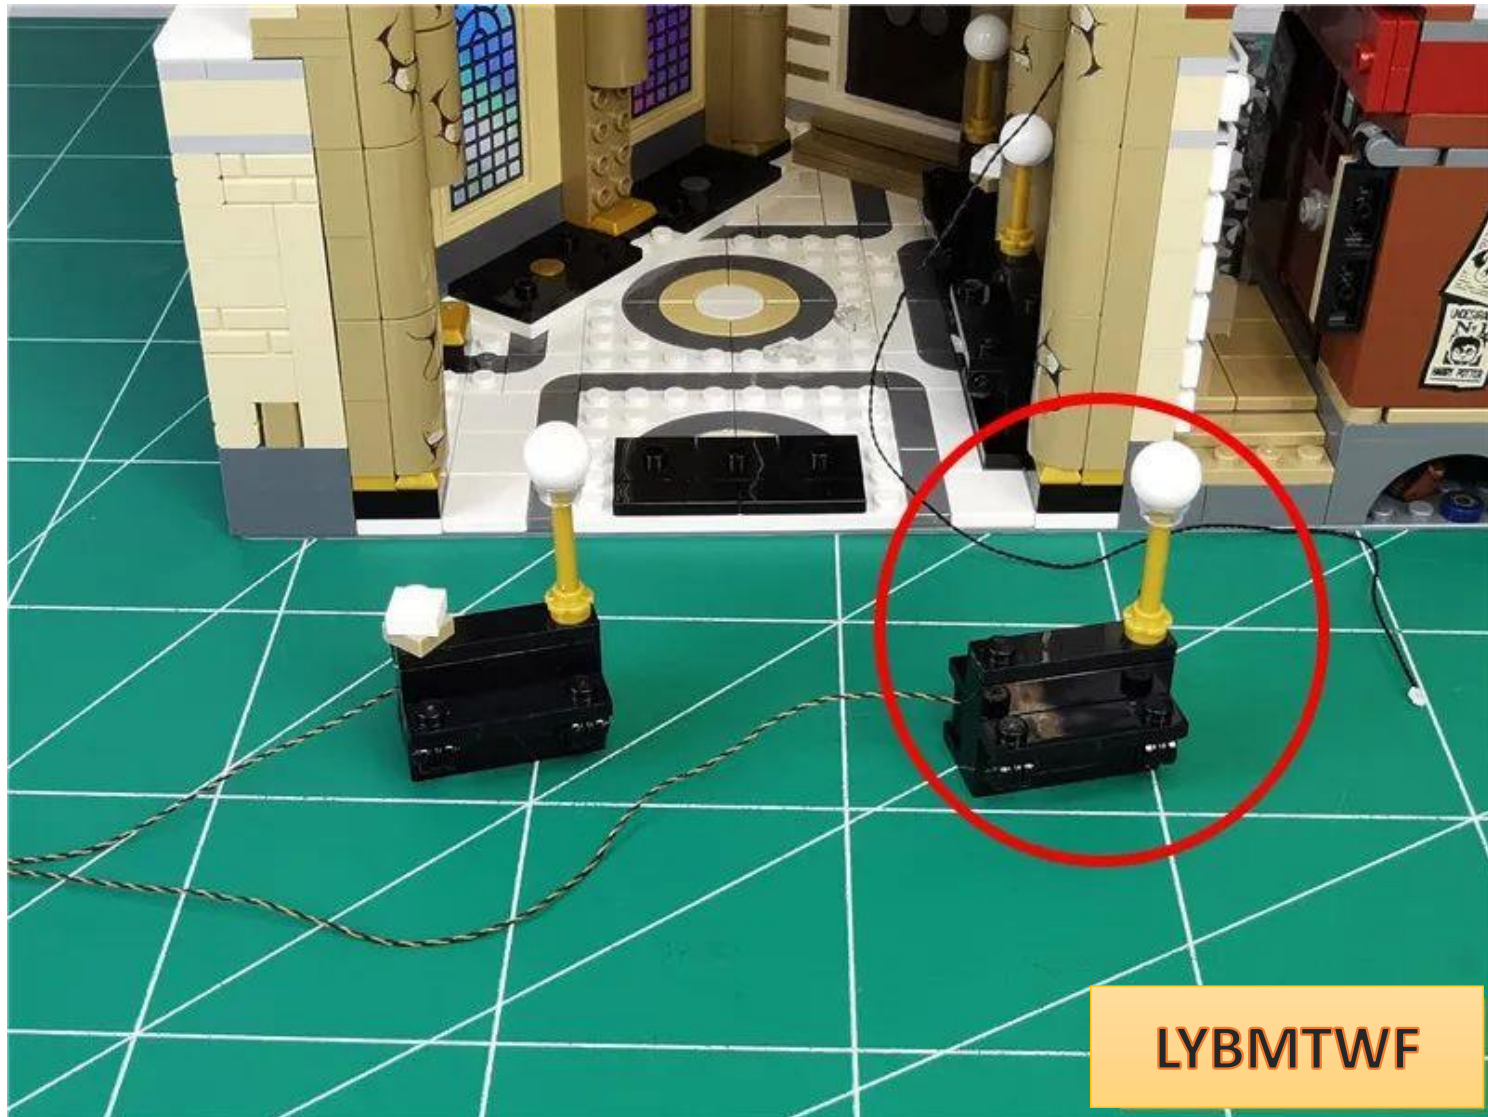


Restore the counter with the wires on the left

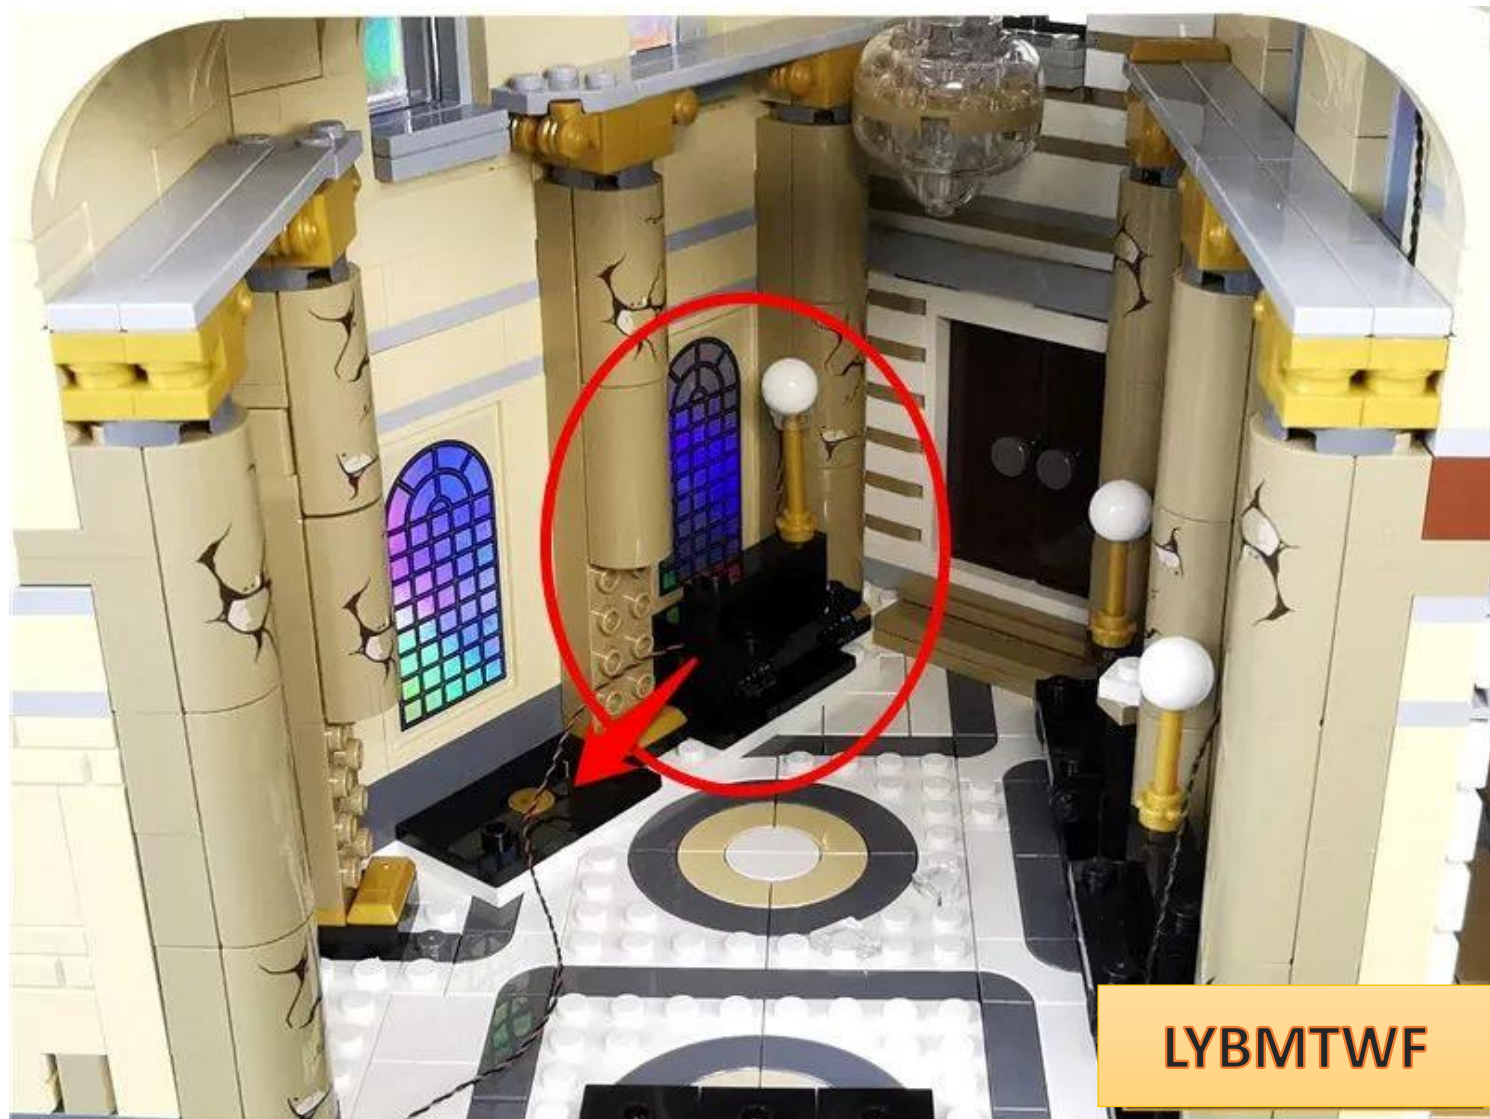

LYBMTWF

Pass the wire through the gaps between the raised particles

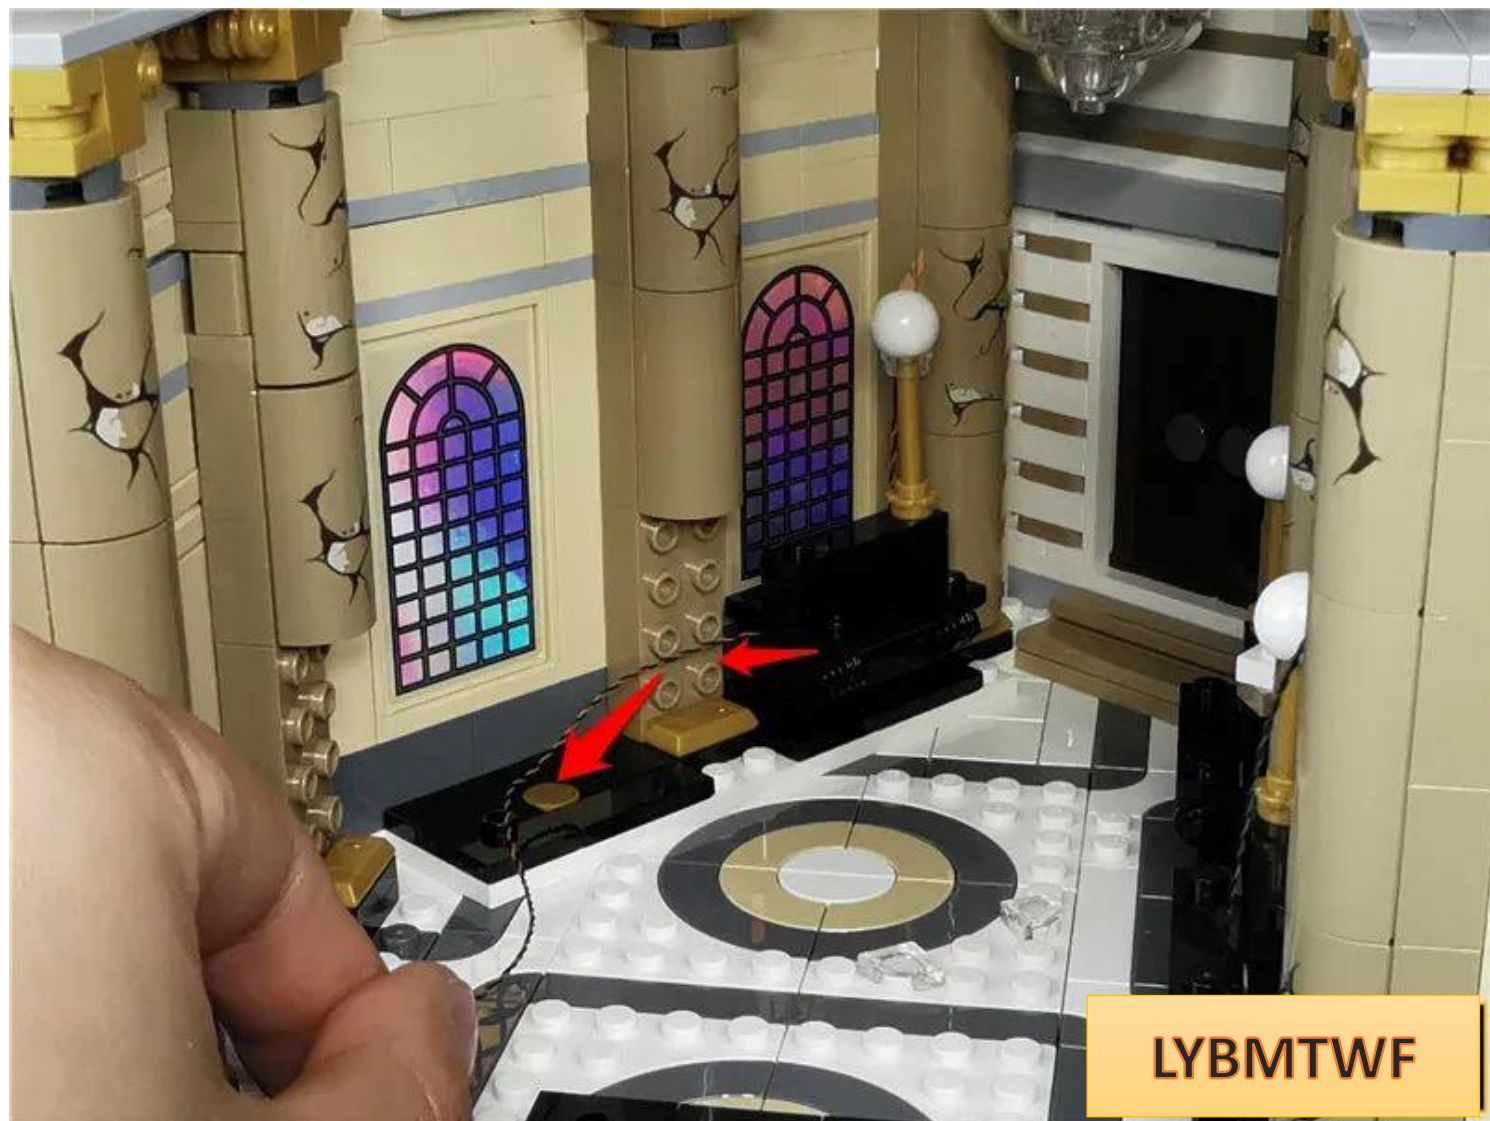


LYBMTWF


Restore parts and fix wires




Hold the wire against the wall and pull it to the left

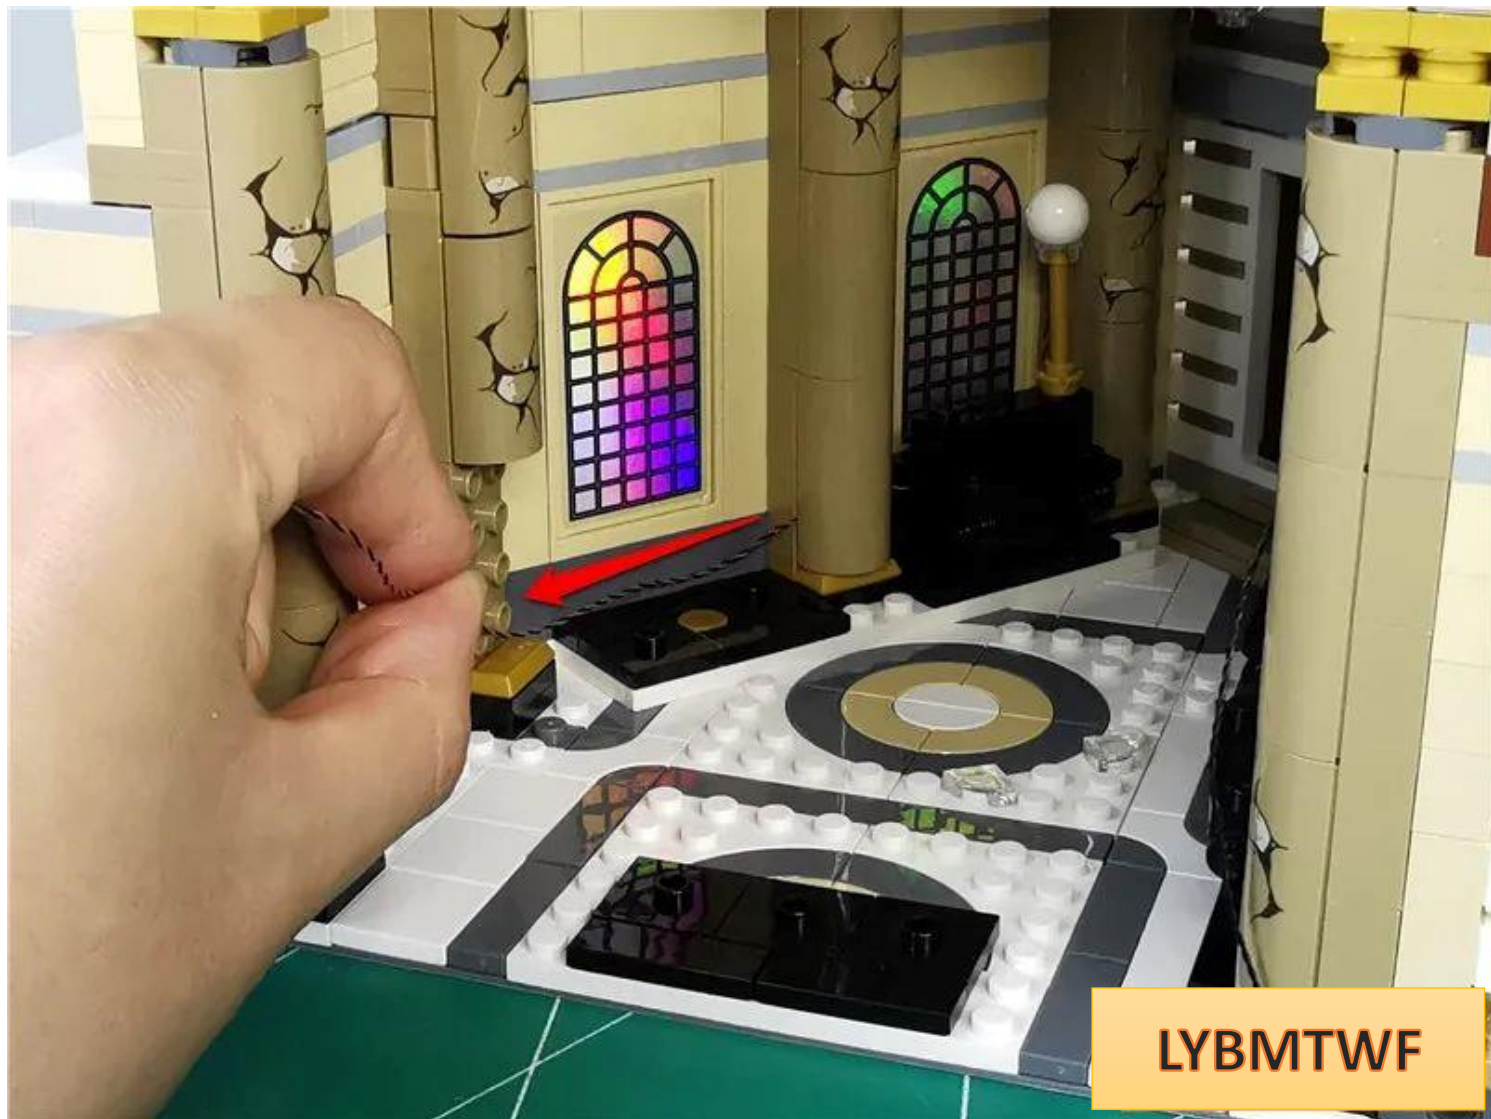


Restore another counter with the wire on the left

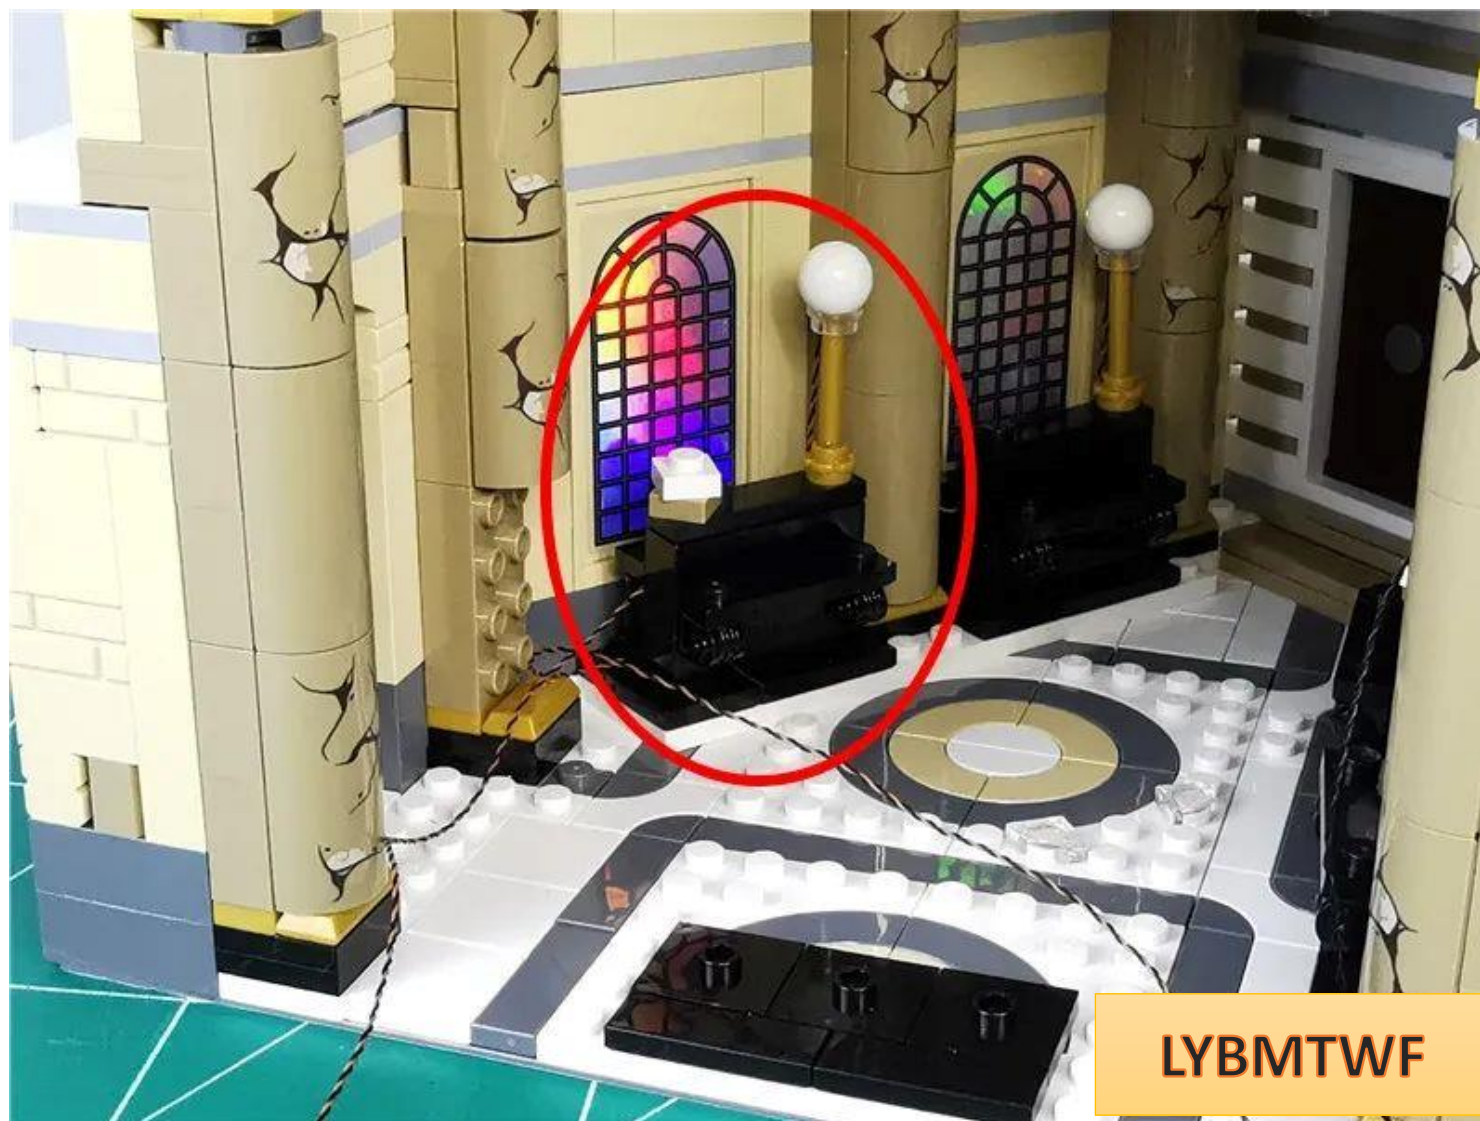


Pass the 2 wires through the gaps between the raised particles

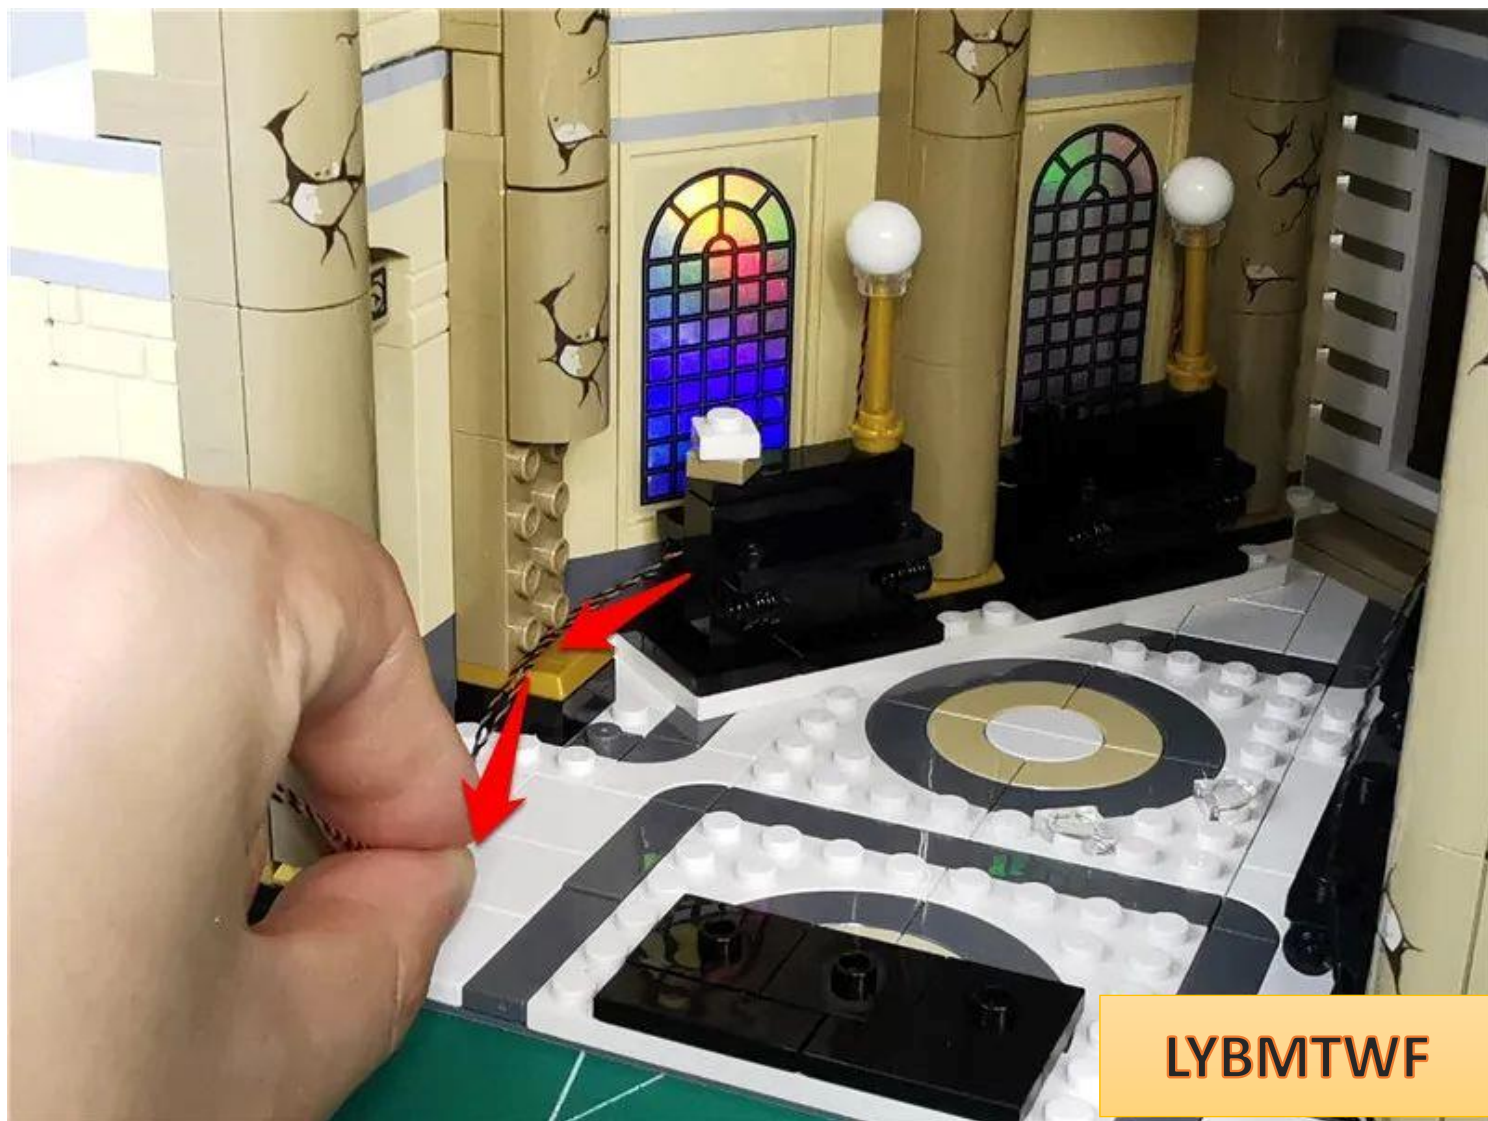


Restore parts and fix wires

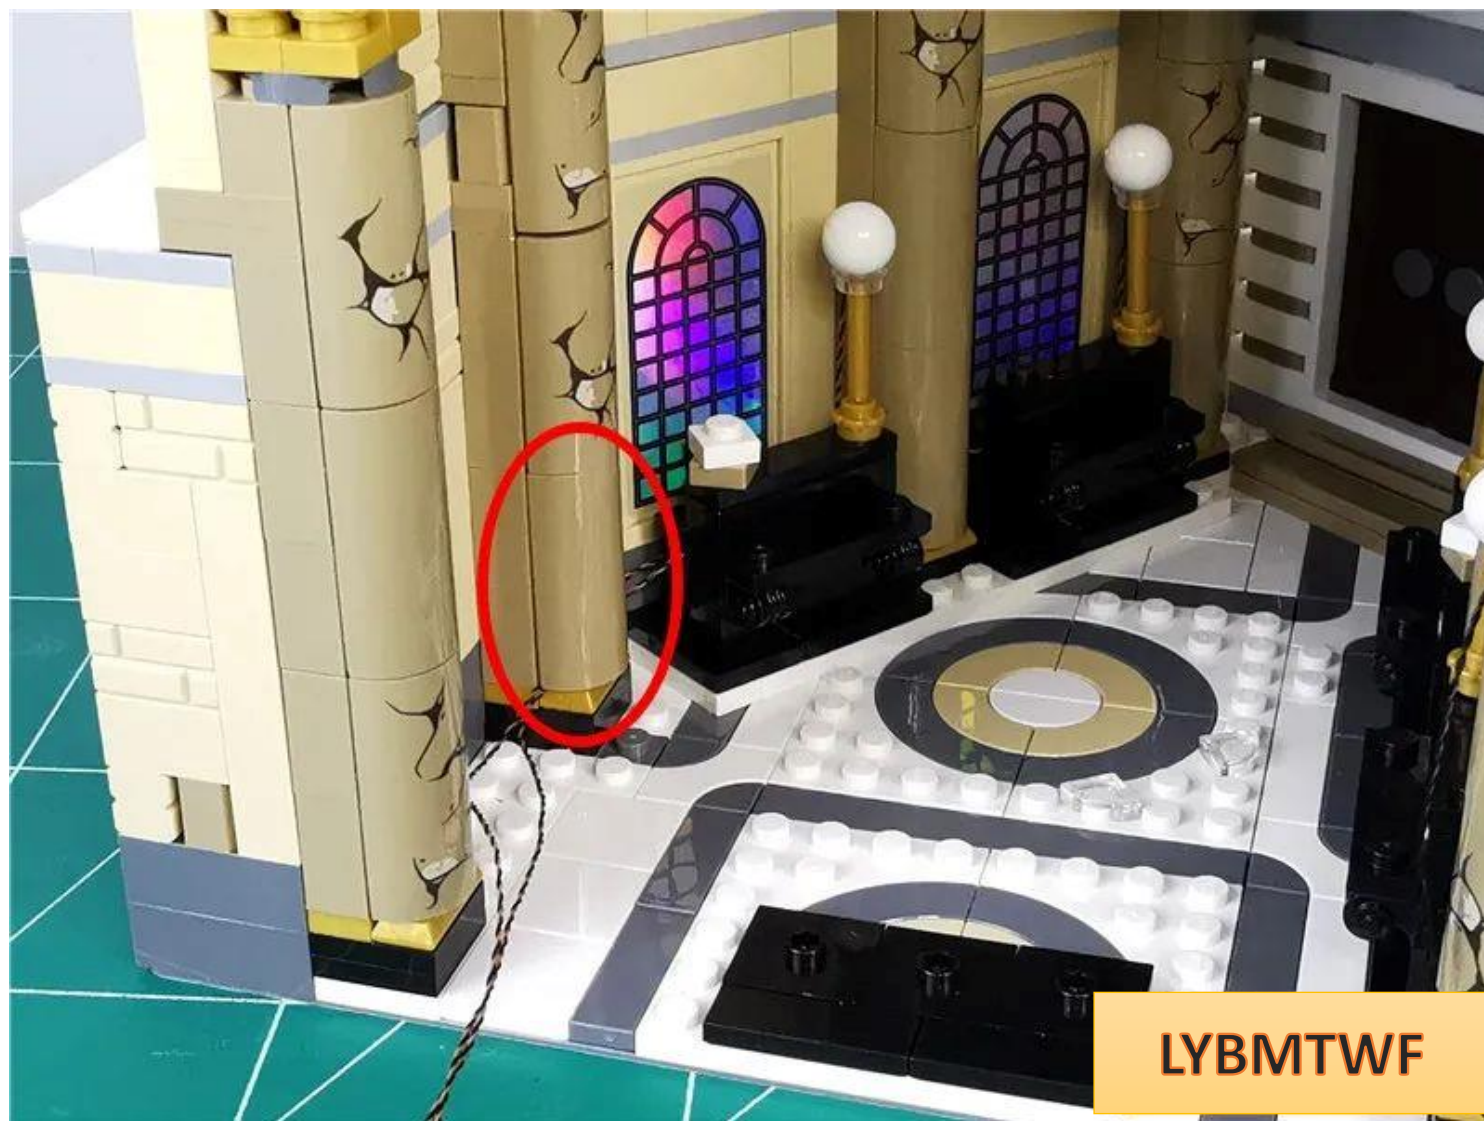


Remove the parts indicated by the arrows

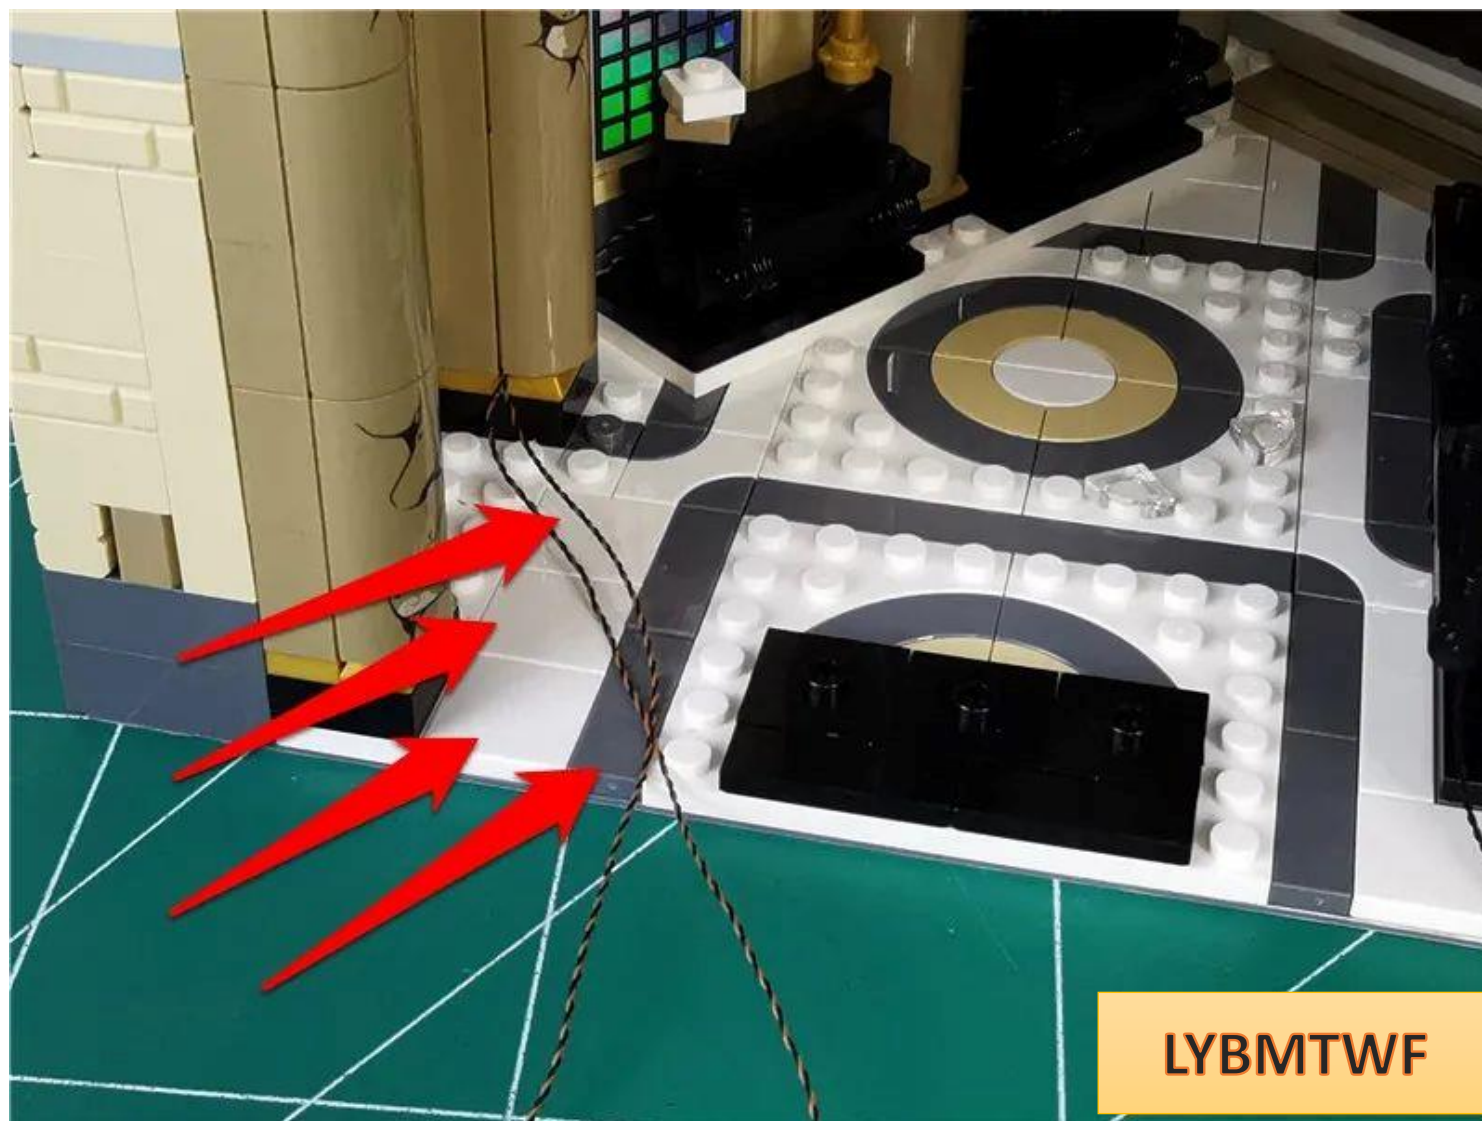


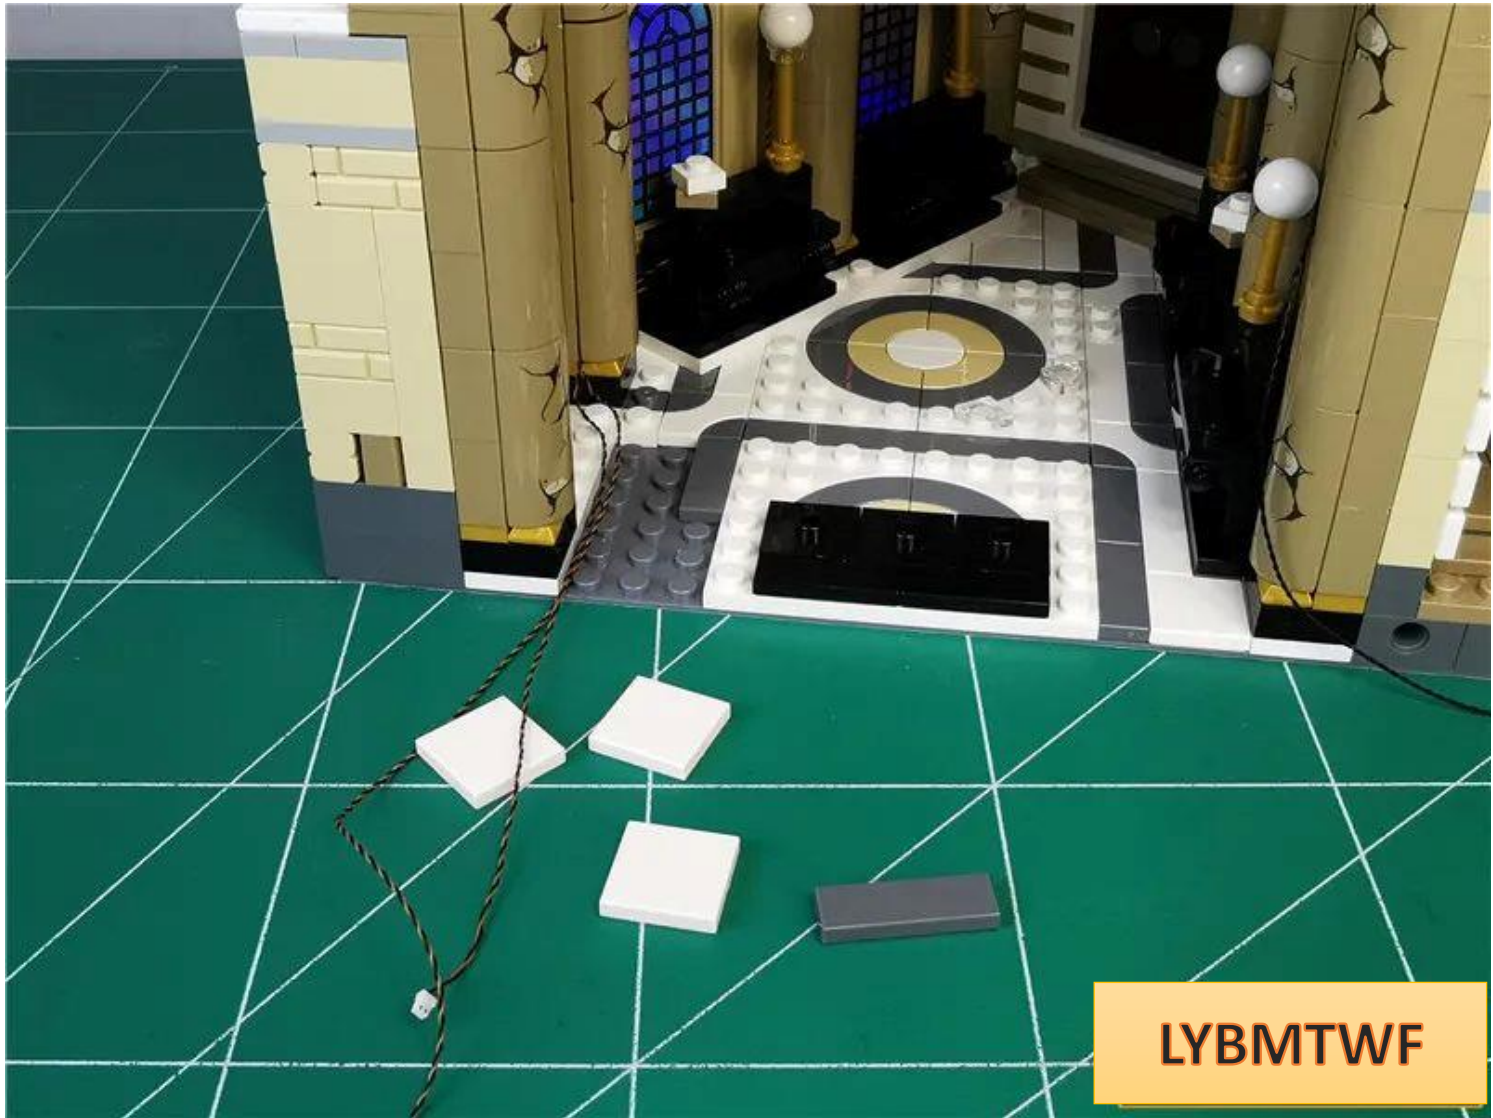

Pass the 2 wires along the angle of the part

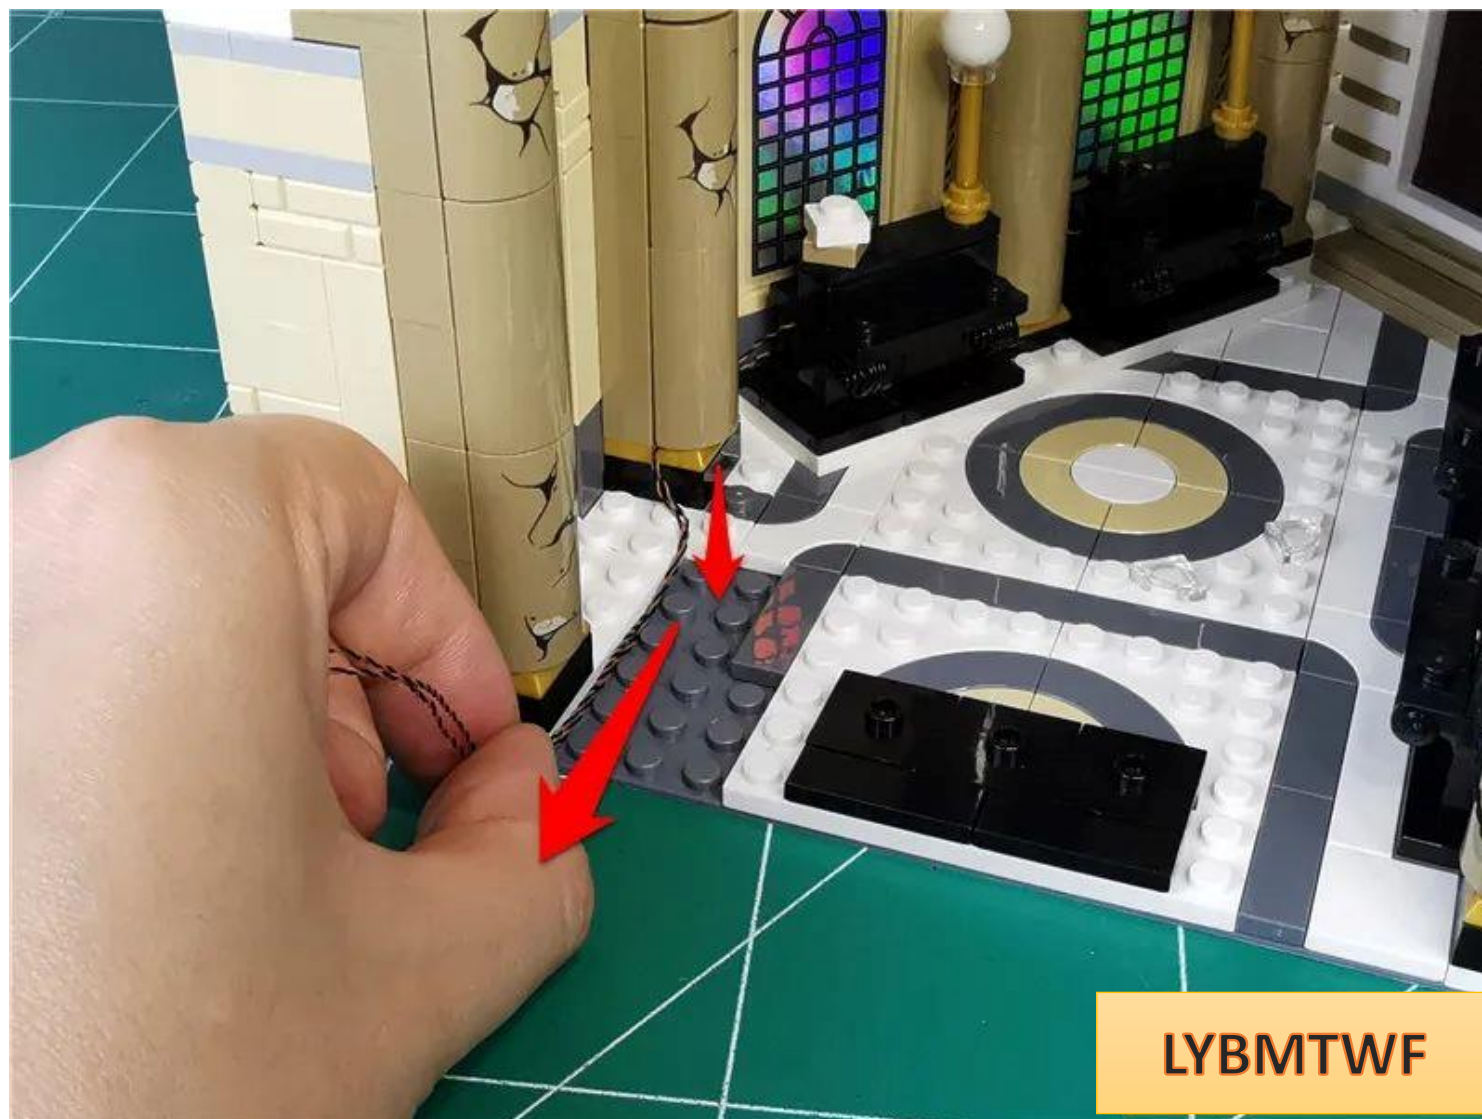


Restore parts and fix wires

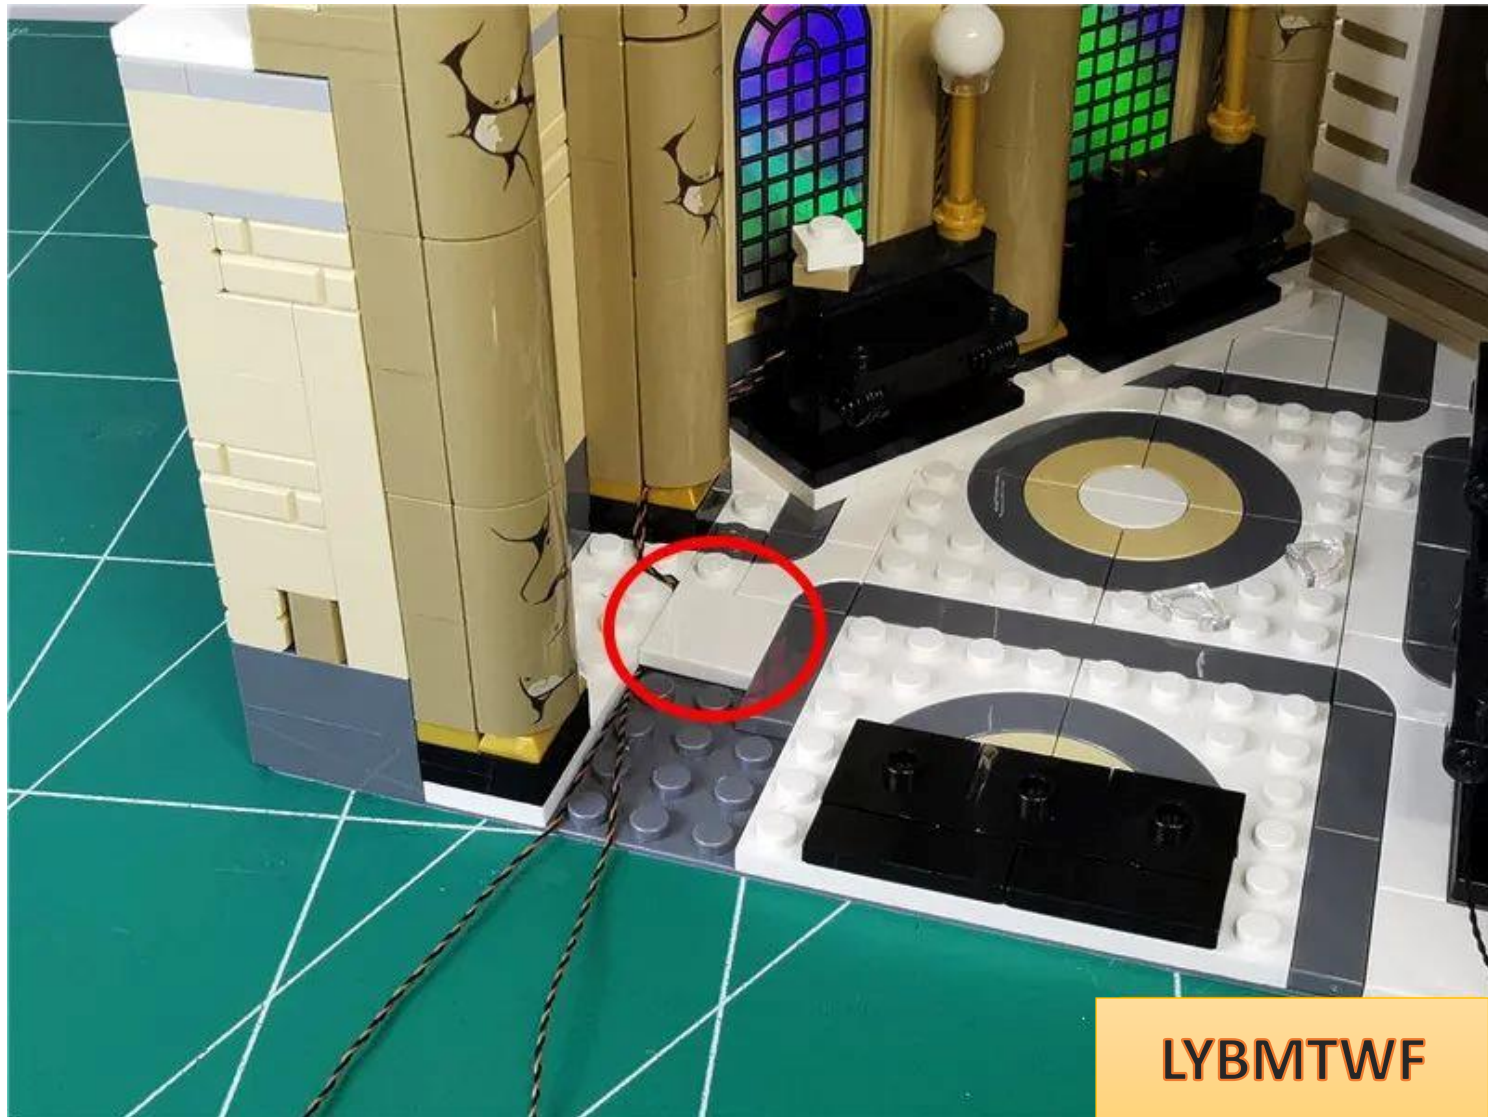


LYBMTWF


Continue to pull the wire along the raised particle gap to the right

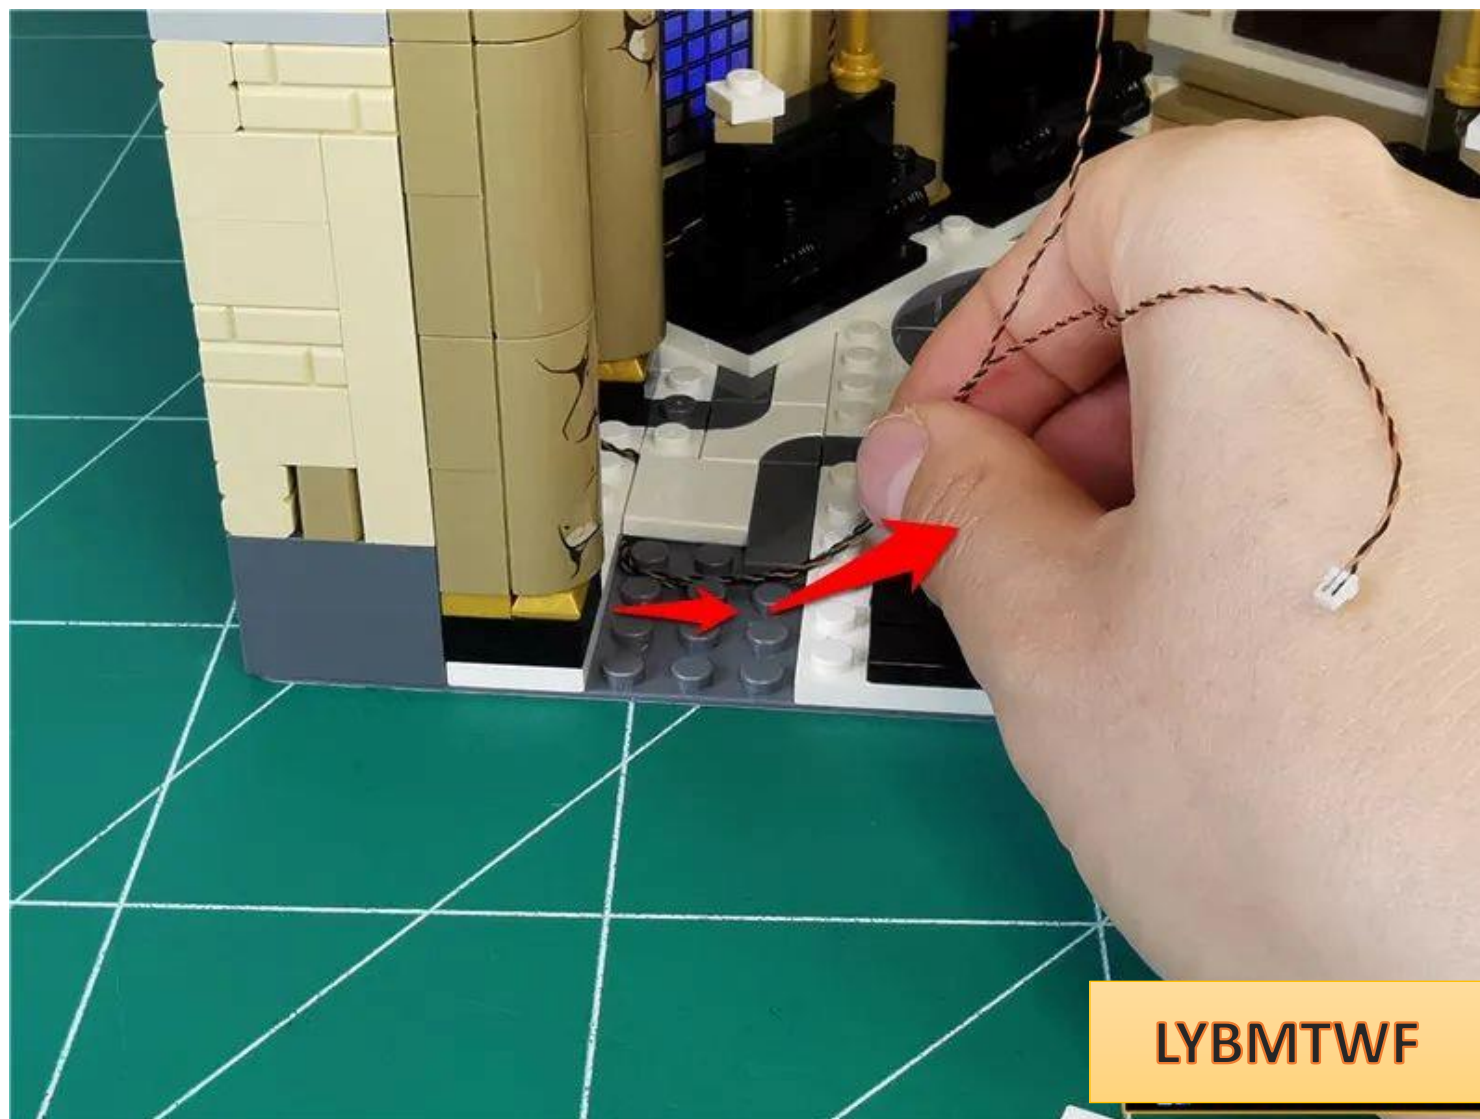


Restore parts and fix wires

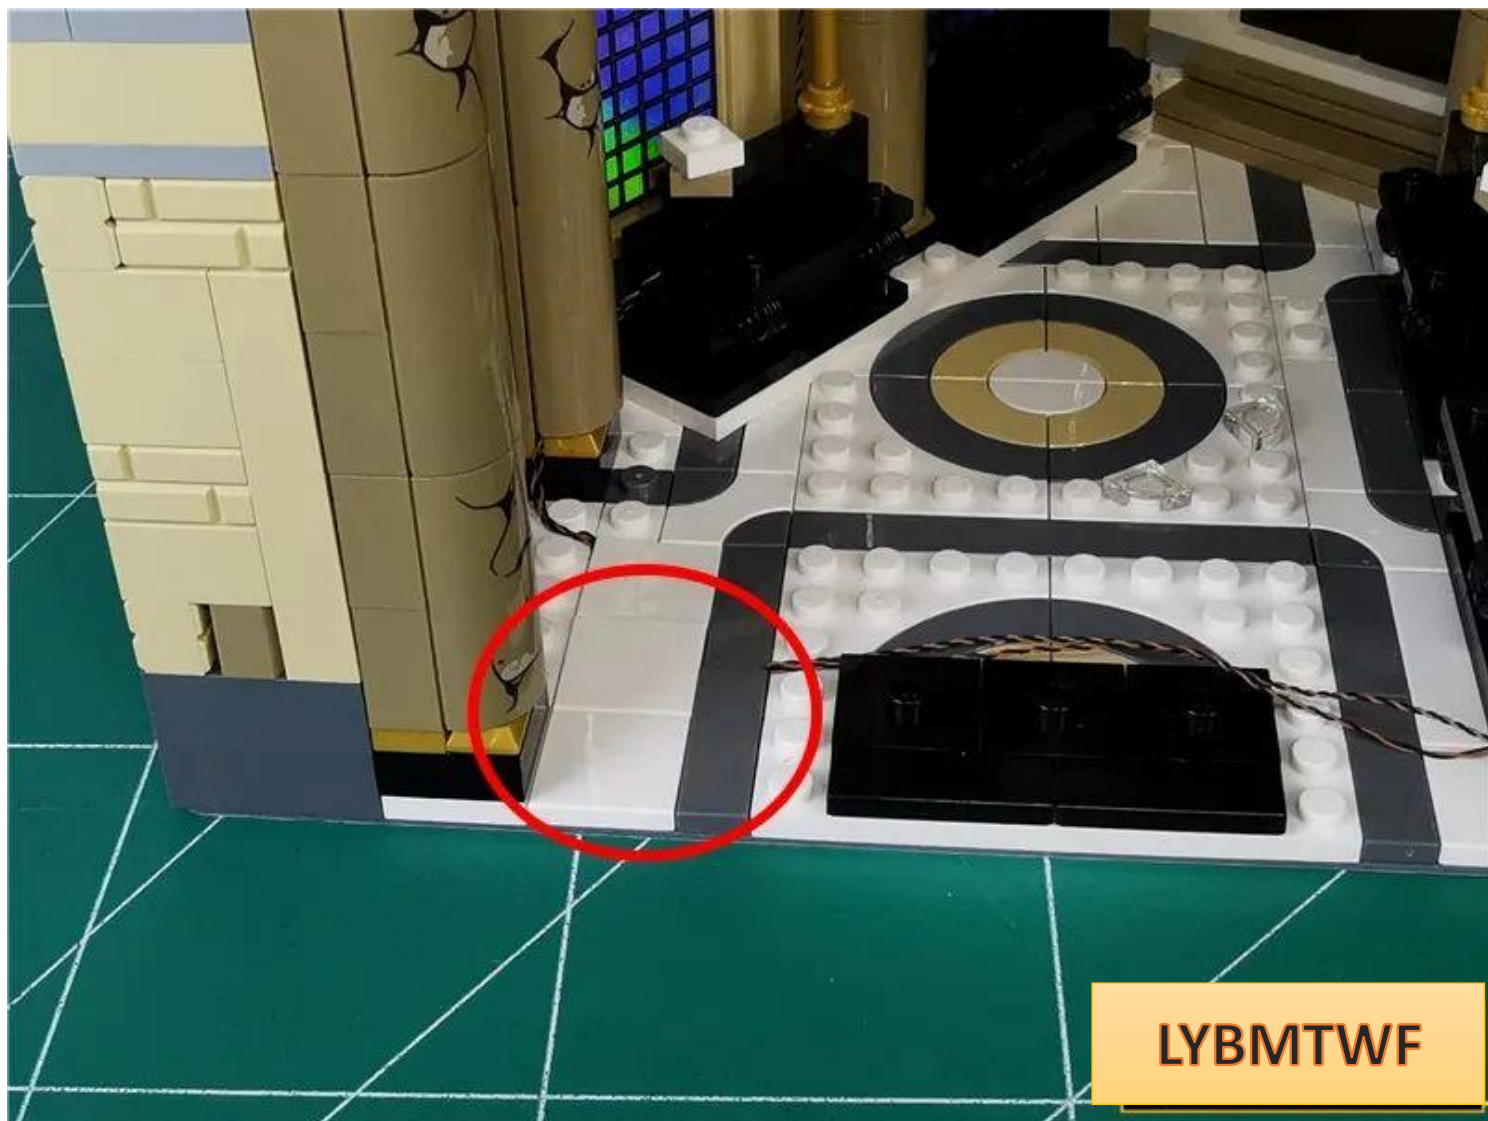


Remove the parts indicated by the arrows in sequence

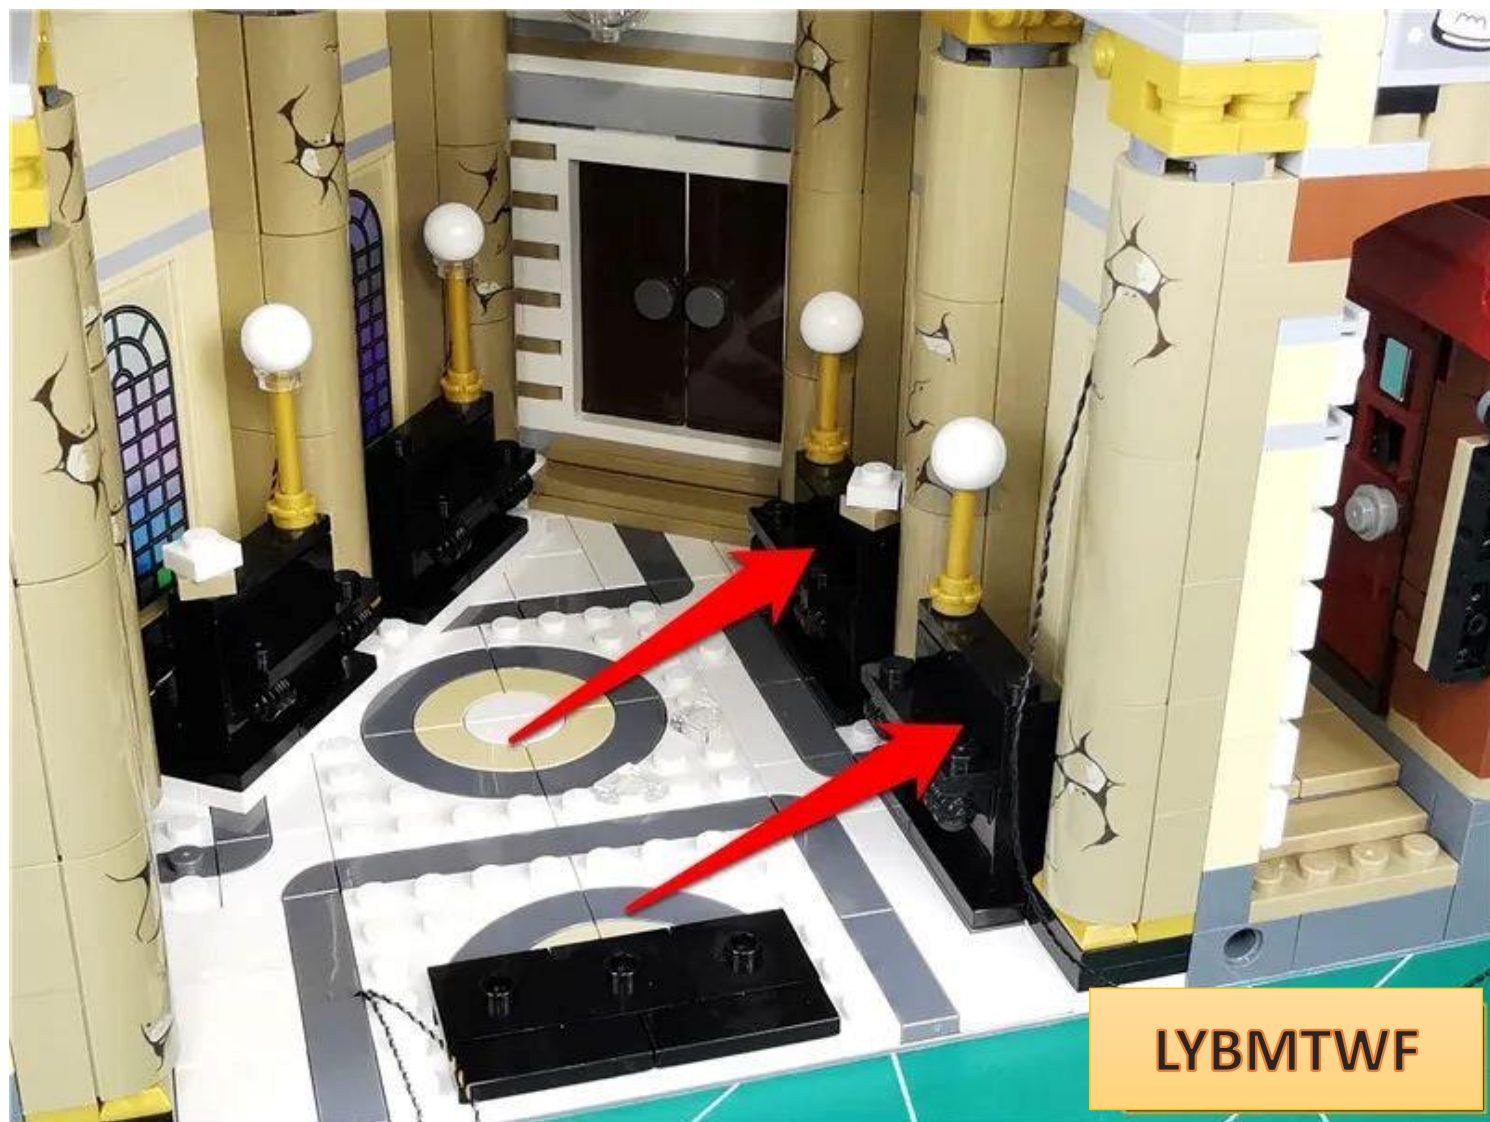


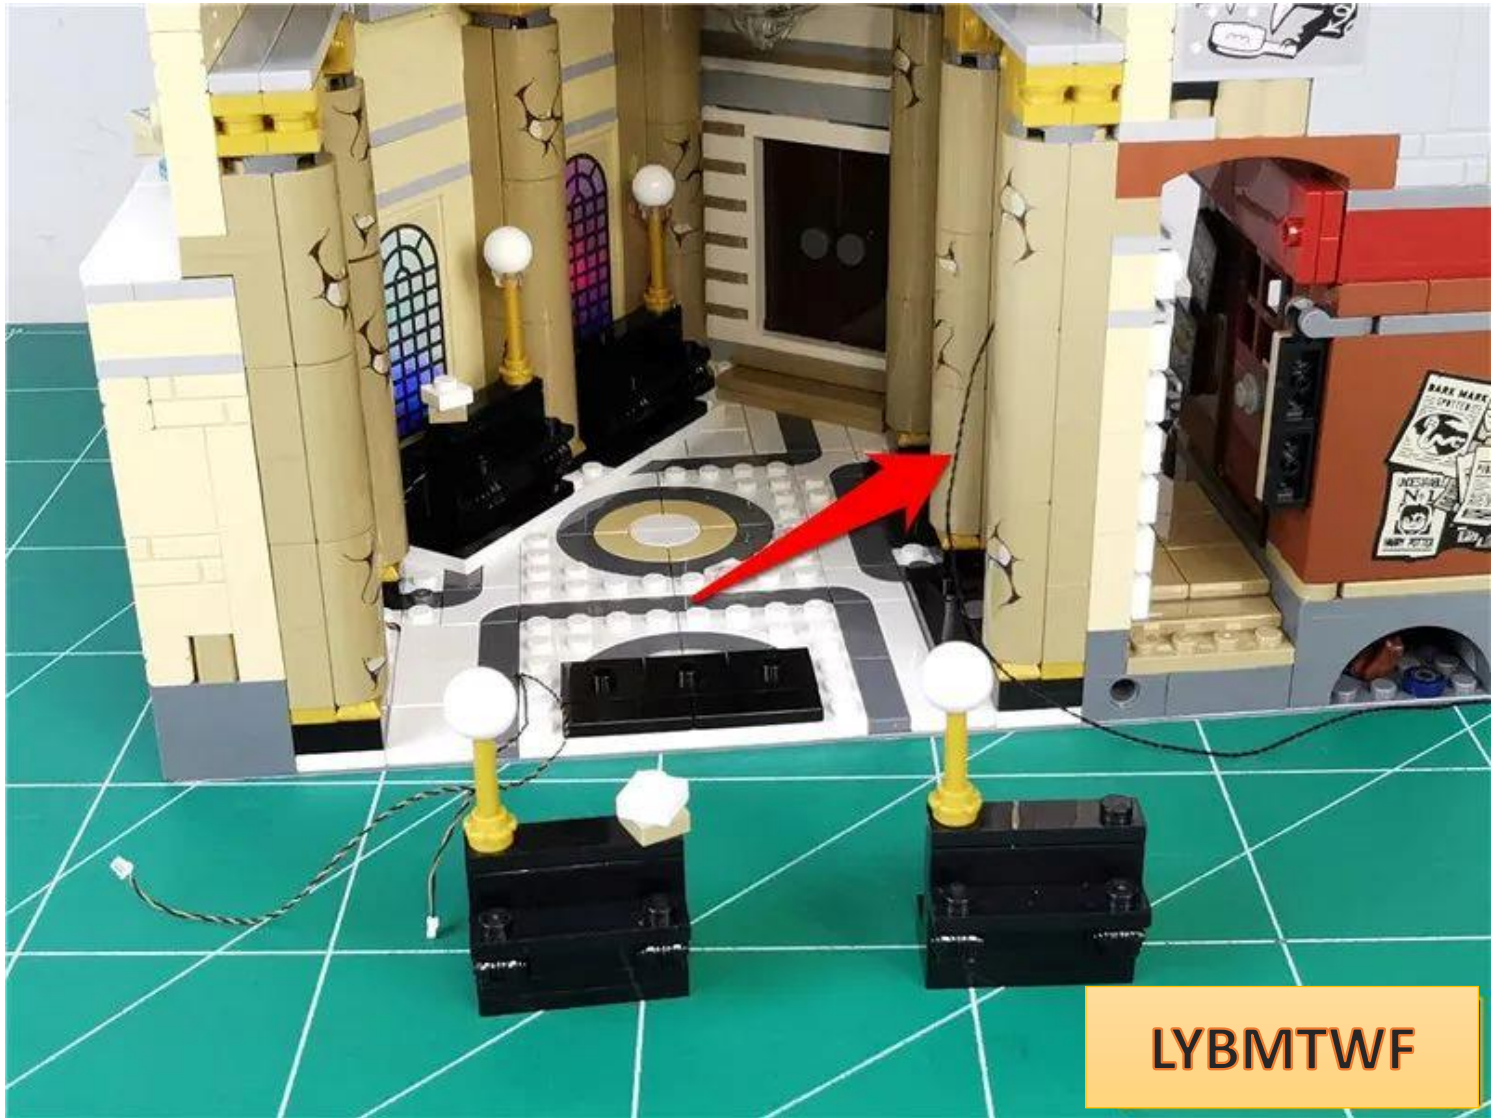


LYBMTWF

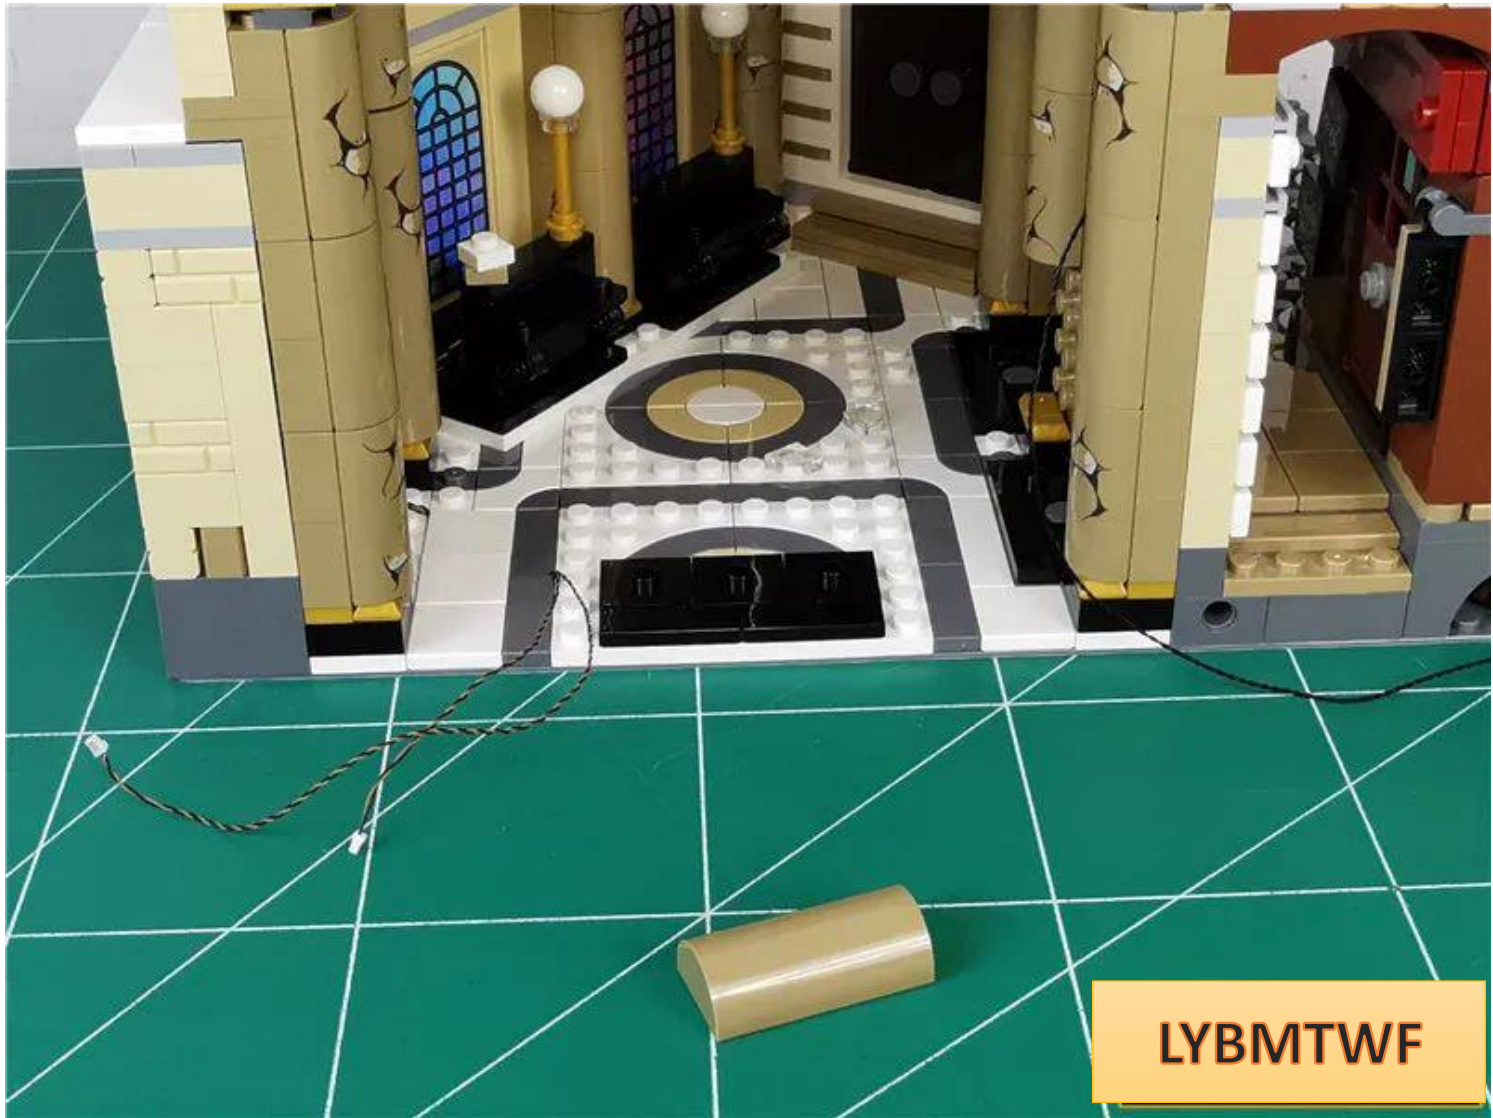

Take 2 30cm ordinary warm light bulbs and 2 hollow transparent circles

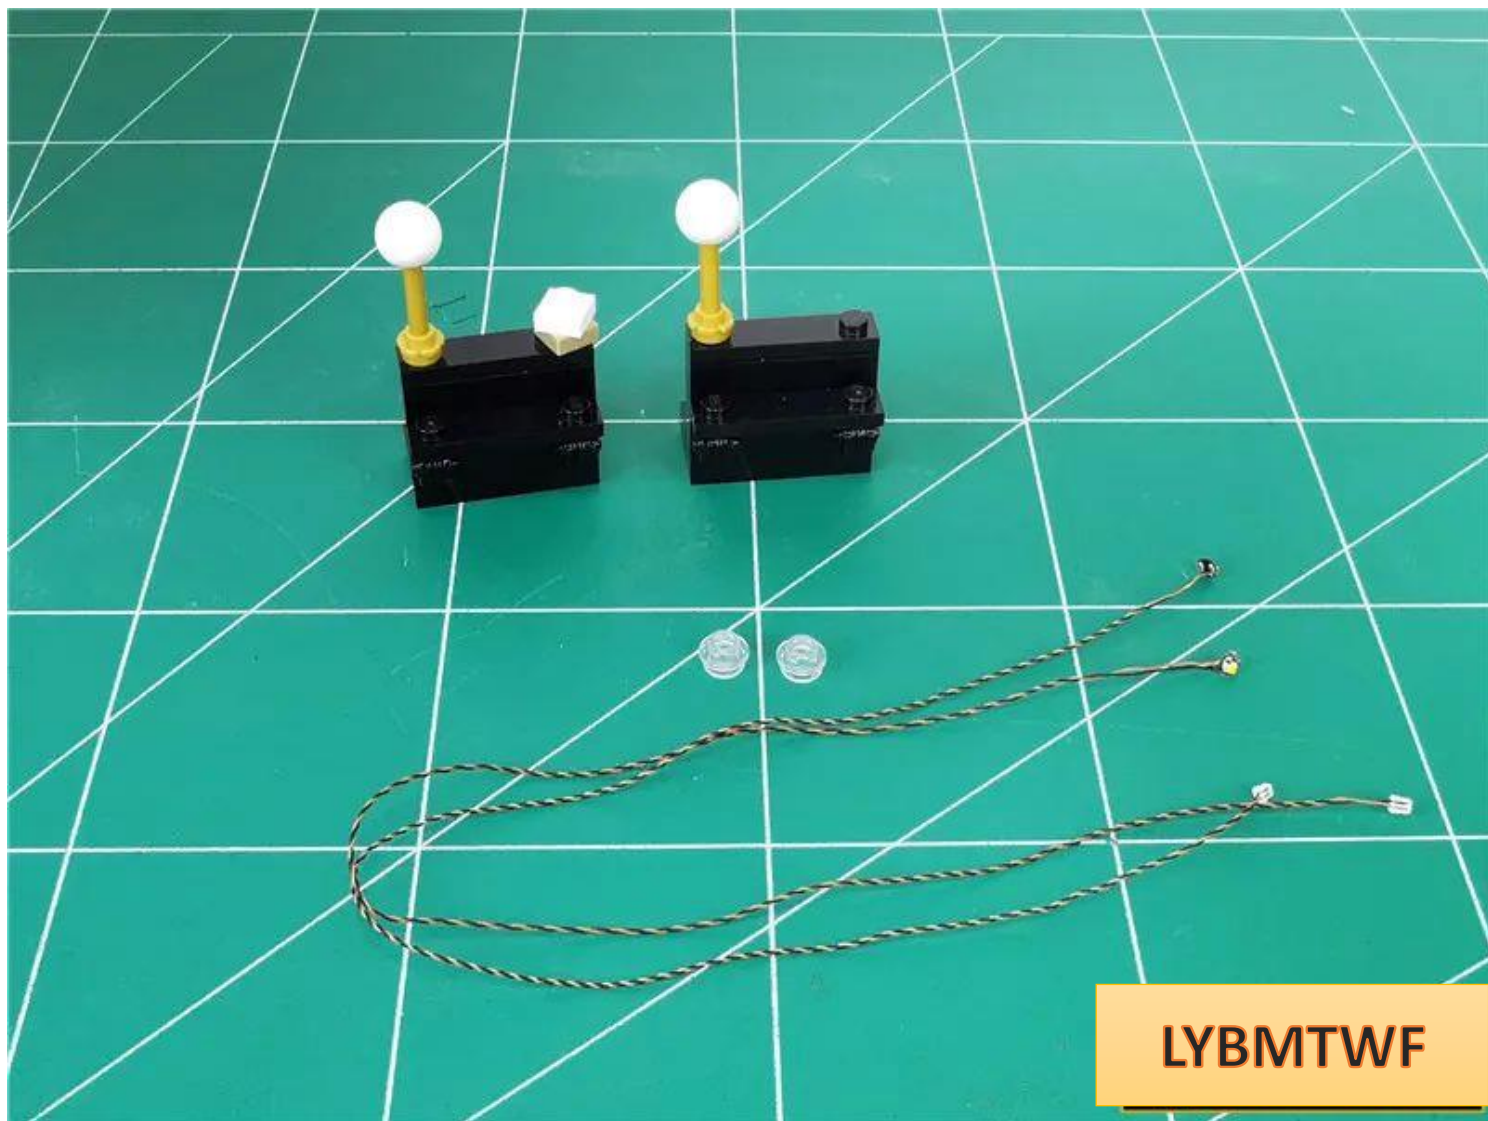


Install the lamp particles

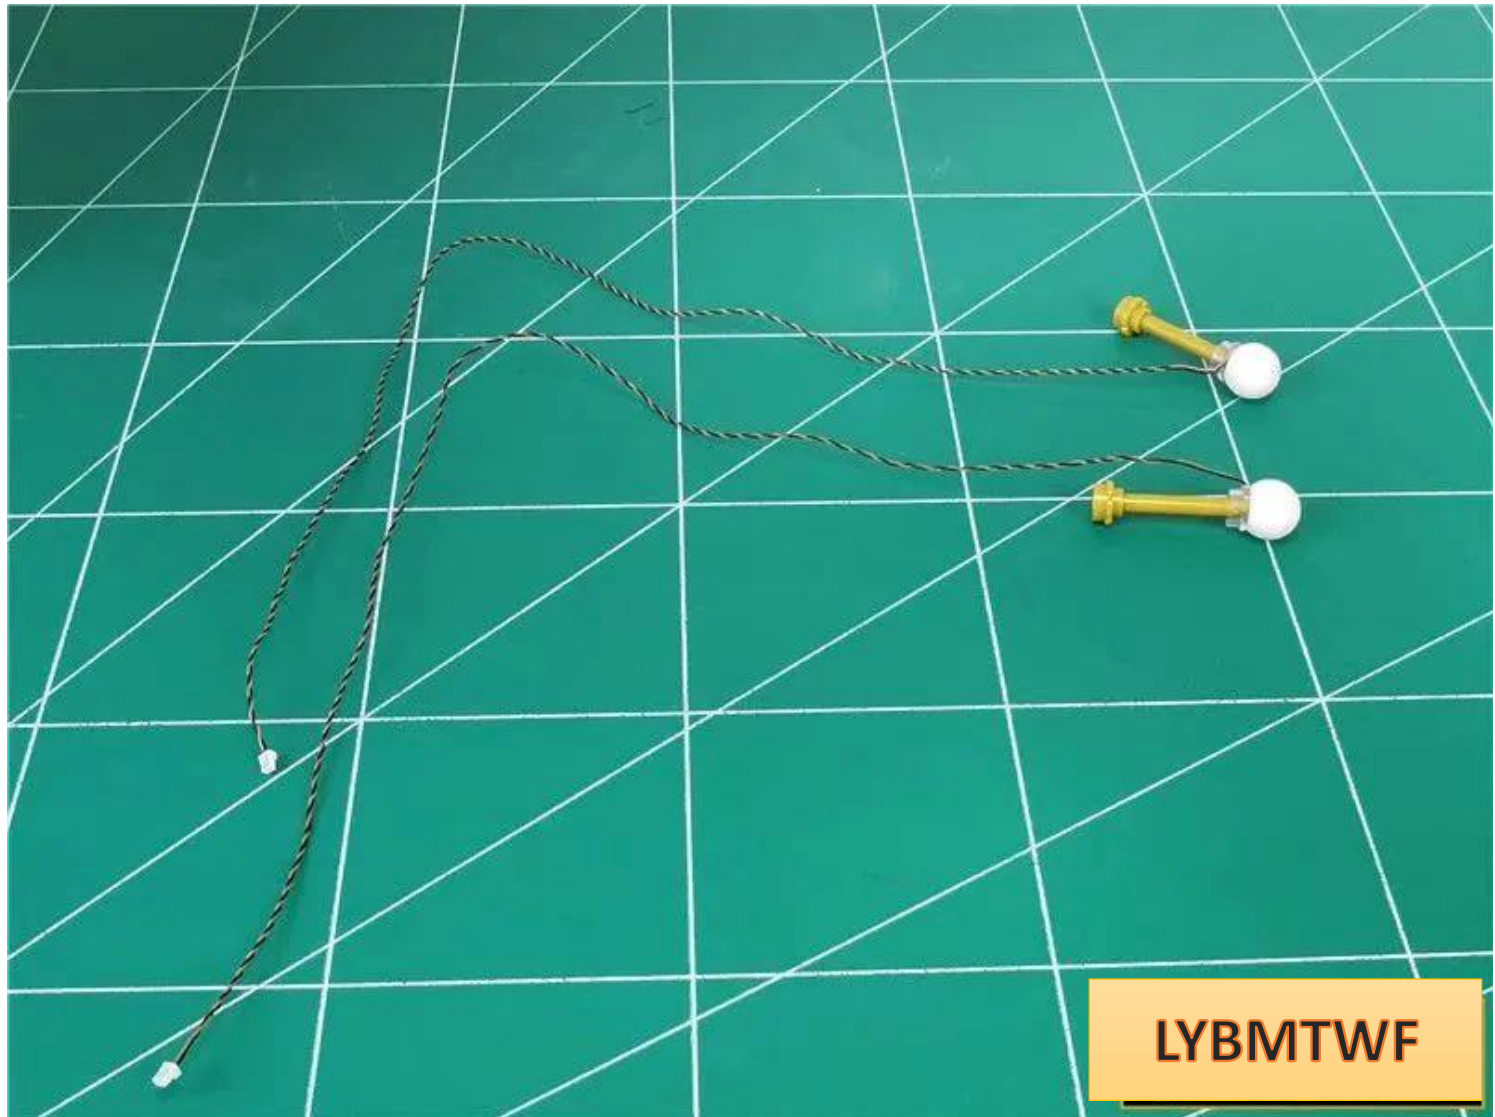


in the same way as before

Restore any table lamp with the wire on the back of the counter (pay attention to the direction of the counter)

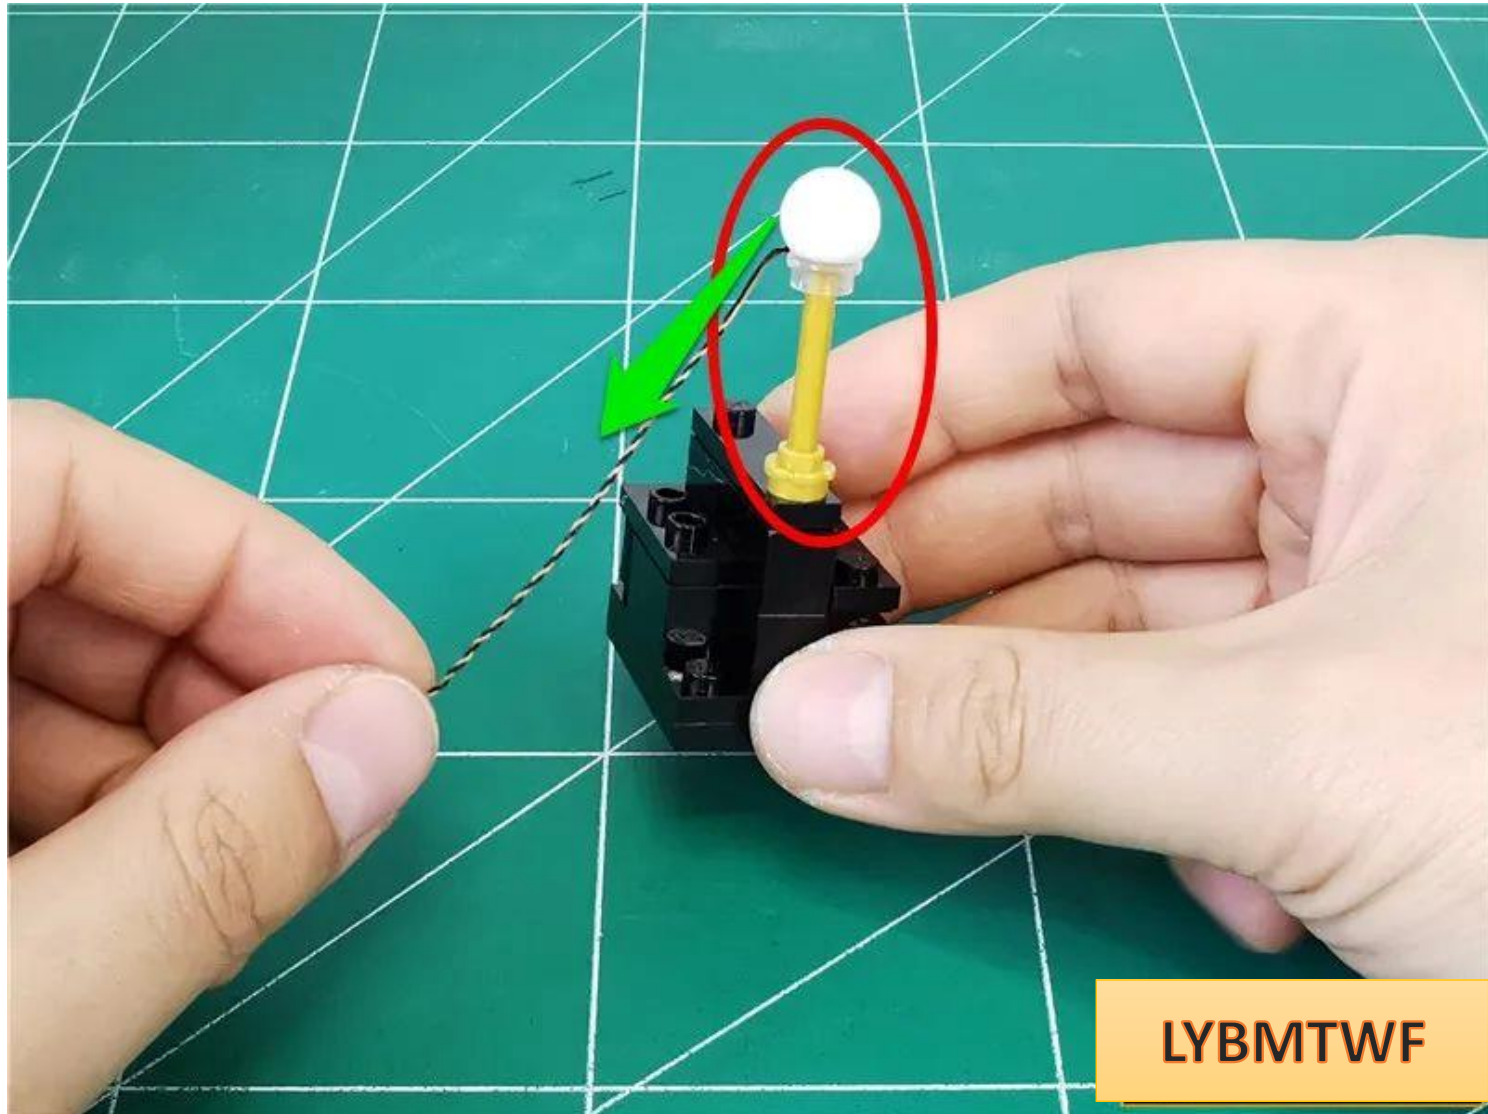


Remove the parts indicated by arrows

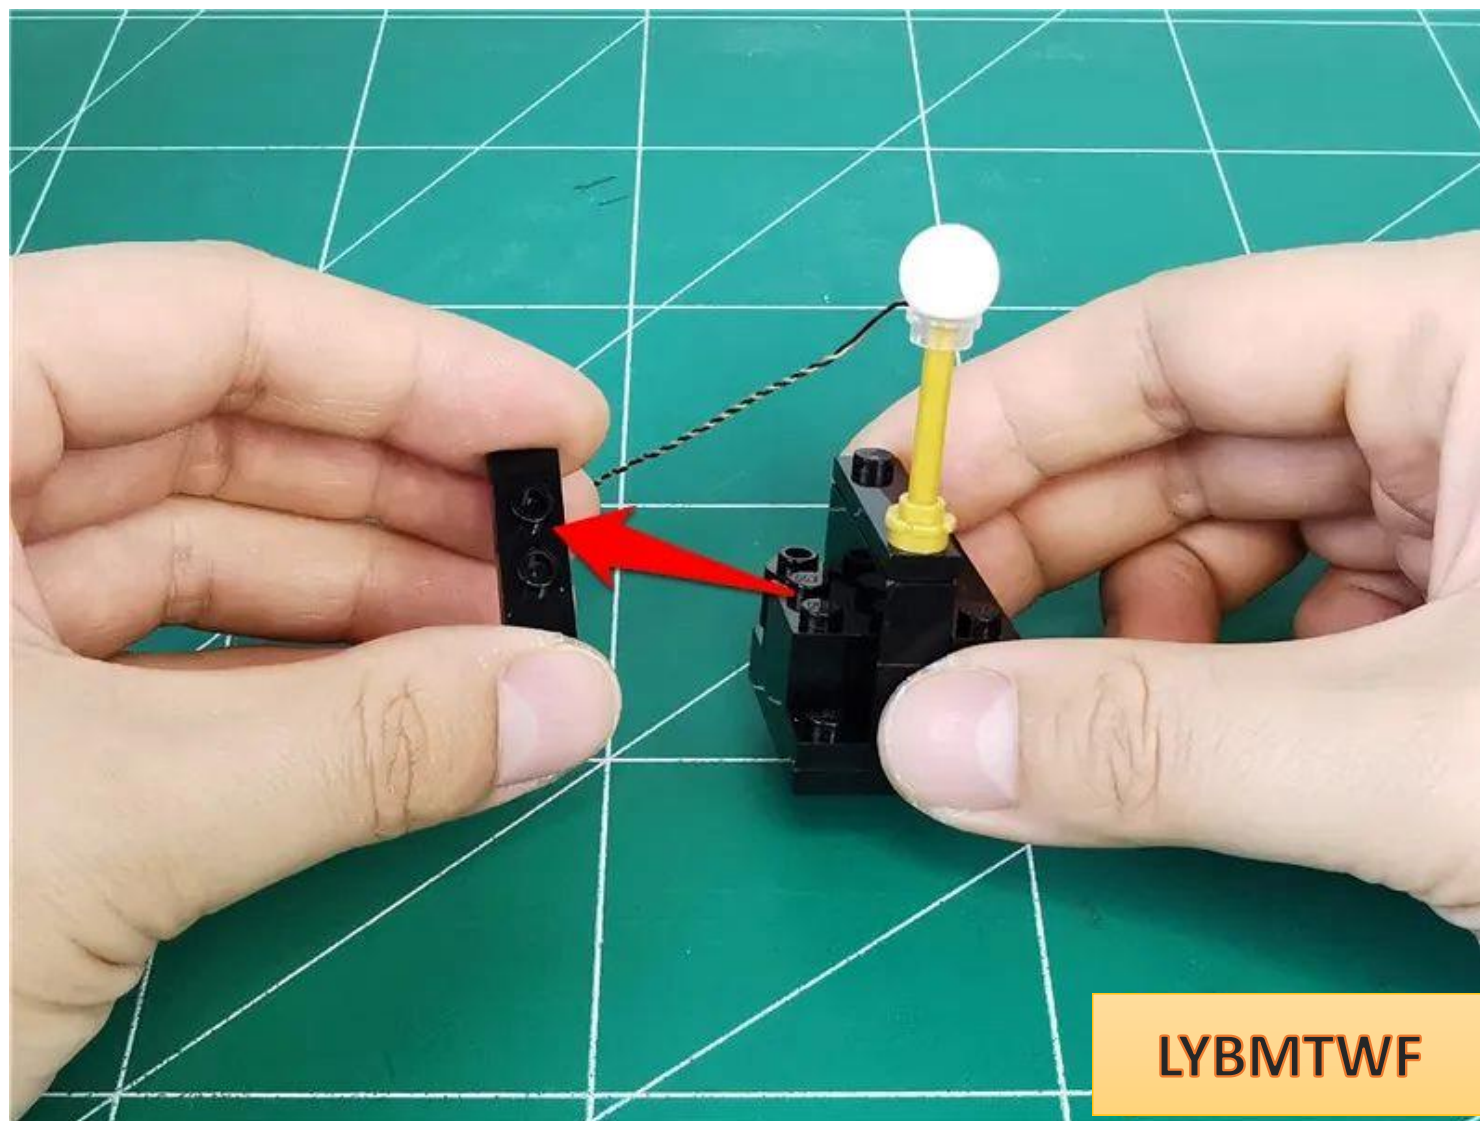


LYBMTWF

Pass the wire through the angle between the parts

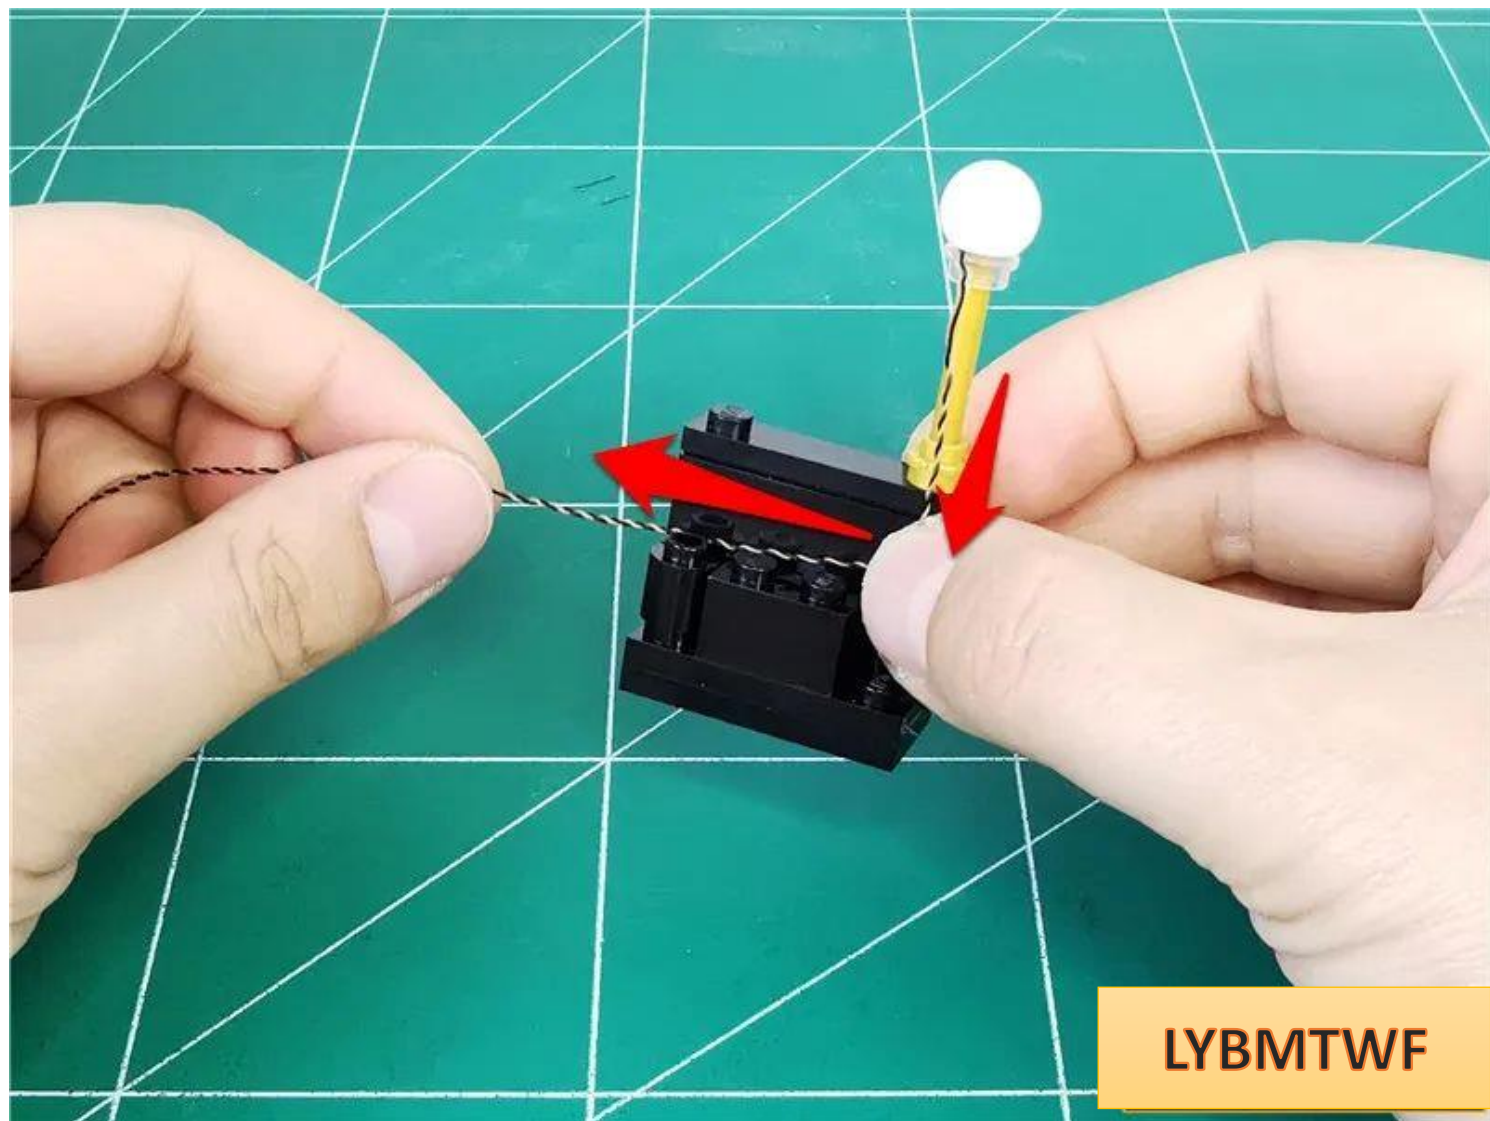


LYBMTWF


Restore parts and fix wires

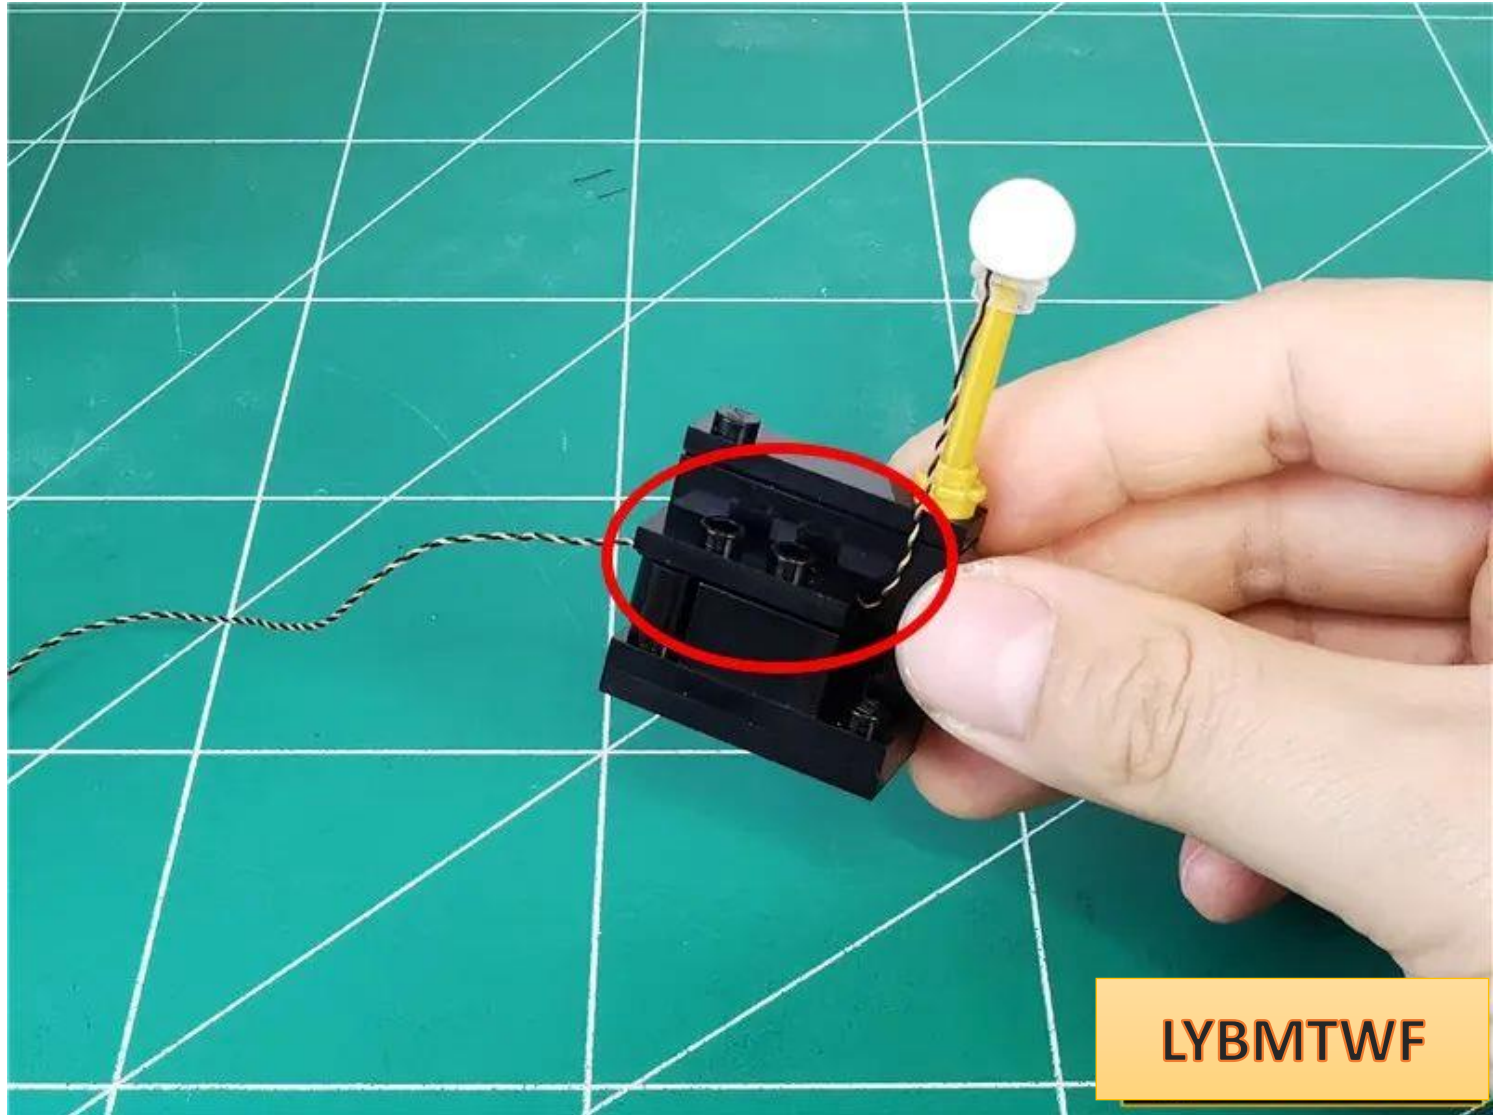


Use the same method to restore another desk lamp and organize the wires

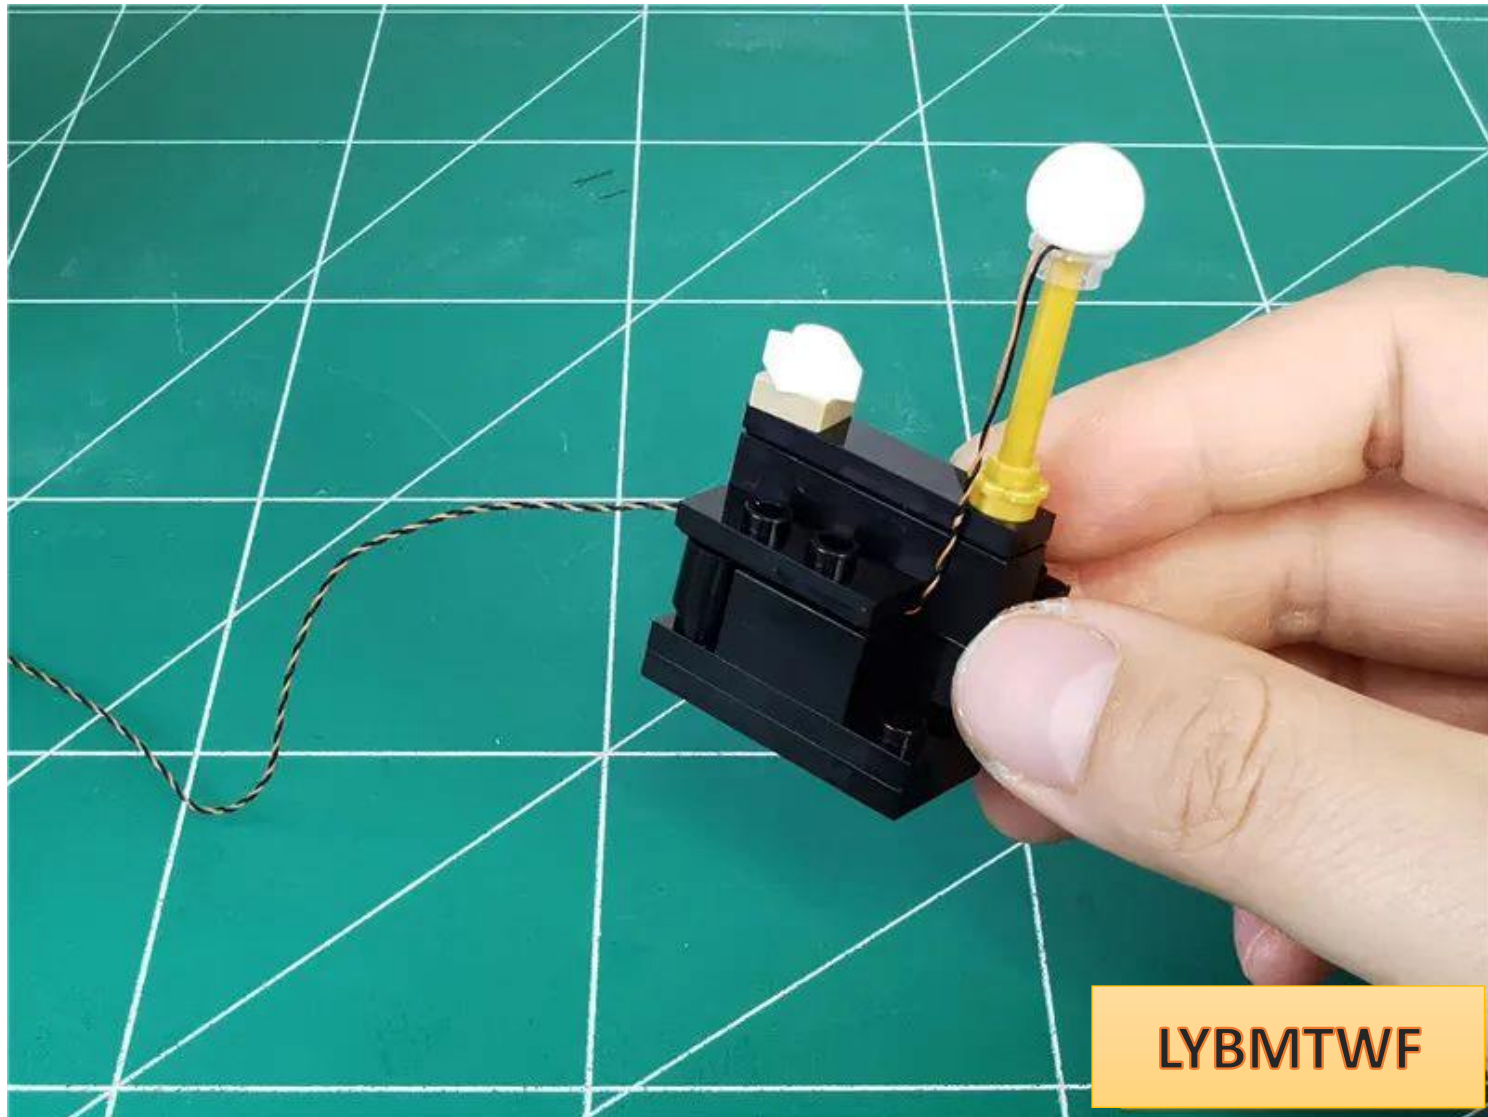


Prepare to restore the counter shown in the circle

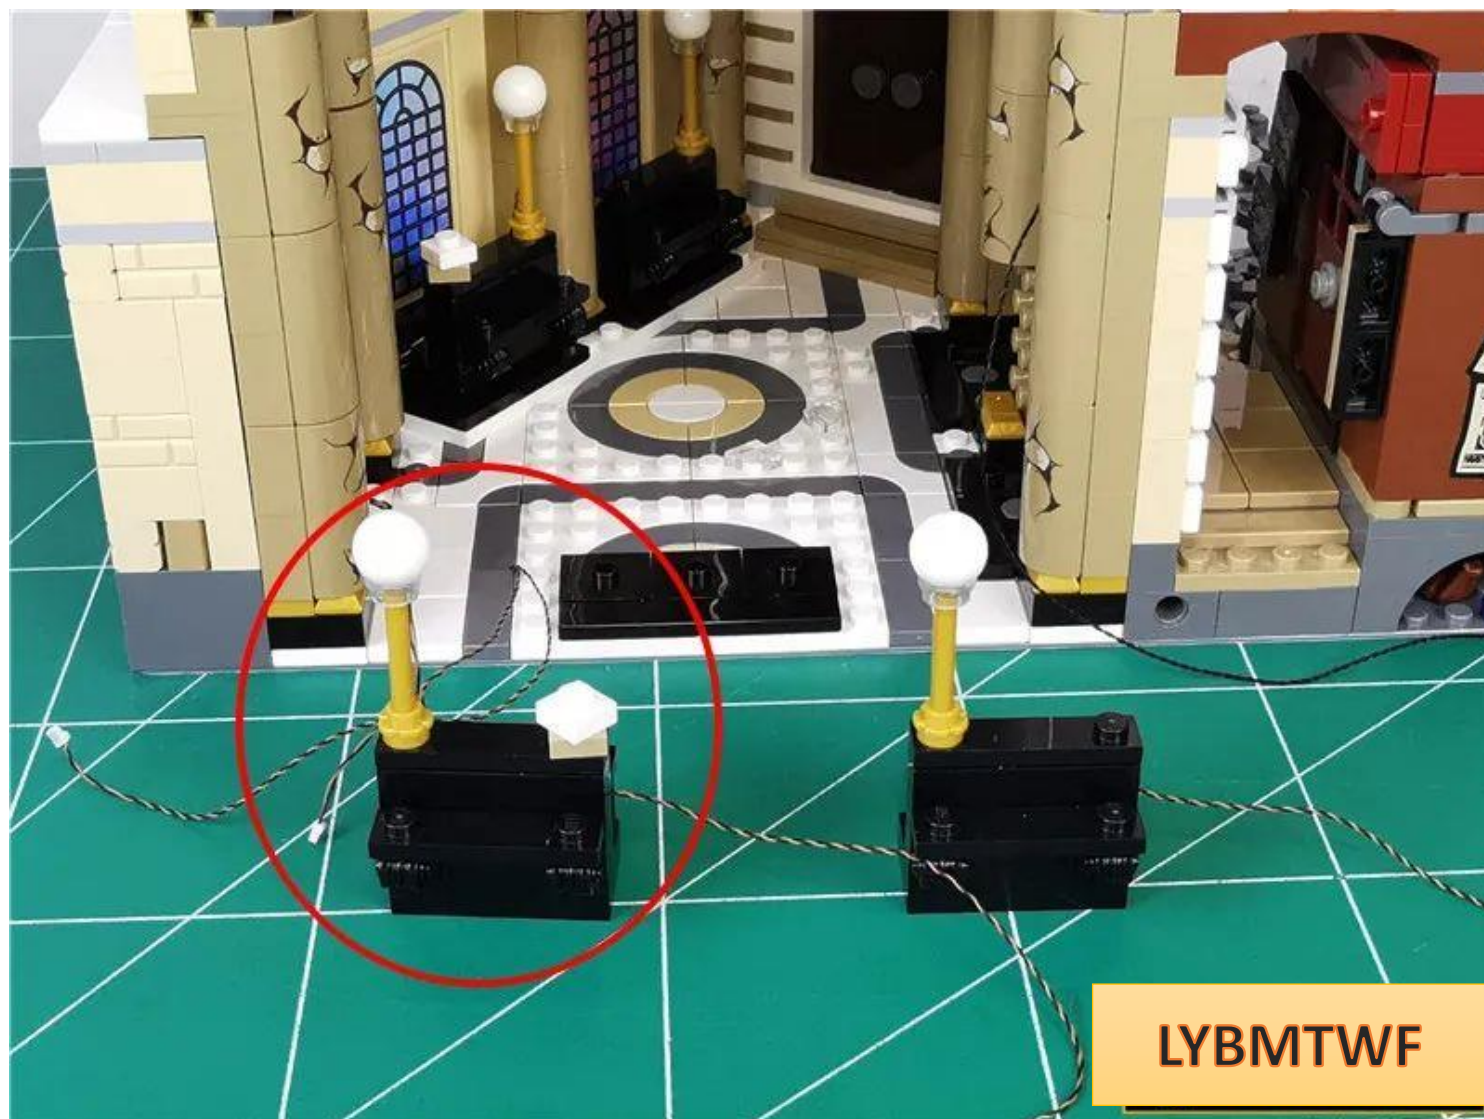


Replace the counter with the wires facing out

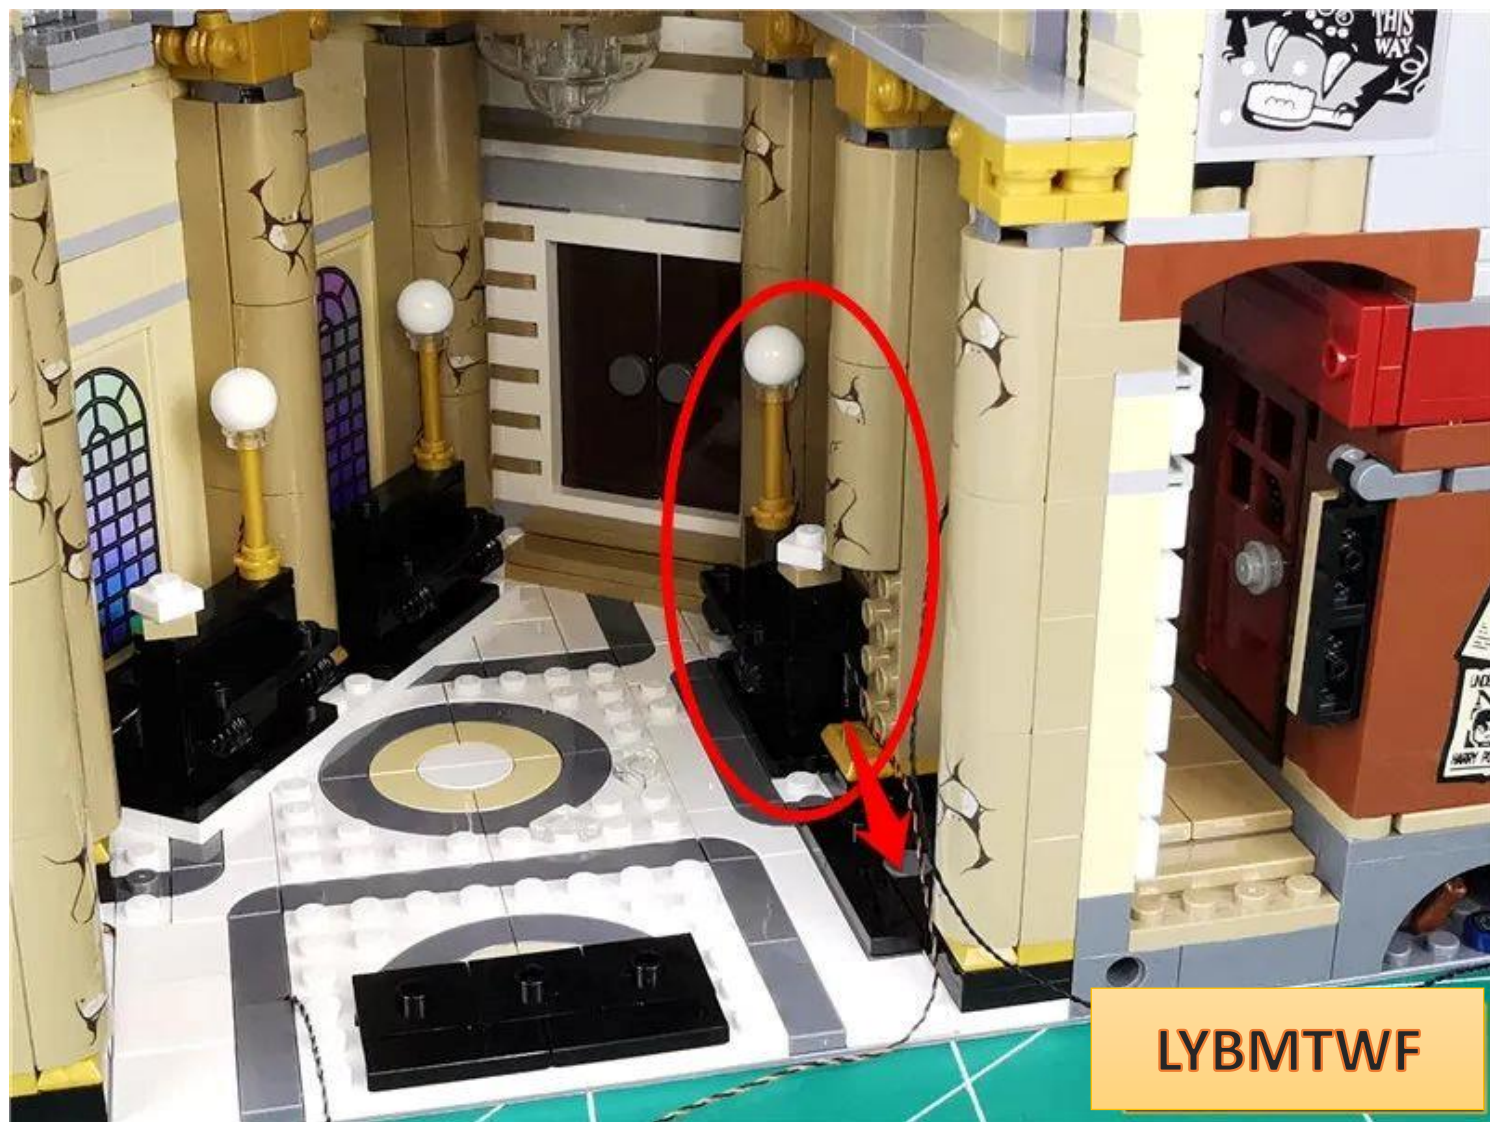


Pass the wire through the gaps between the raised particles

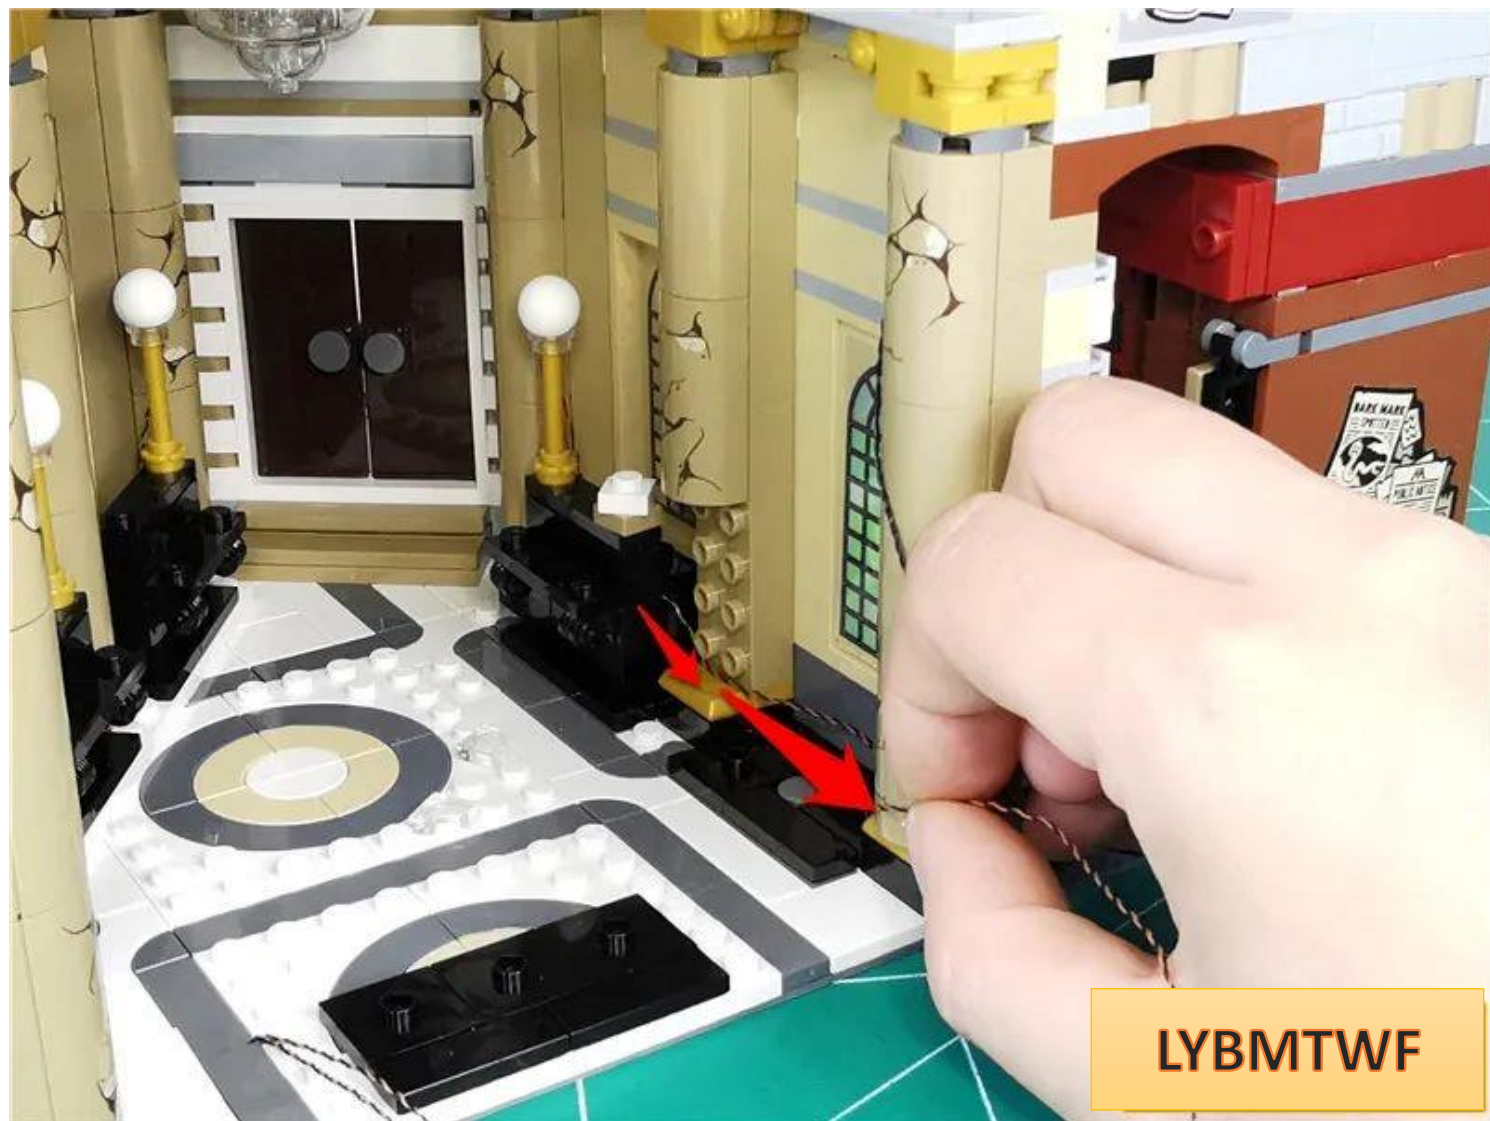


Restore parts and fix wires

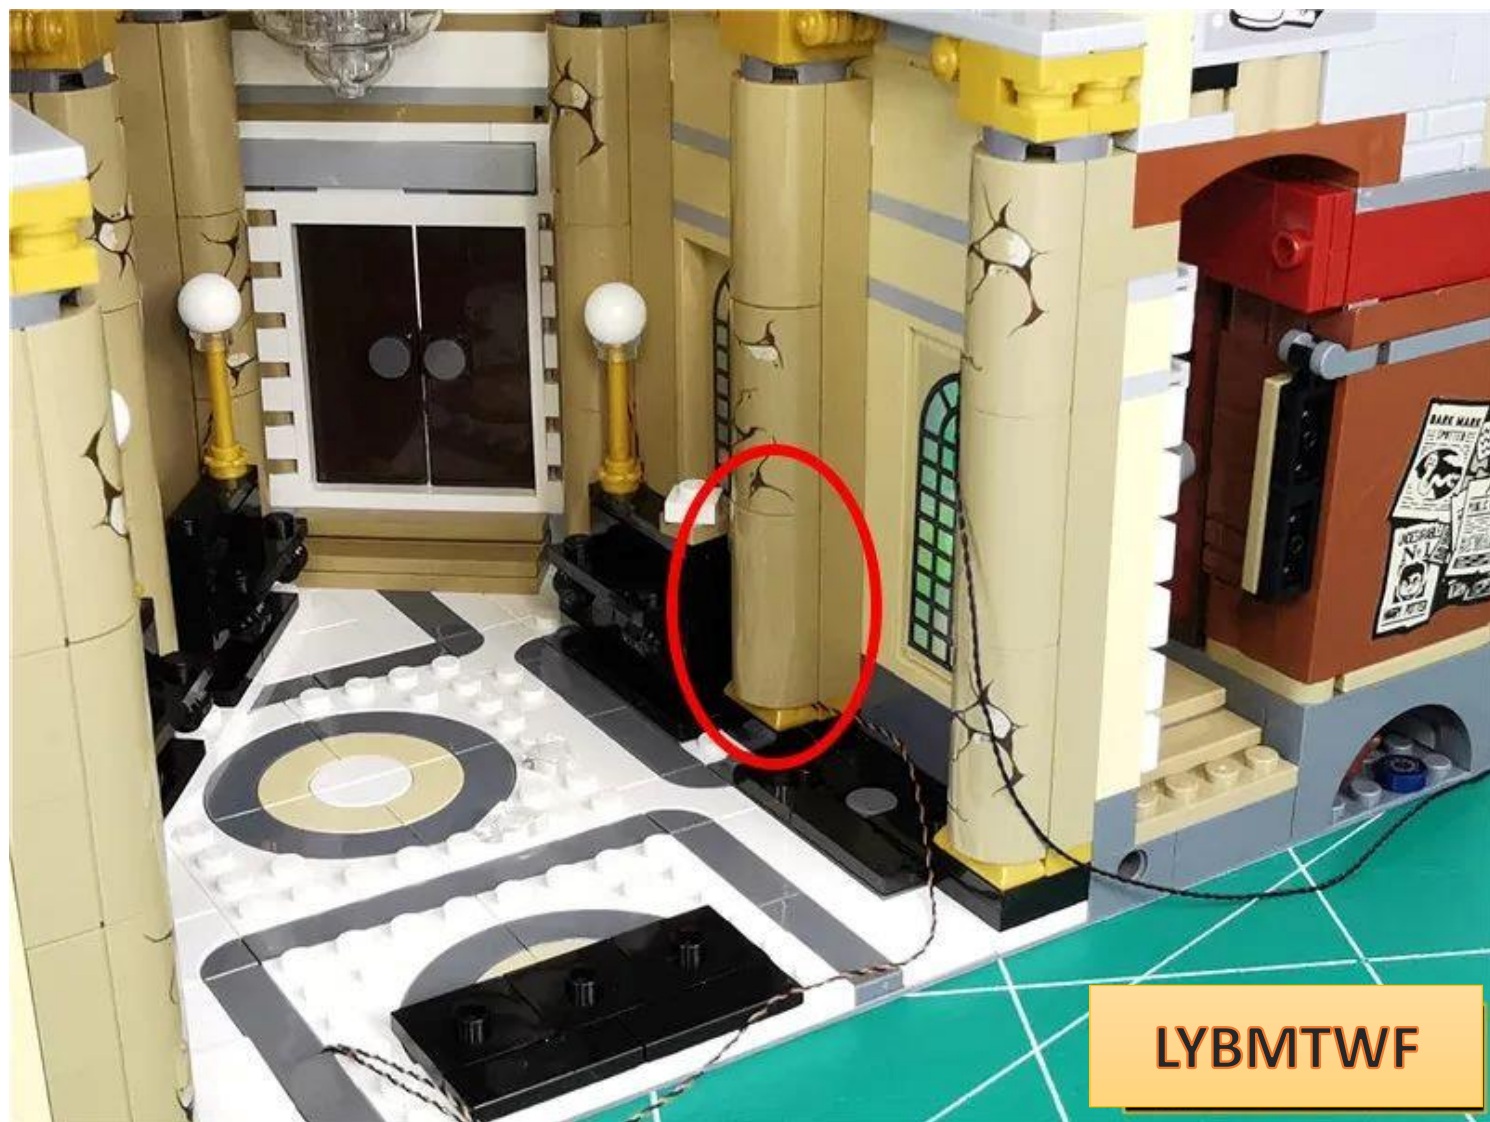


Pass the wire through the wall

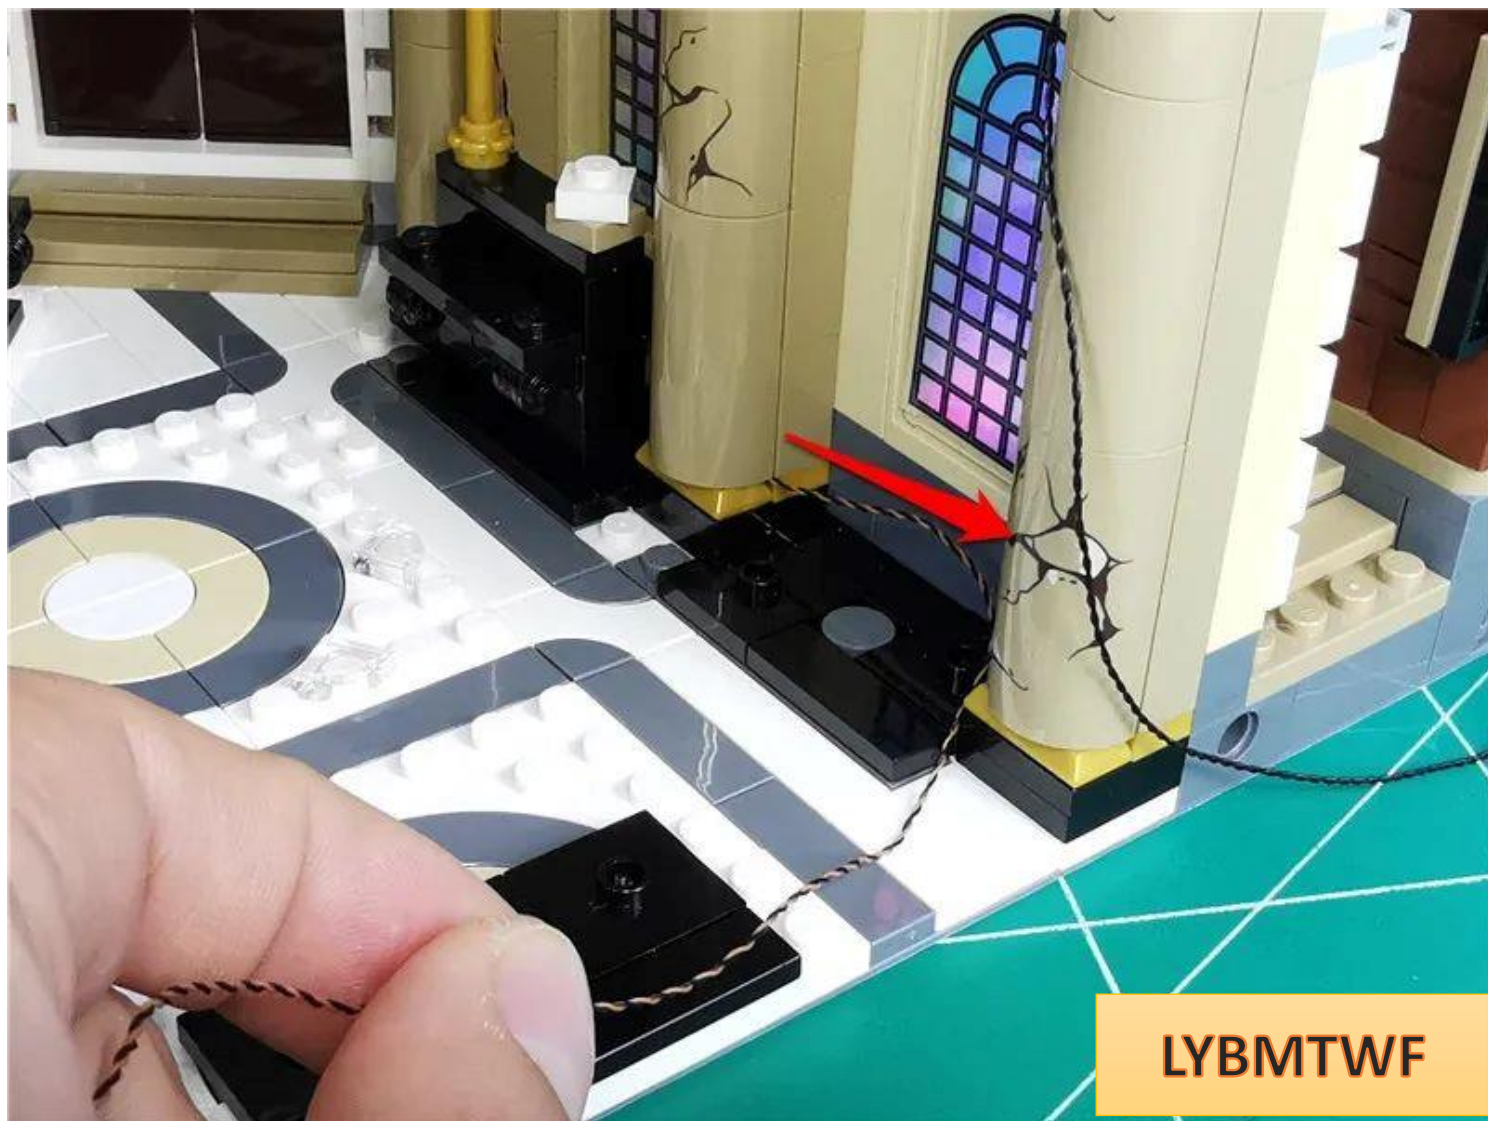


Restore the other counter with the wires facing out.

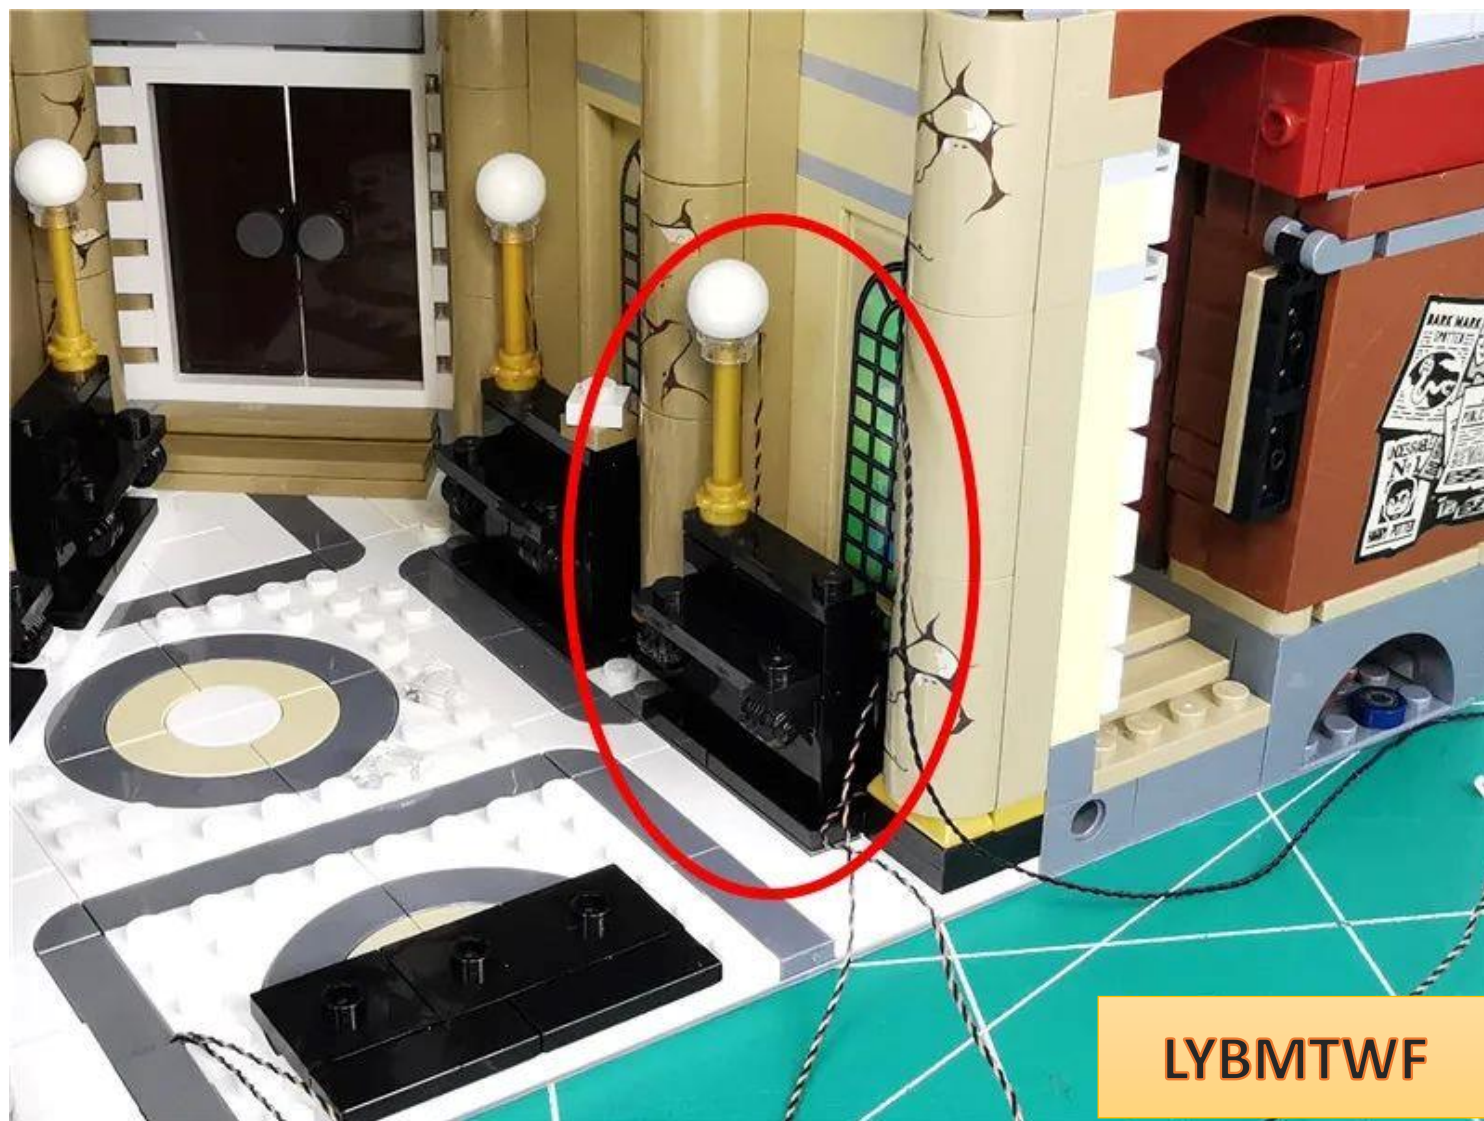


Remove the parts indicated by arrows

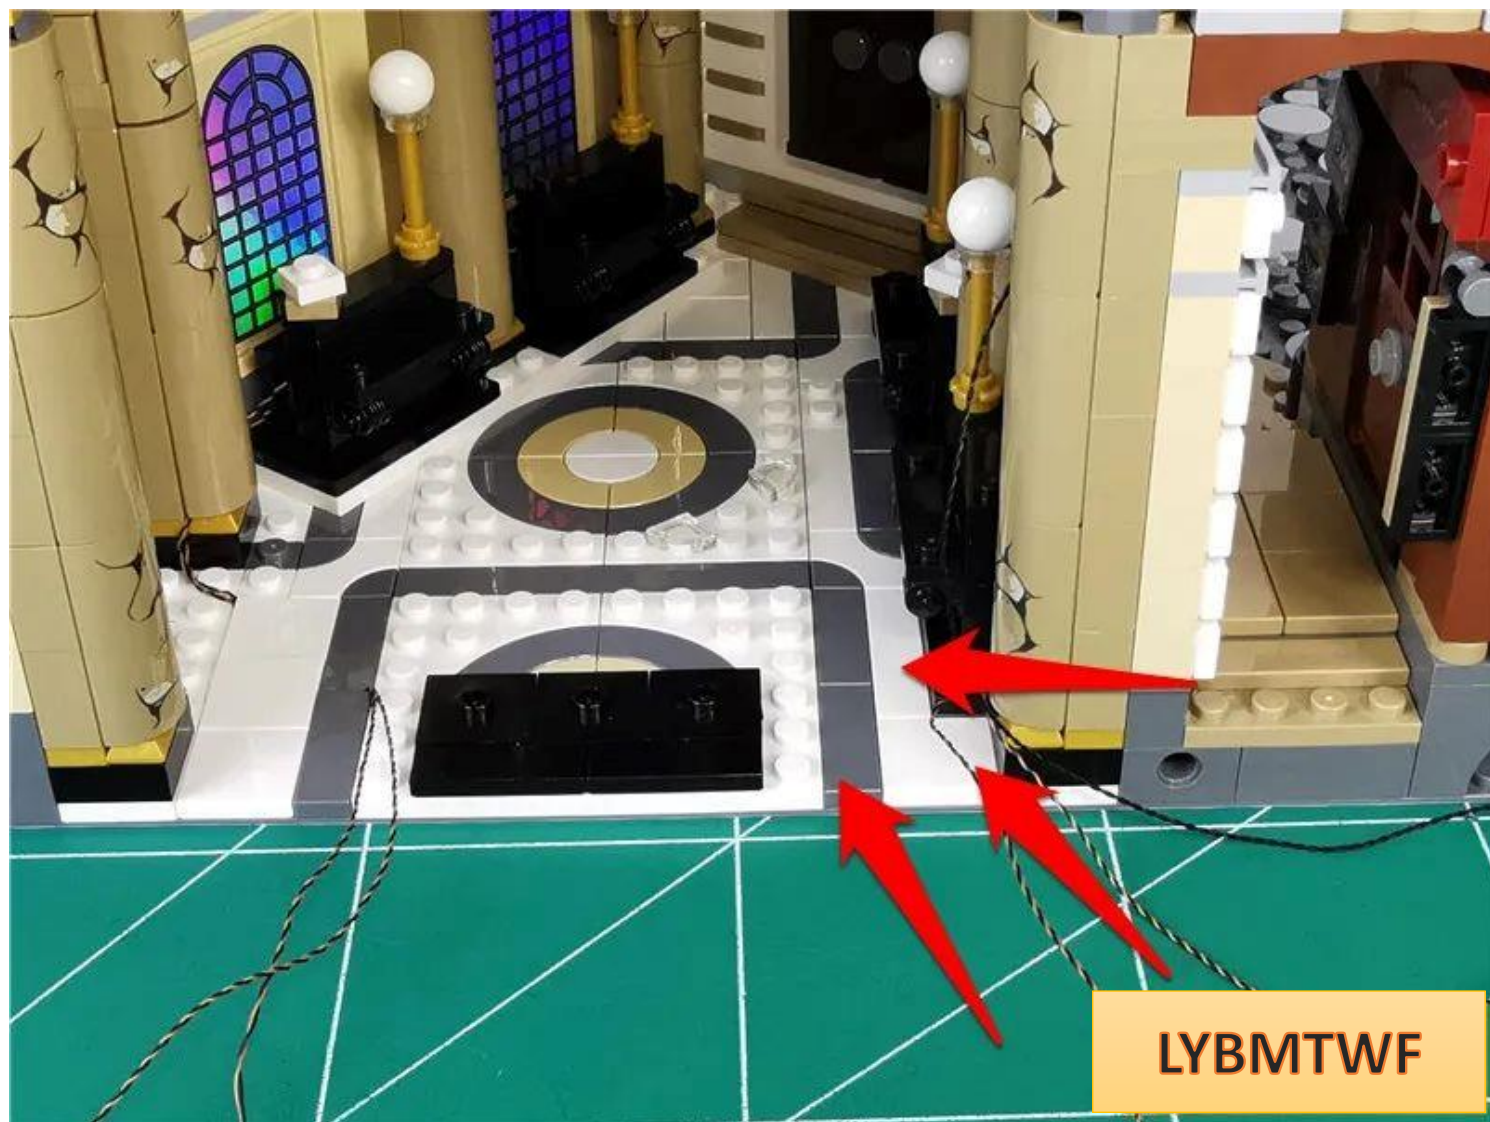


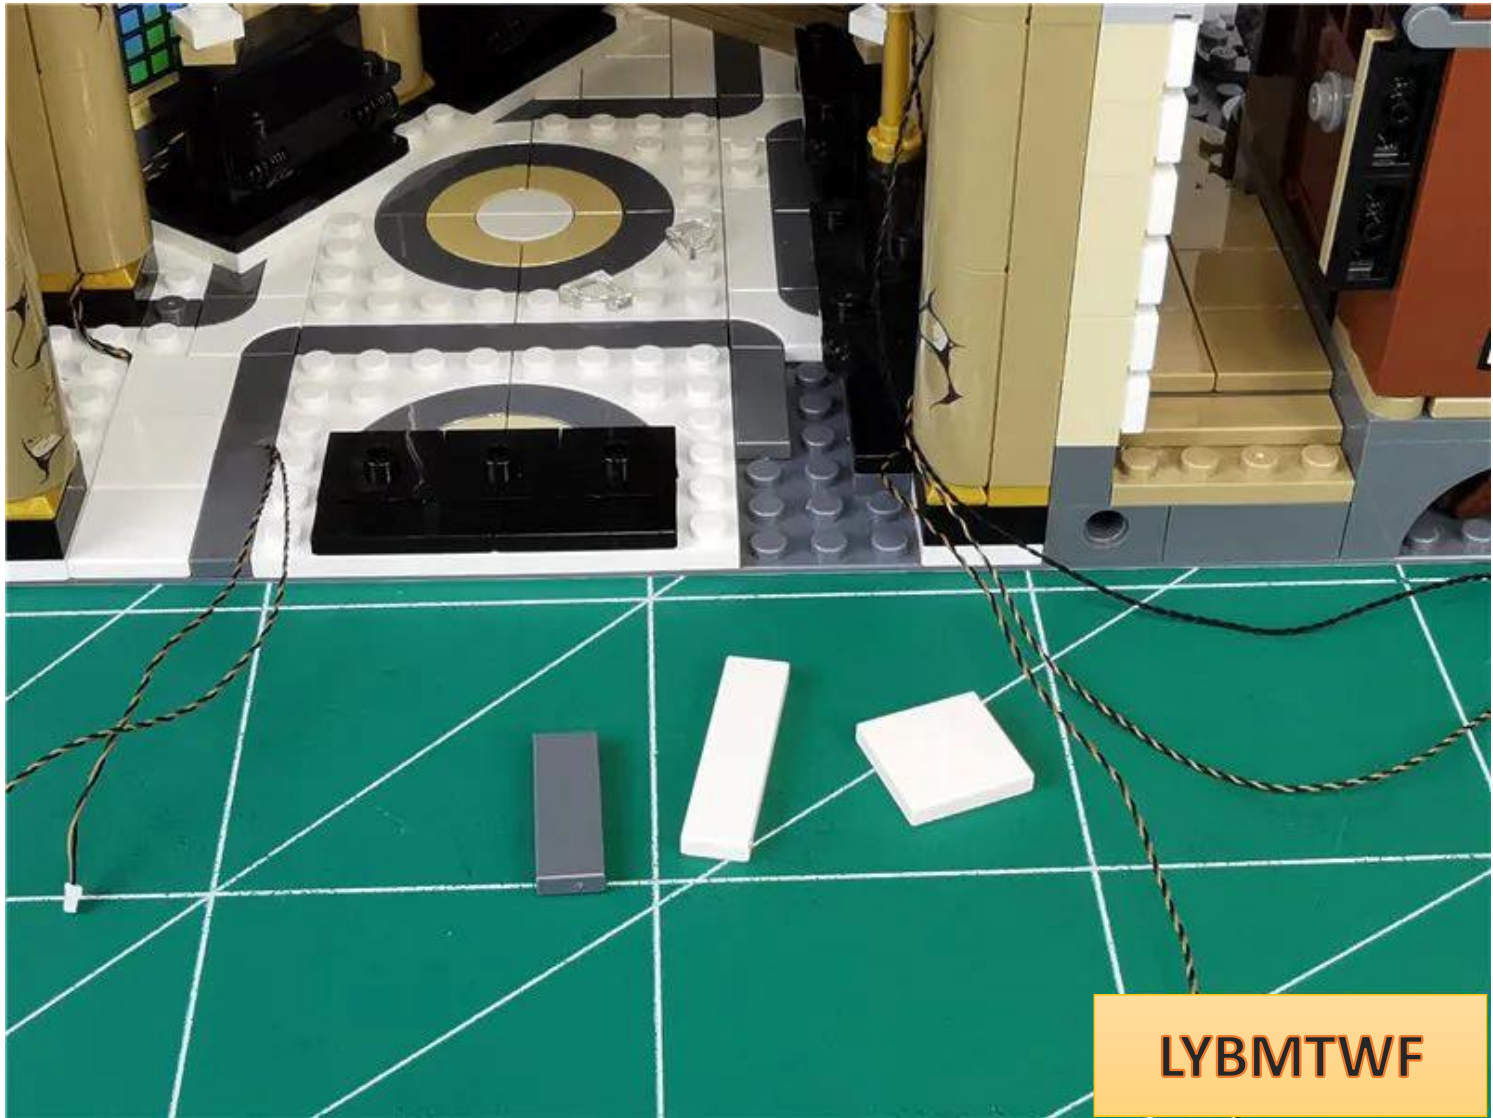


Pull the three wires on the right side along the gaps between the raised particles to the left side (**the wires should be laid as flat as possible**)

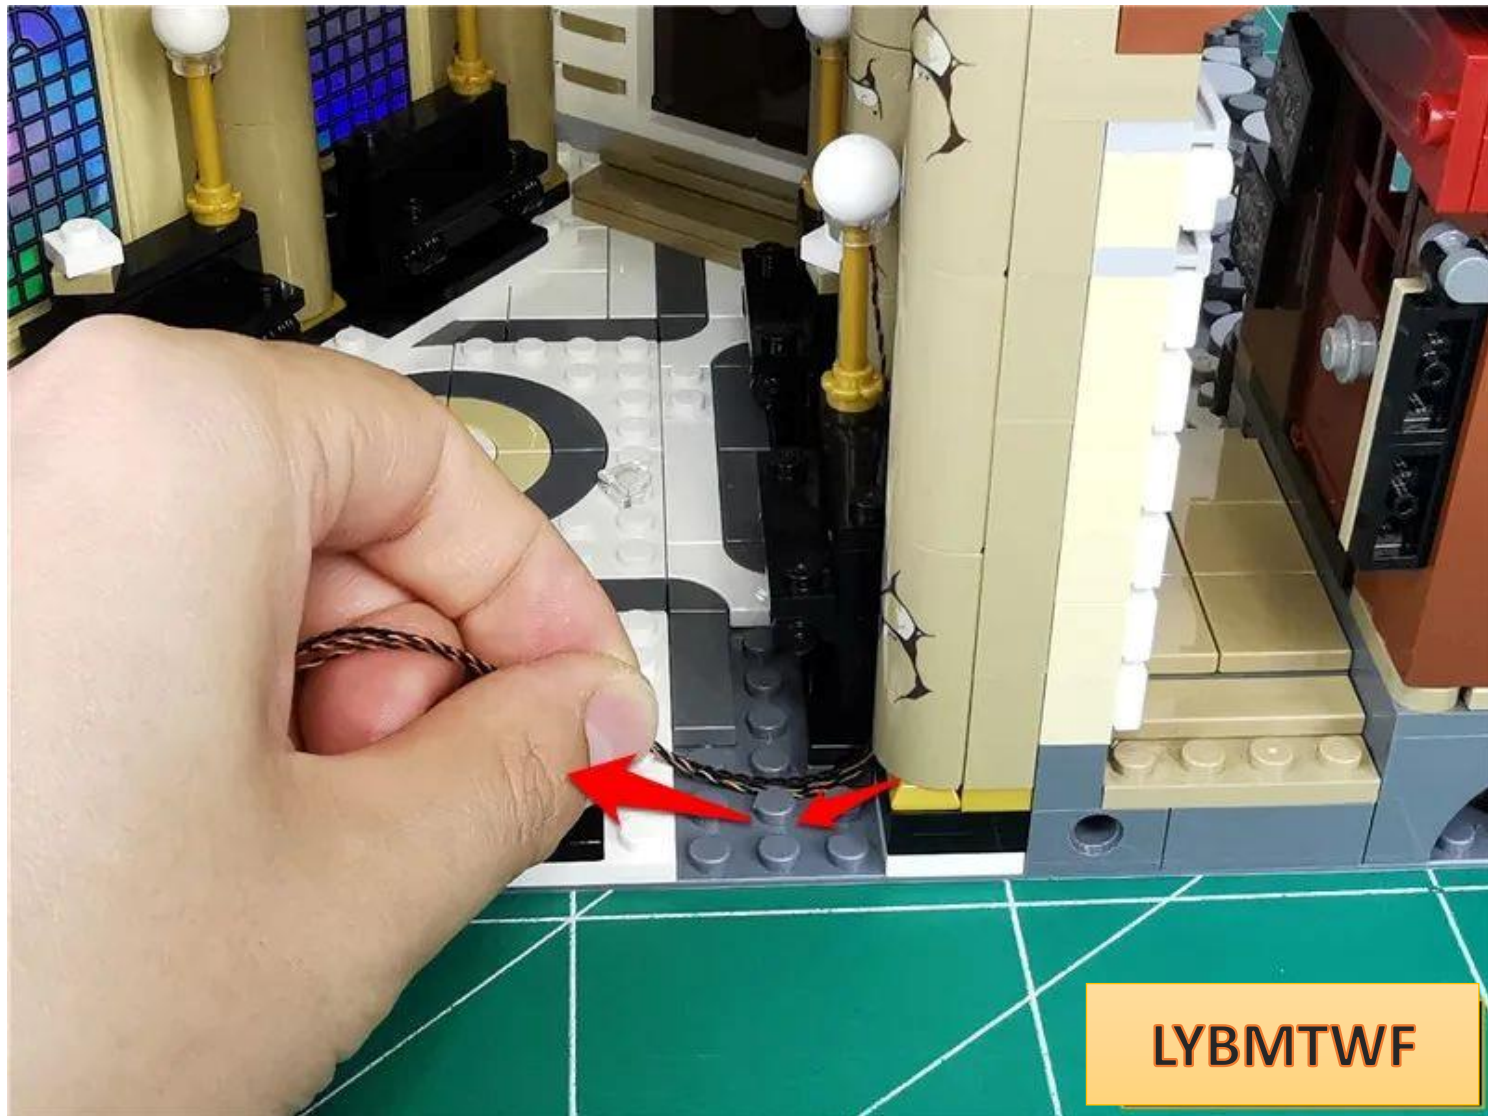

Restore parts and fix wires

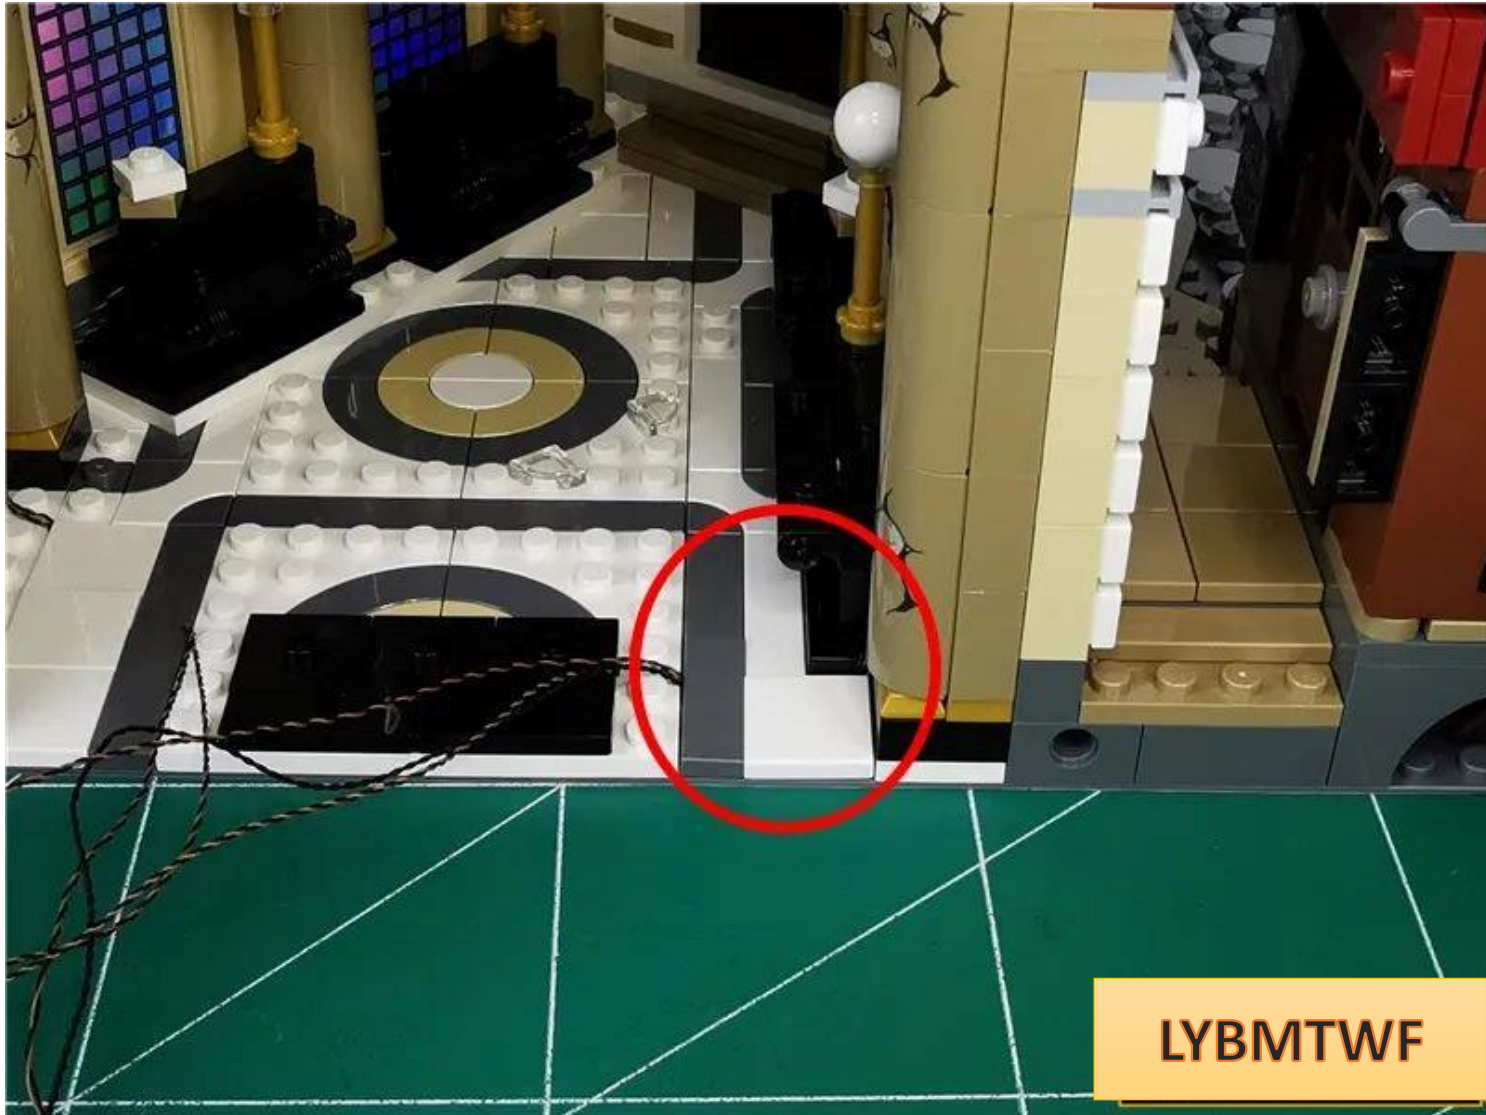


Take 2 15cm ordinary warm light bulbs and 2 hollow transparent circles

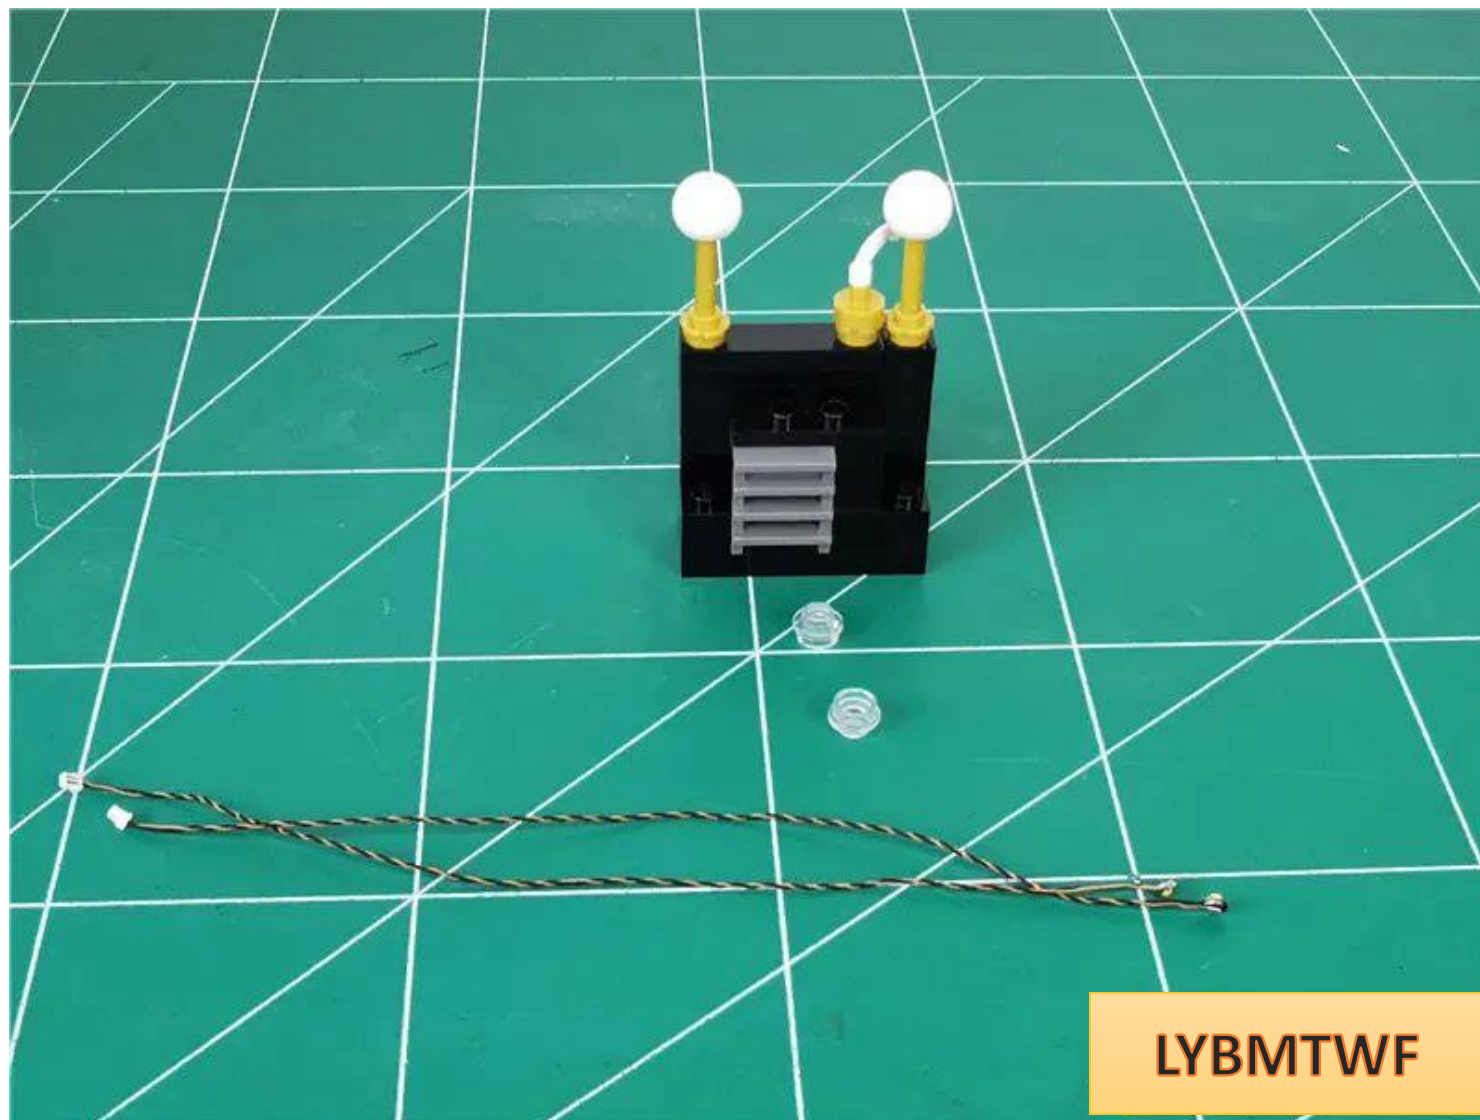


LYBMTWF

In the same way as before, install the lamp particles and restore the desk lamp (**pay attention to the direction of the wires**)

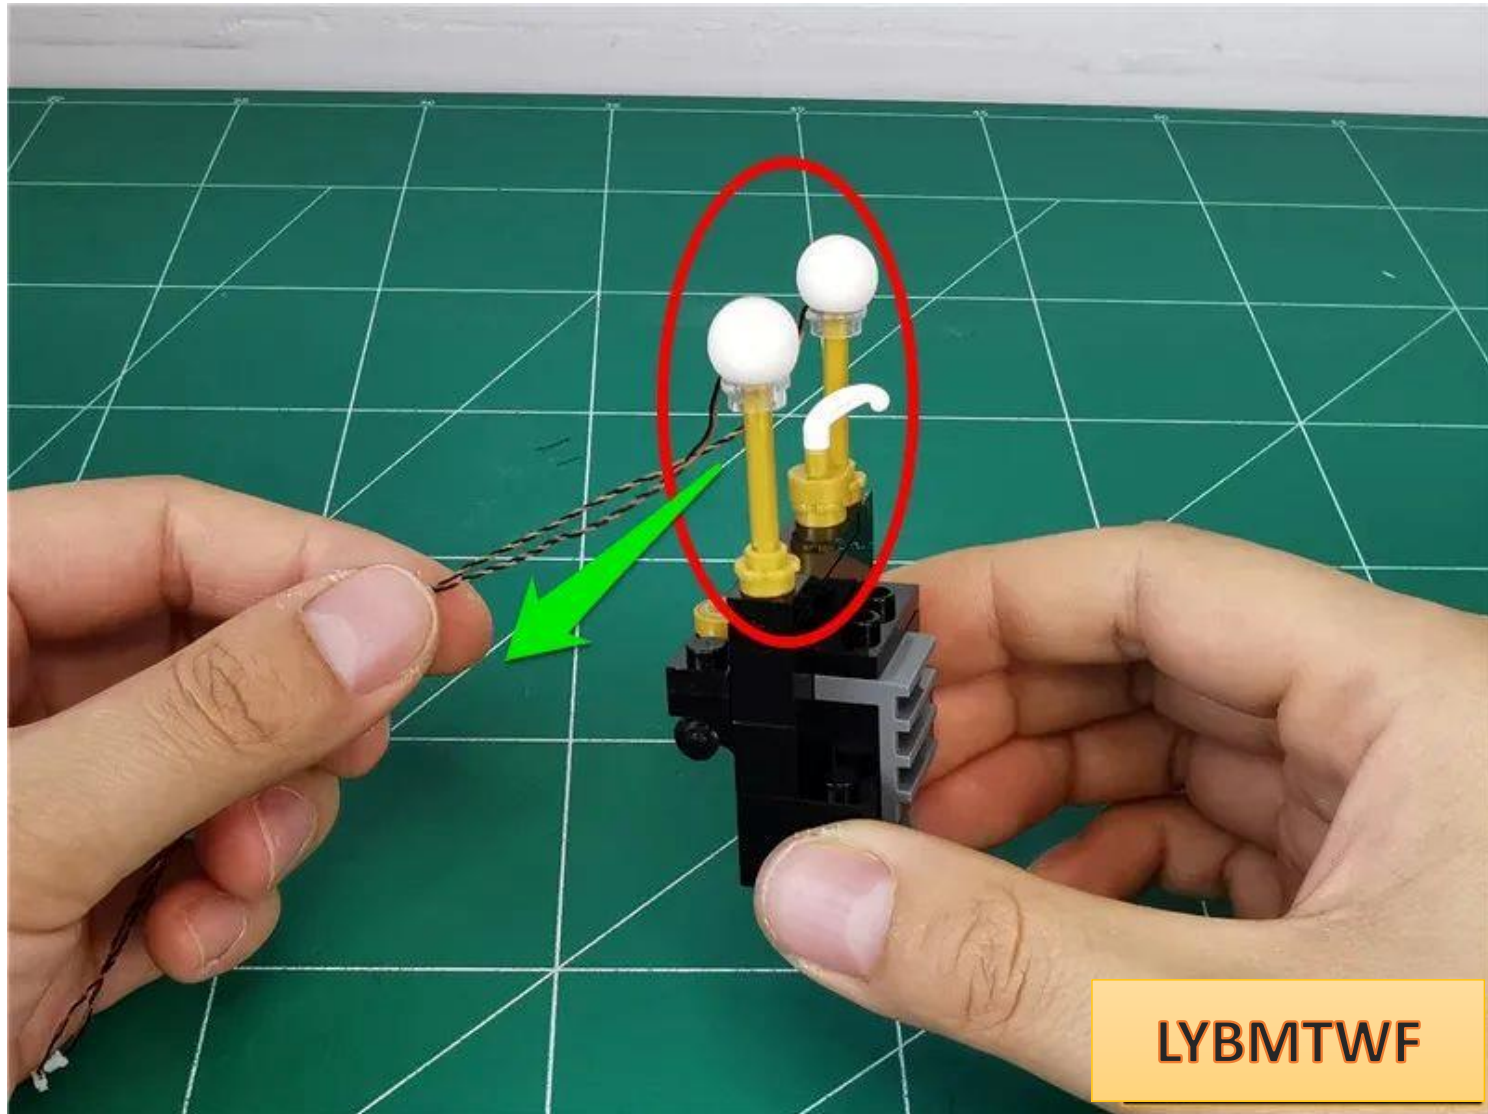


LYBMTWF

Remove the parts indicated by arrows

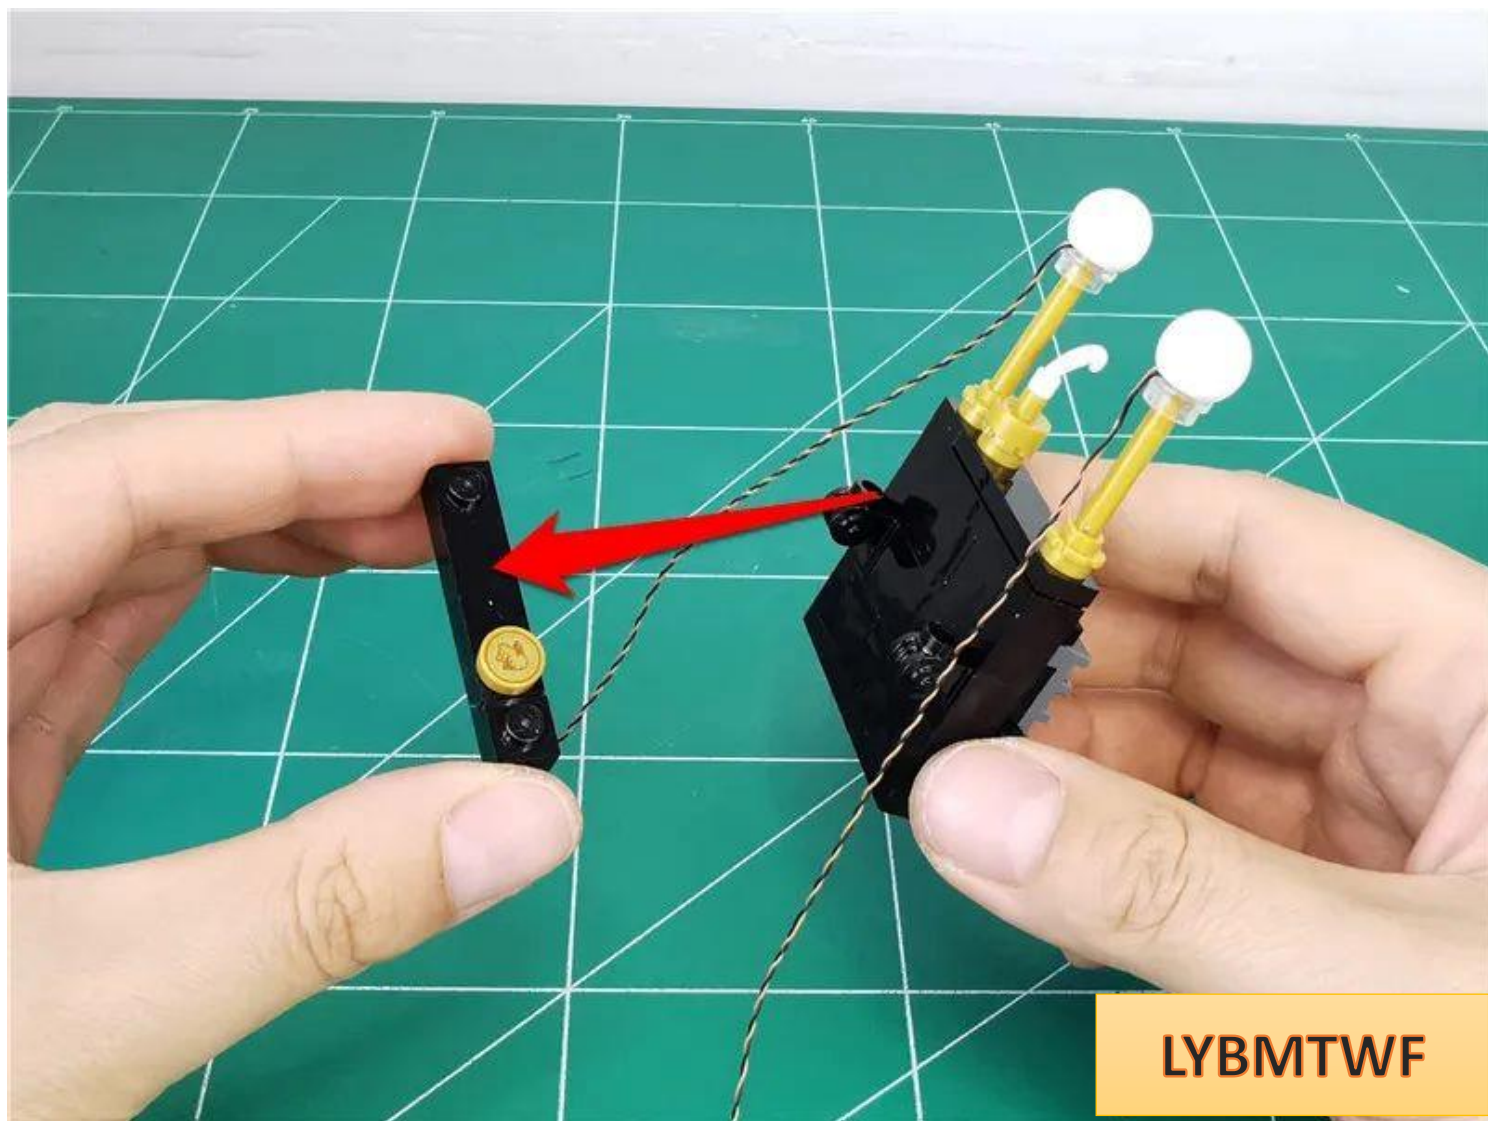

Place the 2 wires close to the part and pull them down

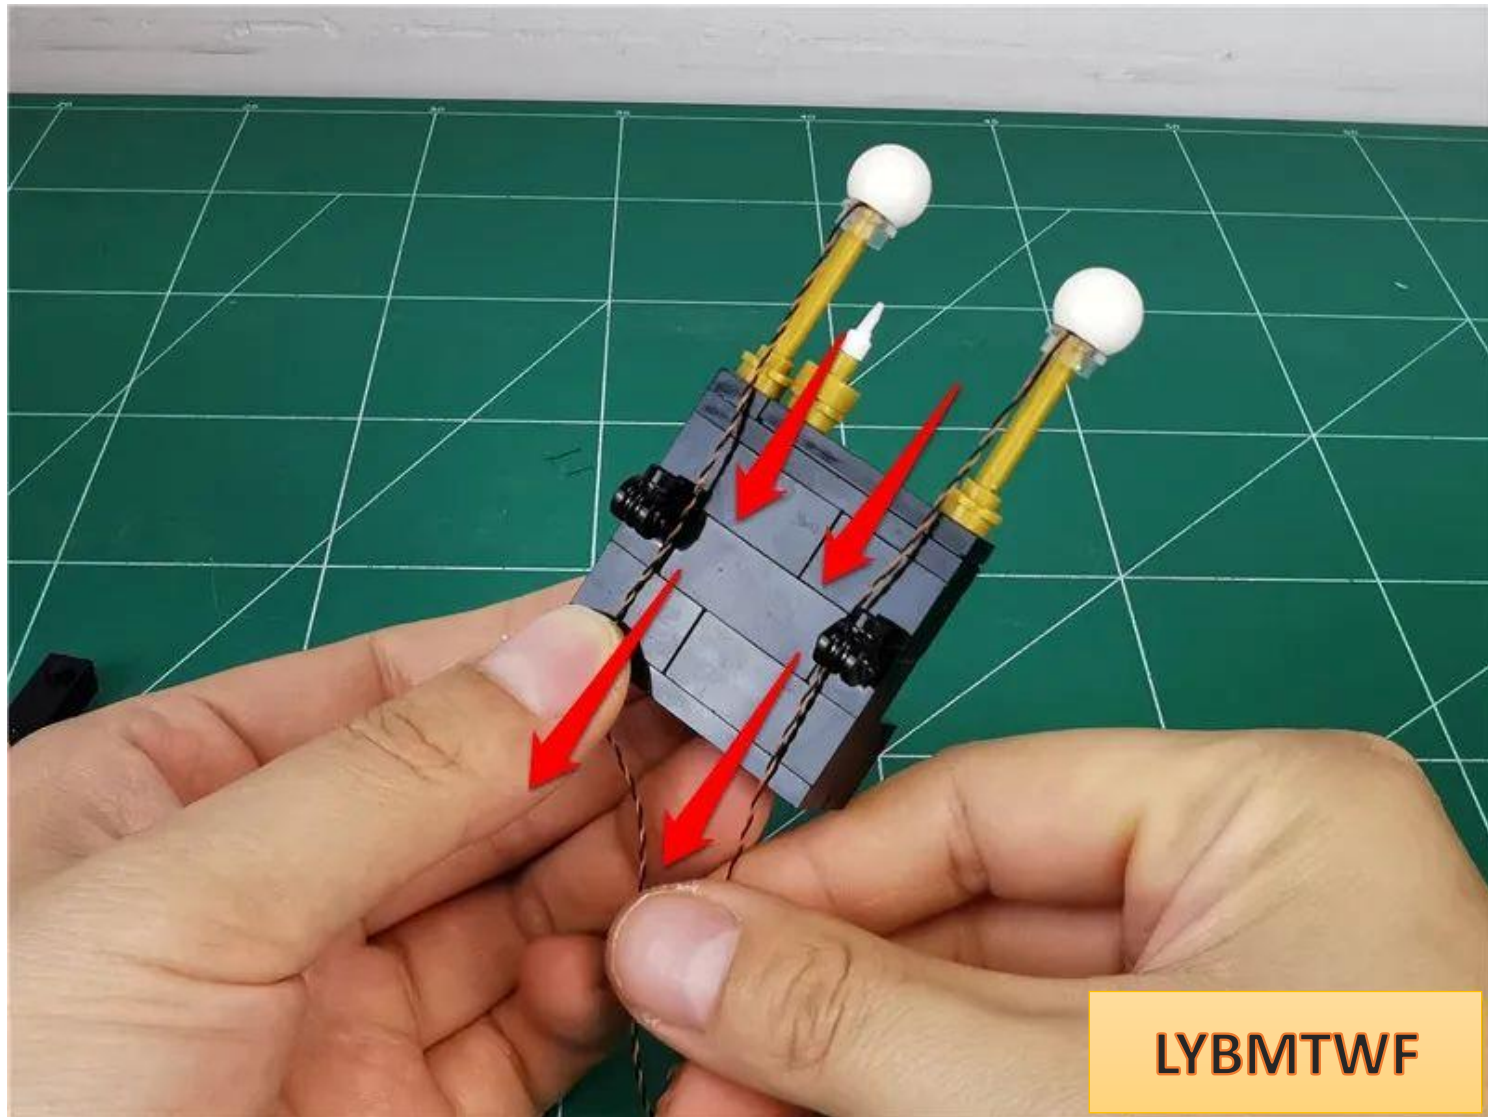


Restore parts and fix wires




LYBMTWF


Take one 8-seater and one 15cm cable, and insert the cable into the 8-socket side socket.

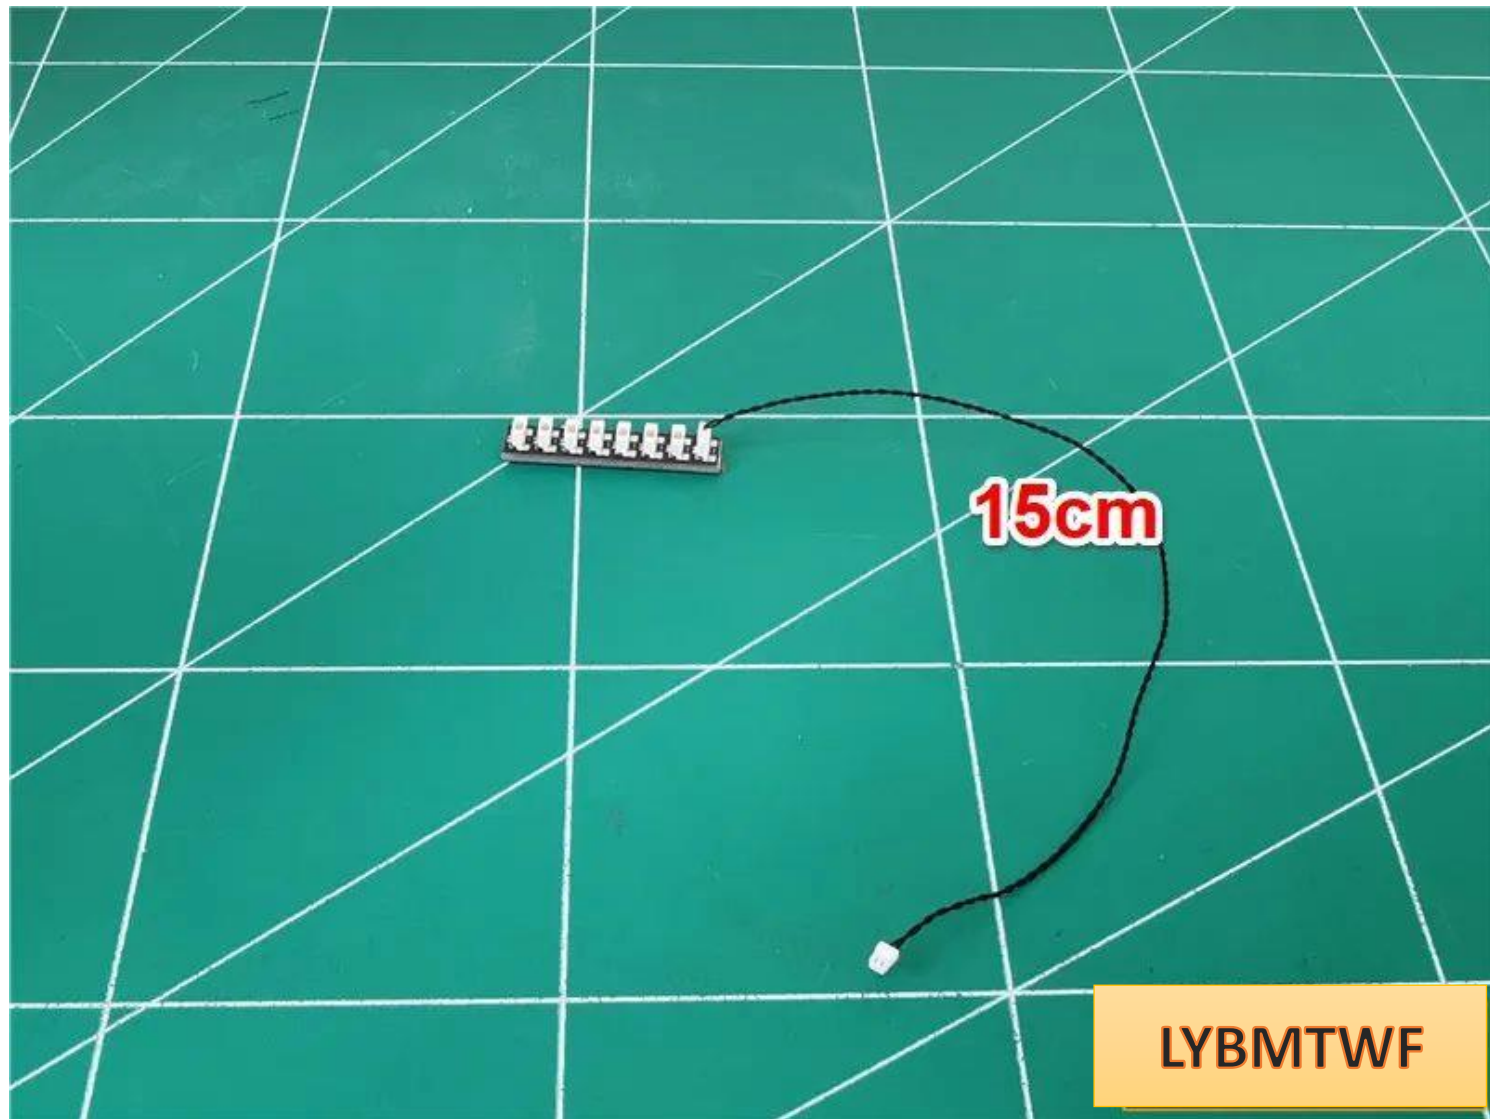

Place the counter close to the building

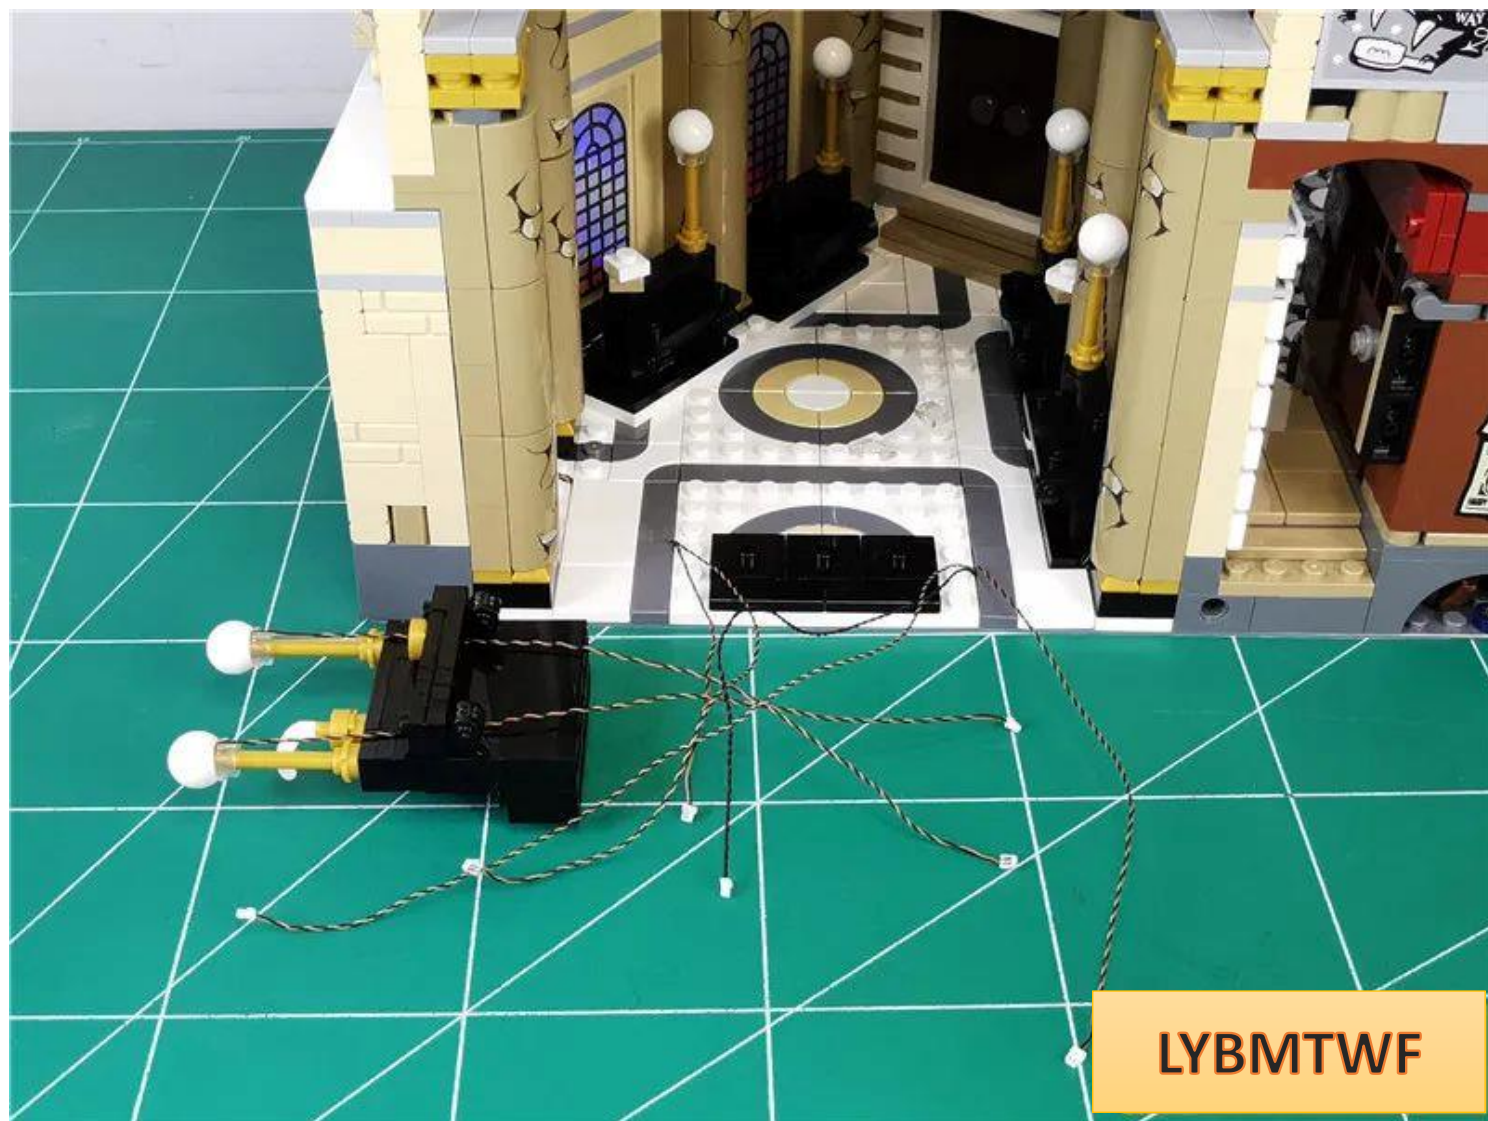


Insert all 7 plugs into 8 sockets

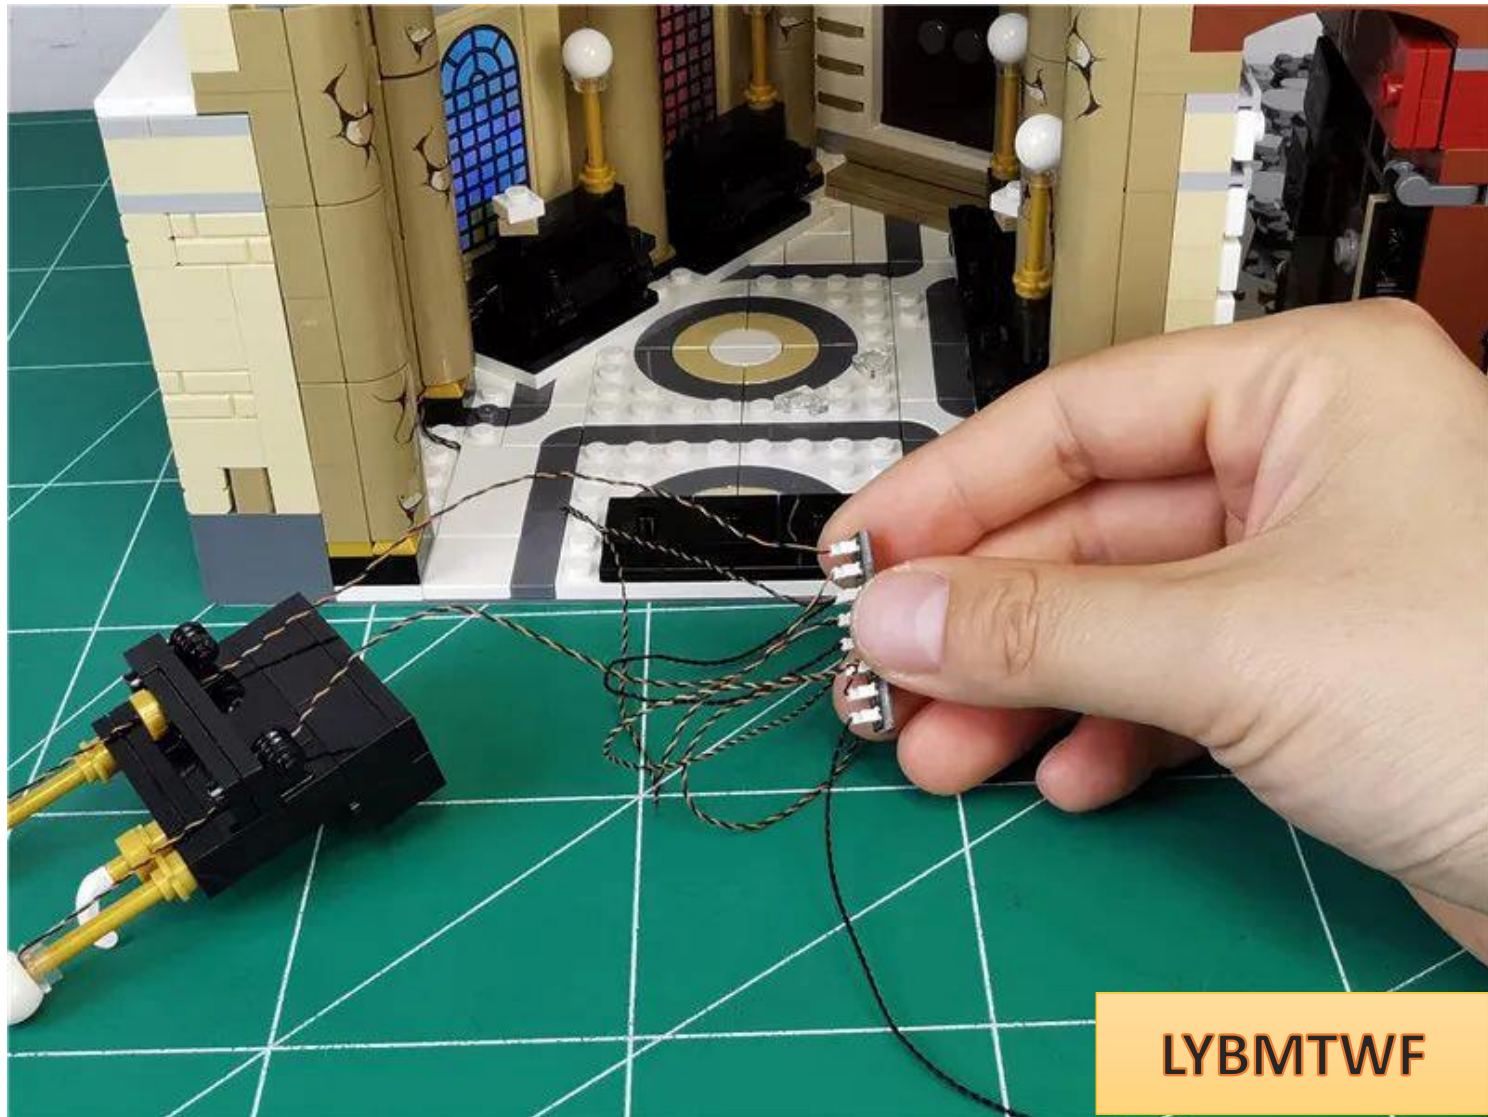

LYBMTWF


Plug the connecting cable on the 8-seat into the 12-seat

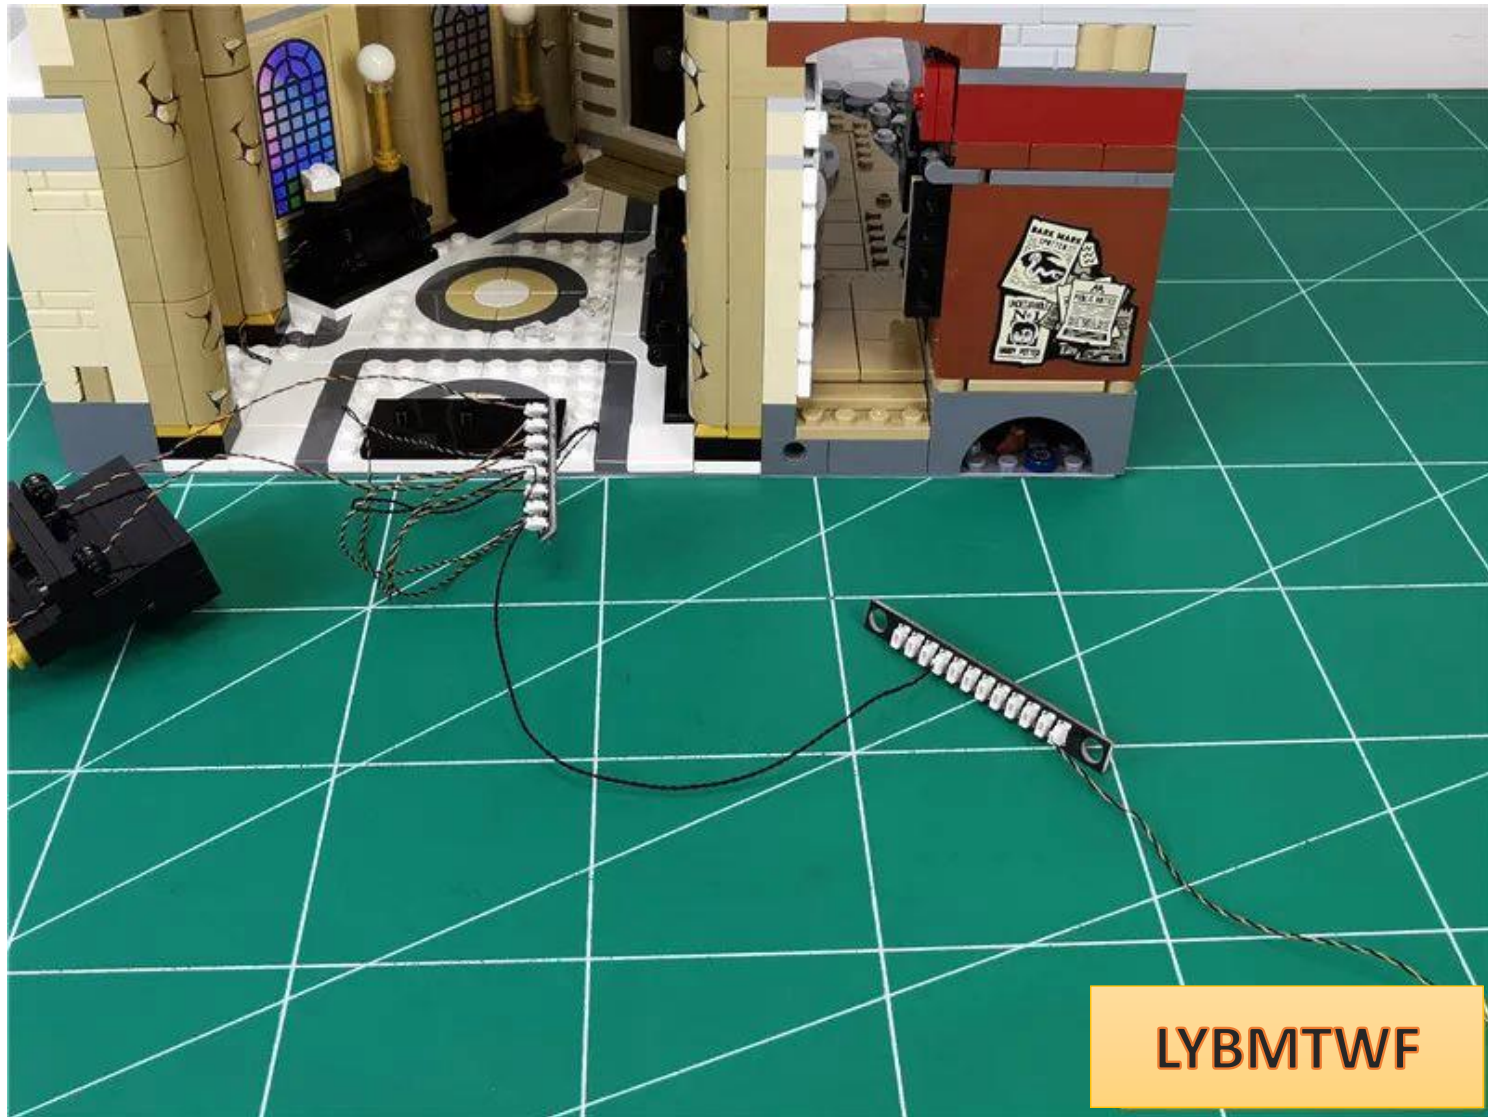


Turn on the power and test that the light lights up normally



After the test is completed, turn off the power, unplug the connection cable, and **leave the 12-seater on the power supply.**

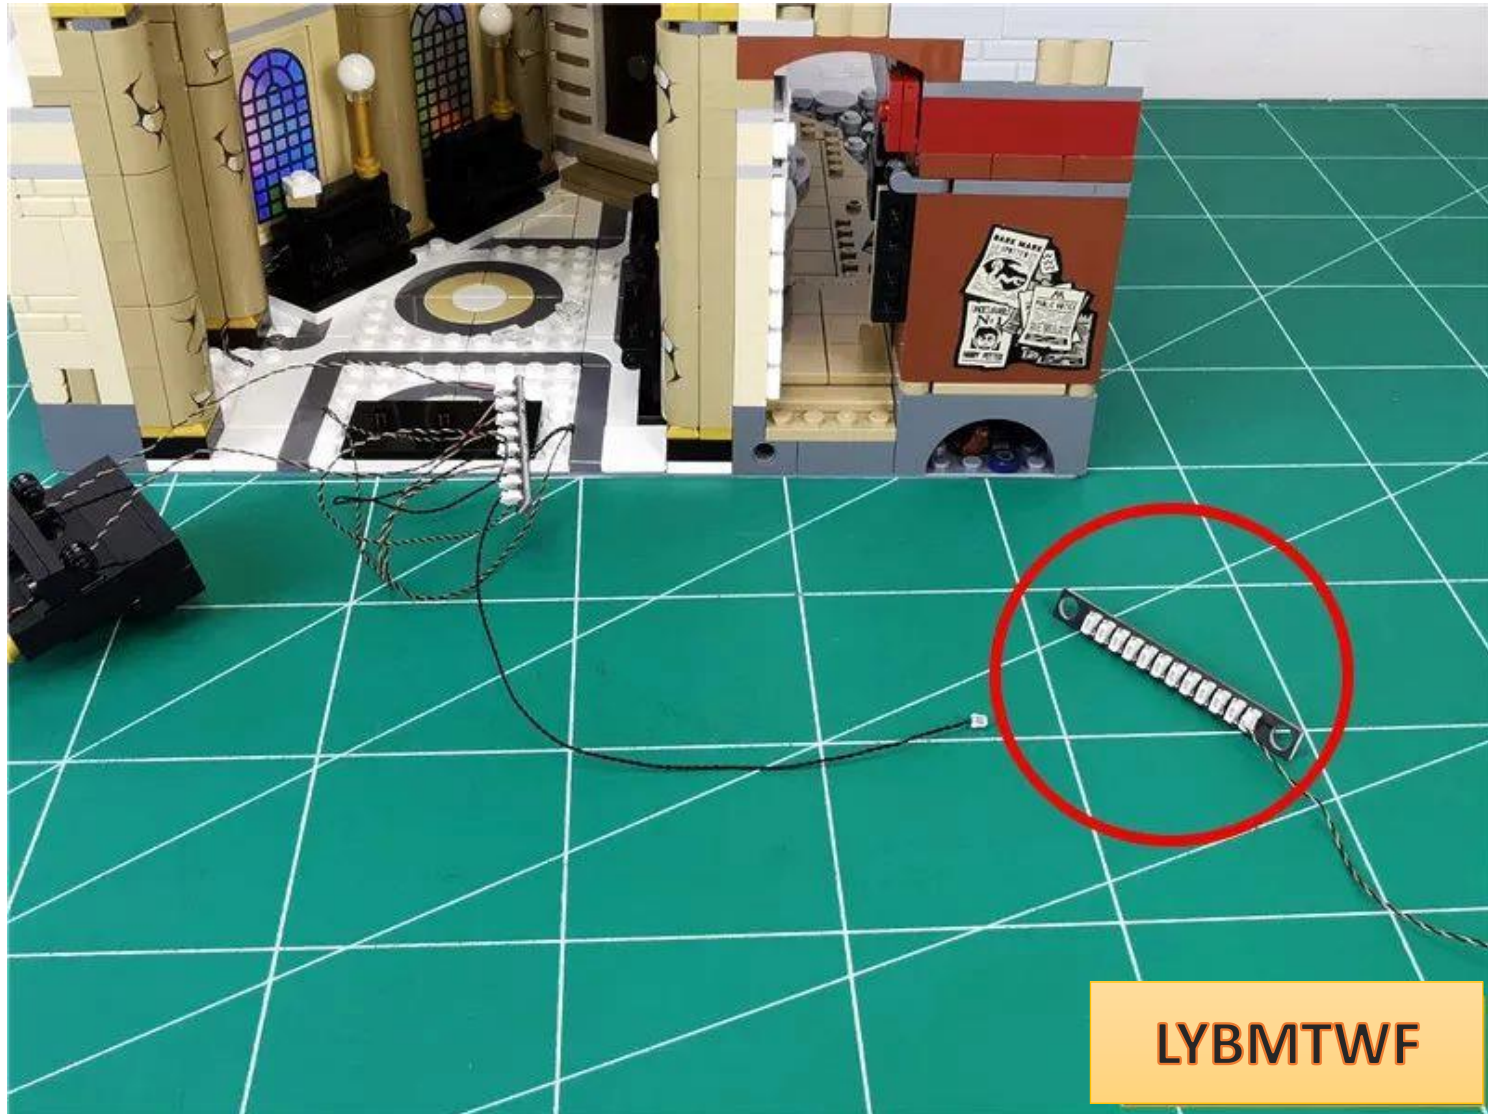


Glue the 8 seats to the back of the counter, with the free connecting wire on the right side

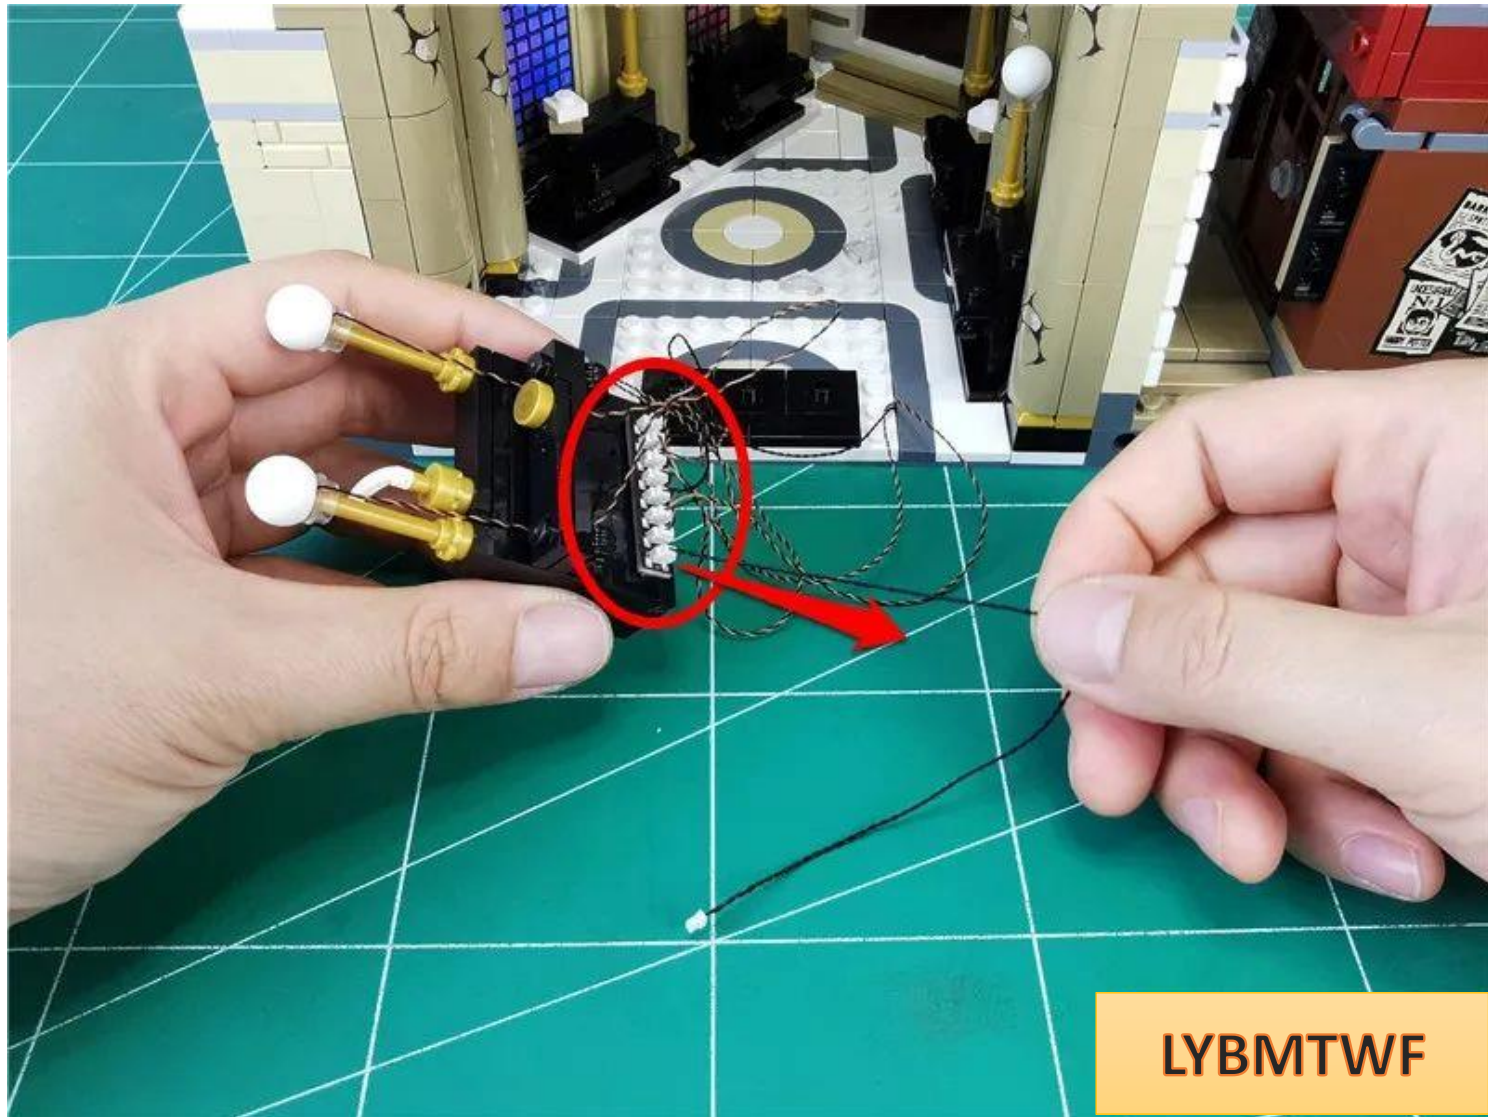


LYBMTWF


Pull the connection cord along the underside of the counter

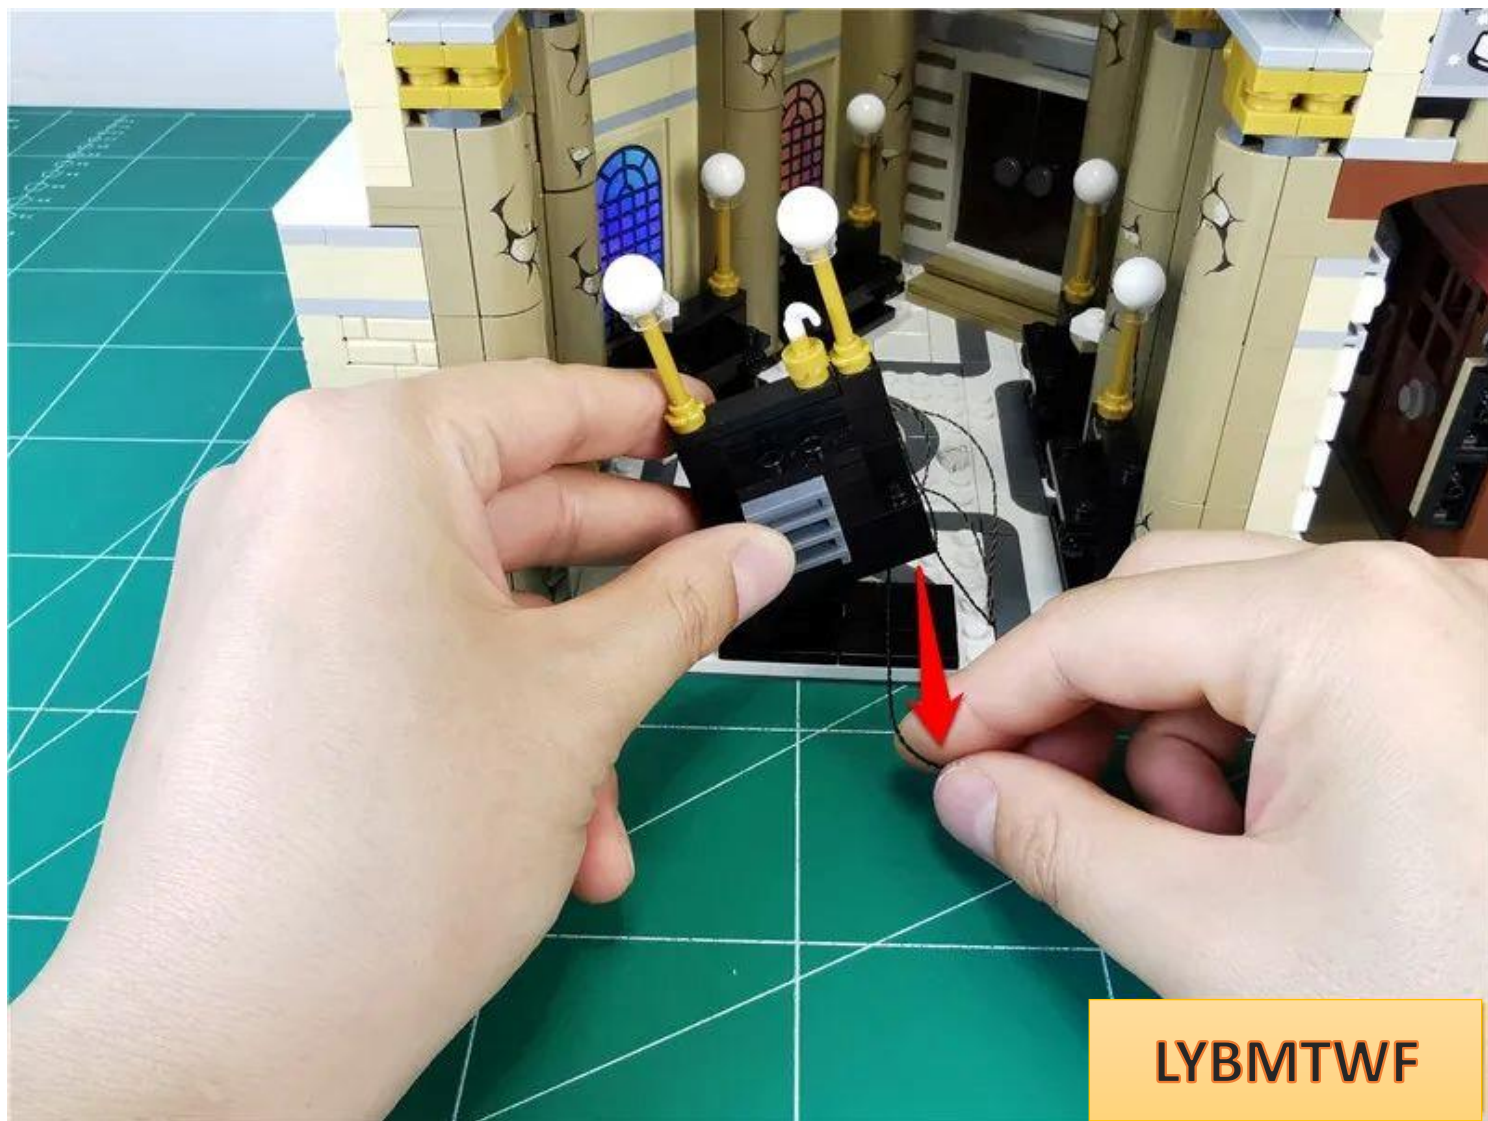


restore counter

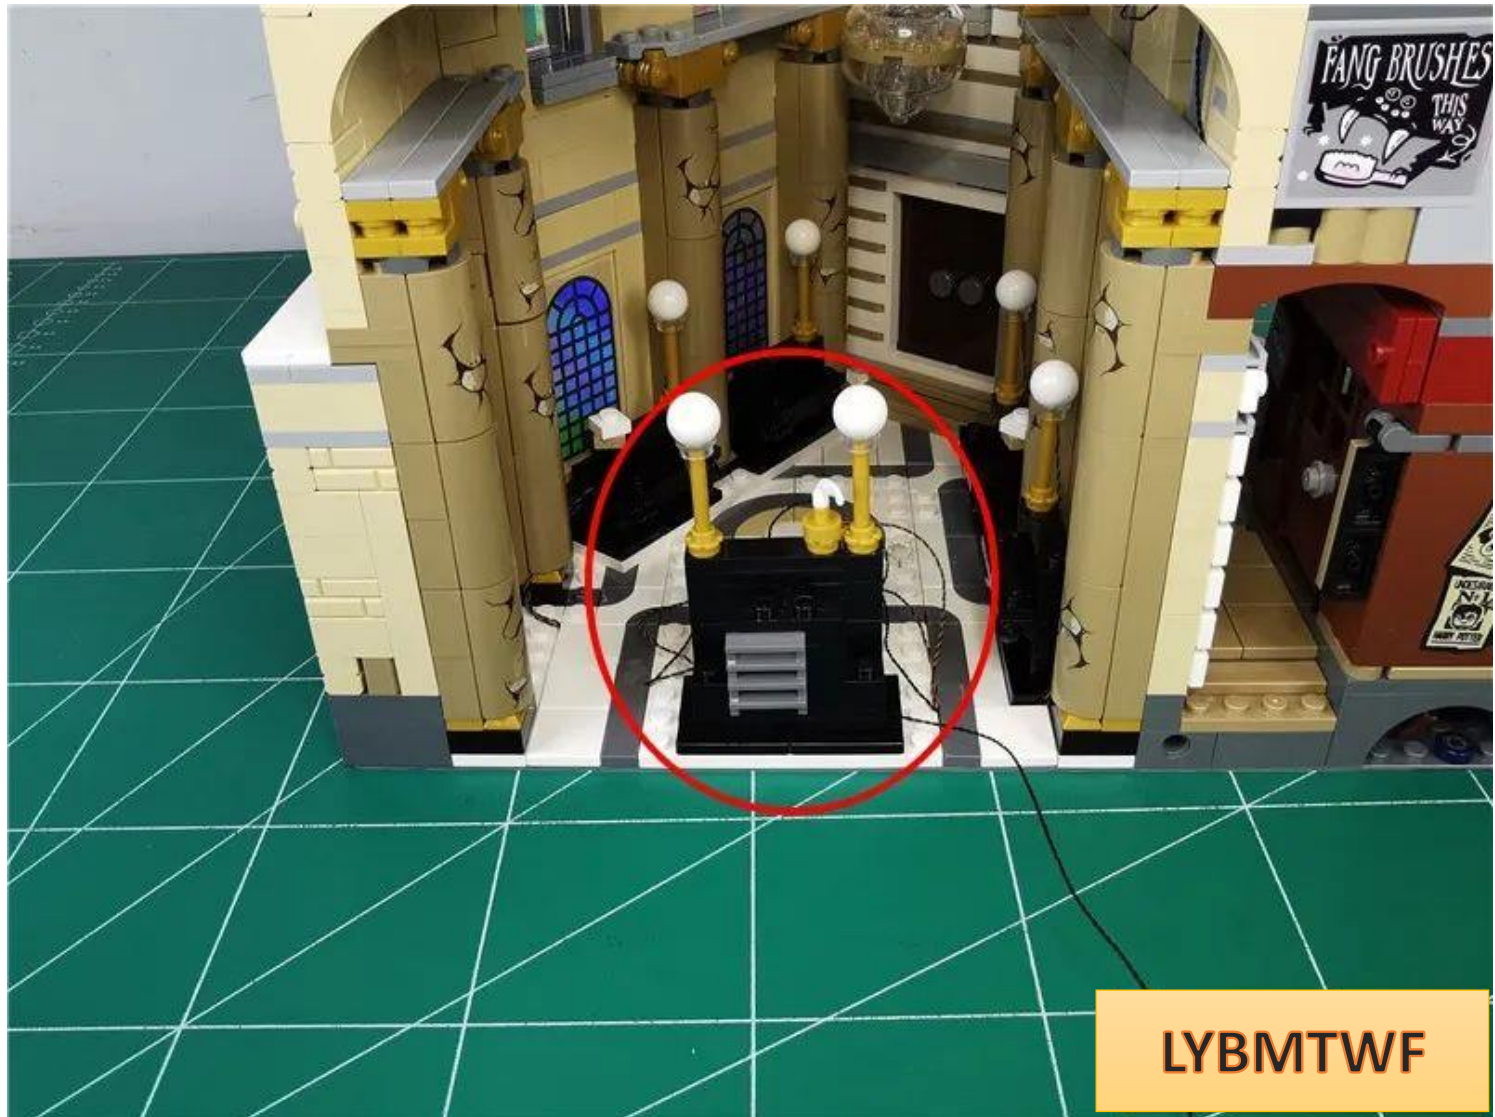

Twist the excess wires together appropriately and stuff them into the gap behind the counter.

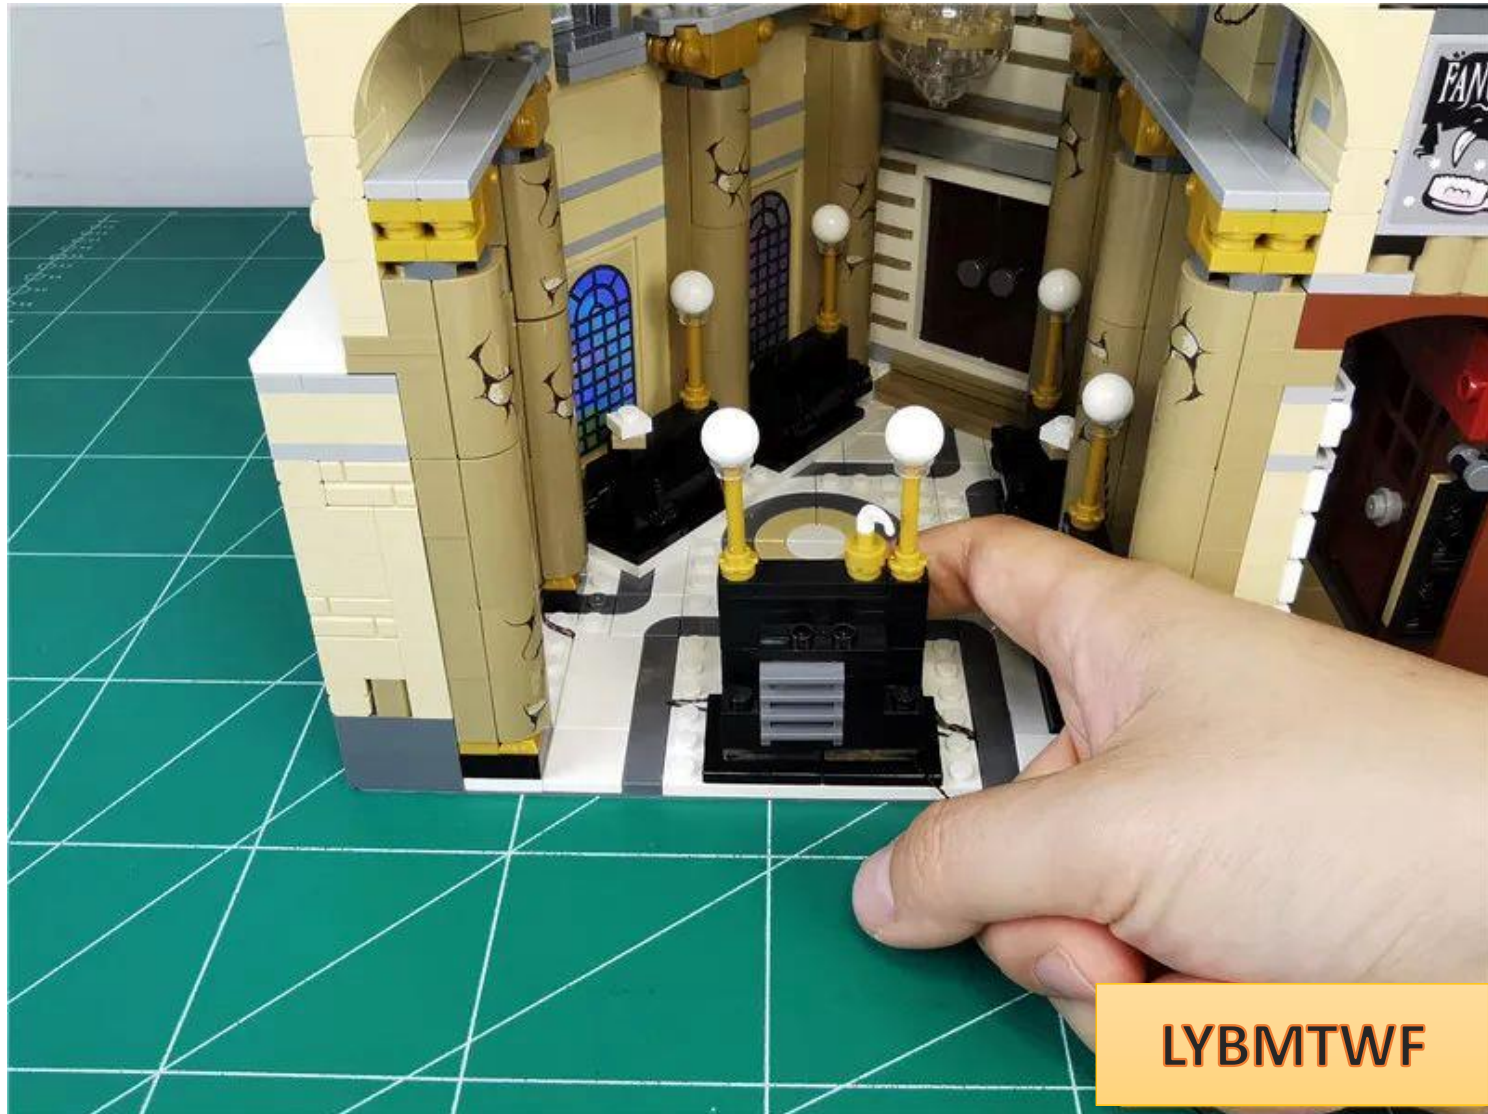


Restoring the upper beam

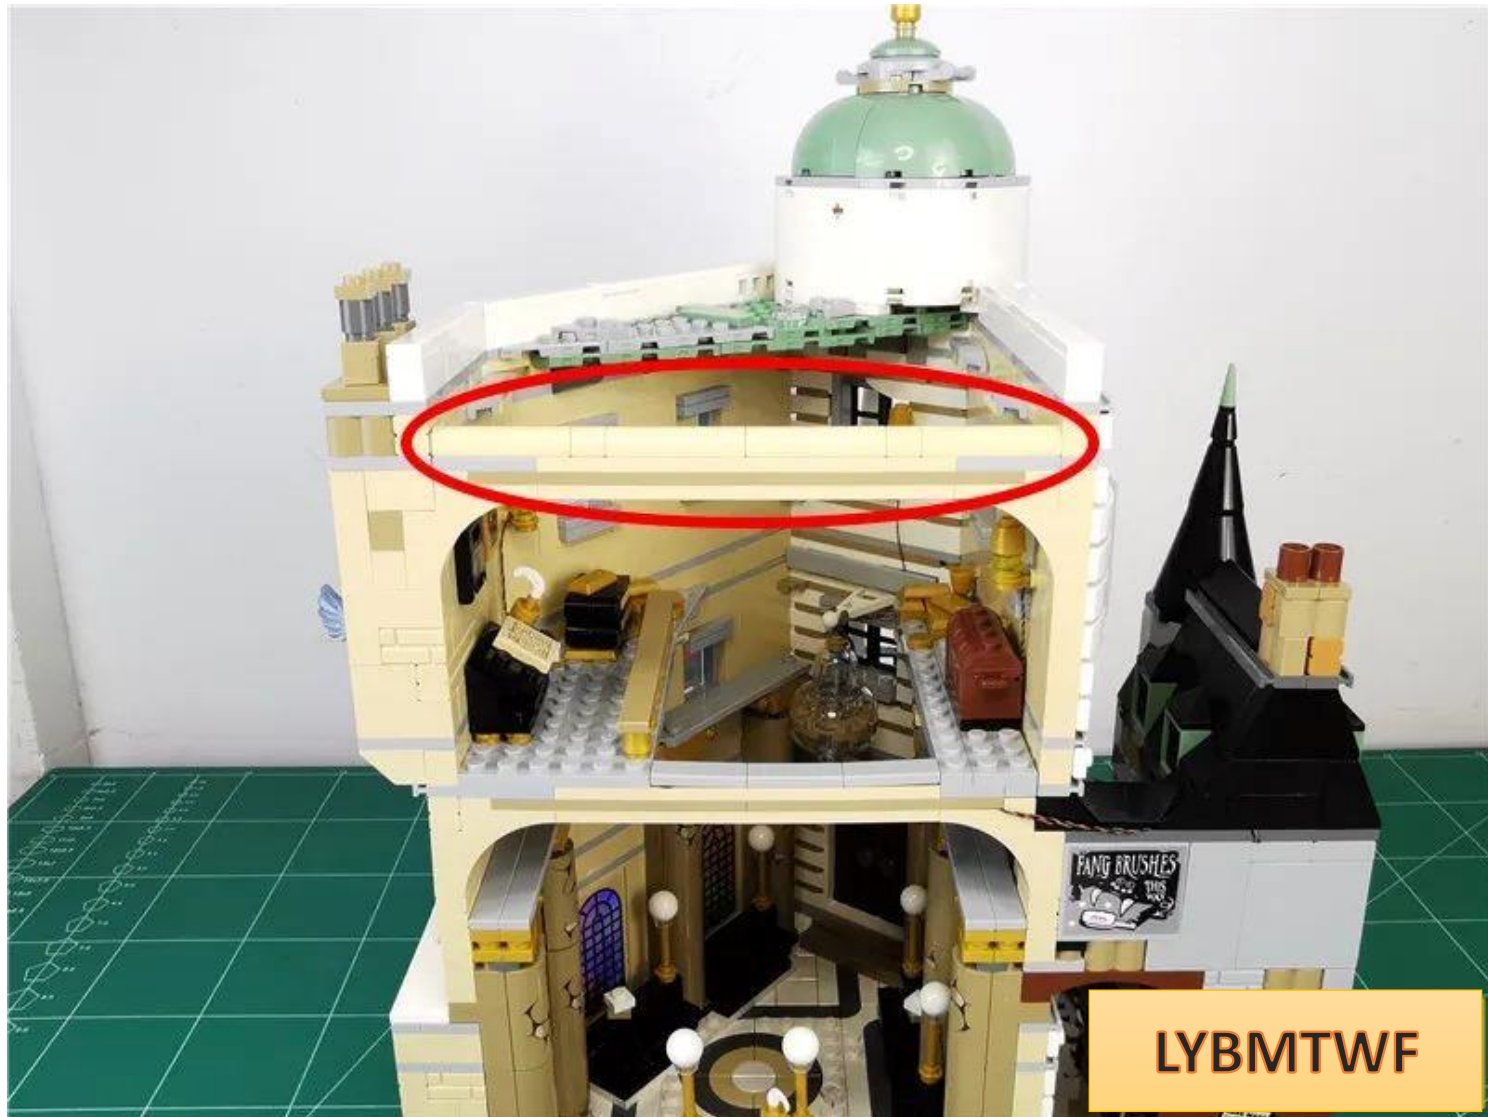

LYBMTWF


Restoring the roof

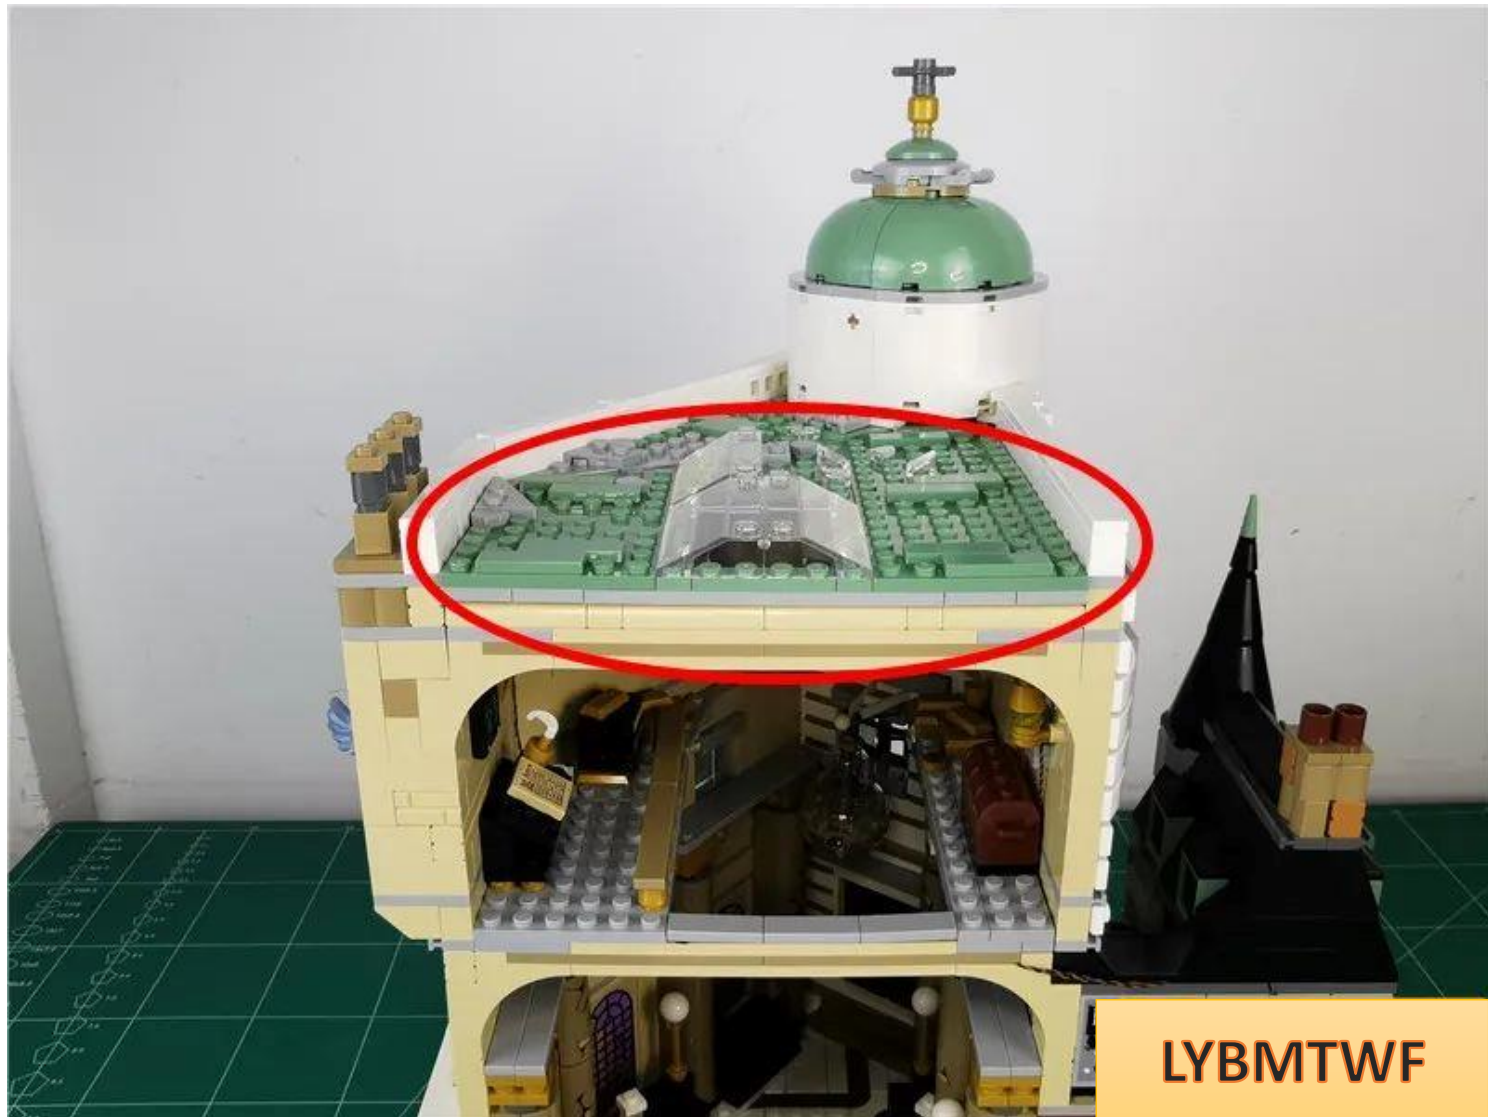

Go outdoors




Remove the 2 wall lights indicated by the arrows

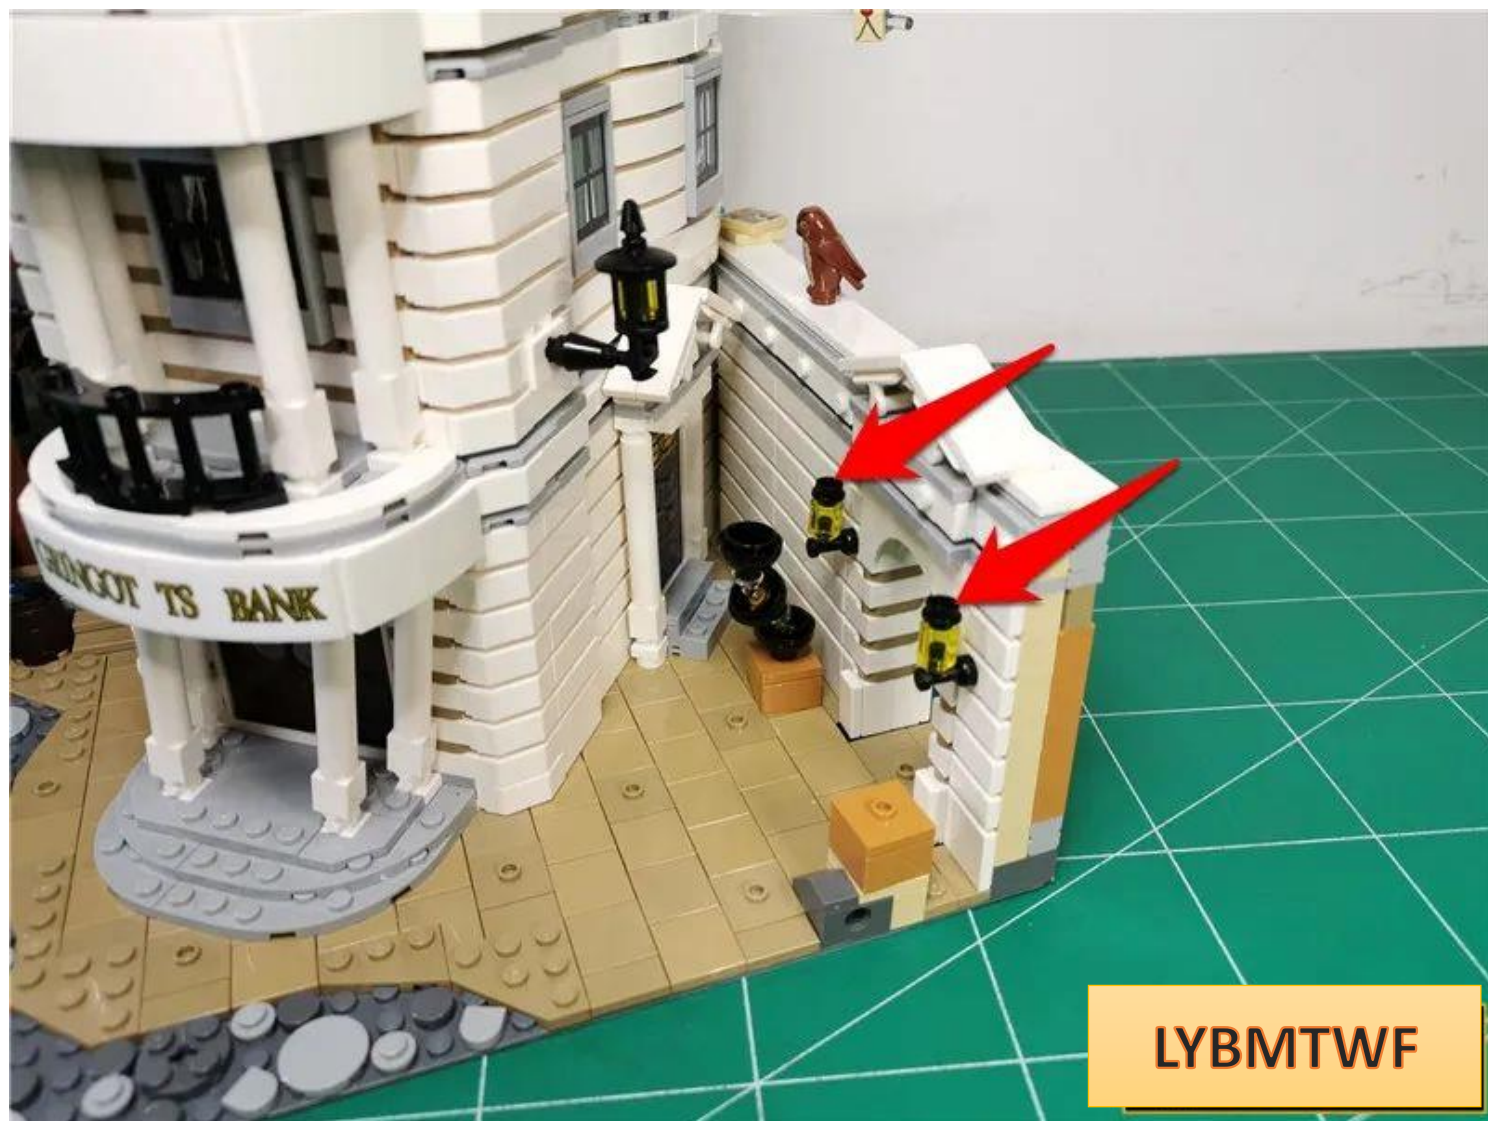


LYBMTWF




Take 2 30cm ordinary warm light bulbs and 2 hollow transparent yellow circles

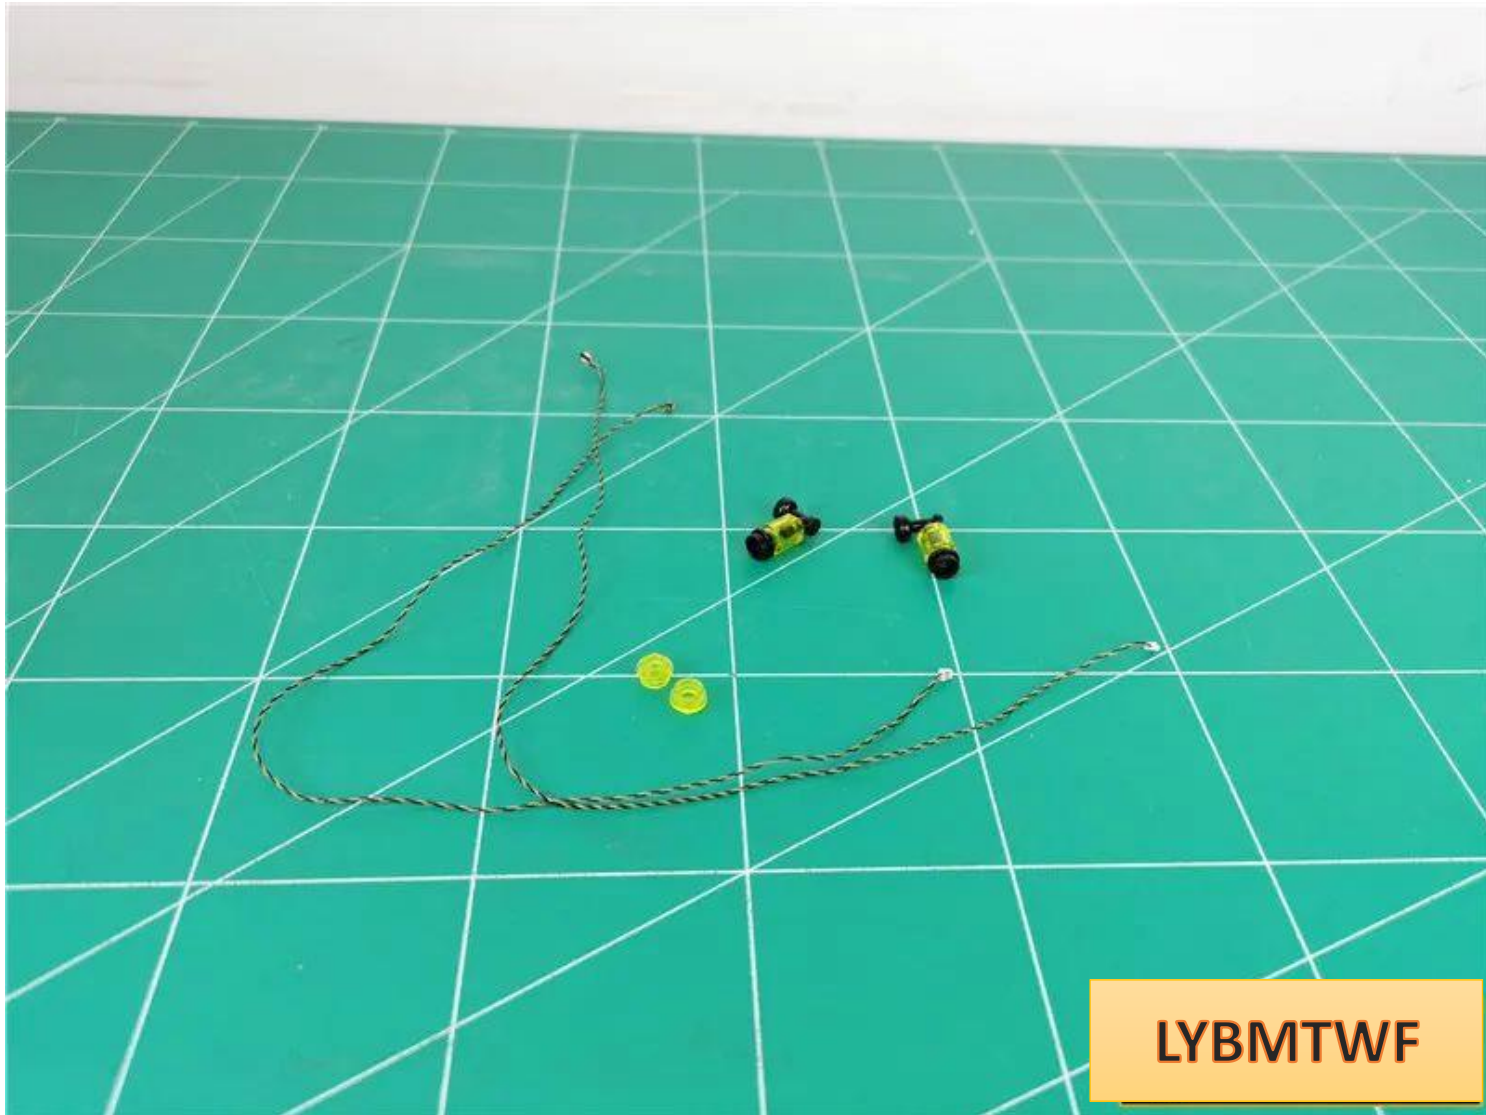


Disassemble the wall light

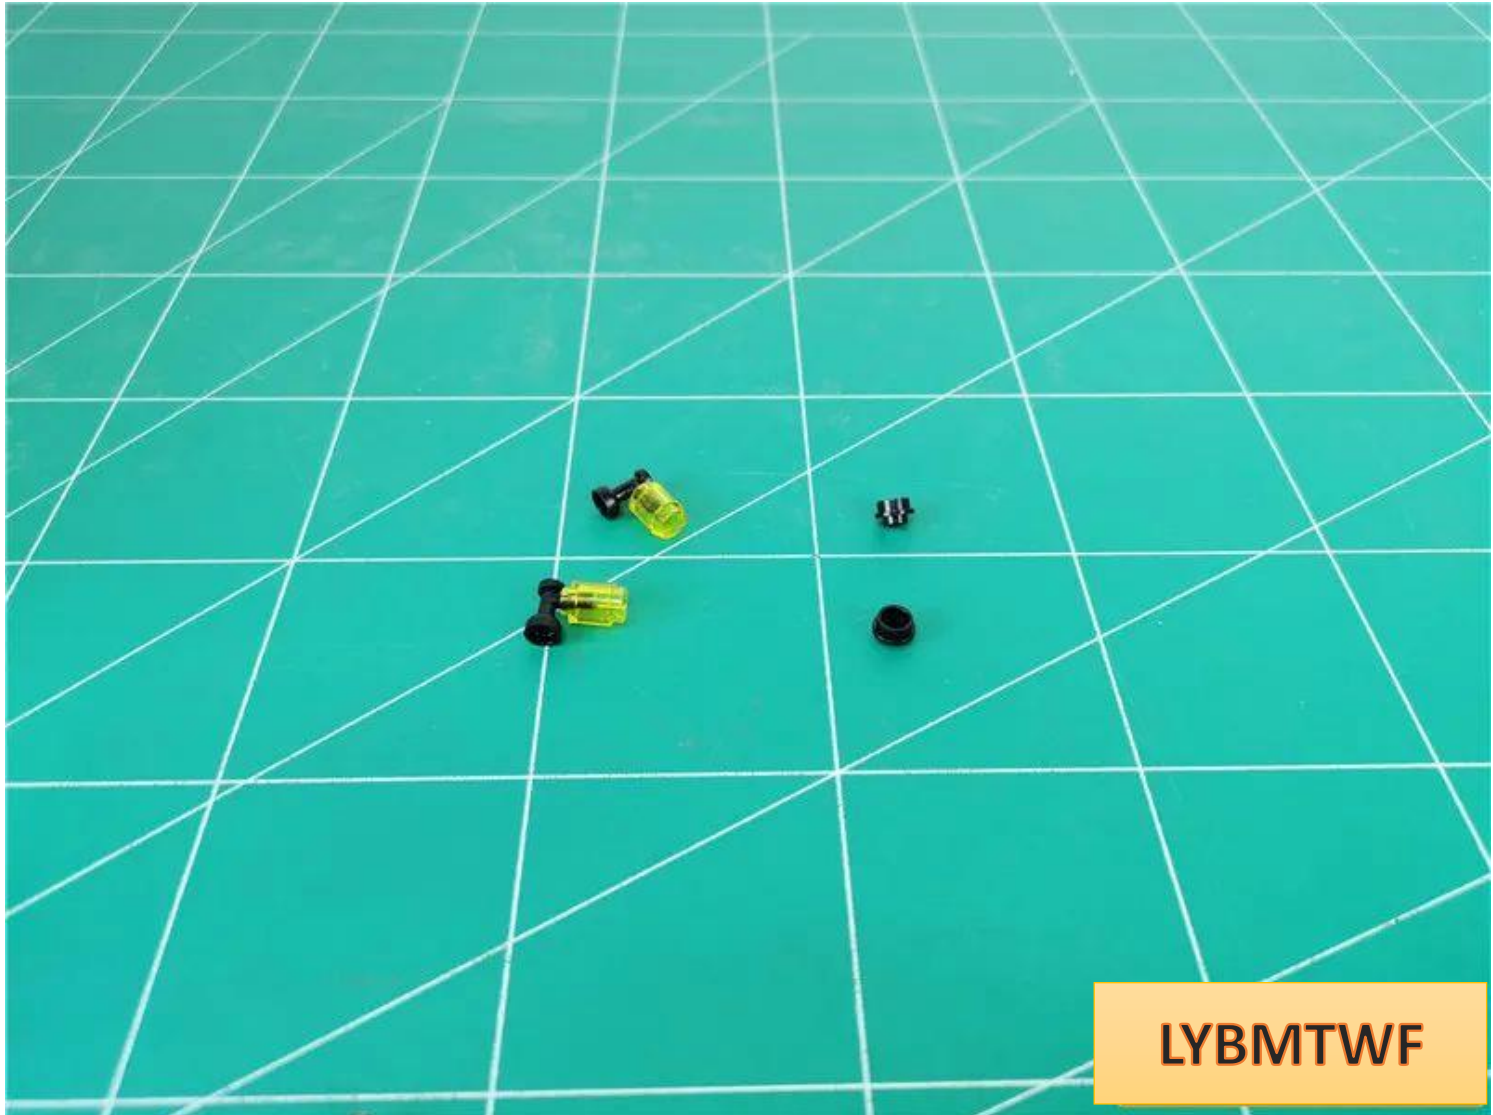

Bend the lamp grain 90°, with the luminous side facing outwards

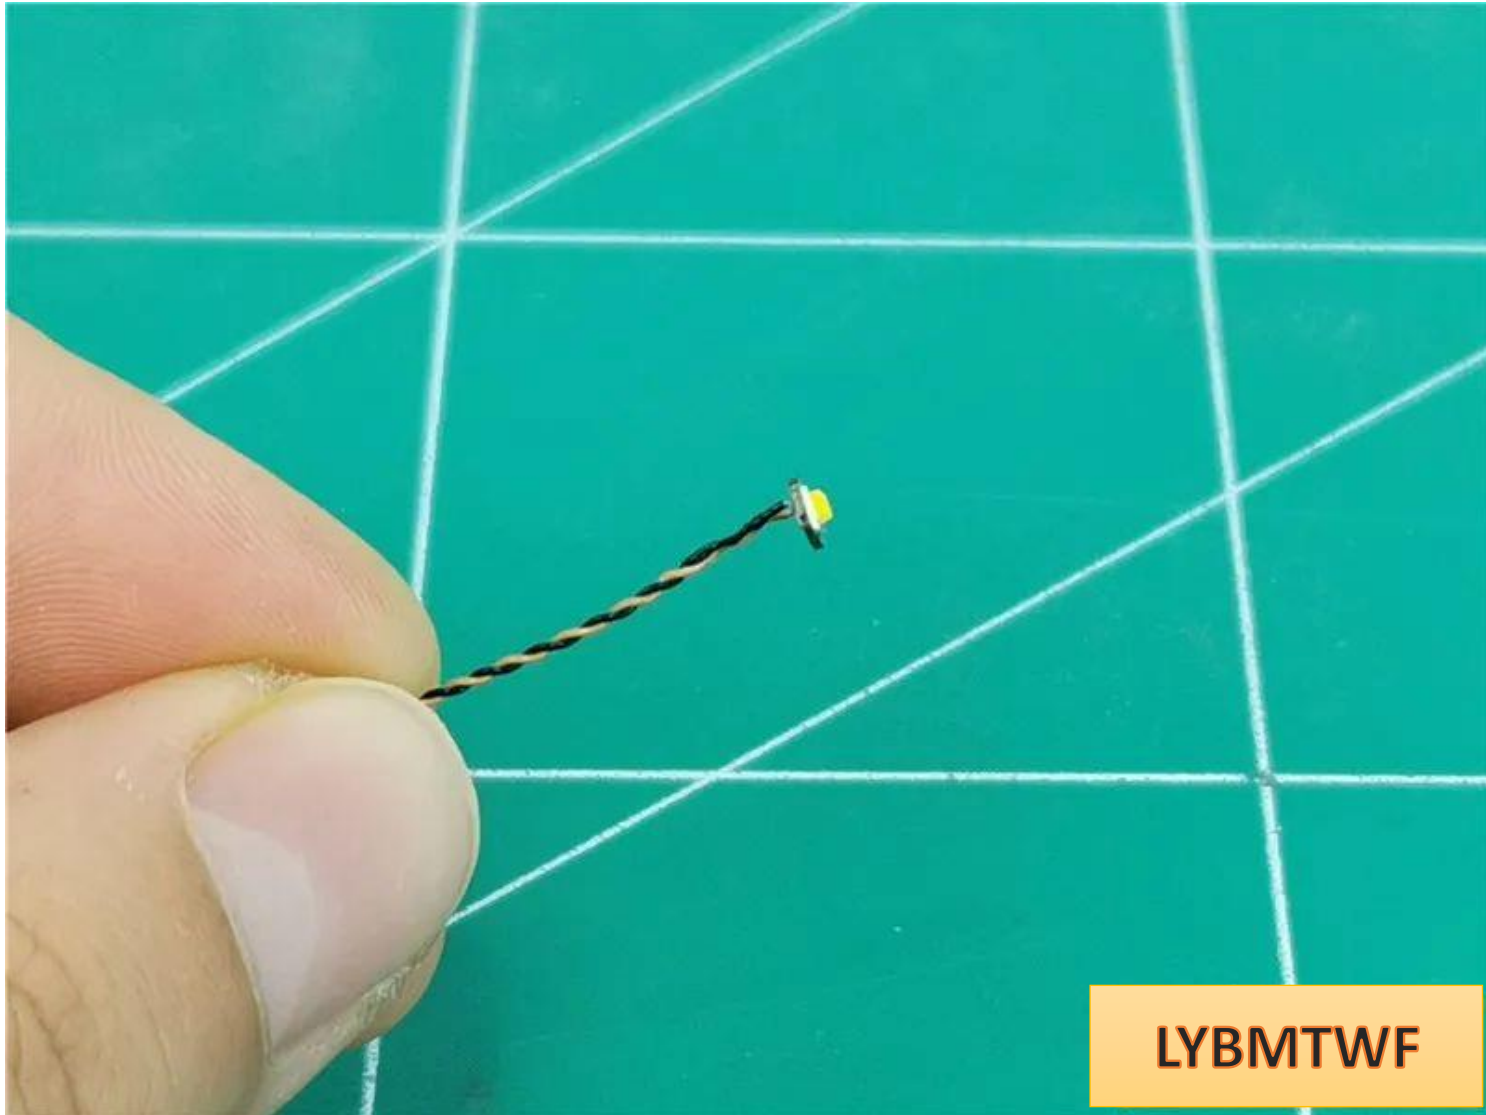

Insert the lamp plug from the hollow circle and pass **one end through the small hole**.

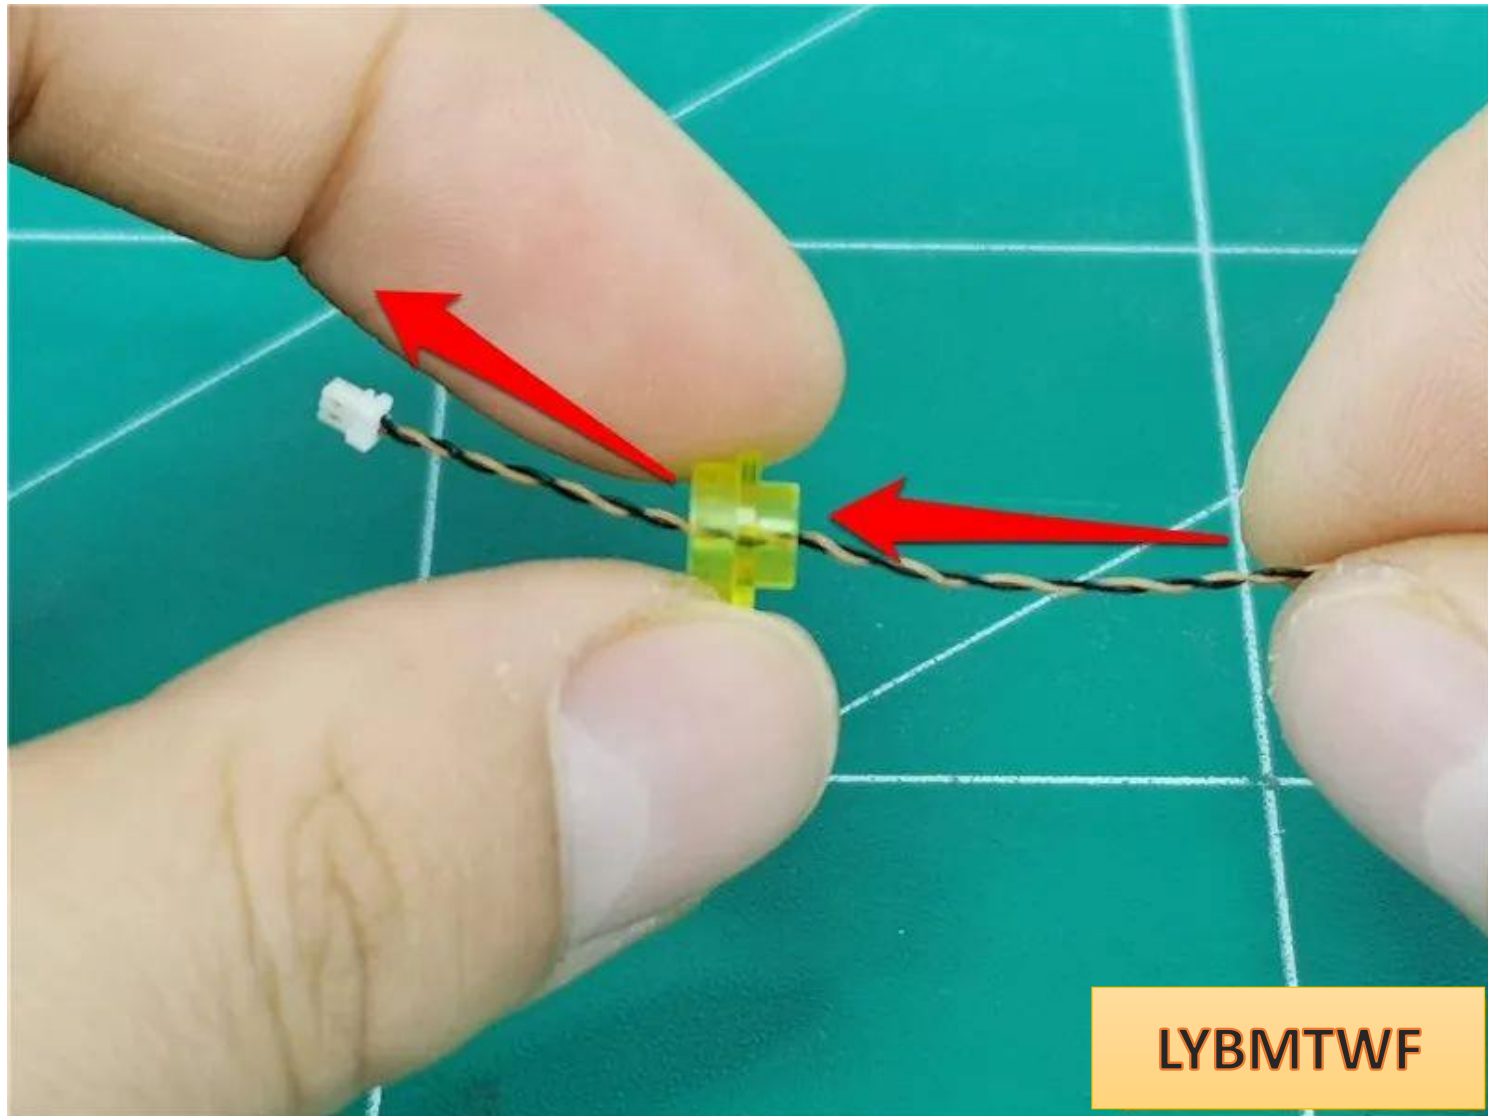


LYBMTWF

Wear it to the bottom so that the lamp particles are placed on the protrusions




Install the black circle and fix the wires

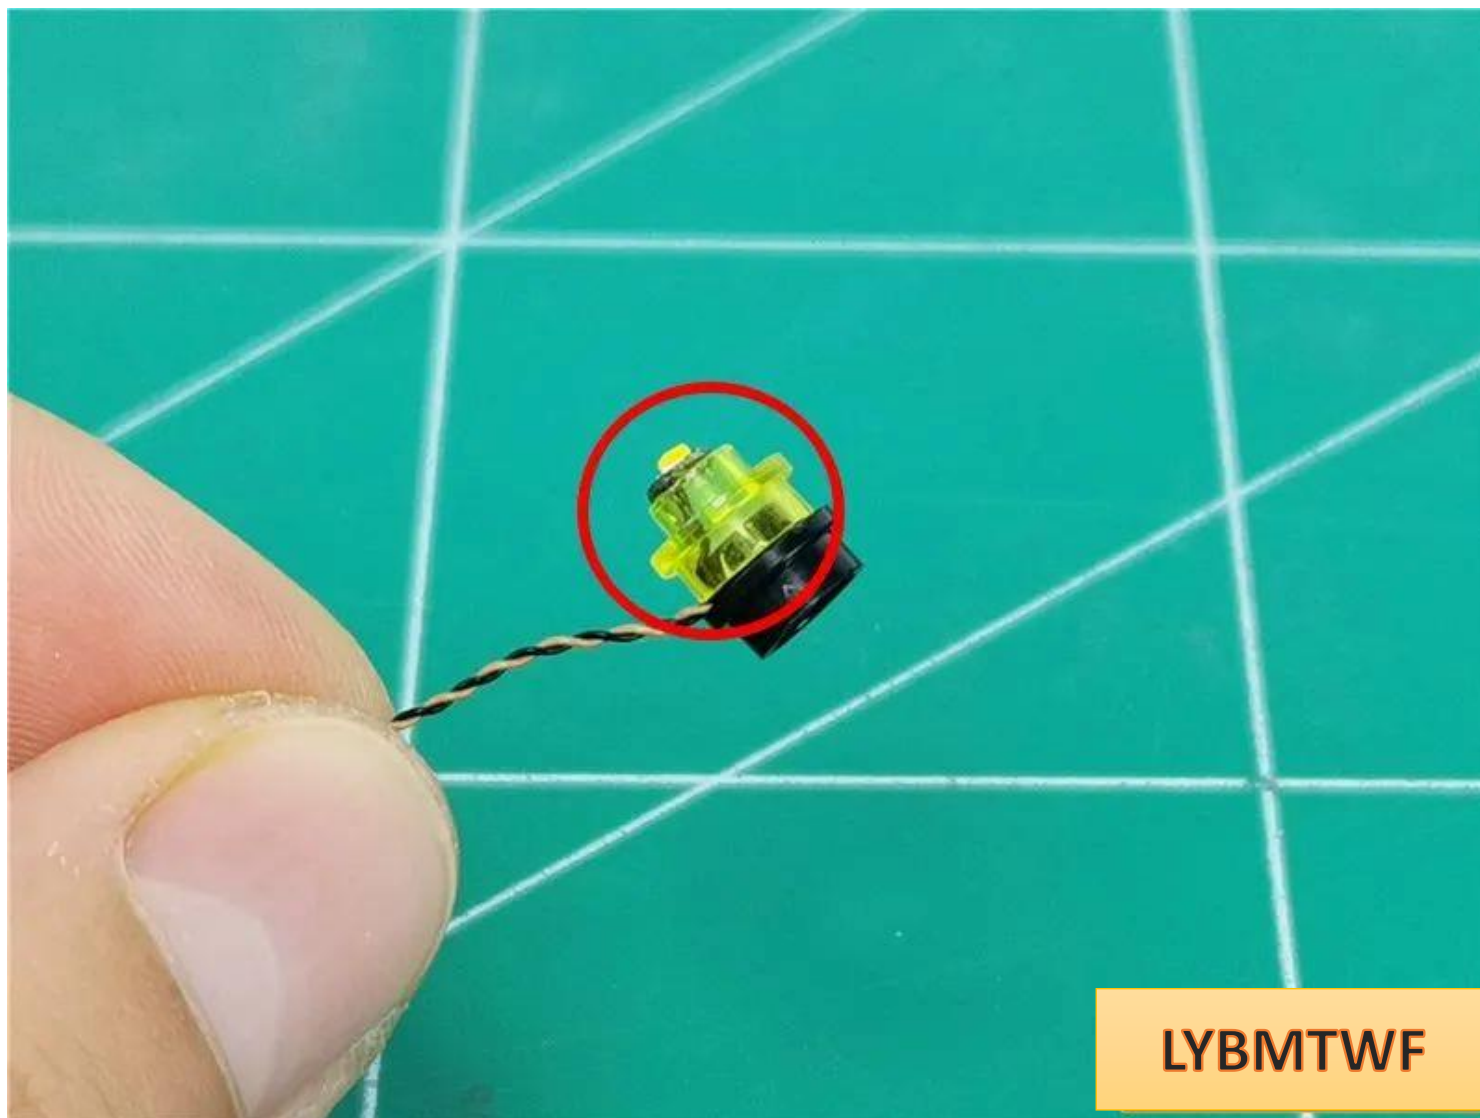


LYBMTWF

Restore the parts, the wires are on the same side as the bracket

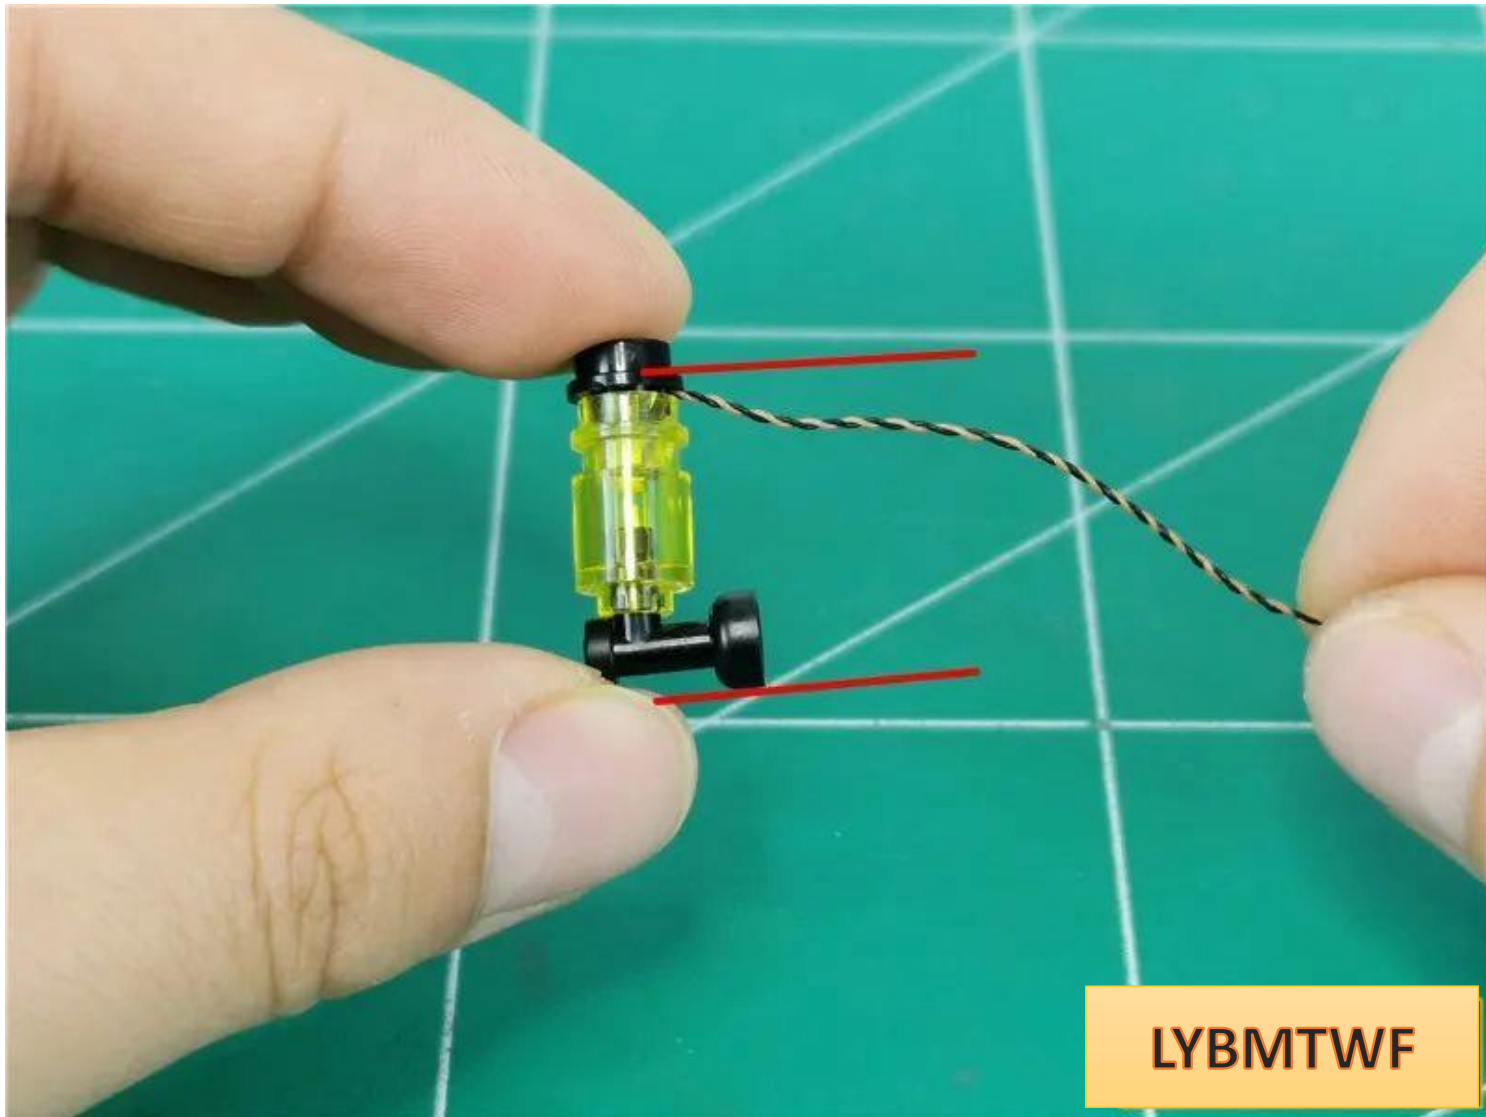


LYBMTWF

In the same way, install another lamp particle

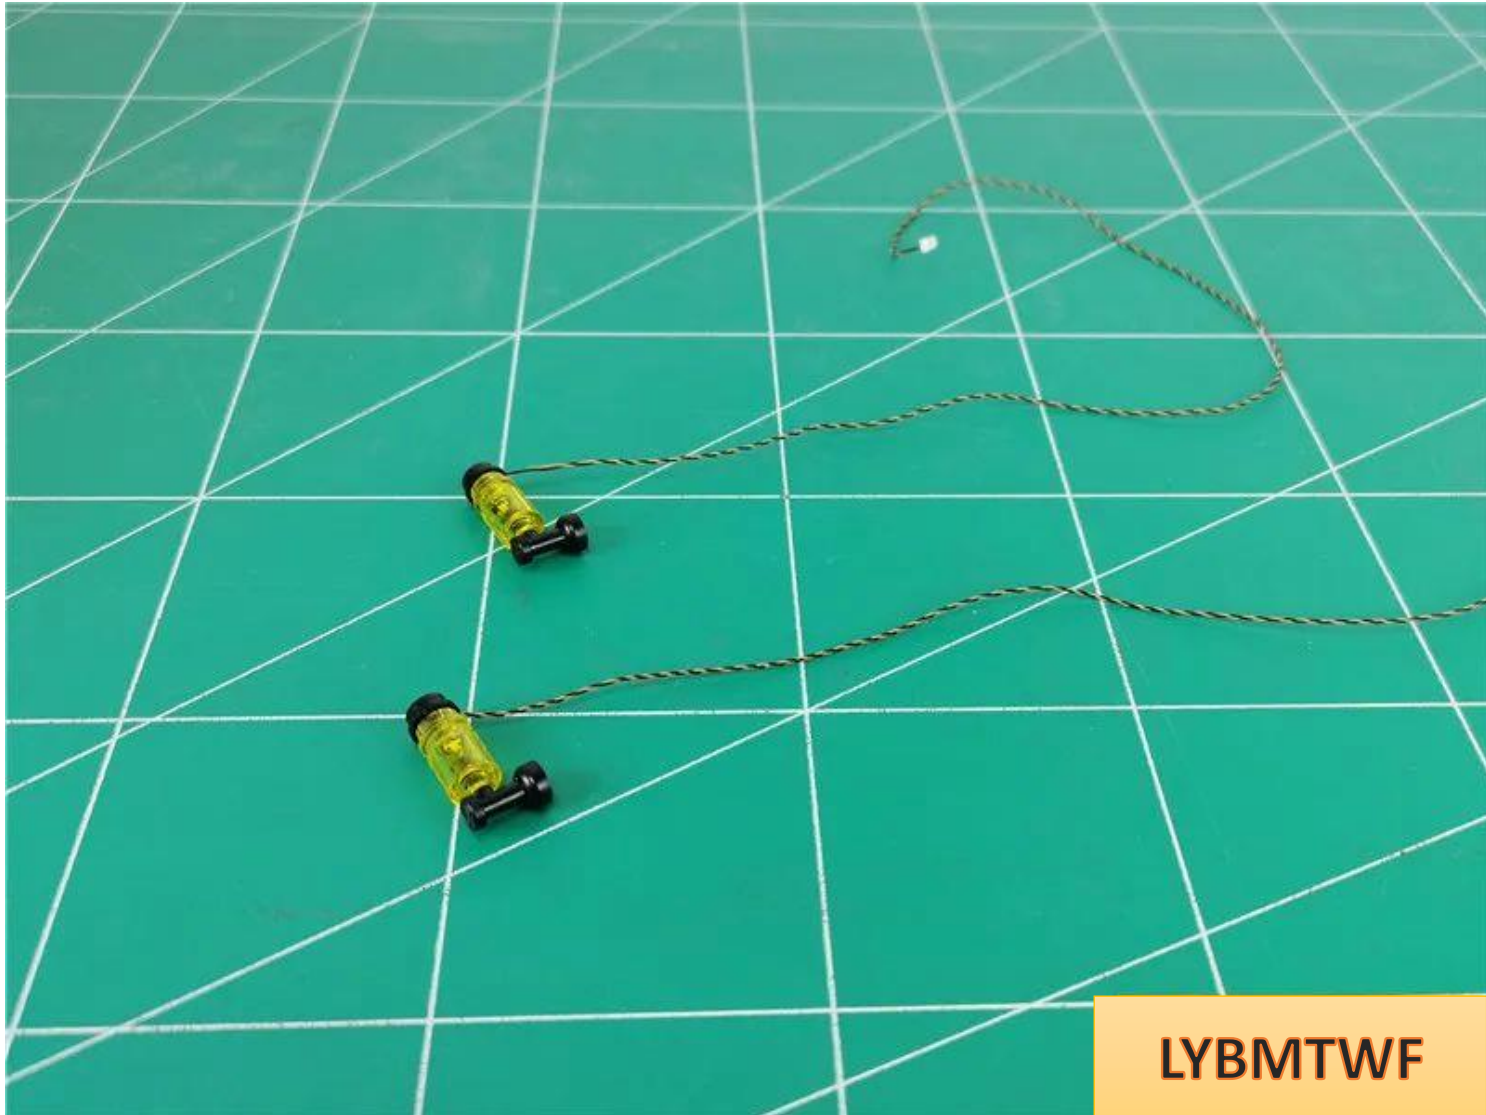


LYBMTWF


Pass the wires around the bracket

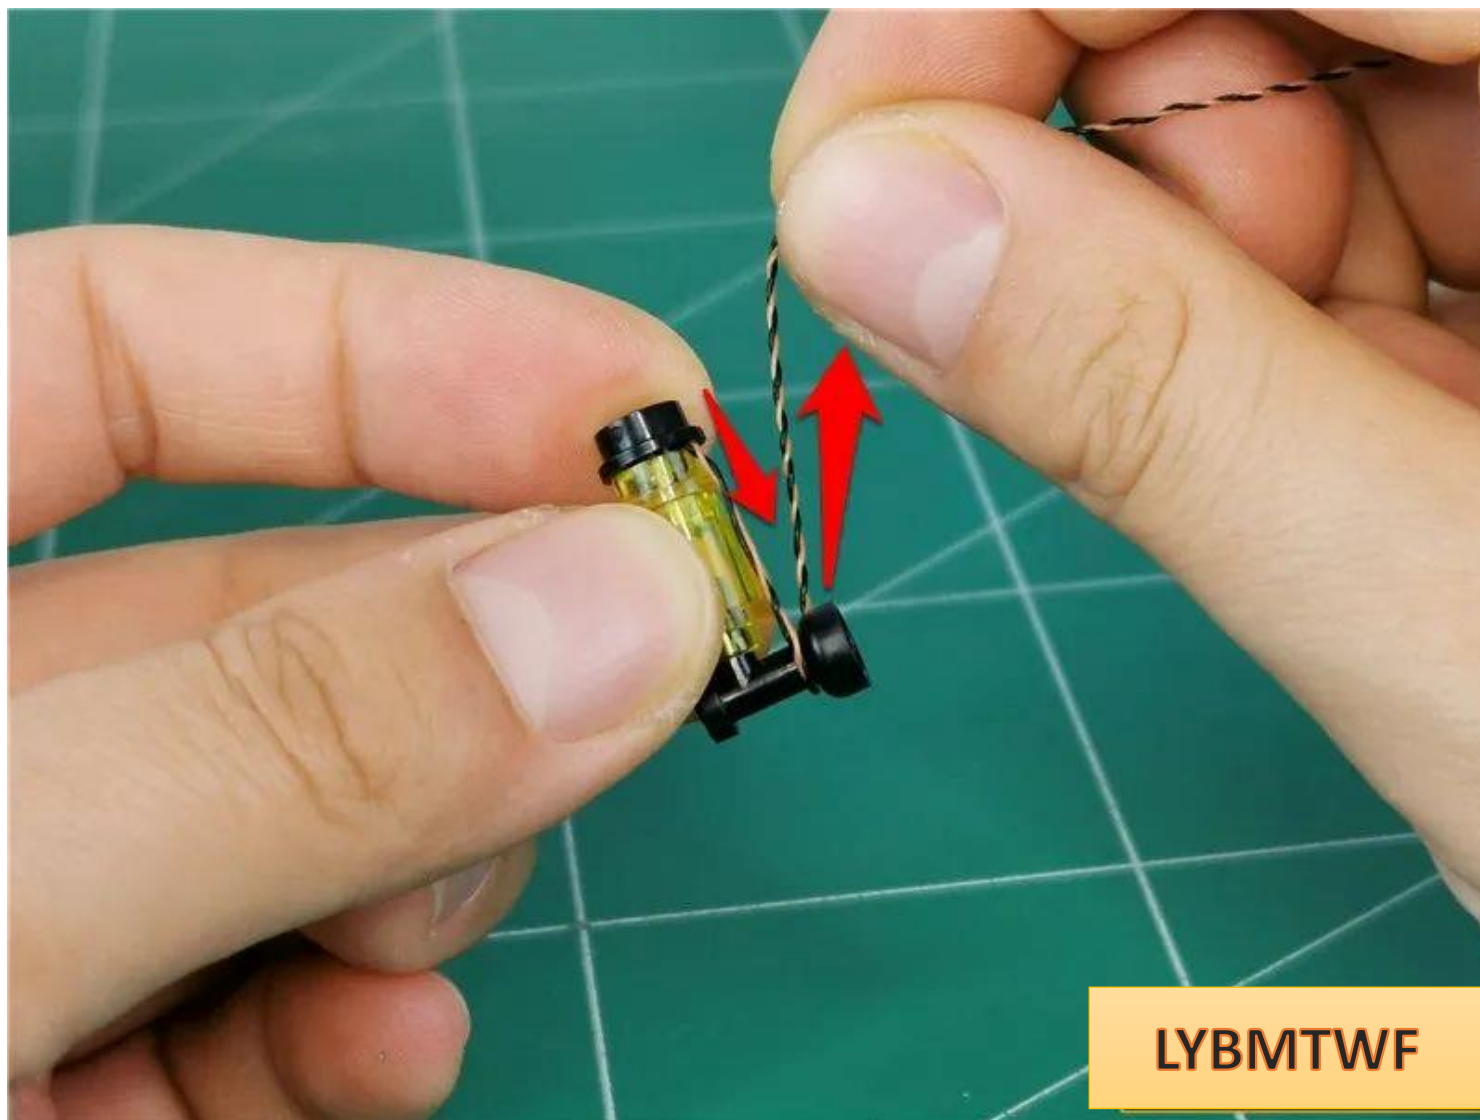

LYBMTWF


Restore wall lamps in sequence

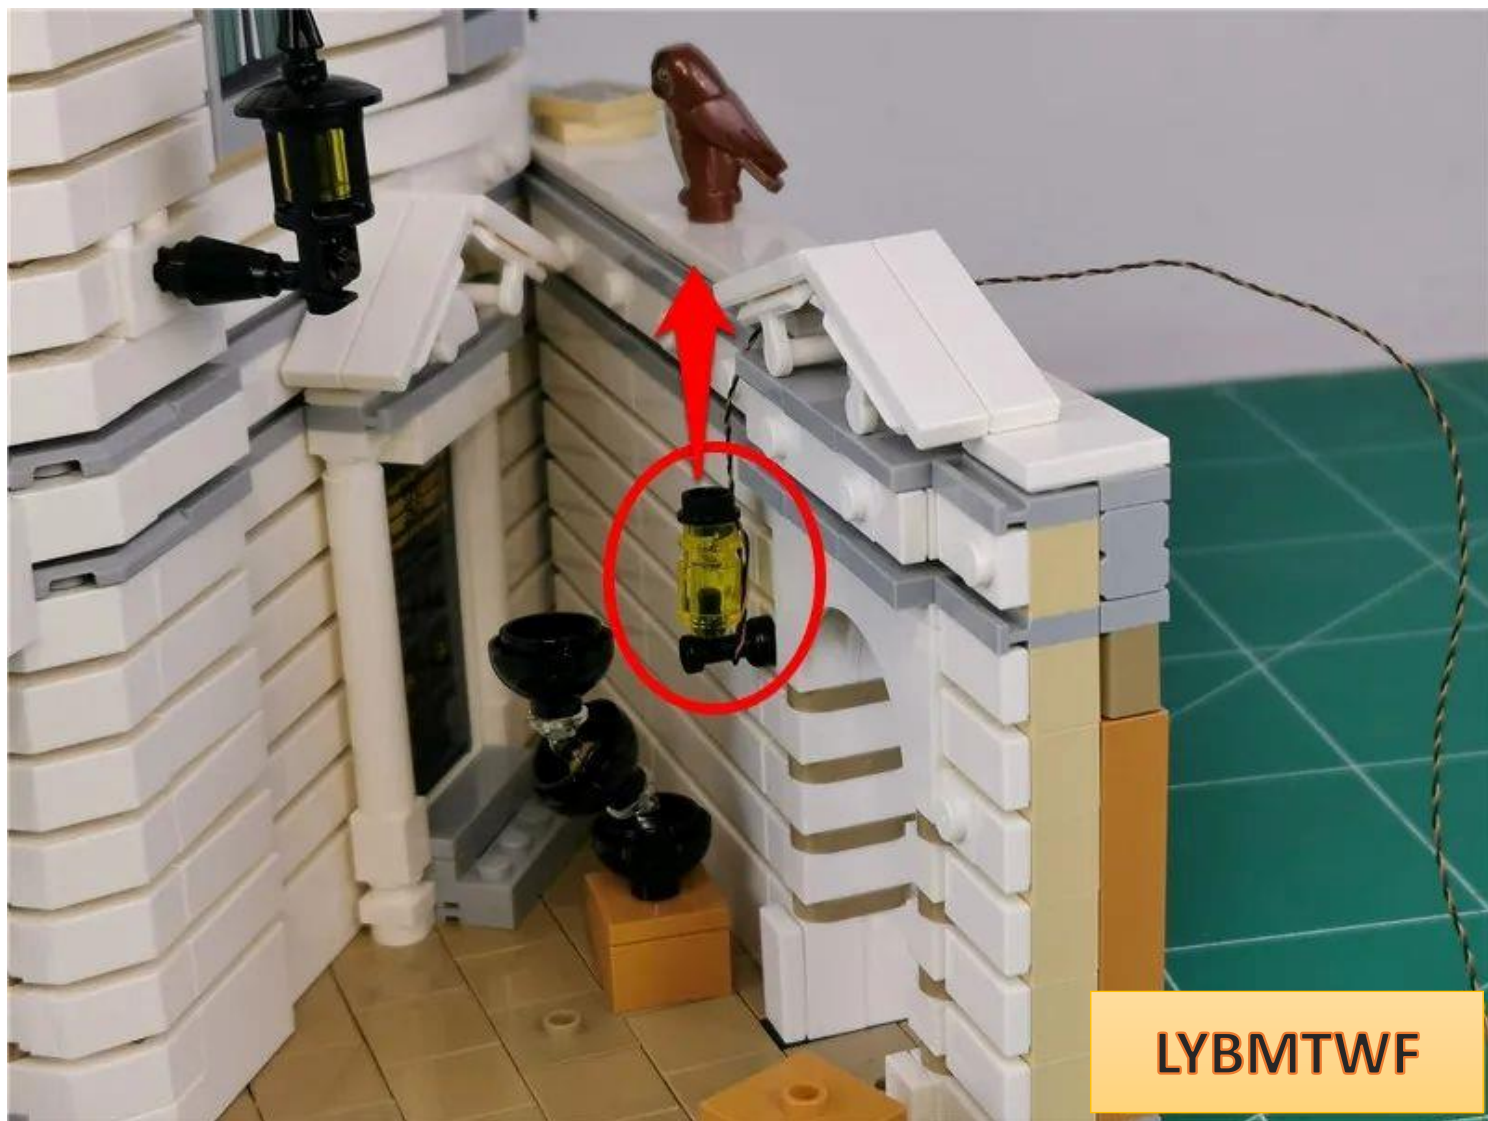


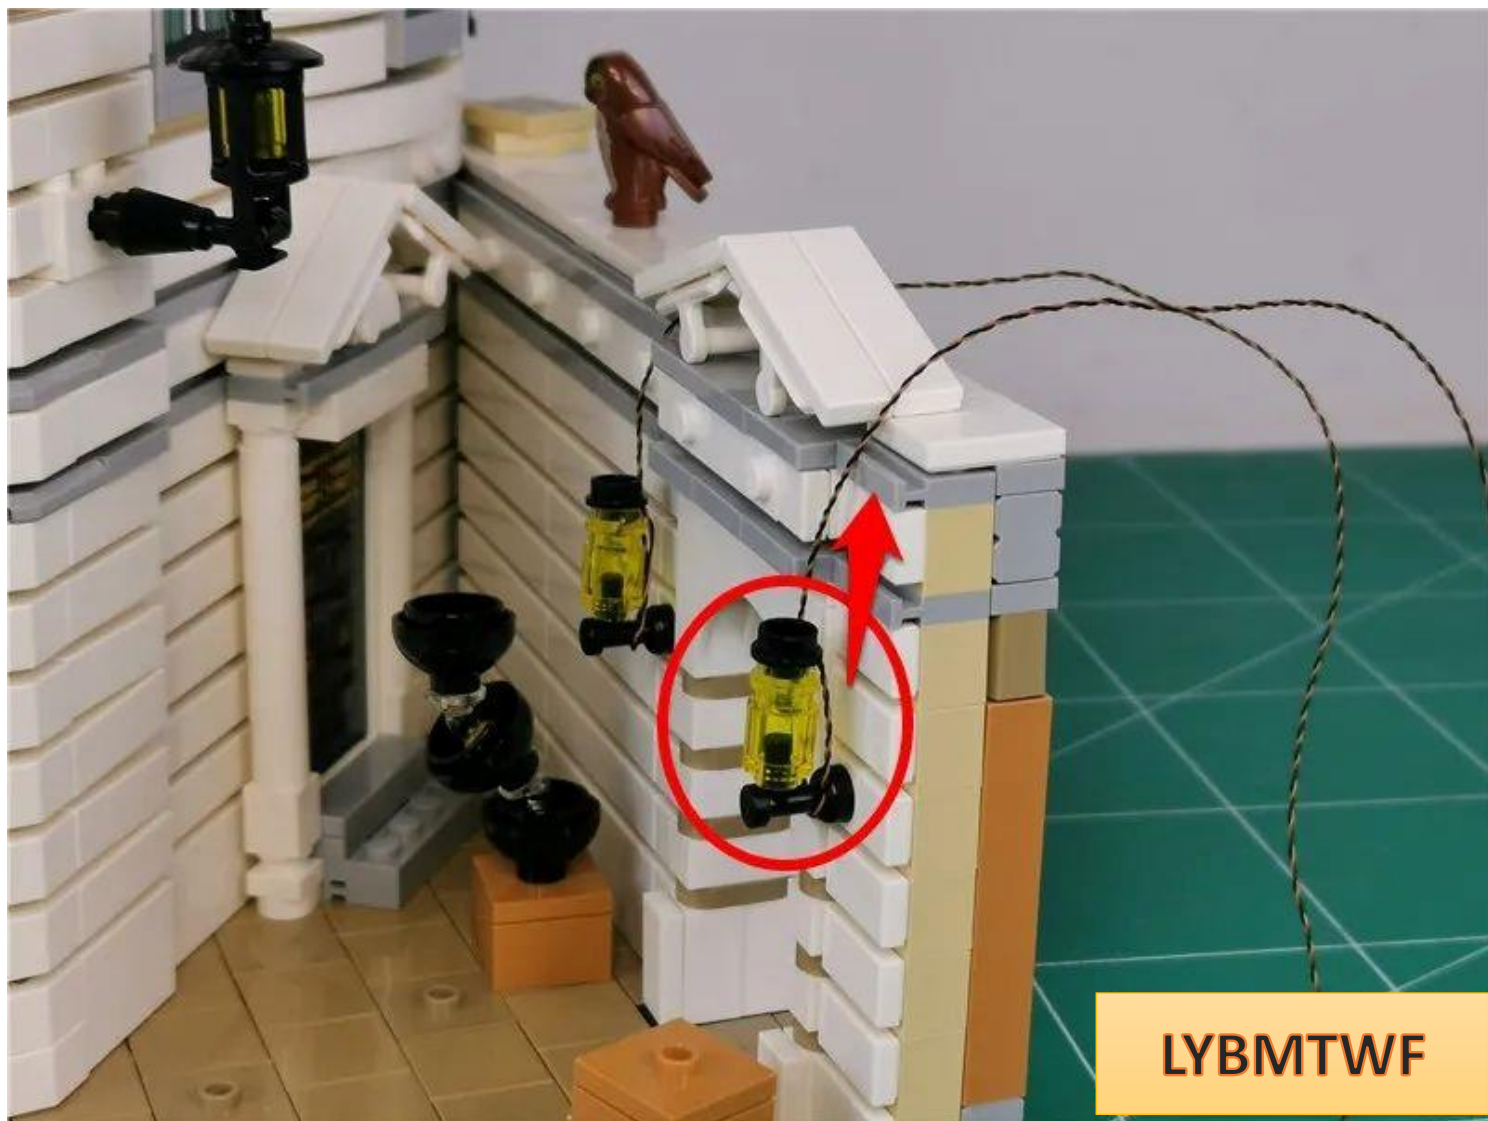


LYBMTWF


Remove the parts indicated by the arrows in sequence

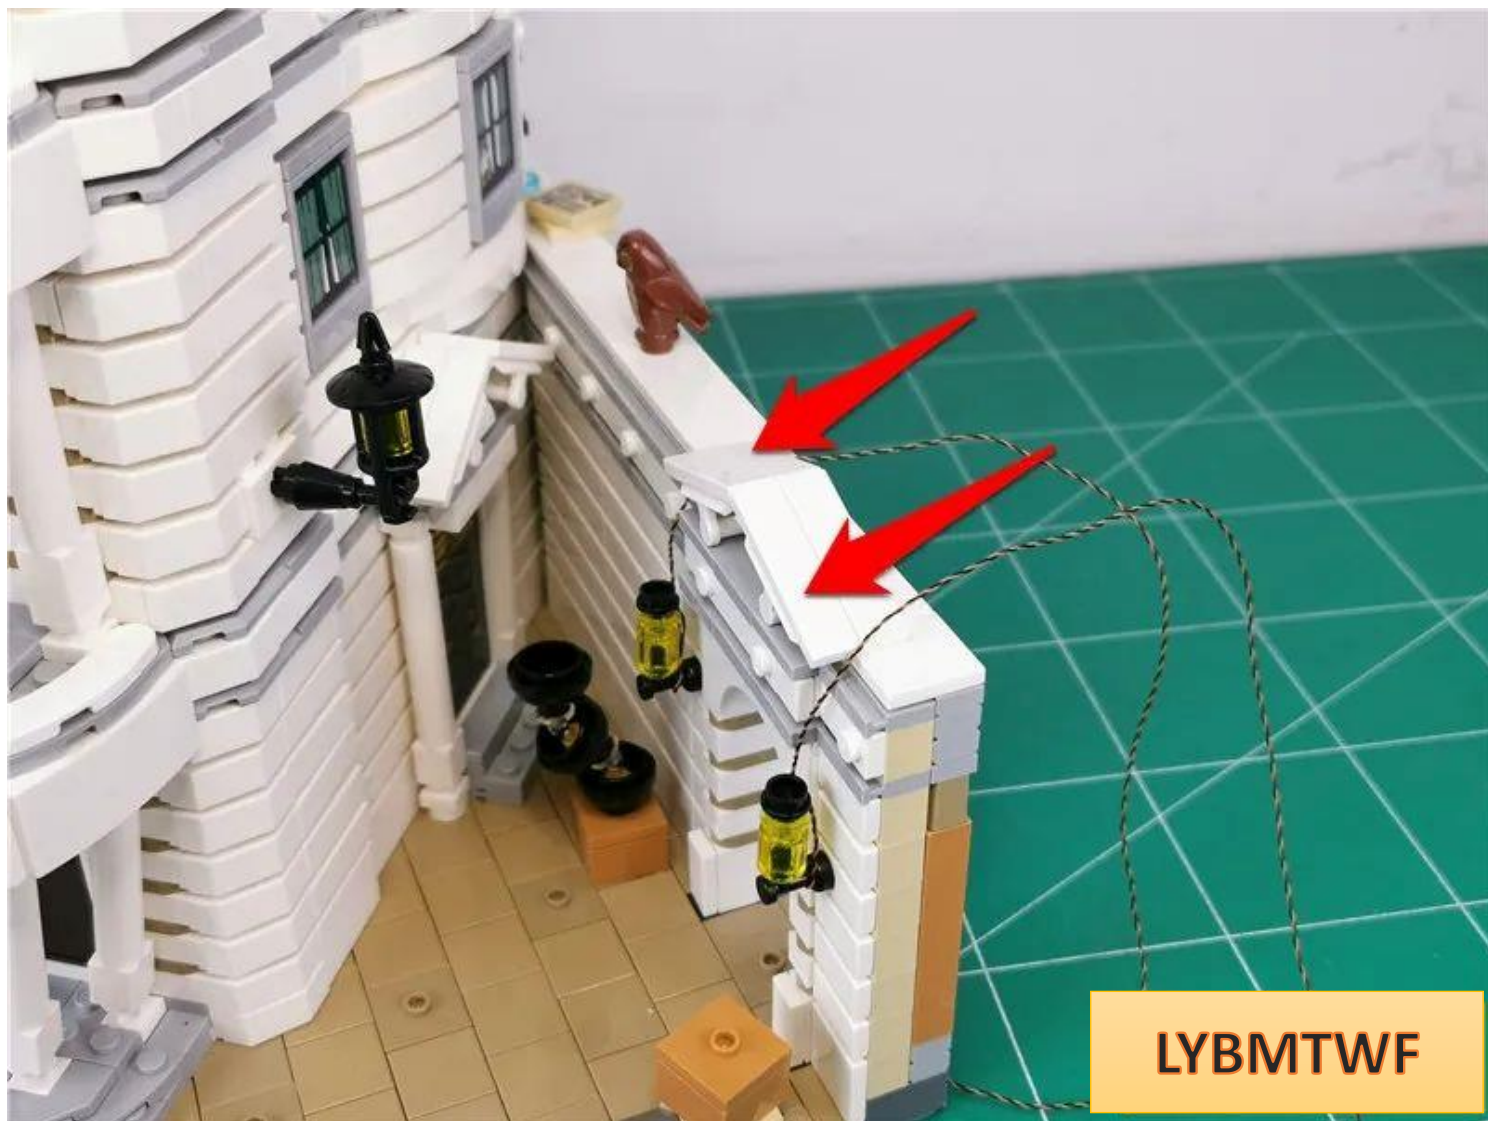

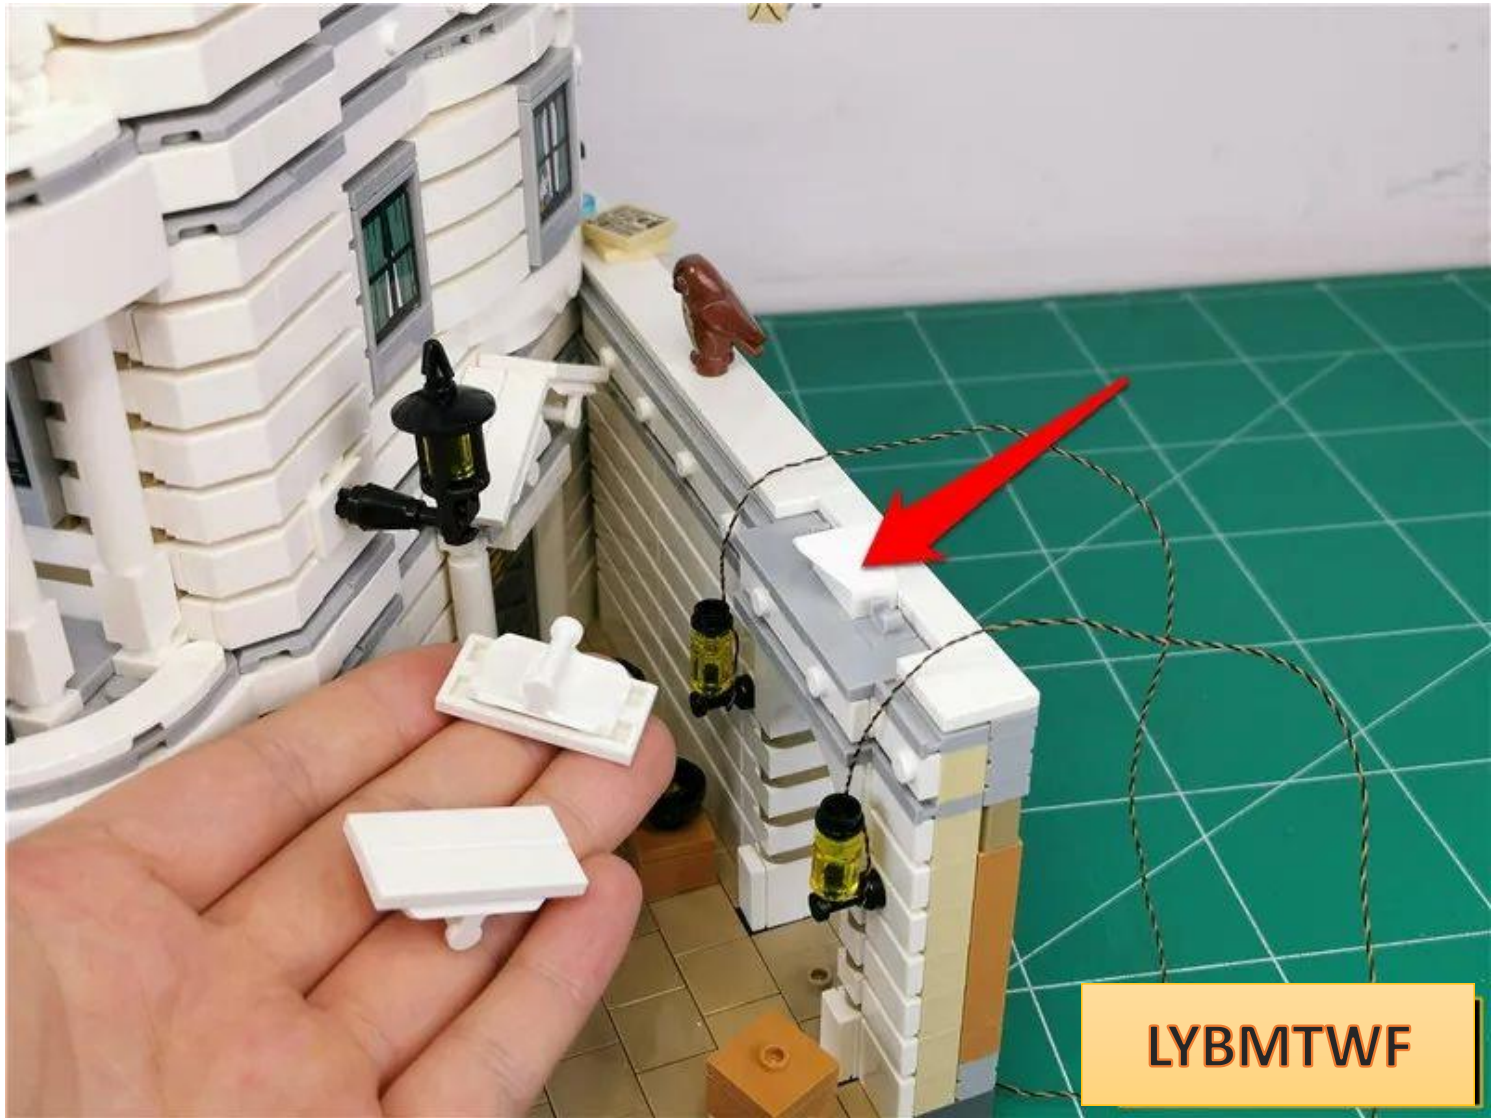


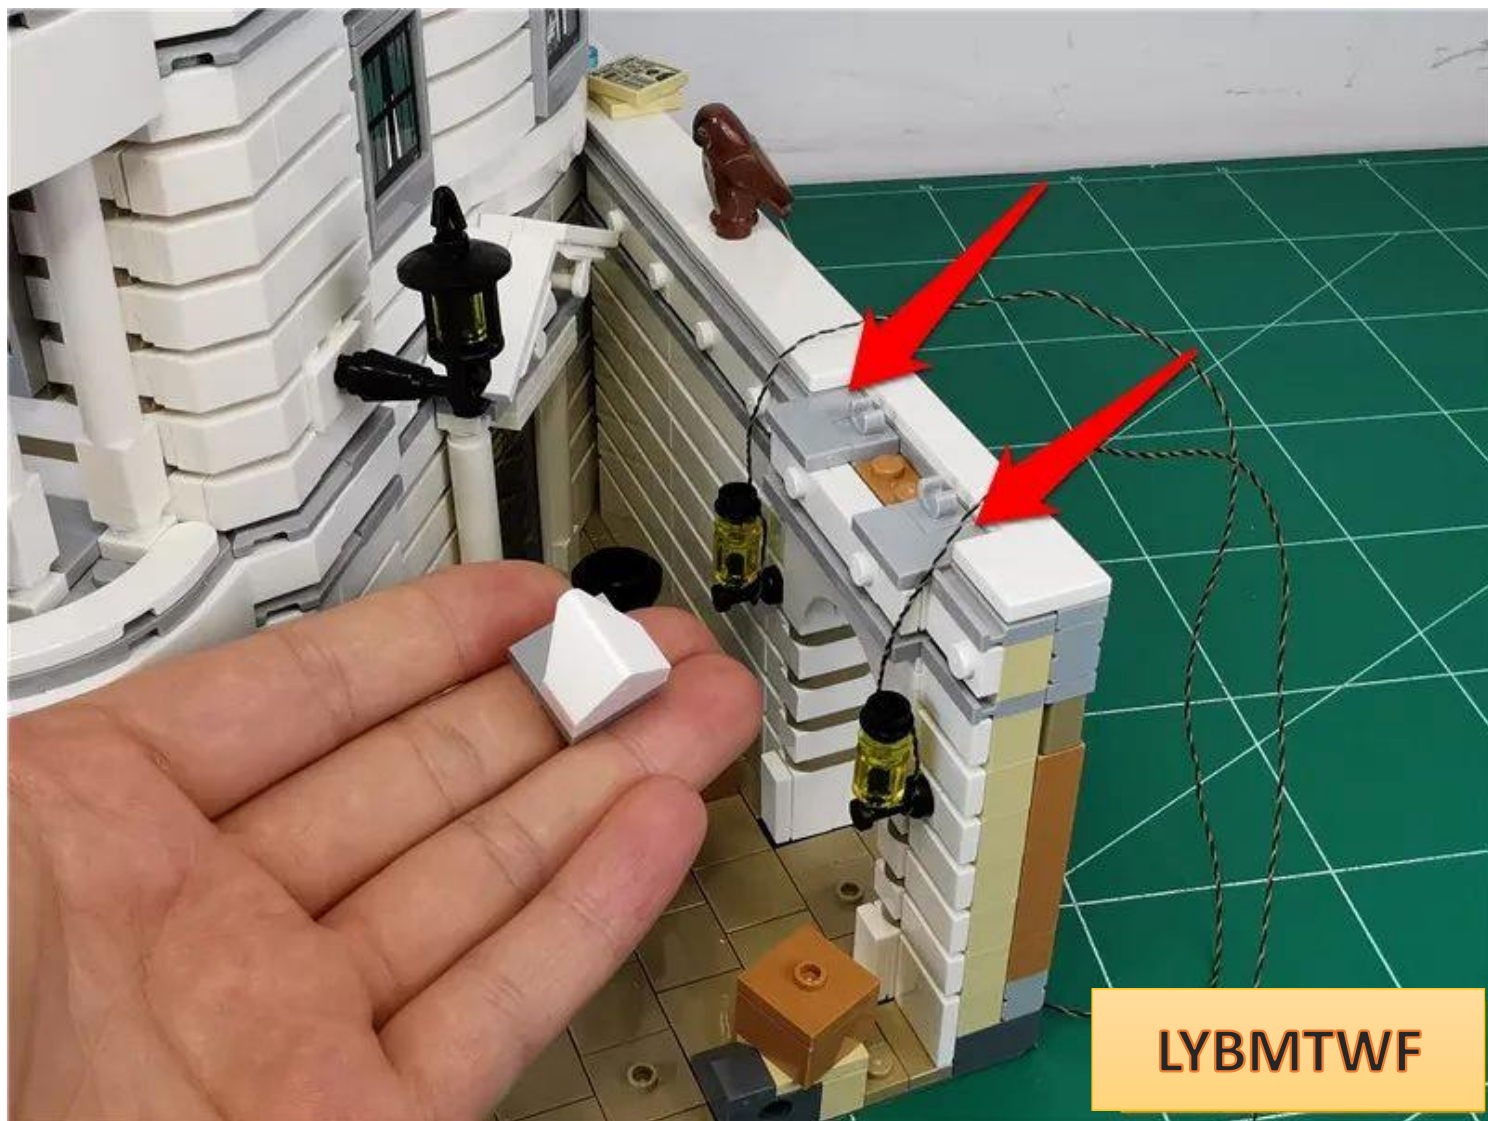

LYBMTWF

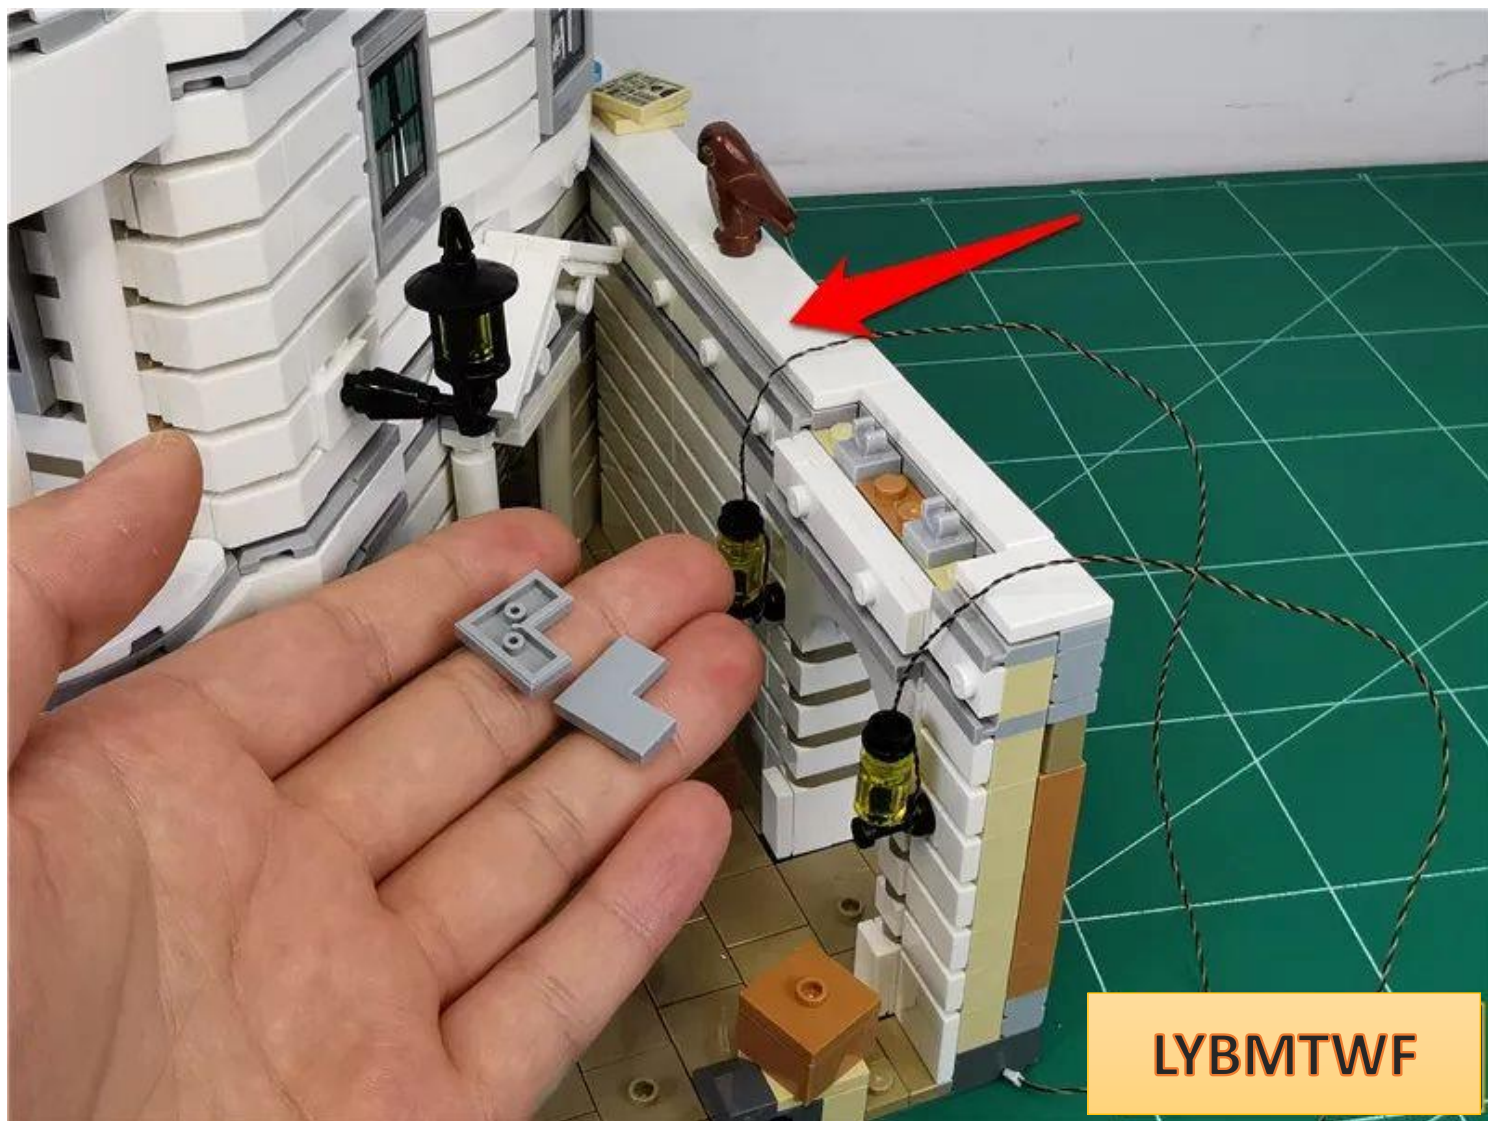


LYBMTWF

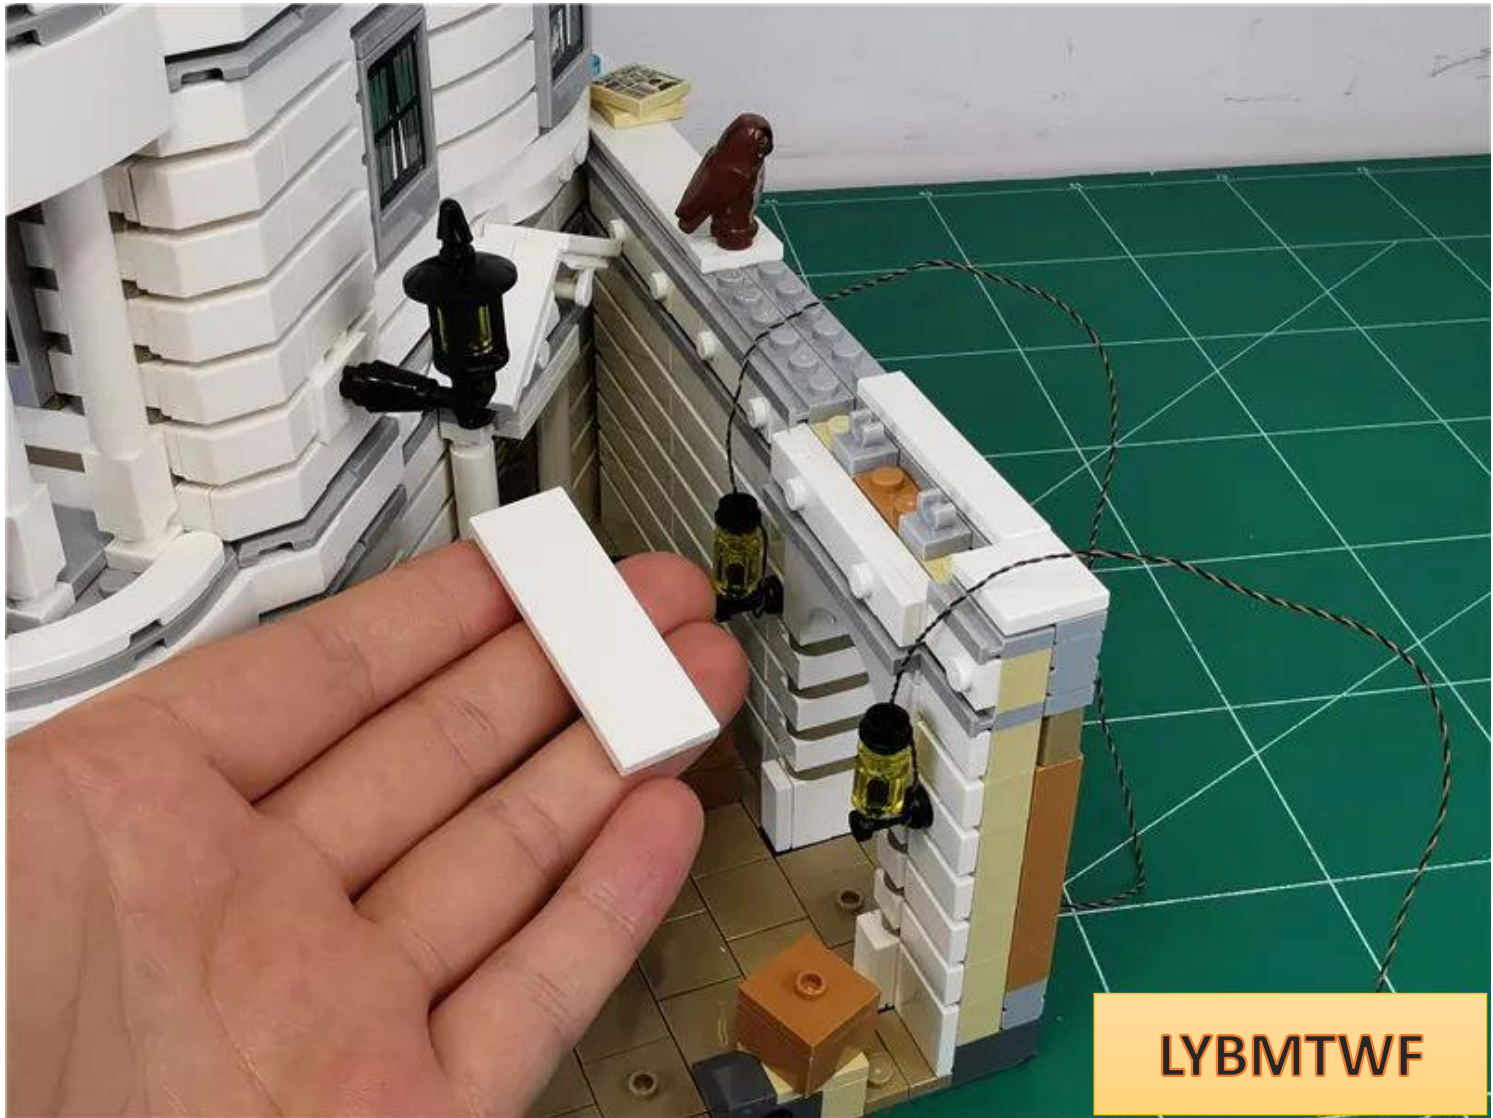


LYBMTWF

As shown in the picture, pass the wire close to the wall

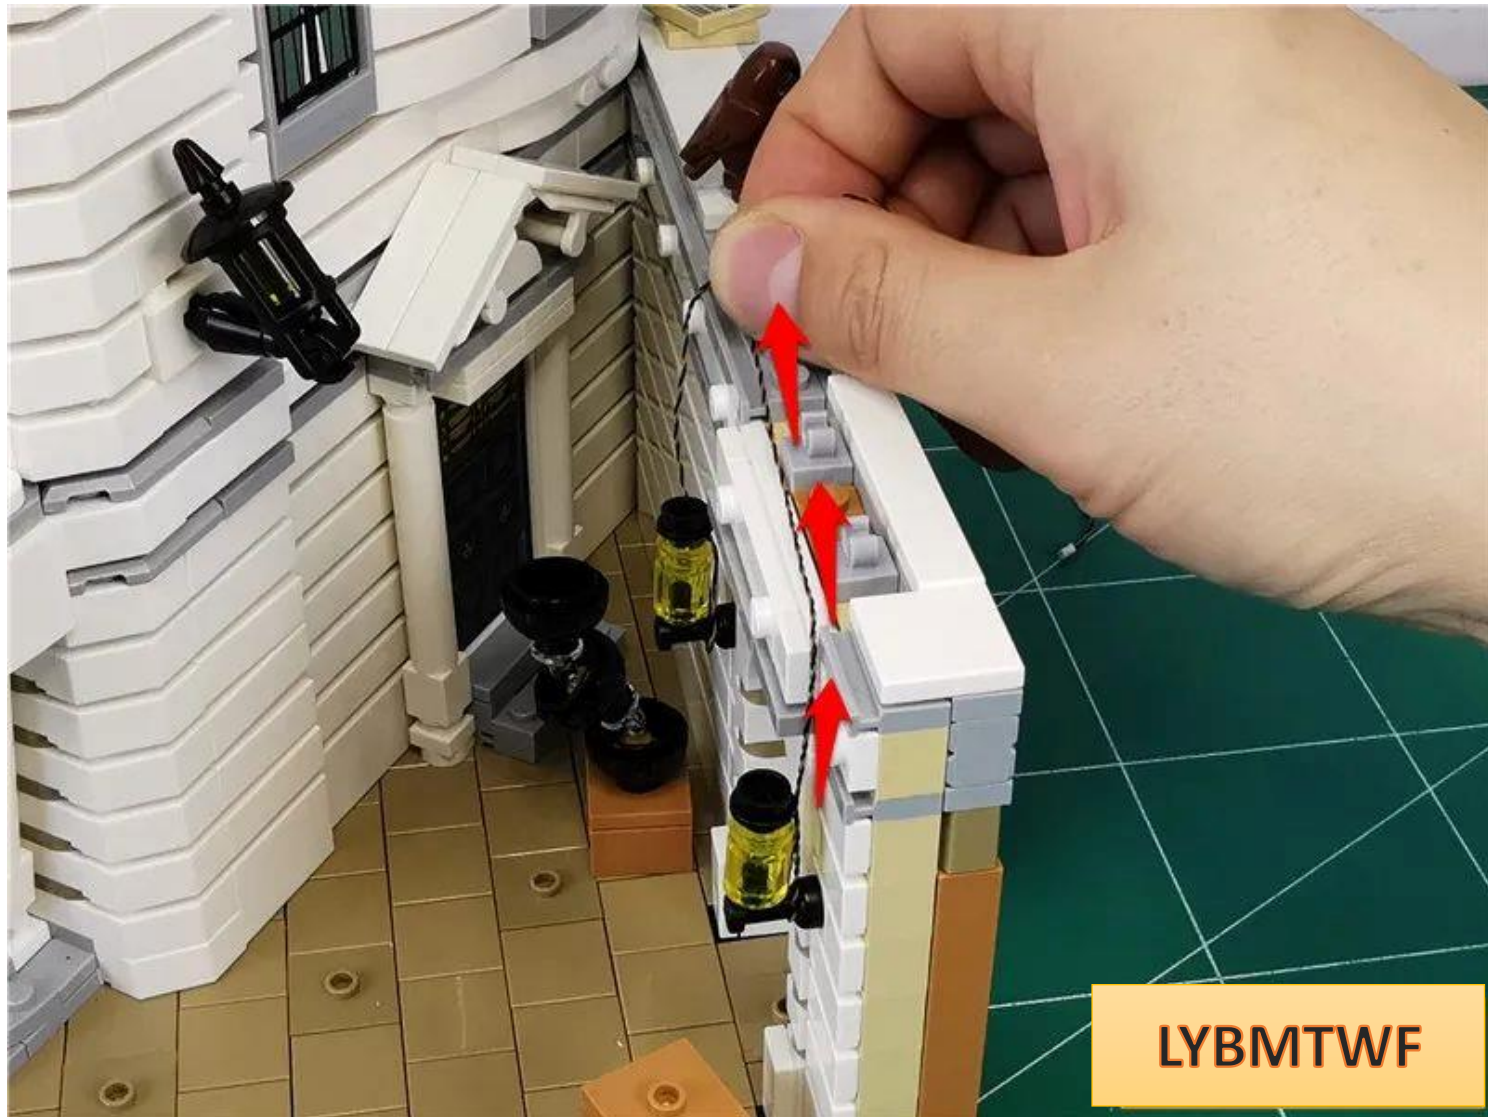


Restore parts and fix wires

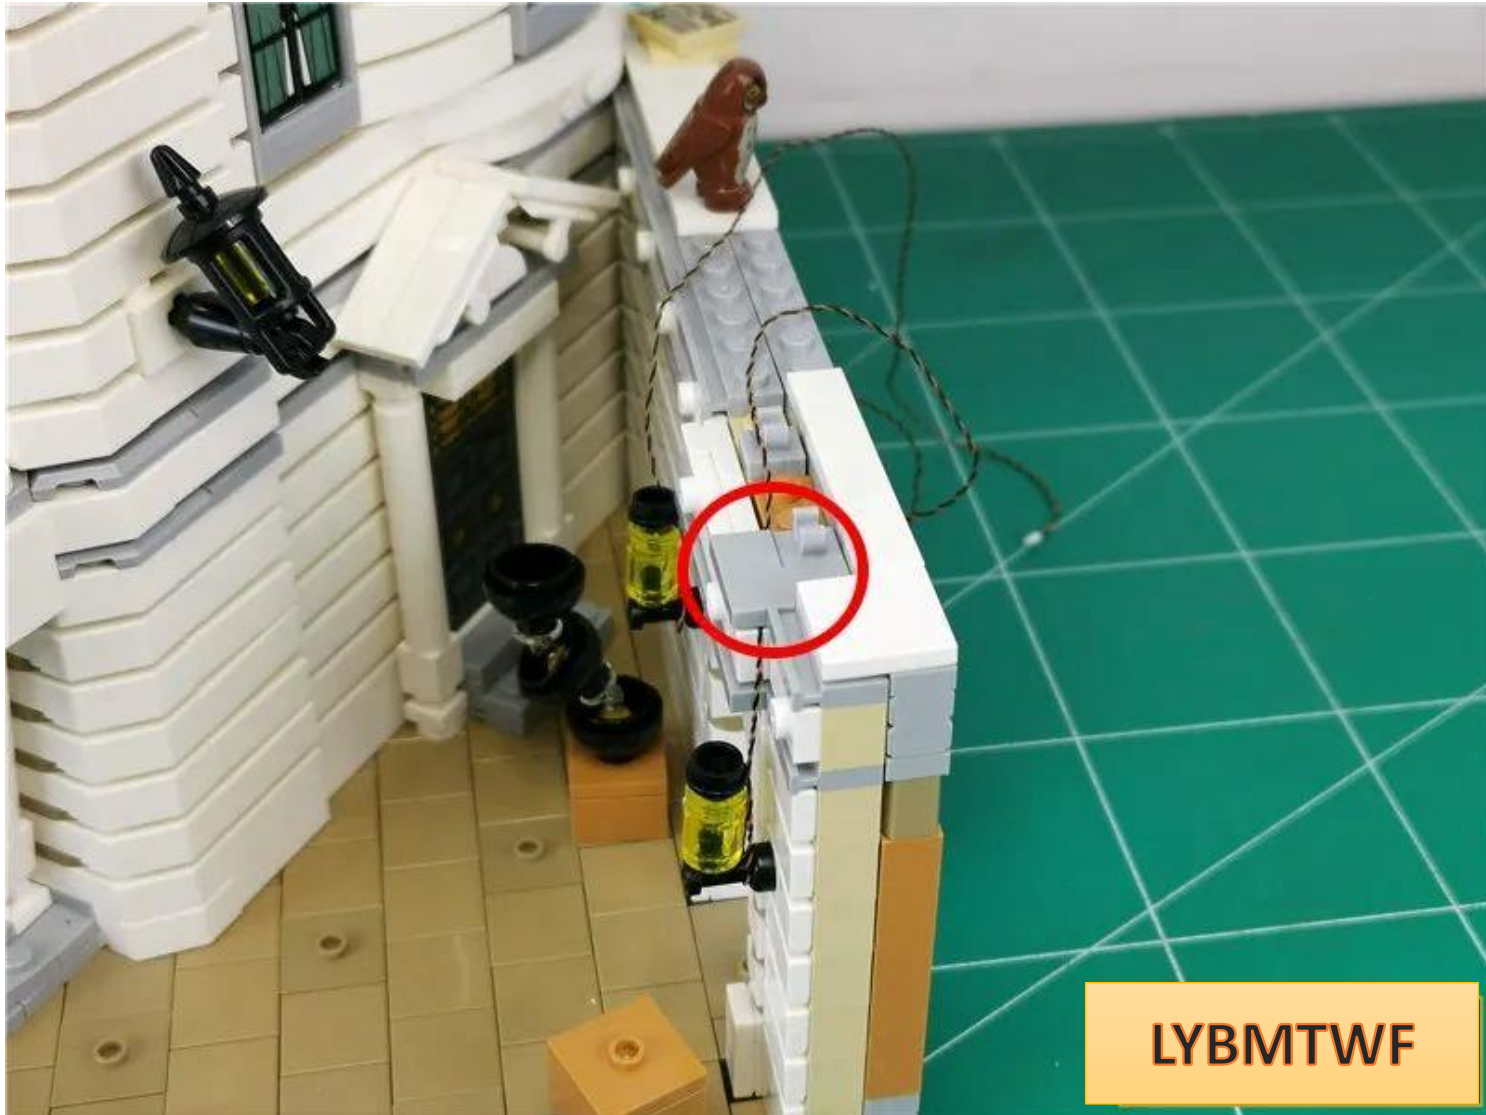


LYBMTWF

Pass the 2 wall lamp wires close to the wall

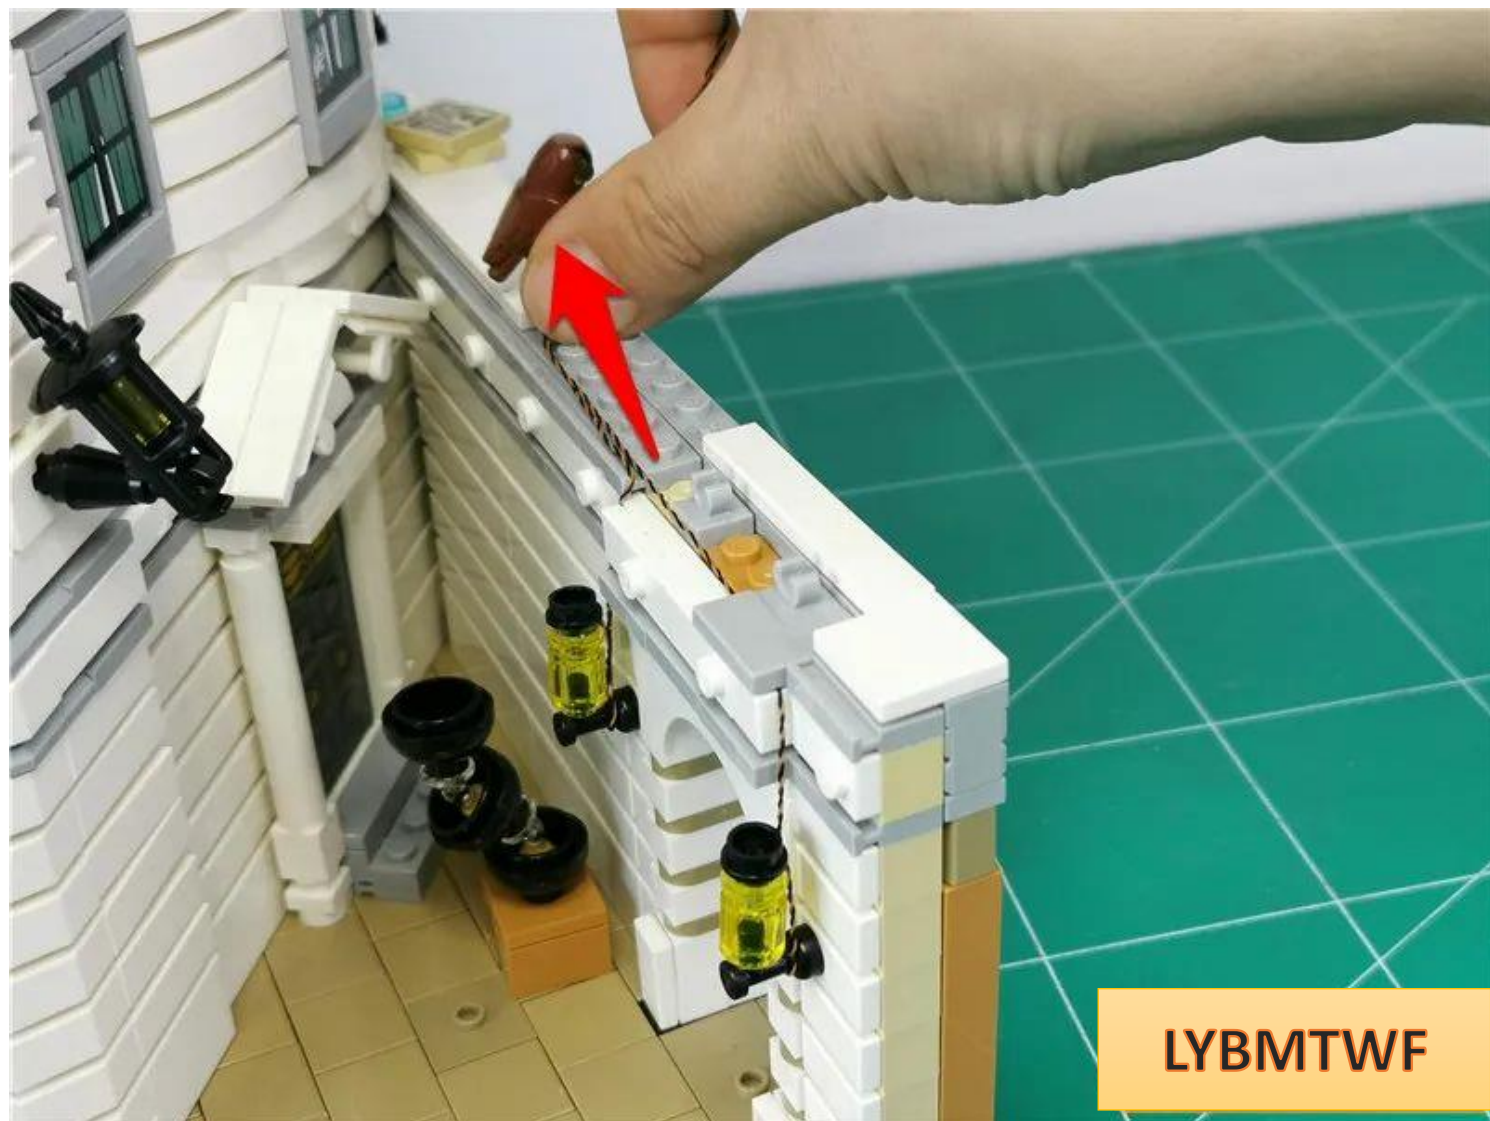


LYBMTWF

Restore the parts in turn and fix the wires

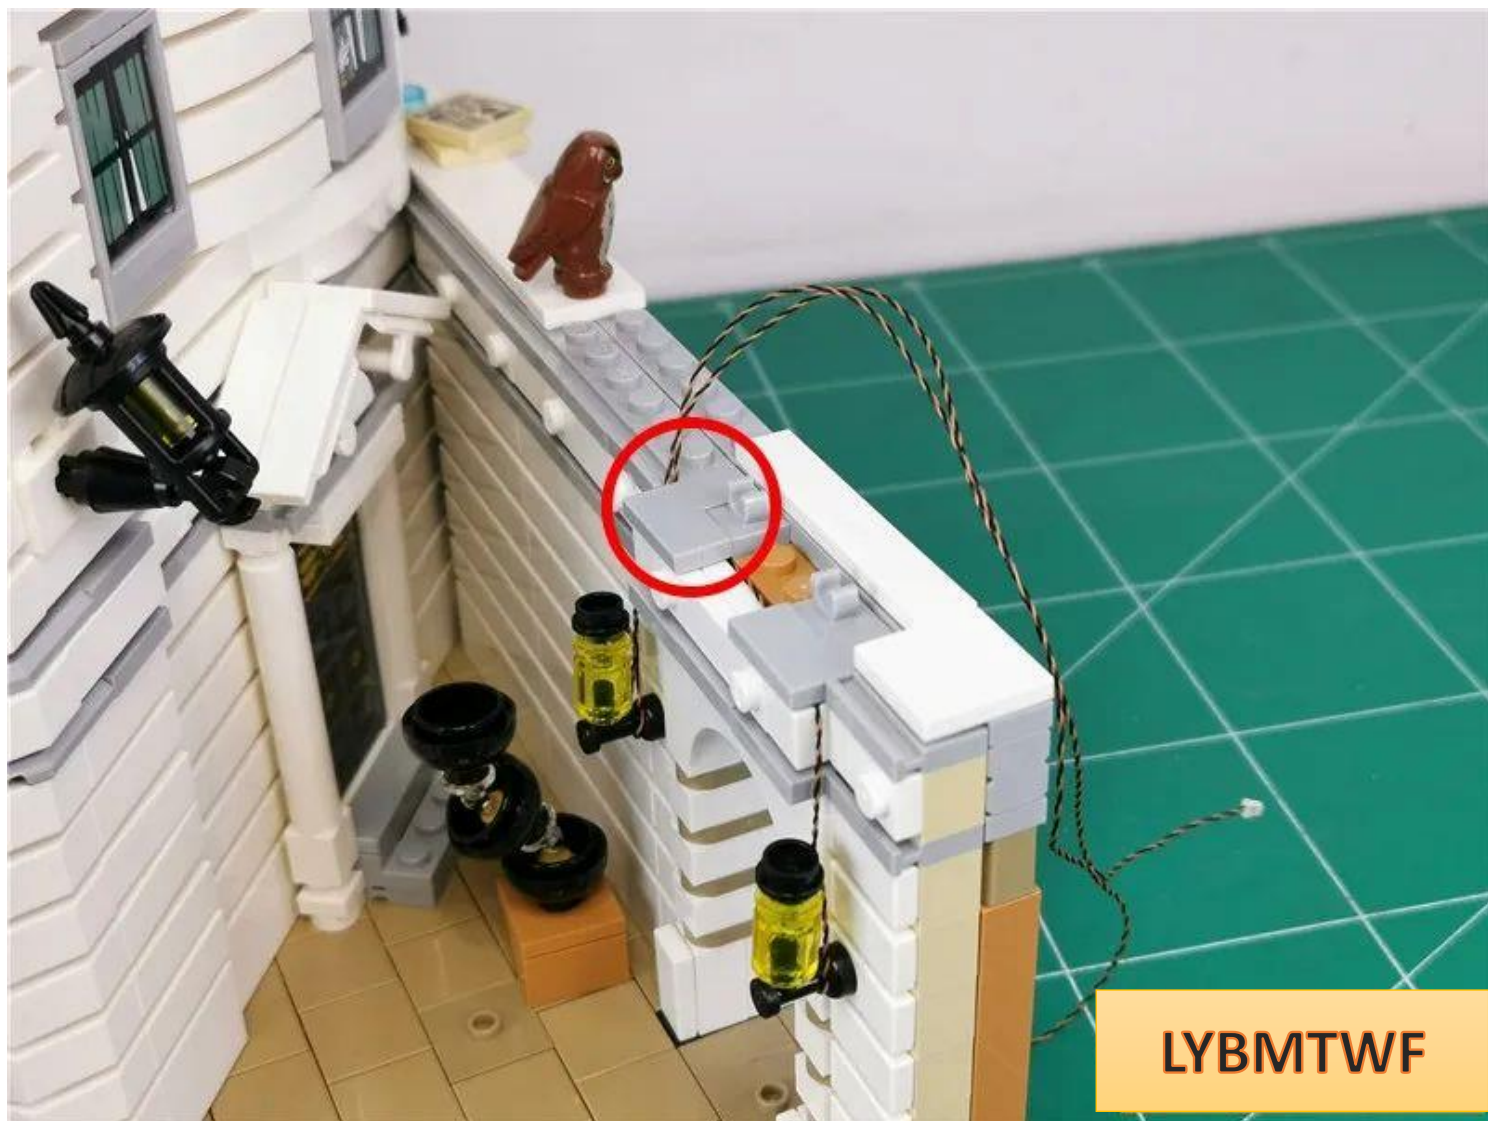

LYBMTWF

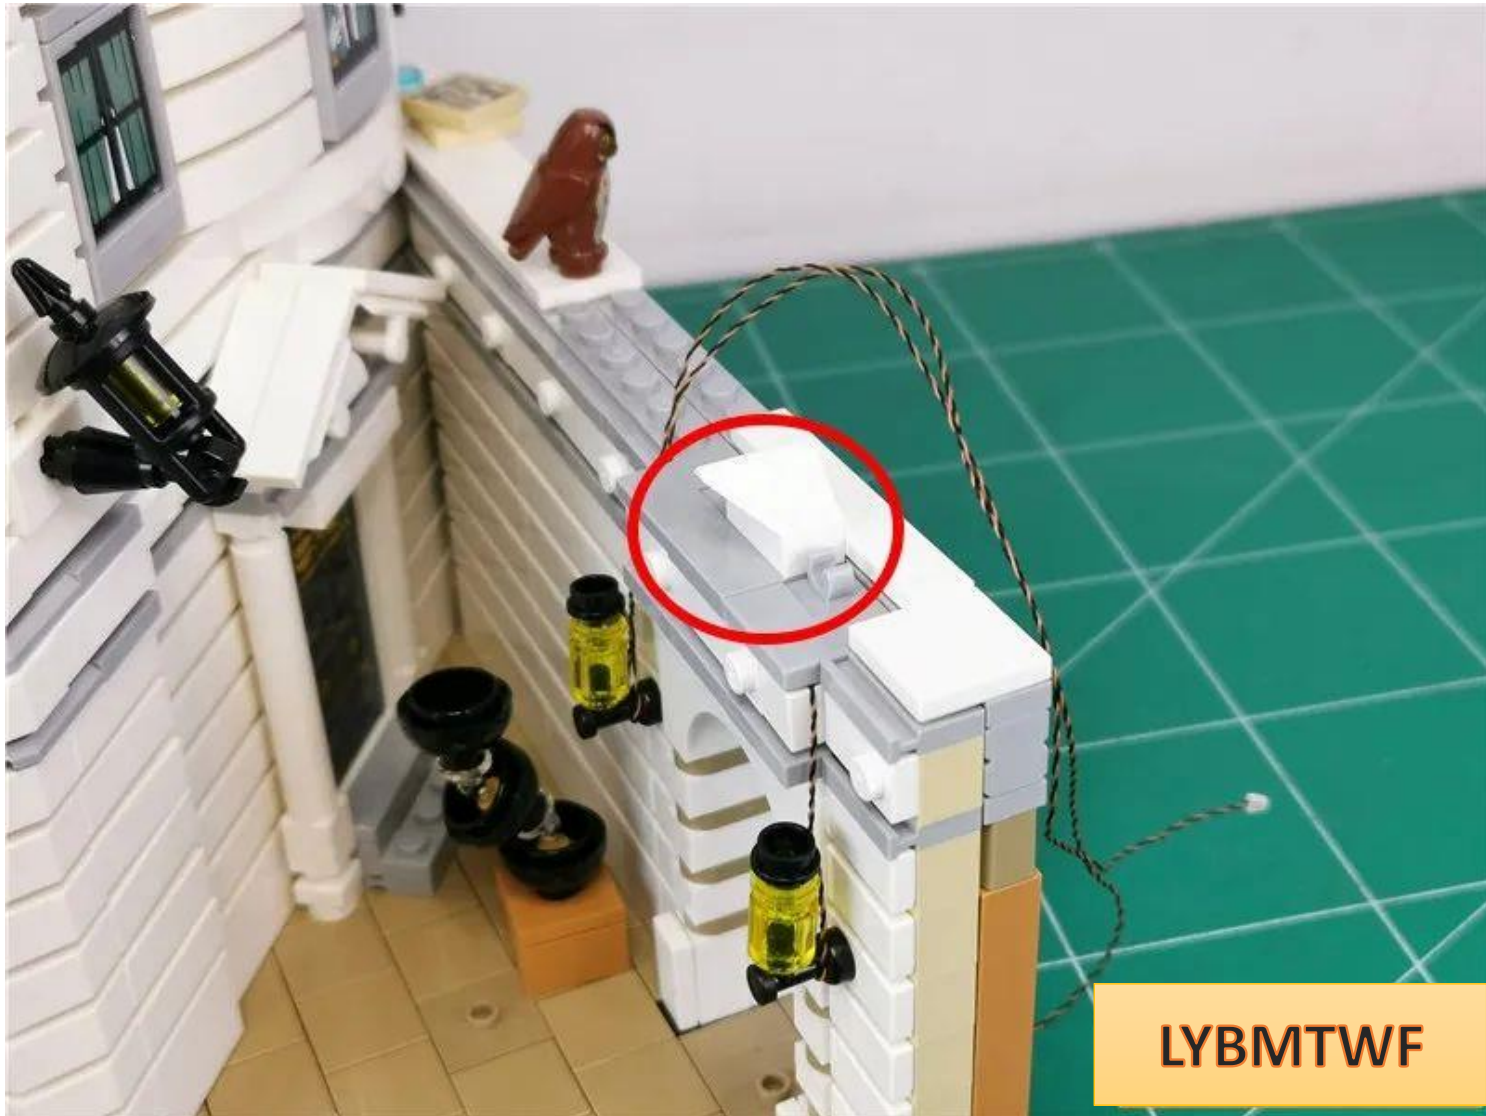

LYBMTWF

turn to side




Remove the parts indicated by arrows





LYBMTWF

Pull the wire along the gap between the raised particles to the right

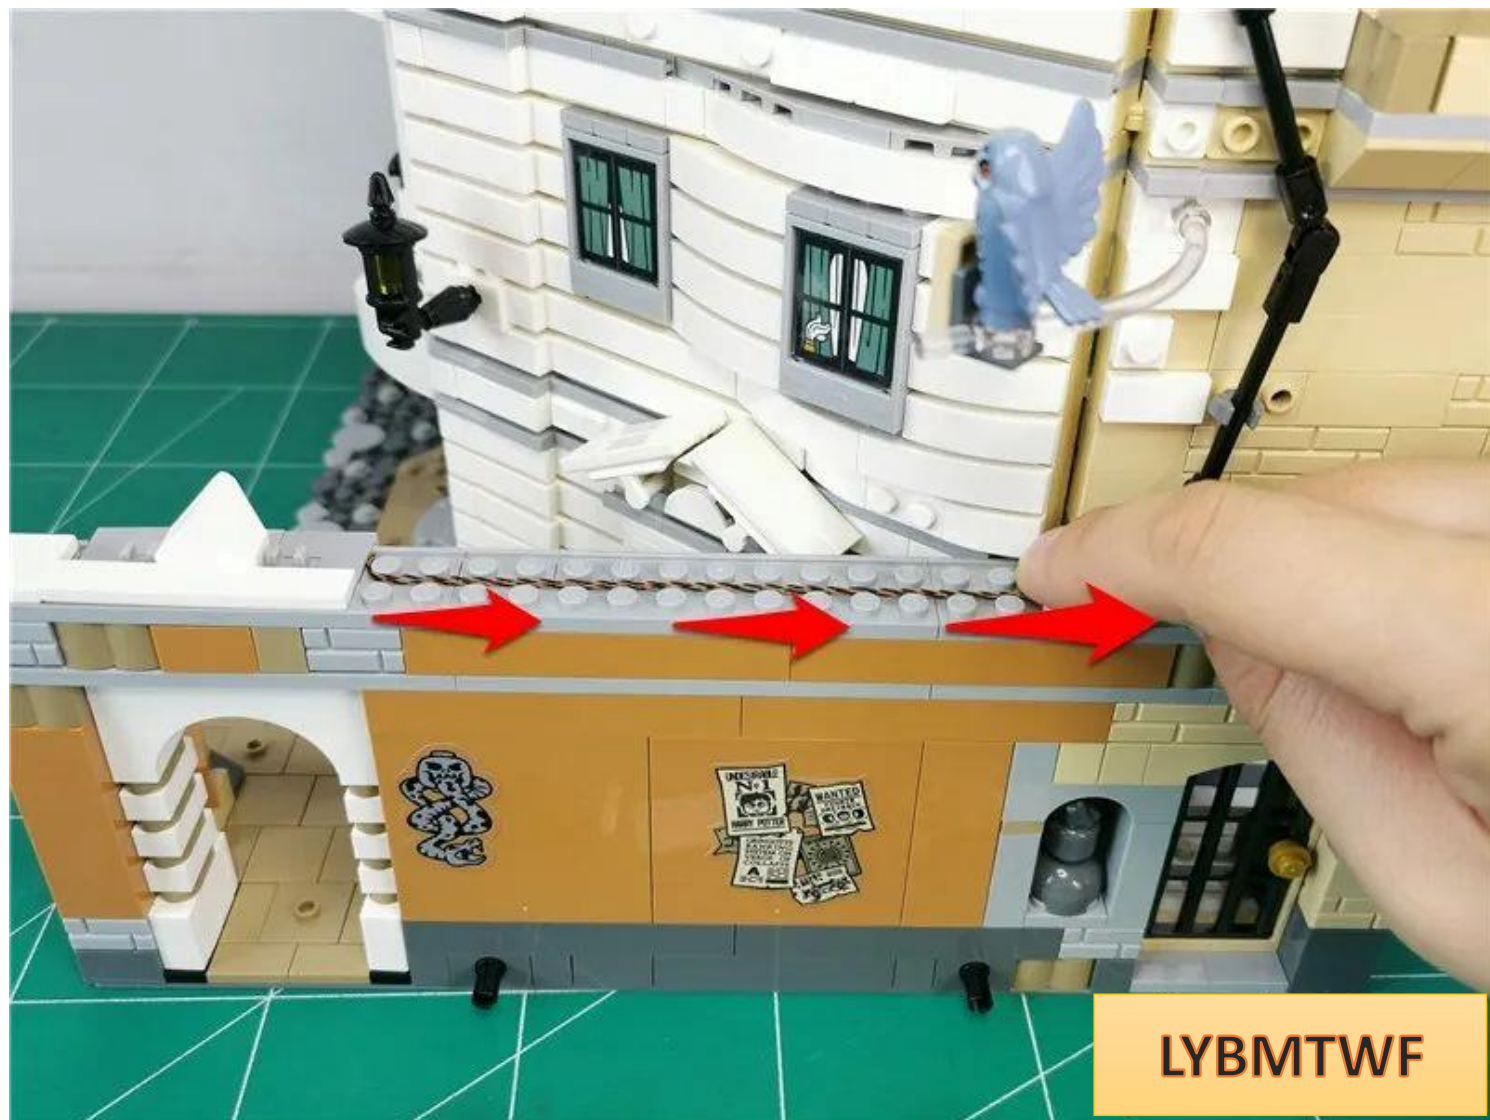


Restore parts and fix wires



Restore dismantled parts




Remove the wall light indicated by the arrow

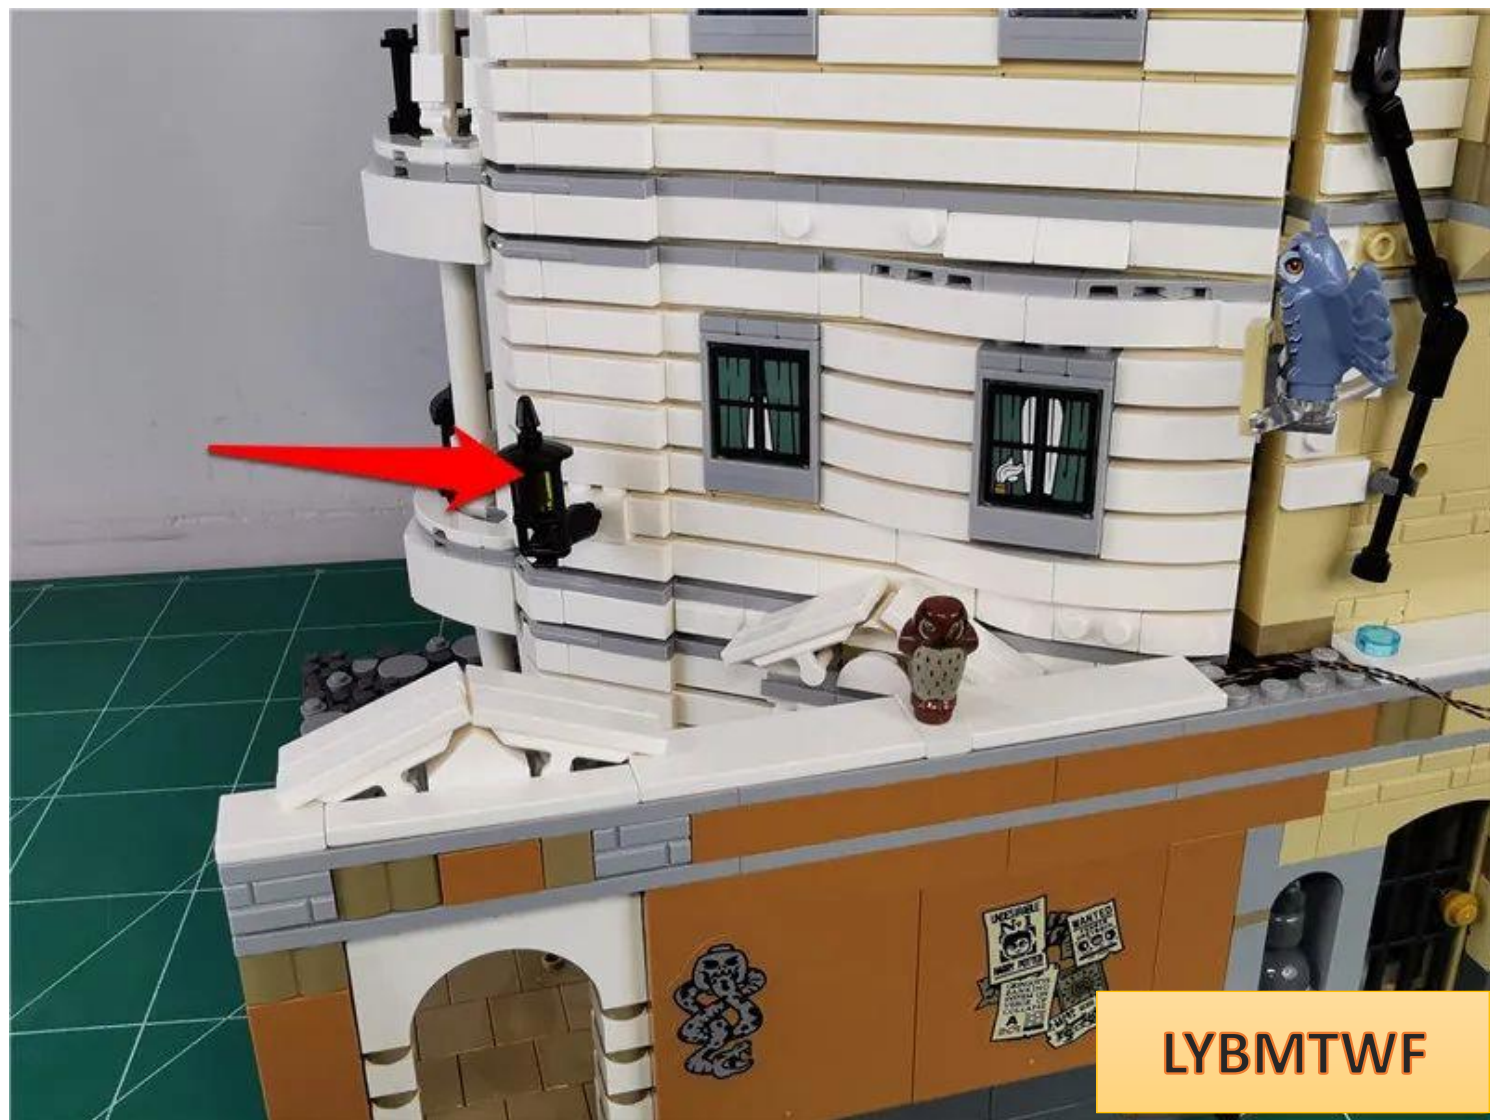





Take 1 30cm ordinary warm light bulb and 2 hollow transparent yellow circles

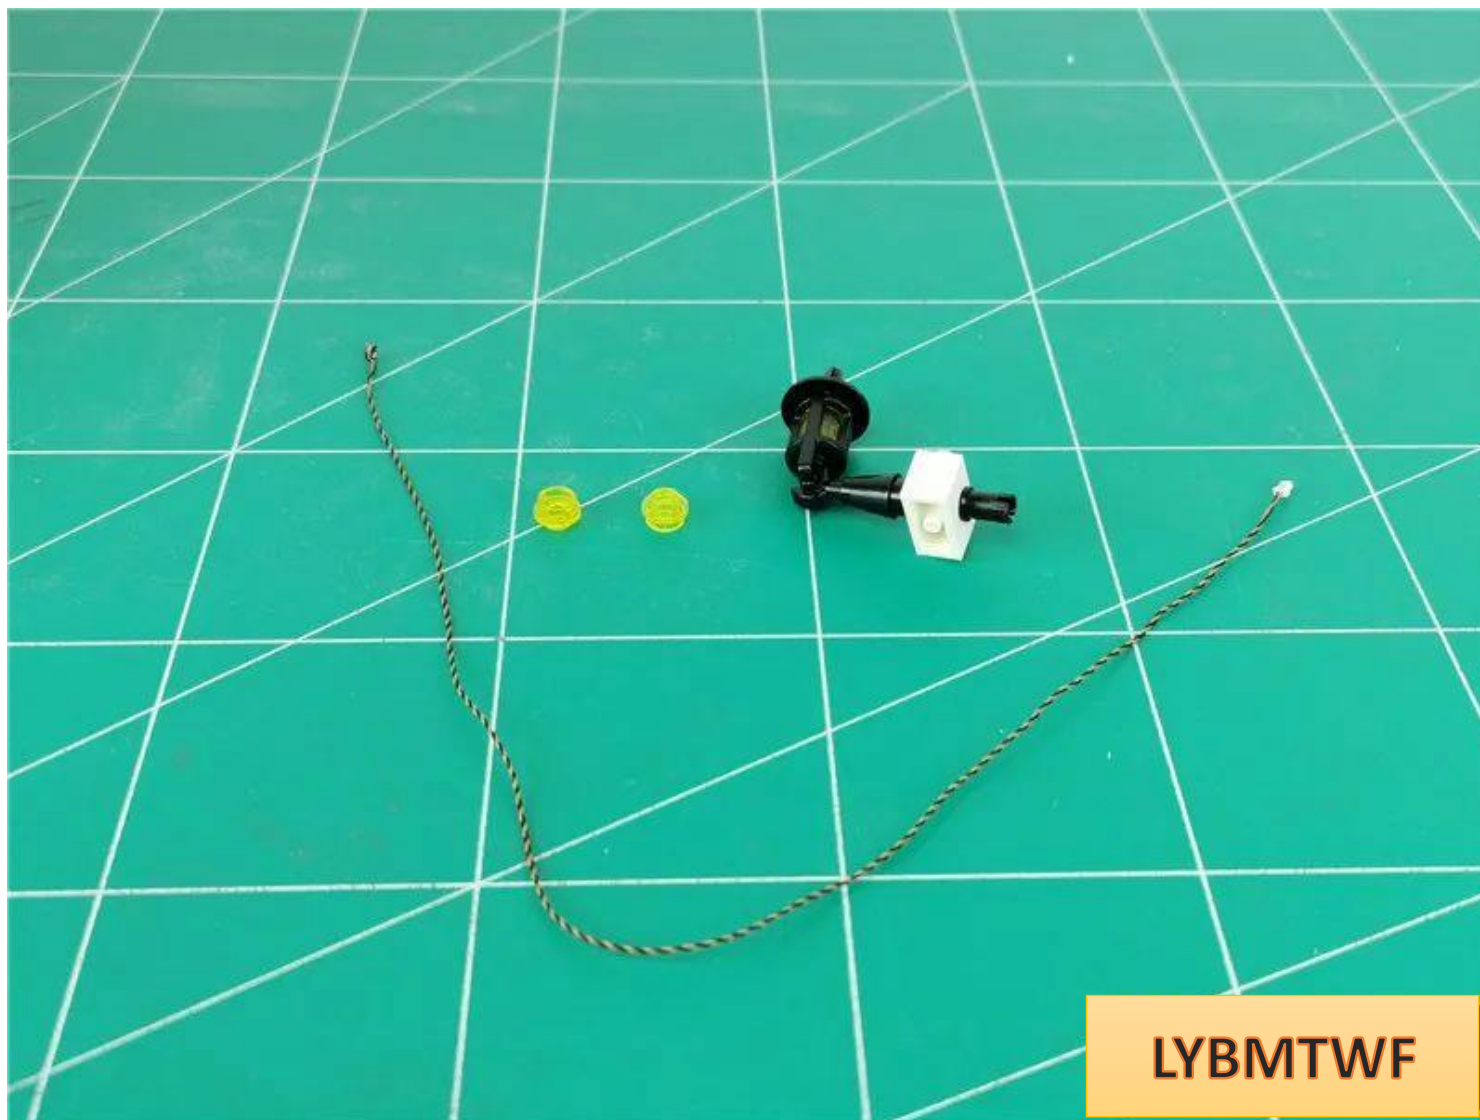


Break down the wall light as follows:

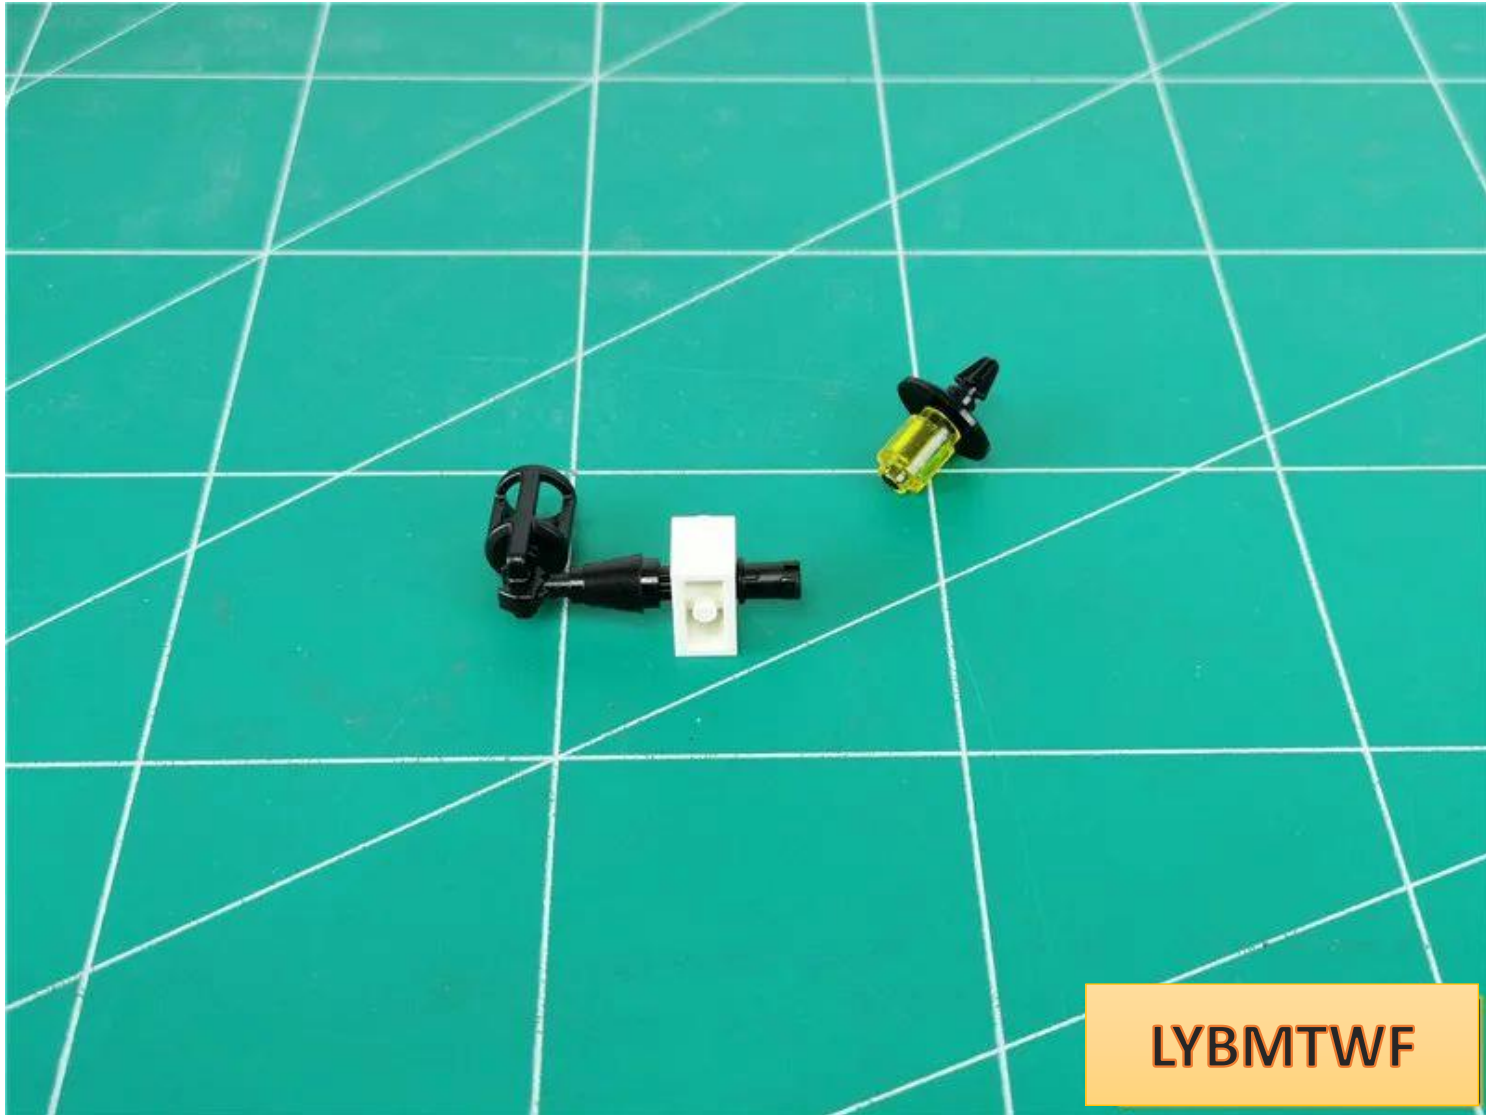

Bend the lamp grain 90°, with the luminous side facing outwards

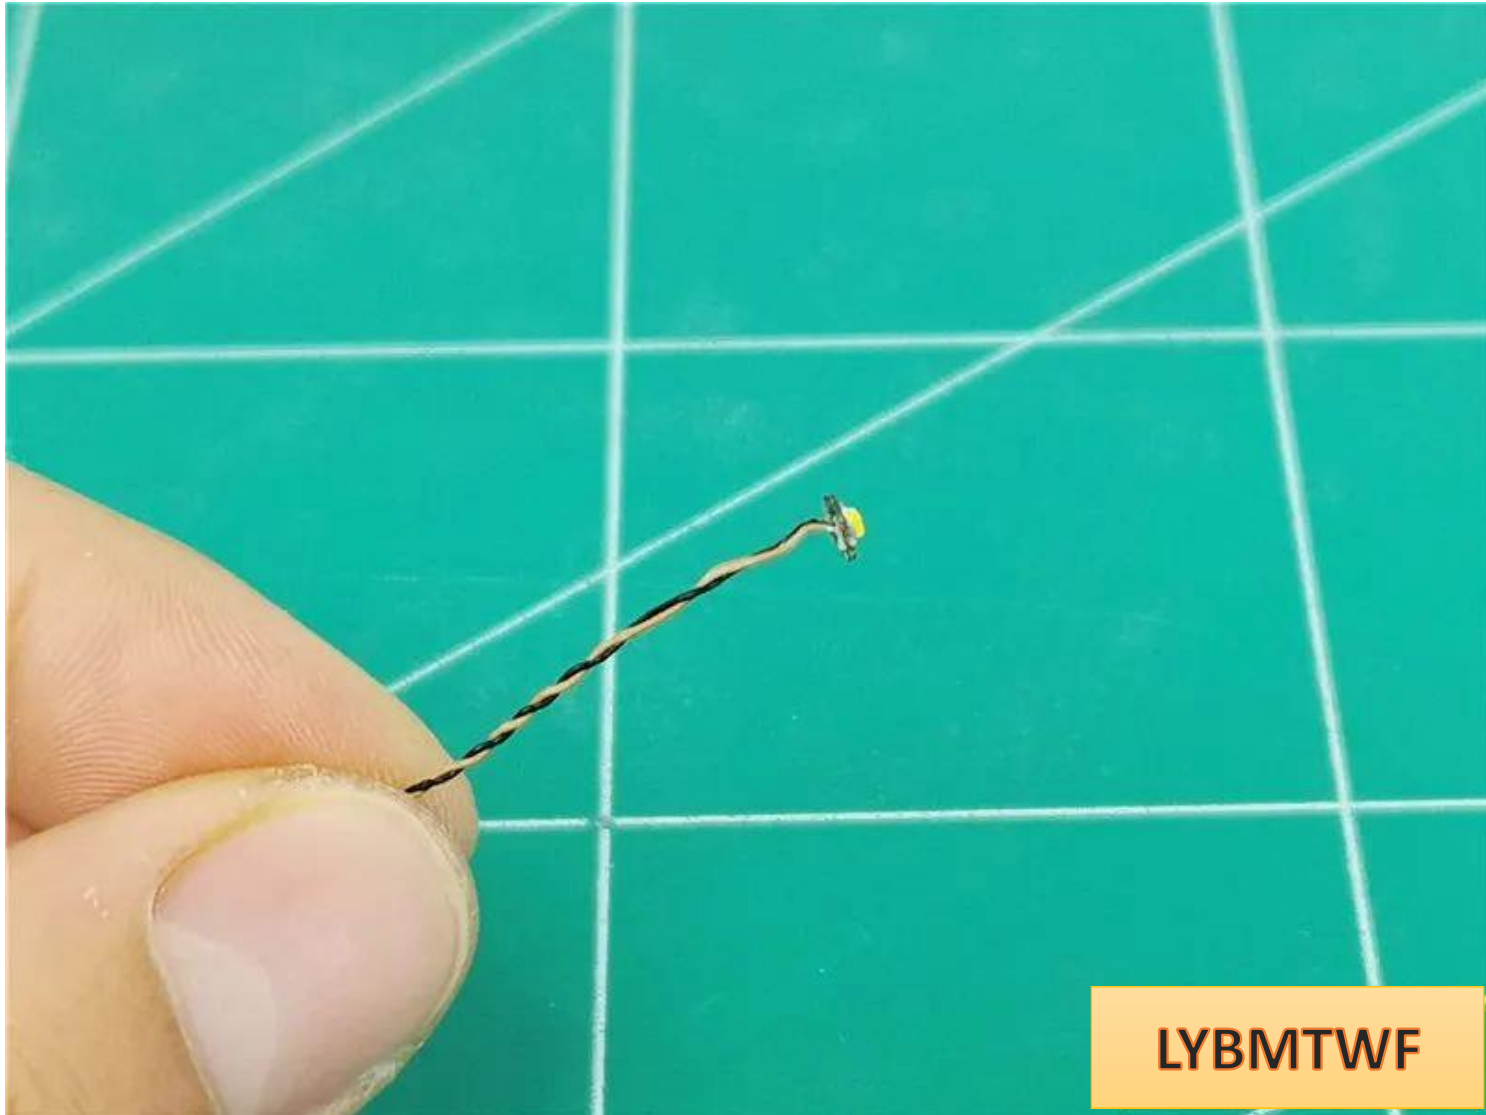

Pass

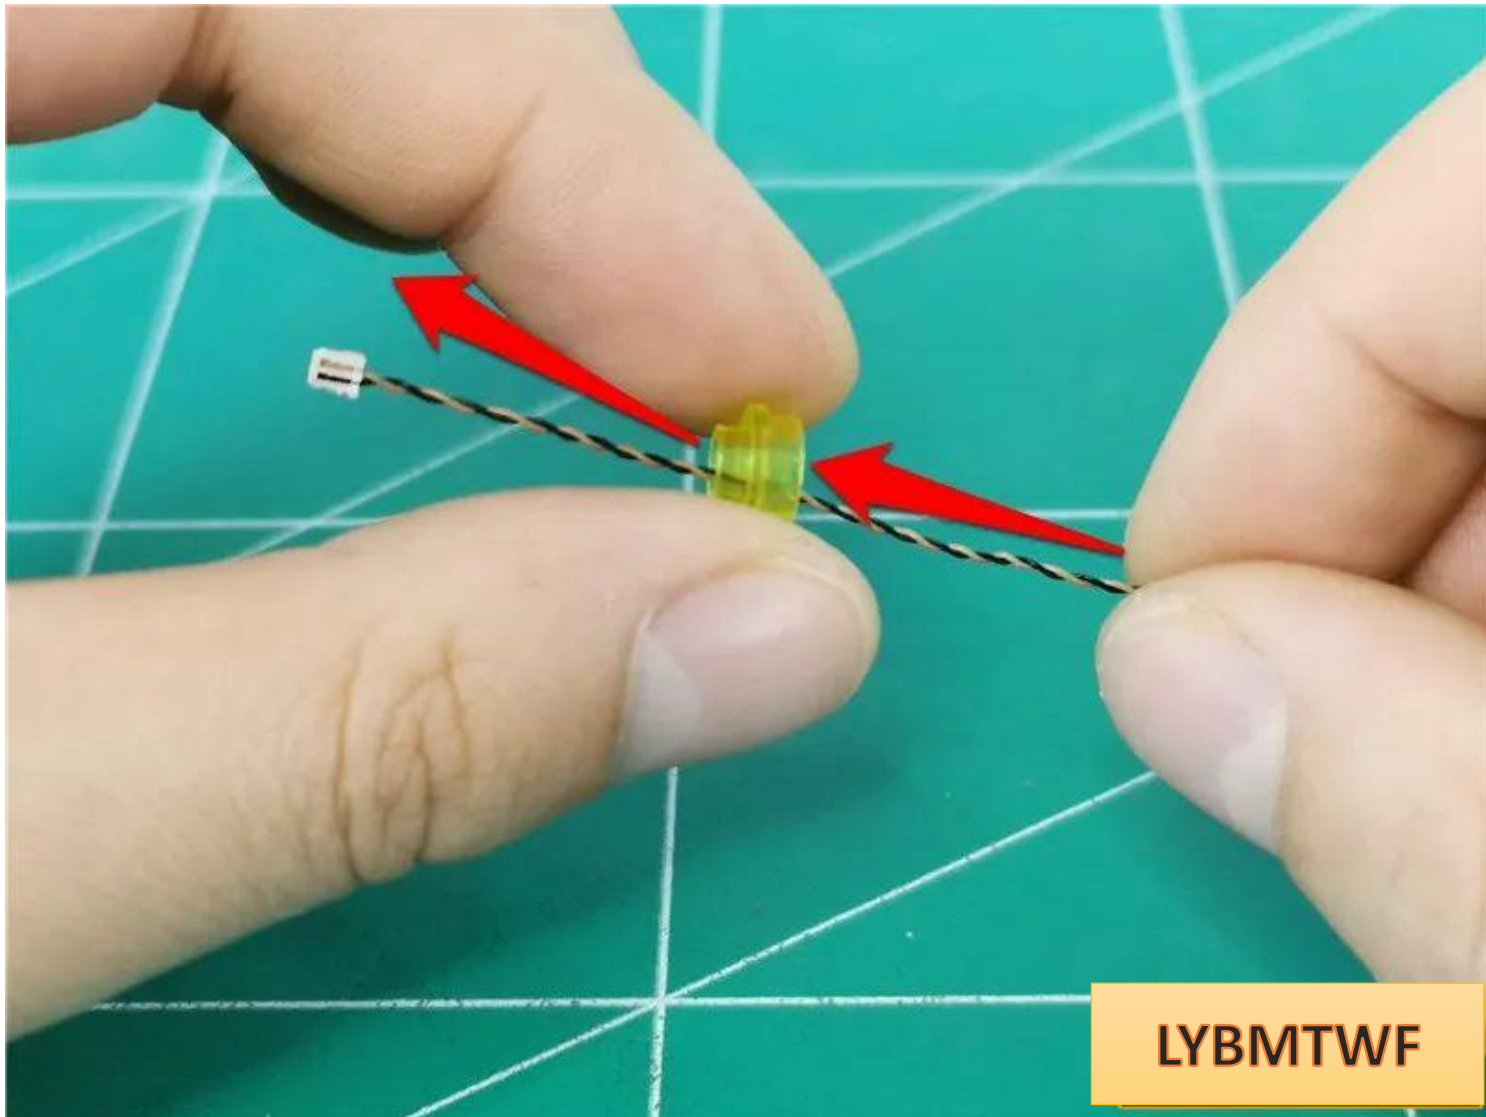


the lamp plug through **one end of the hollow round hole**

Thread it to the bottom so that the lamp particles are placed in the center of the circle



Install the hollow circle and fix the lamp particles

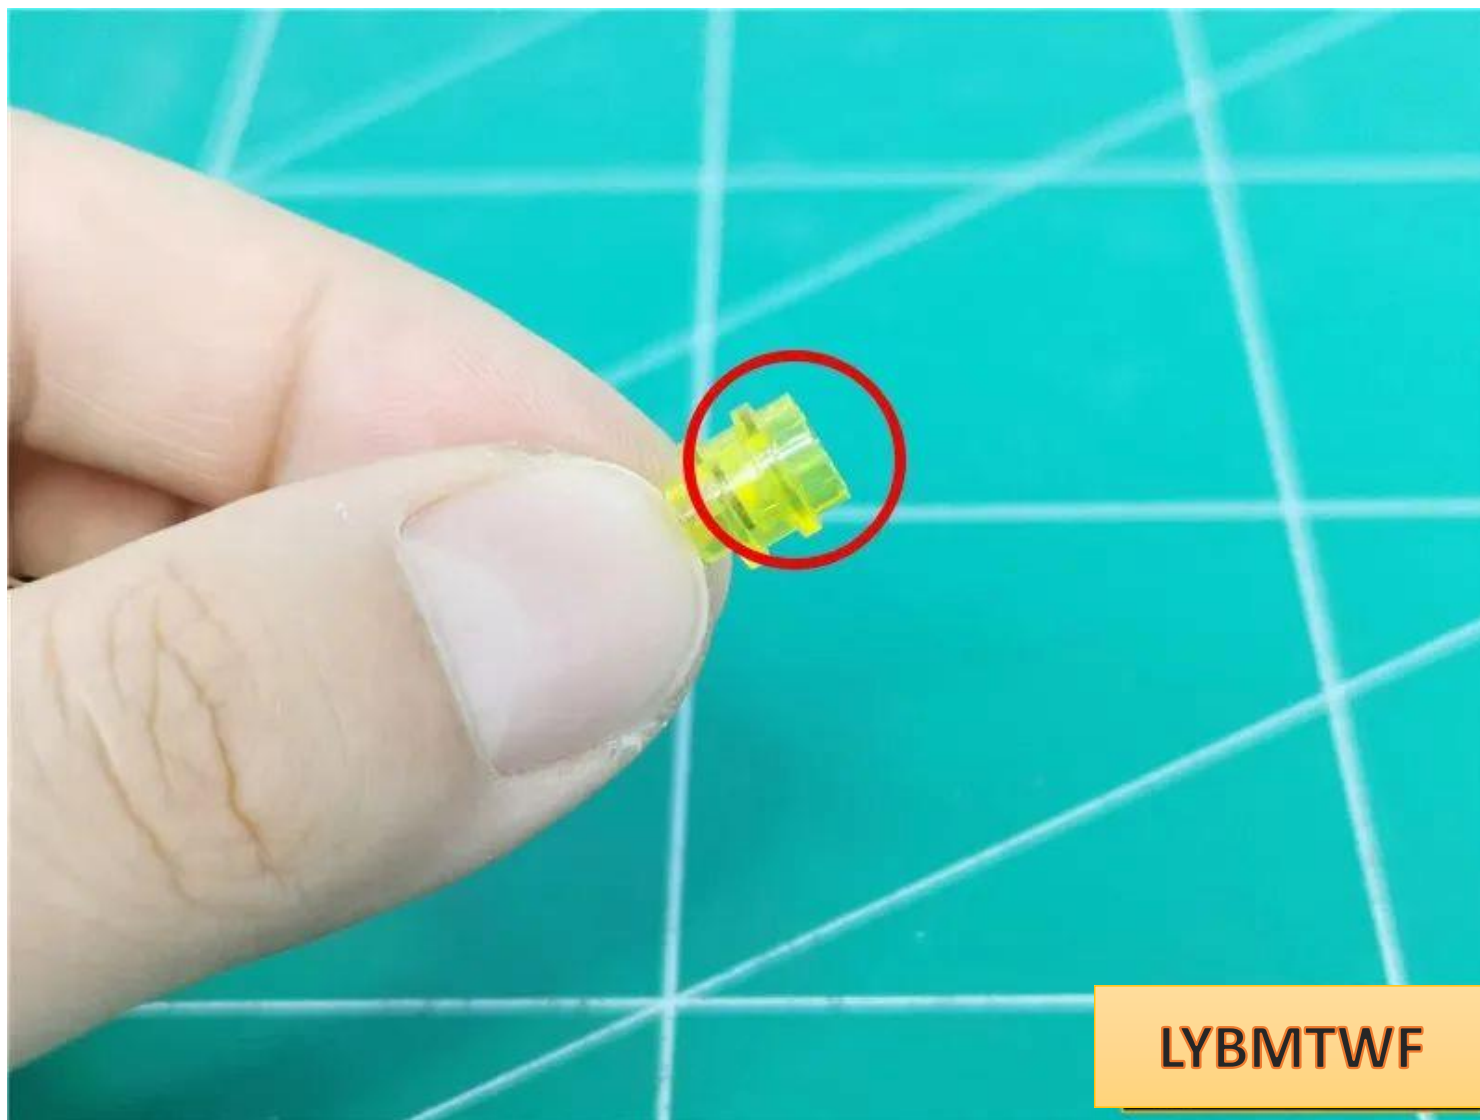


Restore the lampshade



LYBMTWF

Pass the wire from the gap to the side of the bracket

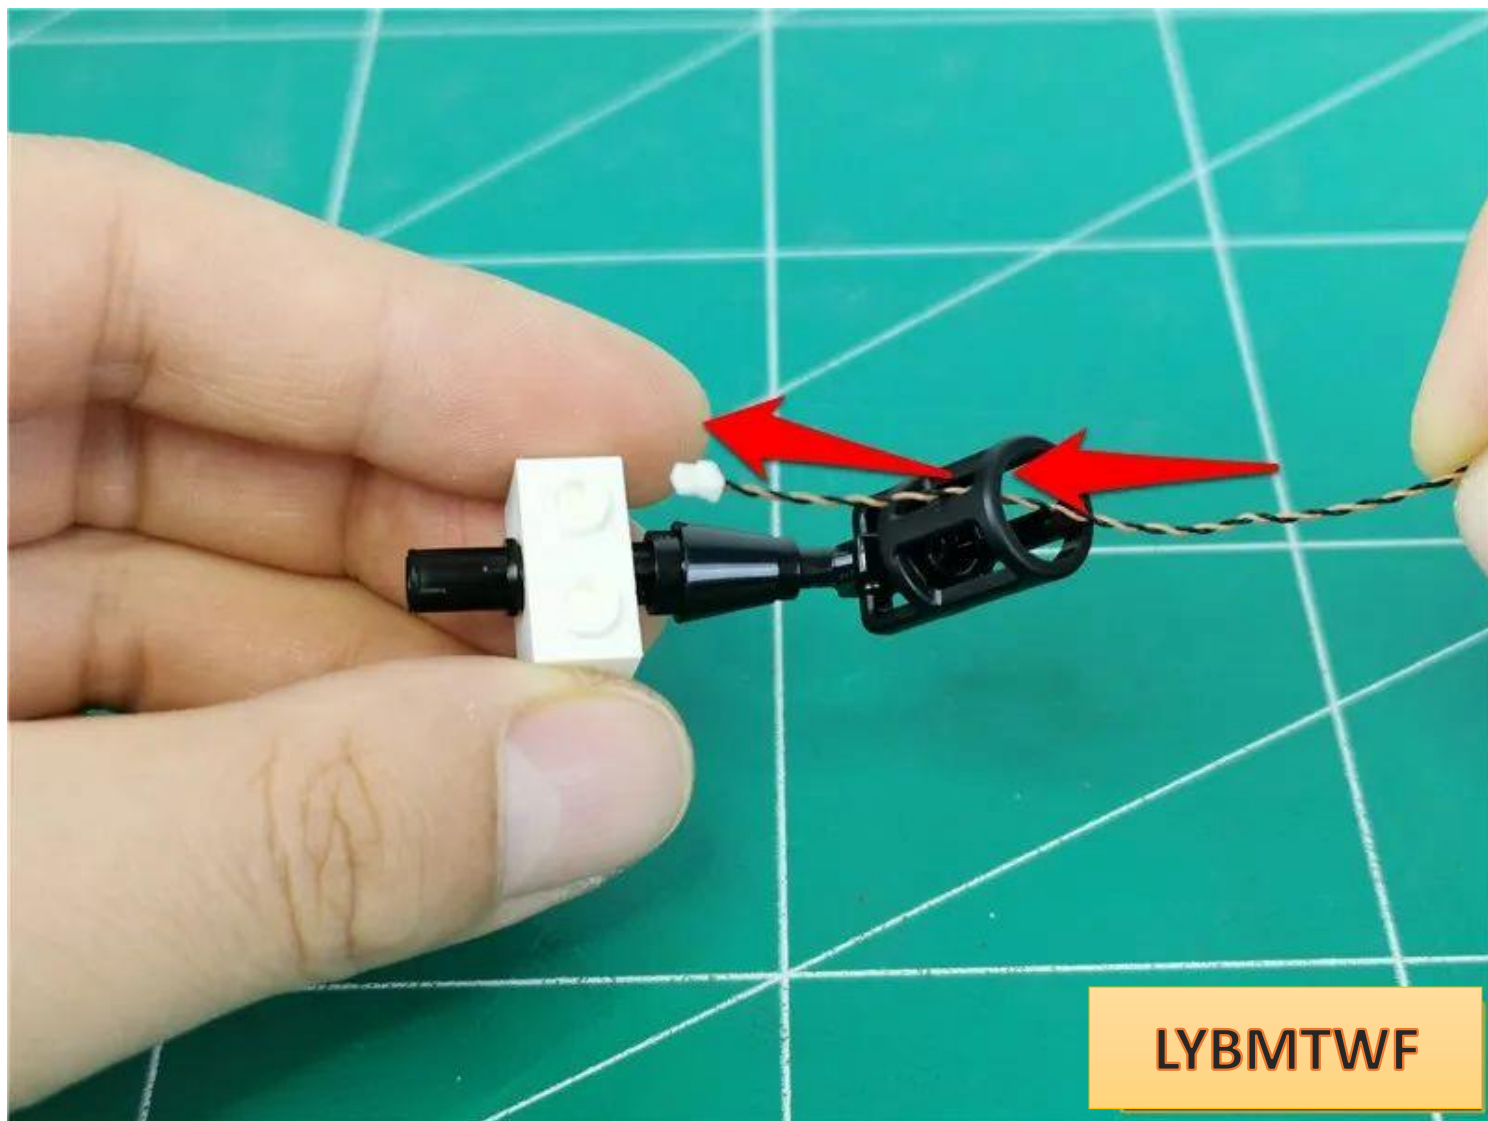


LYBMTWF


Restoration lampshade



Pass the wire around the bracket, along the white part, and through the raised particle gaps

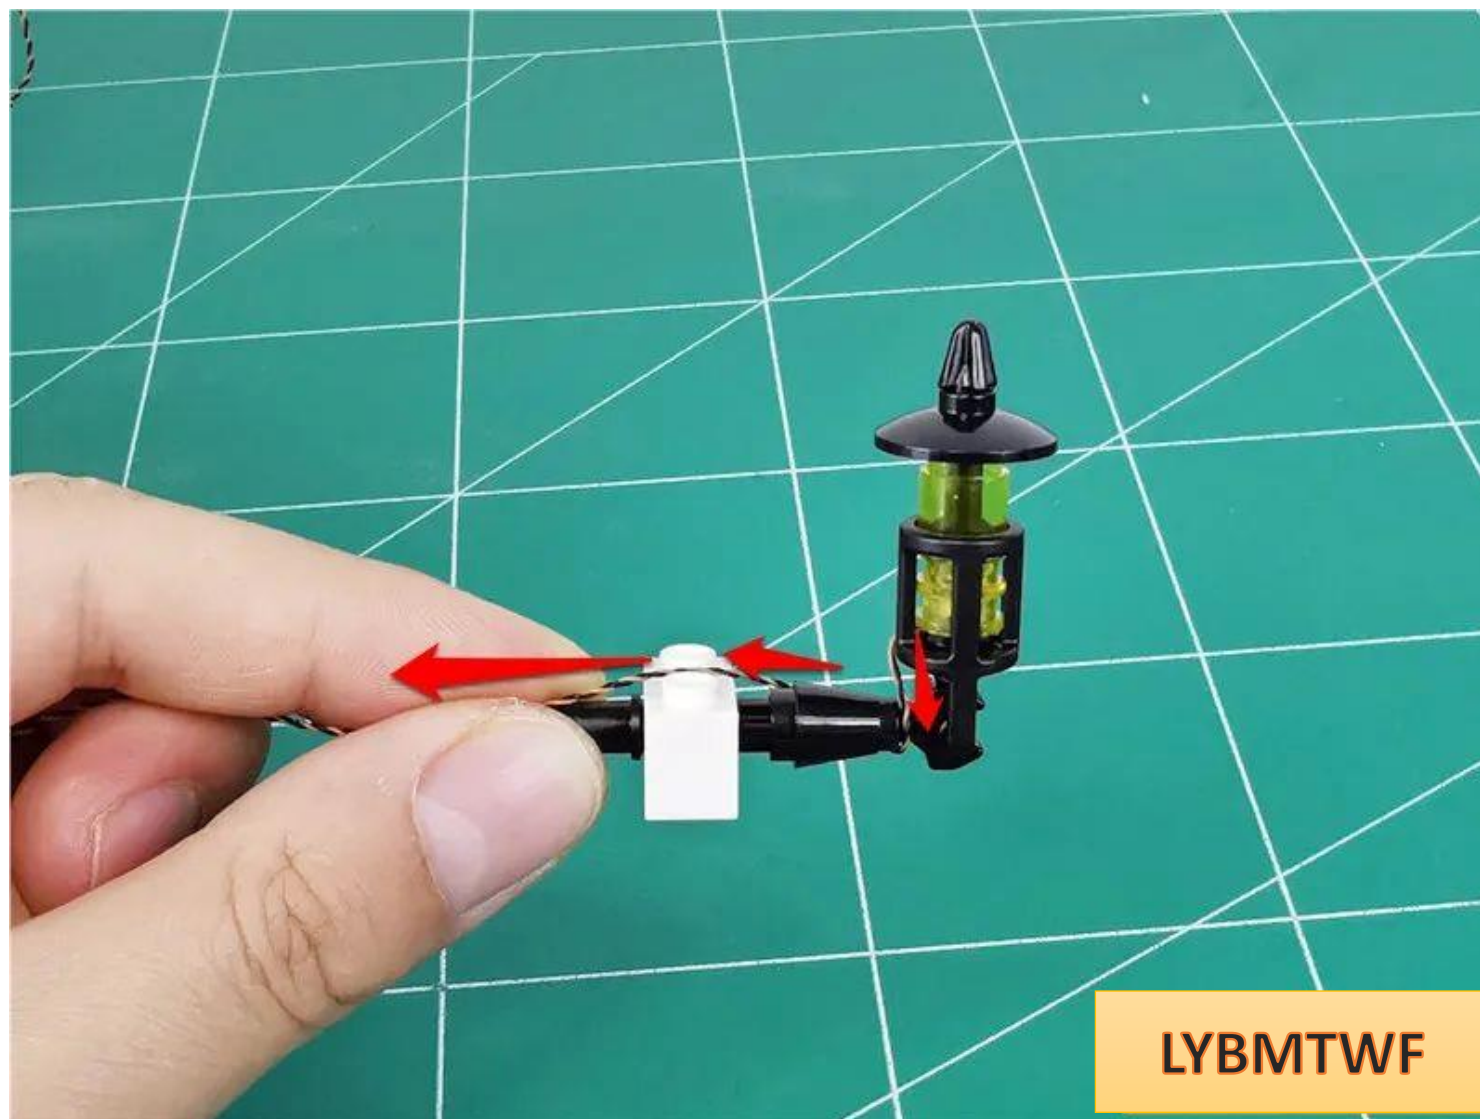

Before you prepare to restore the wall light, loop the wires around the black connecting pins

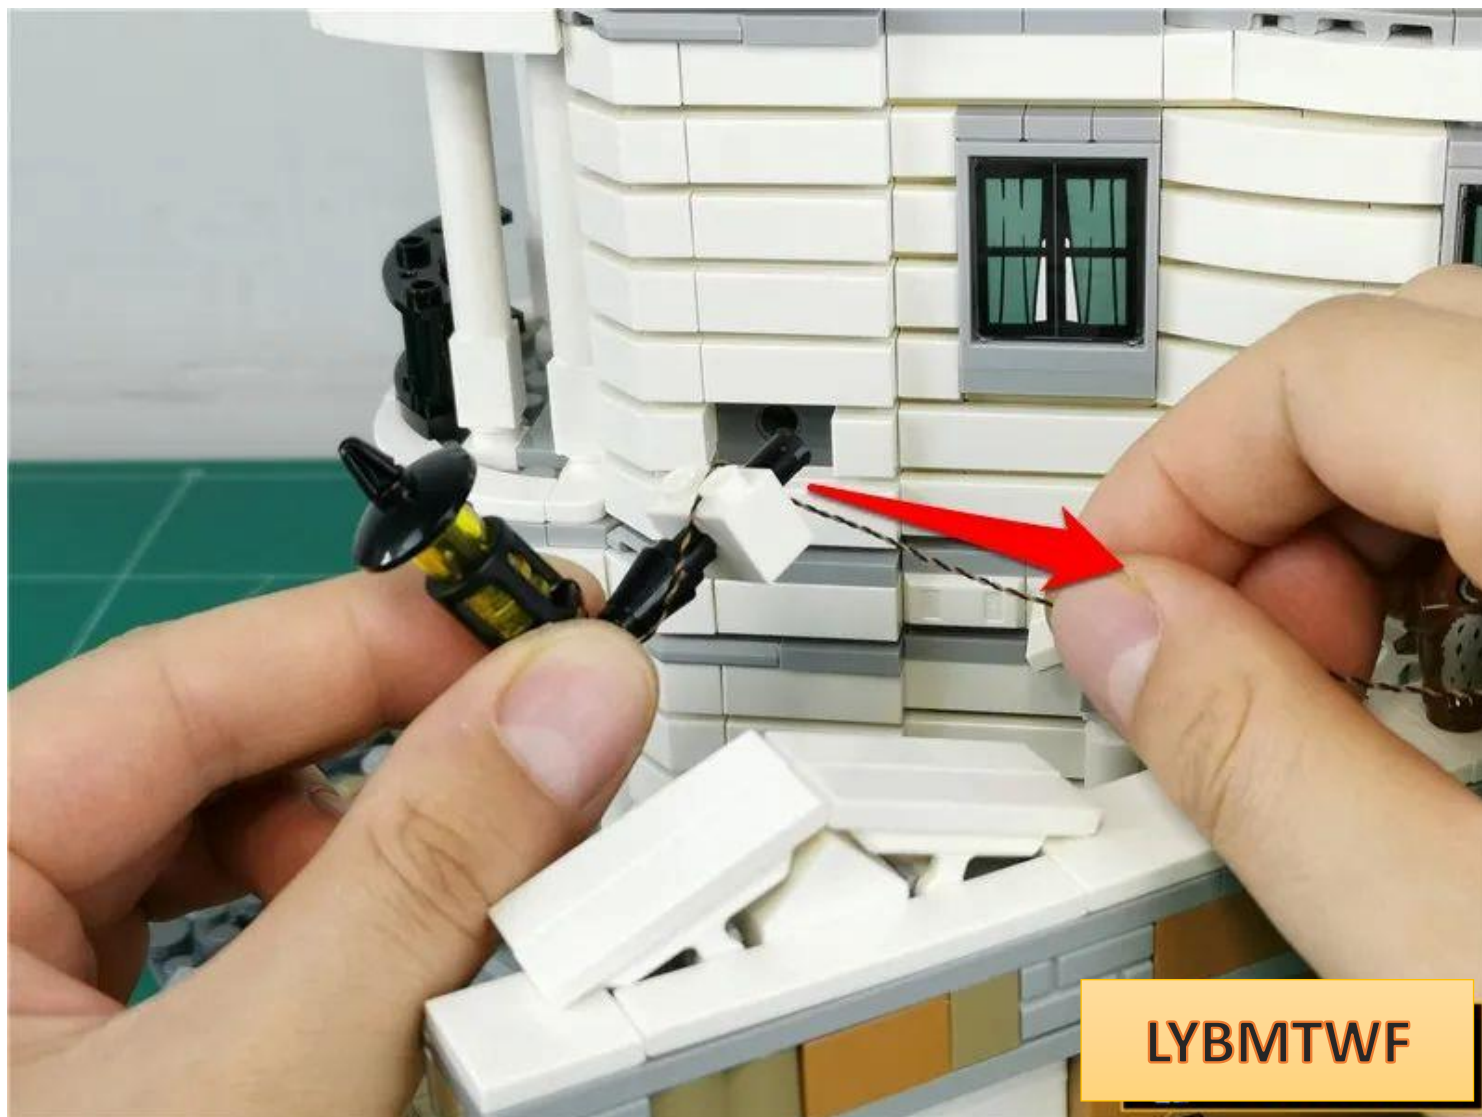


Restore the wall lamp and pull the wire to the right




Pull the wire along the gap to the right




Remove the parts indicated by arrows

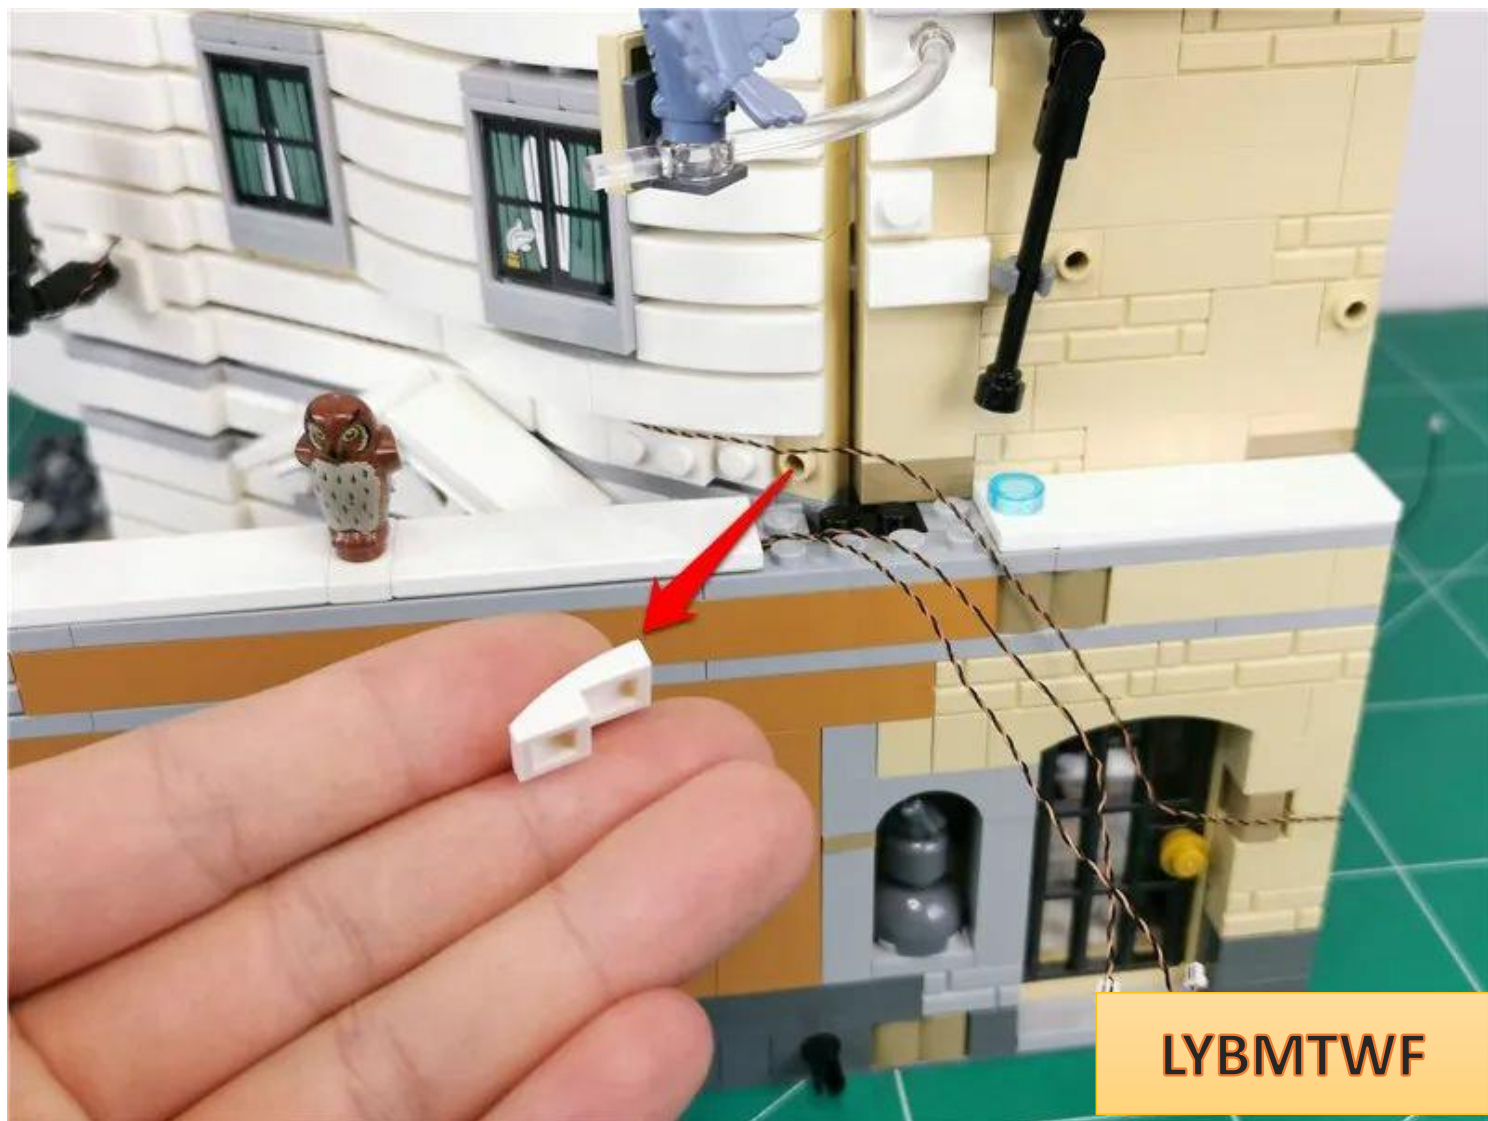


Pass the wire around the raised particles as shown in the picture

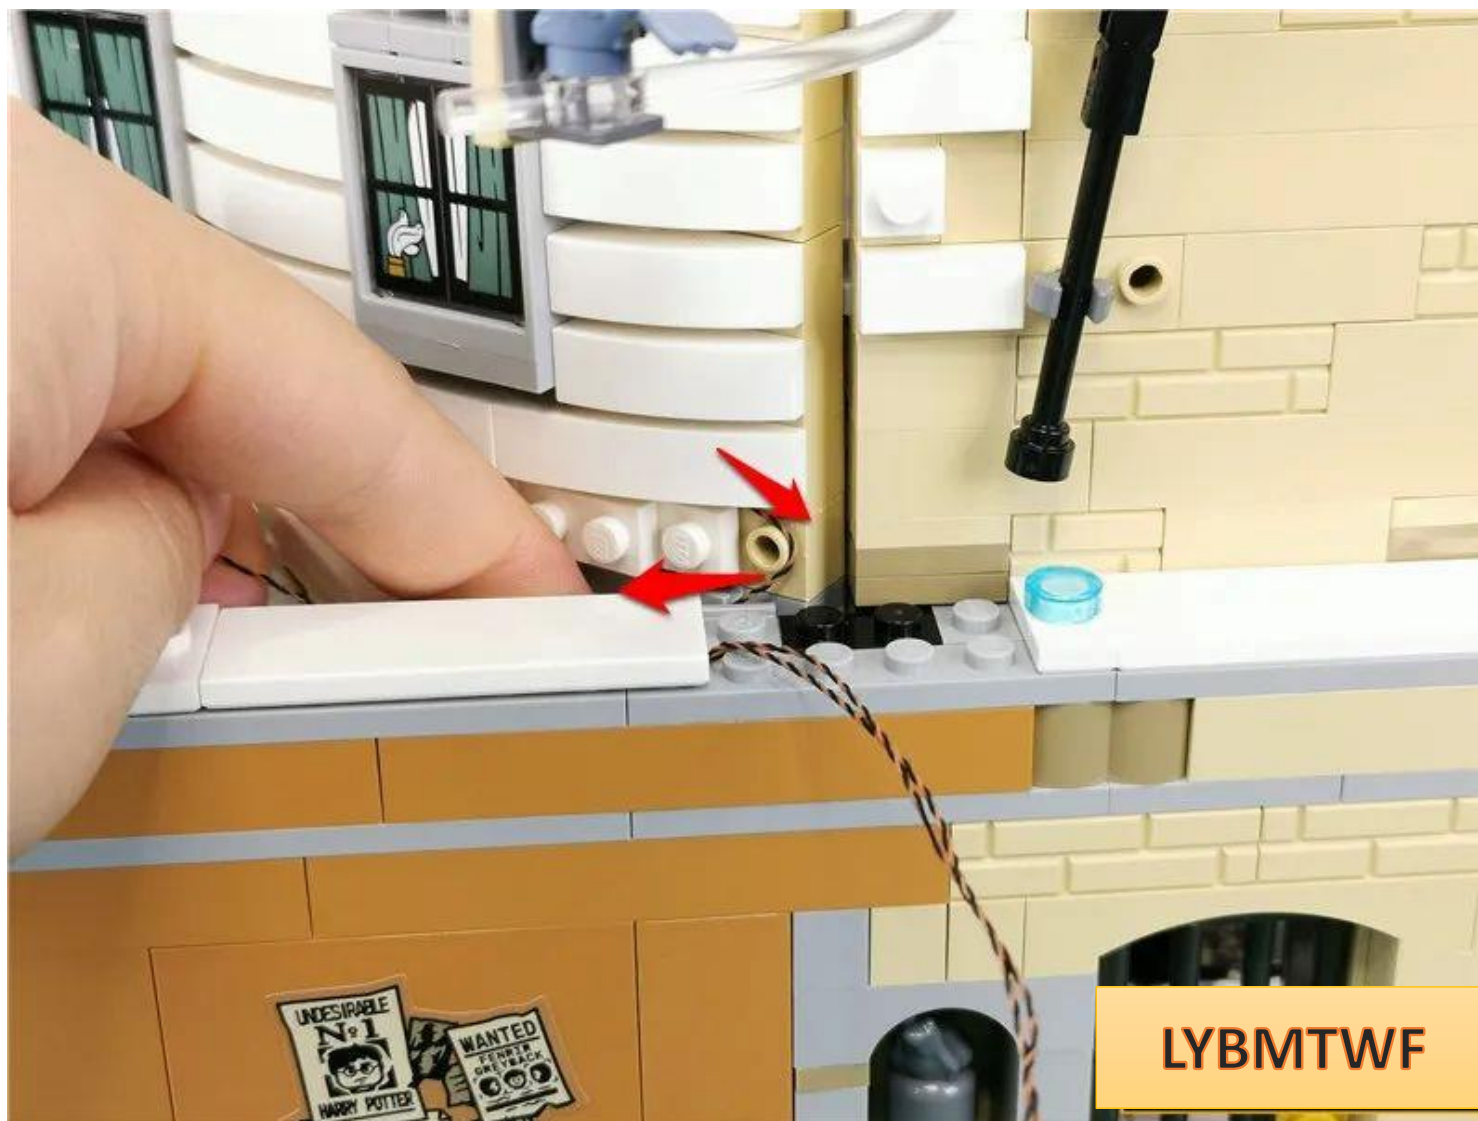


Restore parts and fix wires

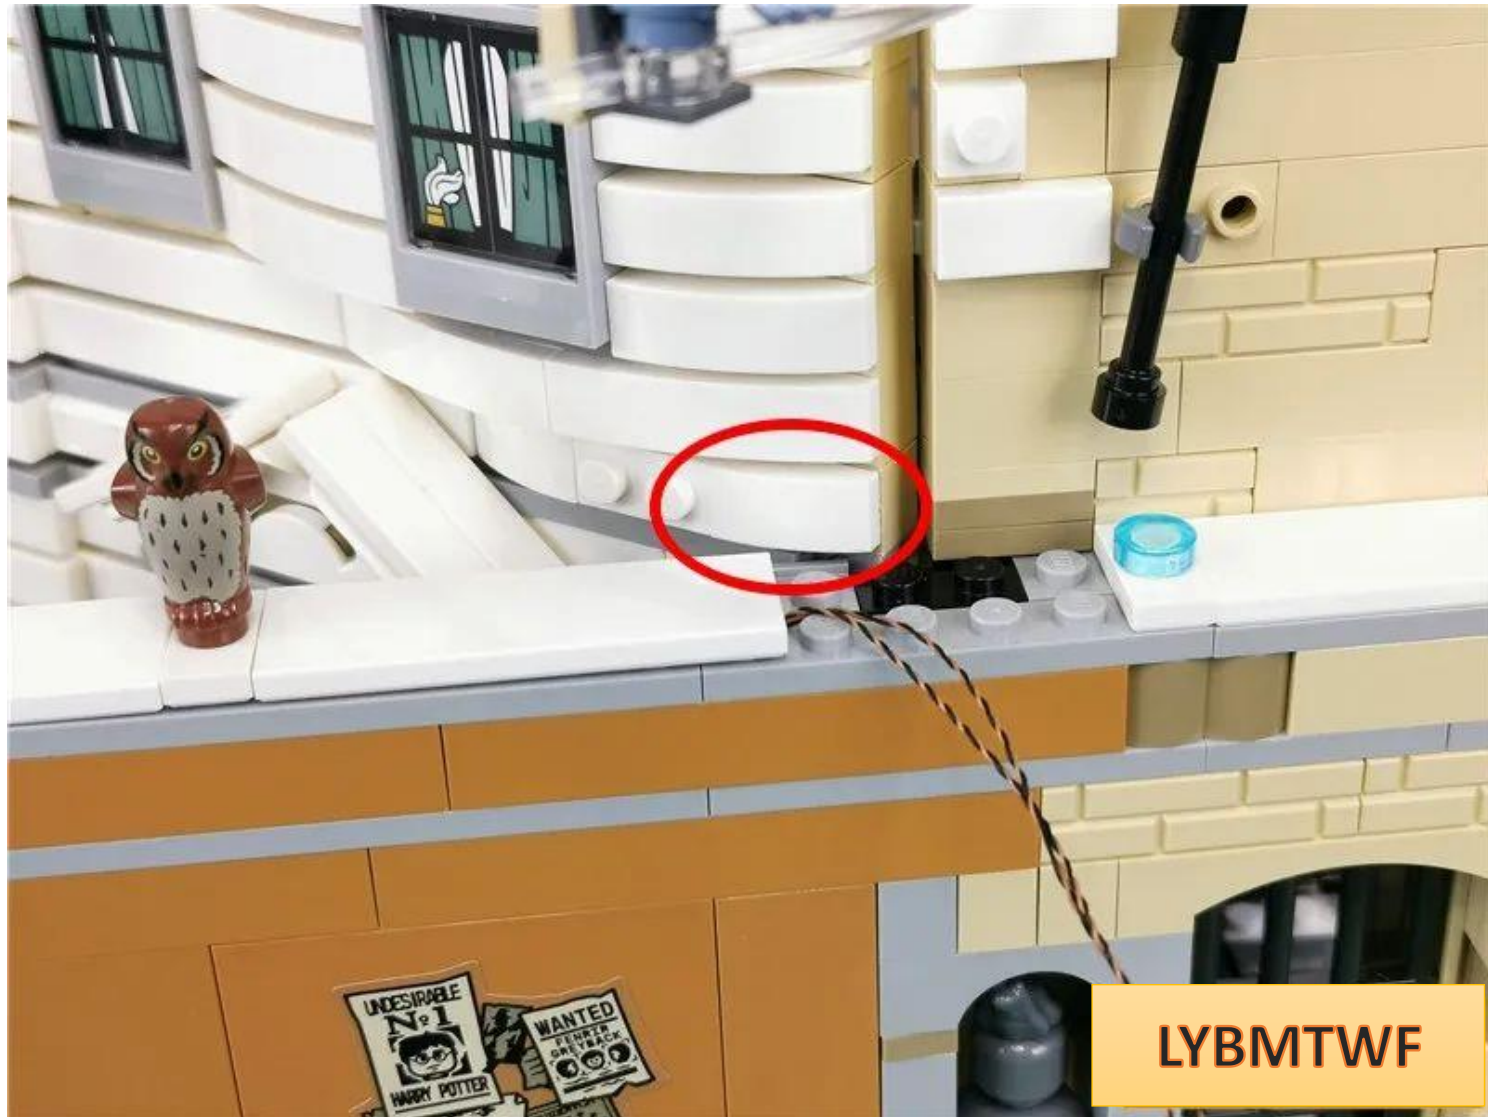


Take a 30cm cable, a 4-socket cable, and insert the cable into the 4-socket side socket.

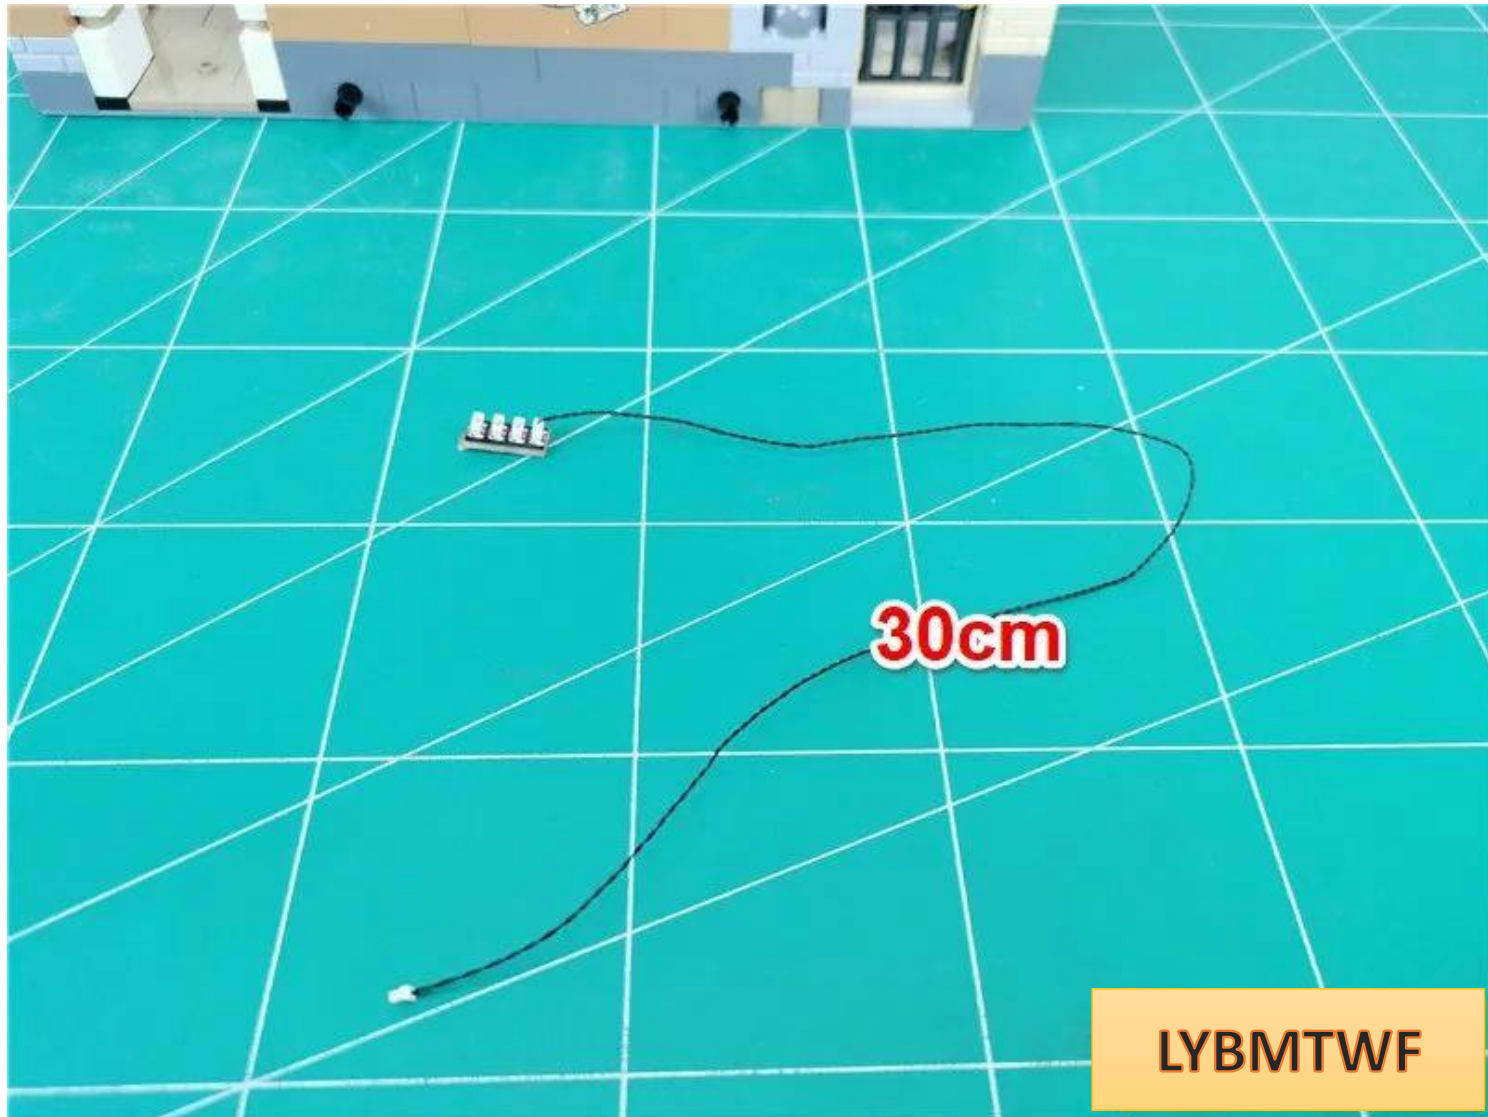


Insert 3 wires into socket 4

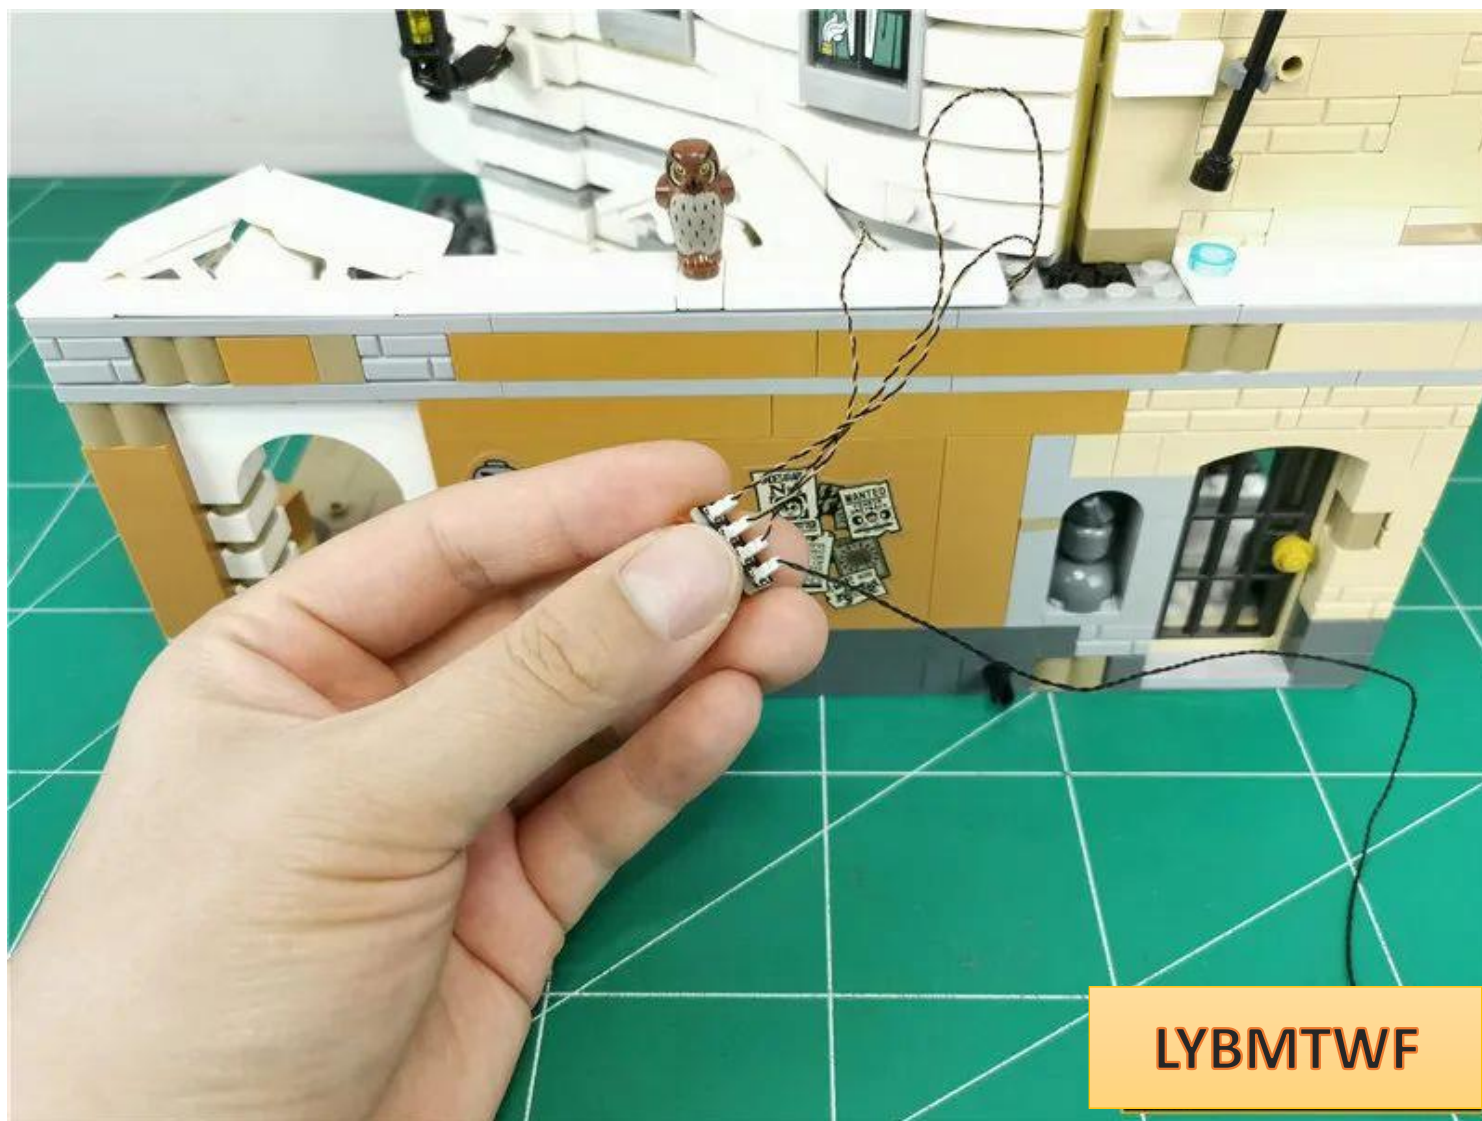

Plug the cable into the 12-socket

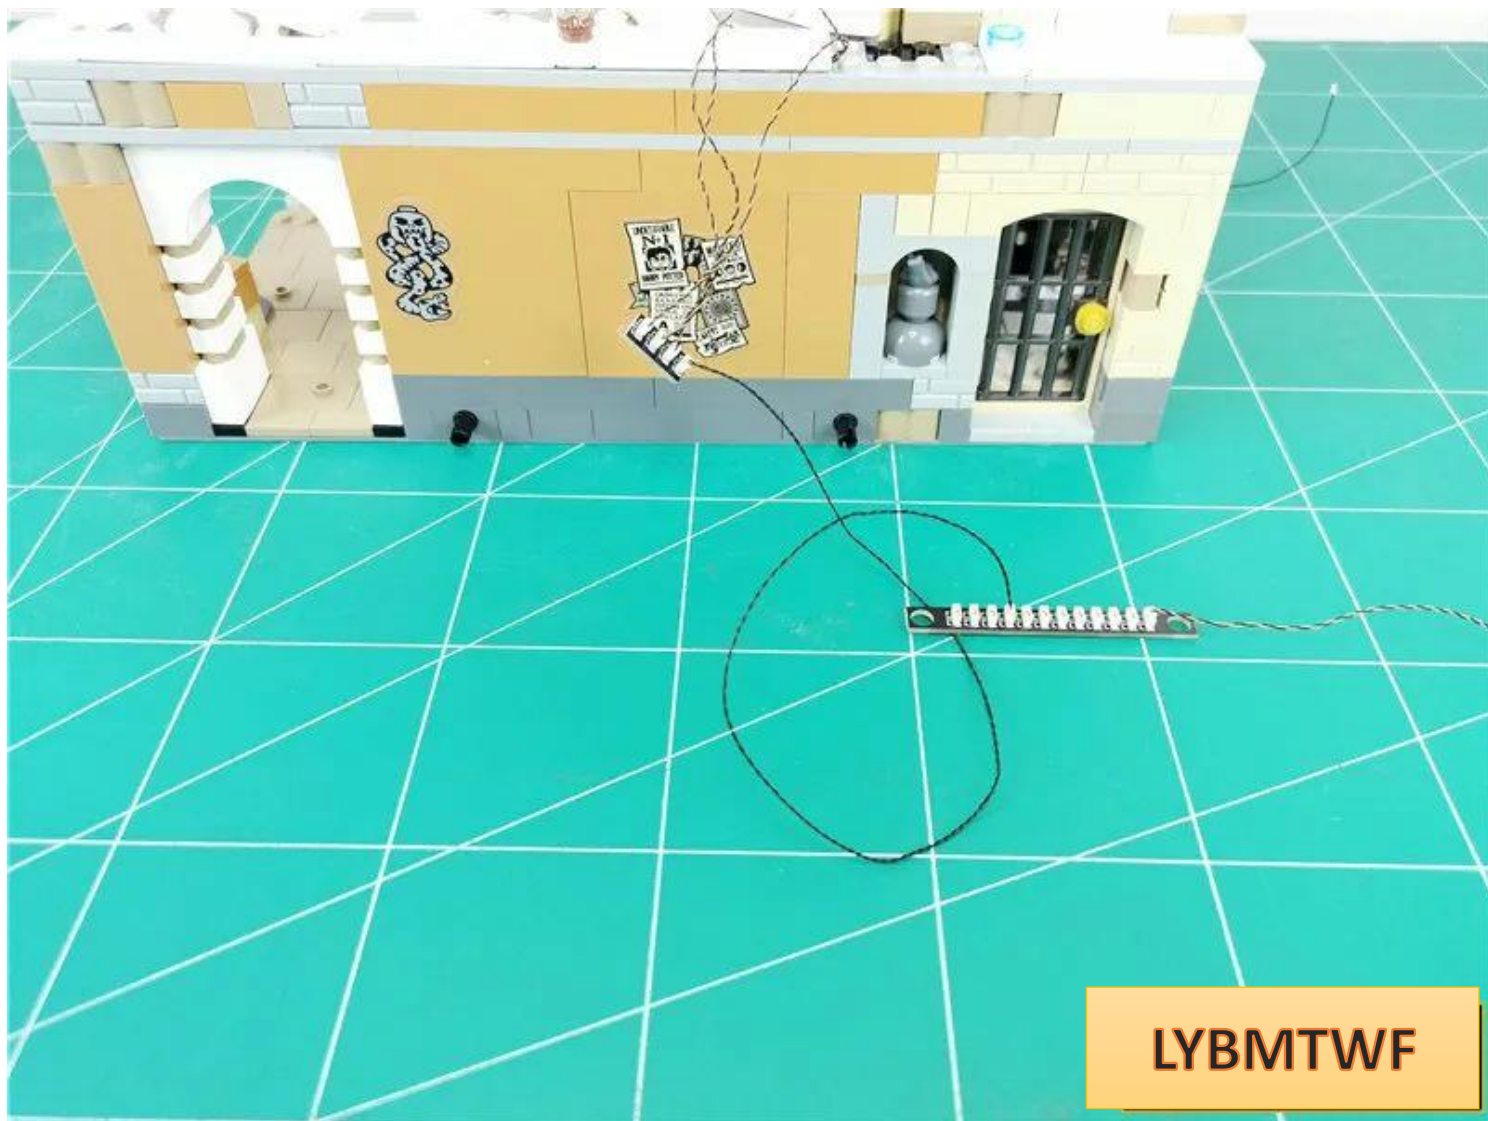


Turn on the power and test that the light lights up normally

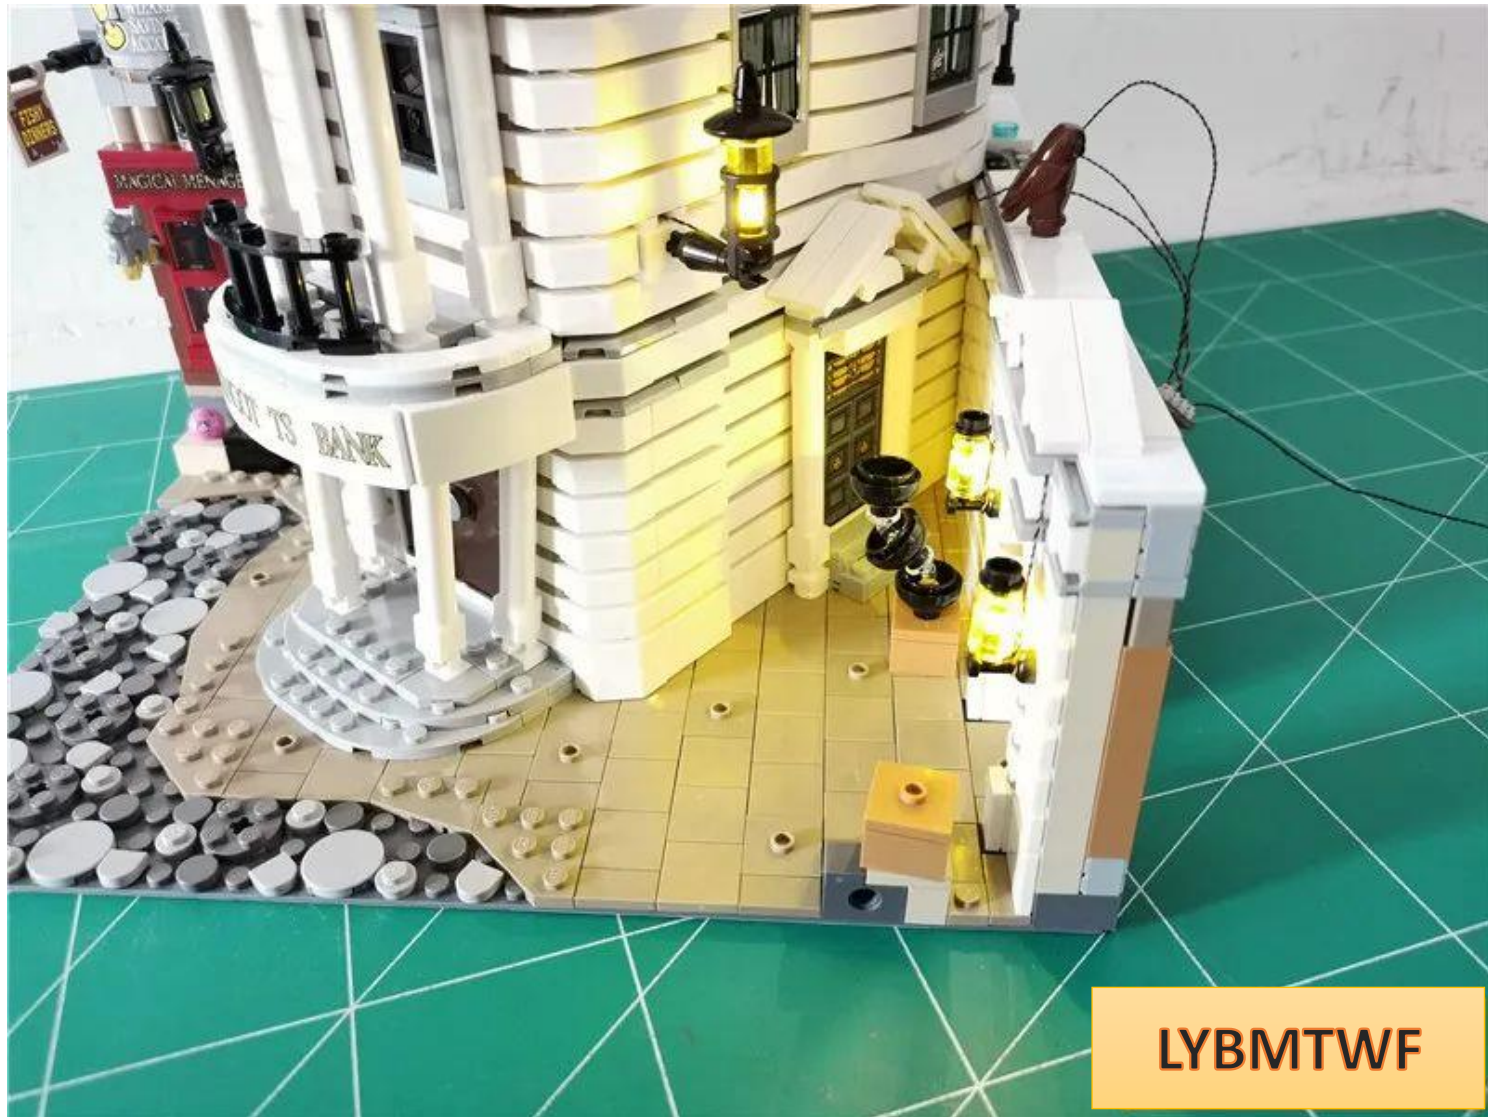


LYBMTWF


After the test is completed, turn off the power, unplug the connection cable, and **leave the 12-seater on the power supply.**

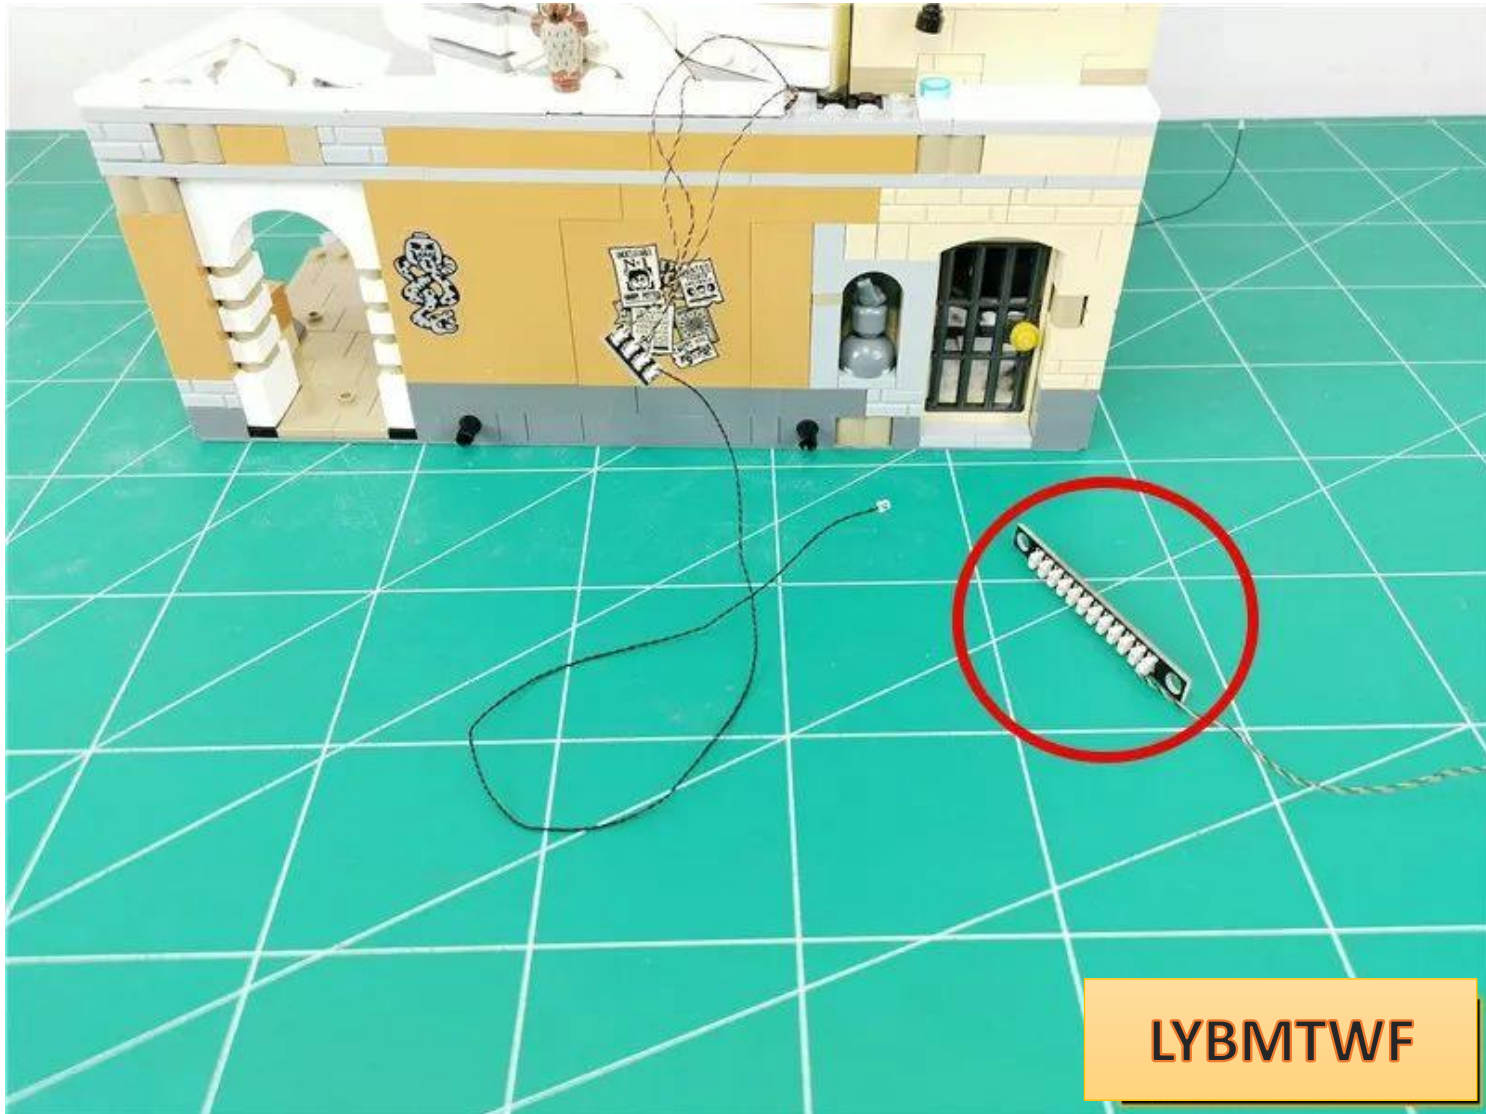


With the help of an opener , stick the 4 seats to the corners, **with the connecting wire at the top**

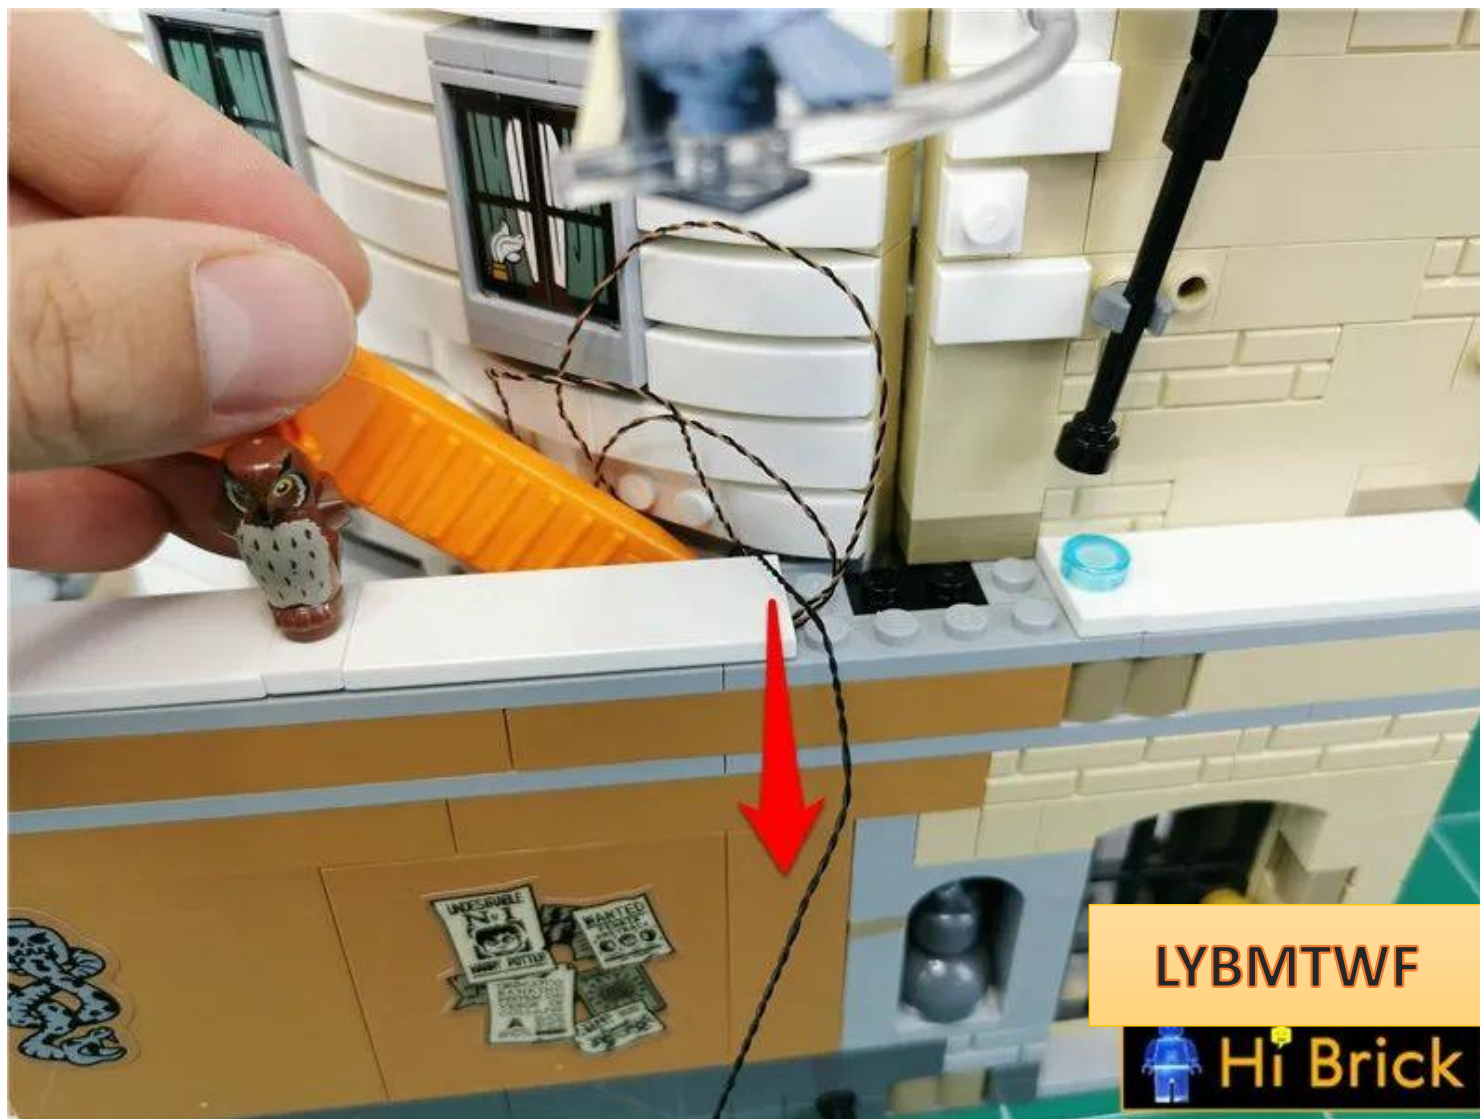


The specific location is as follows

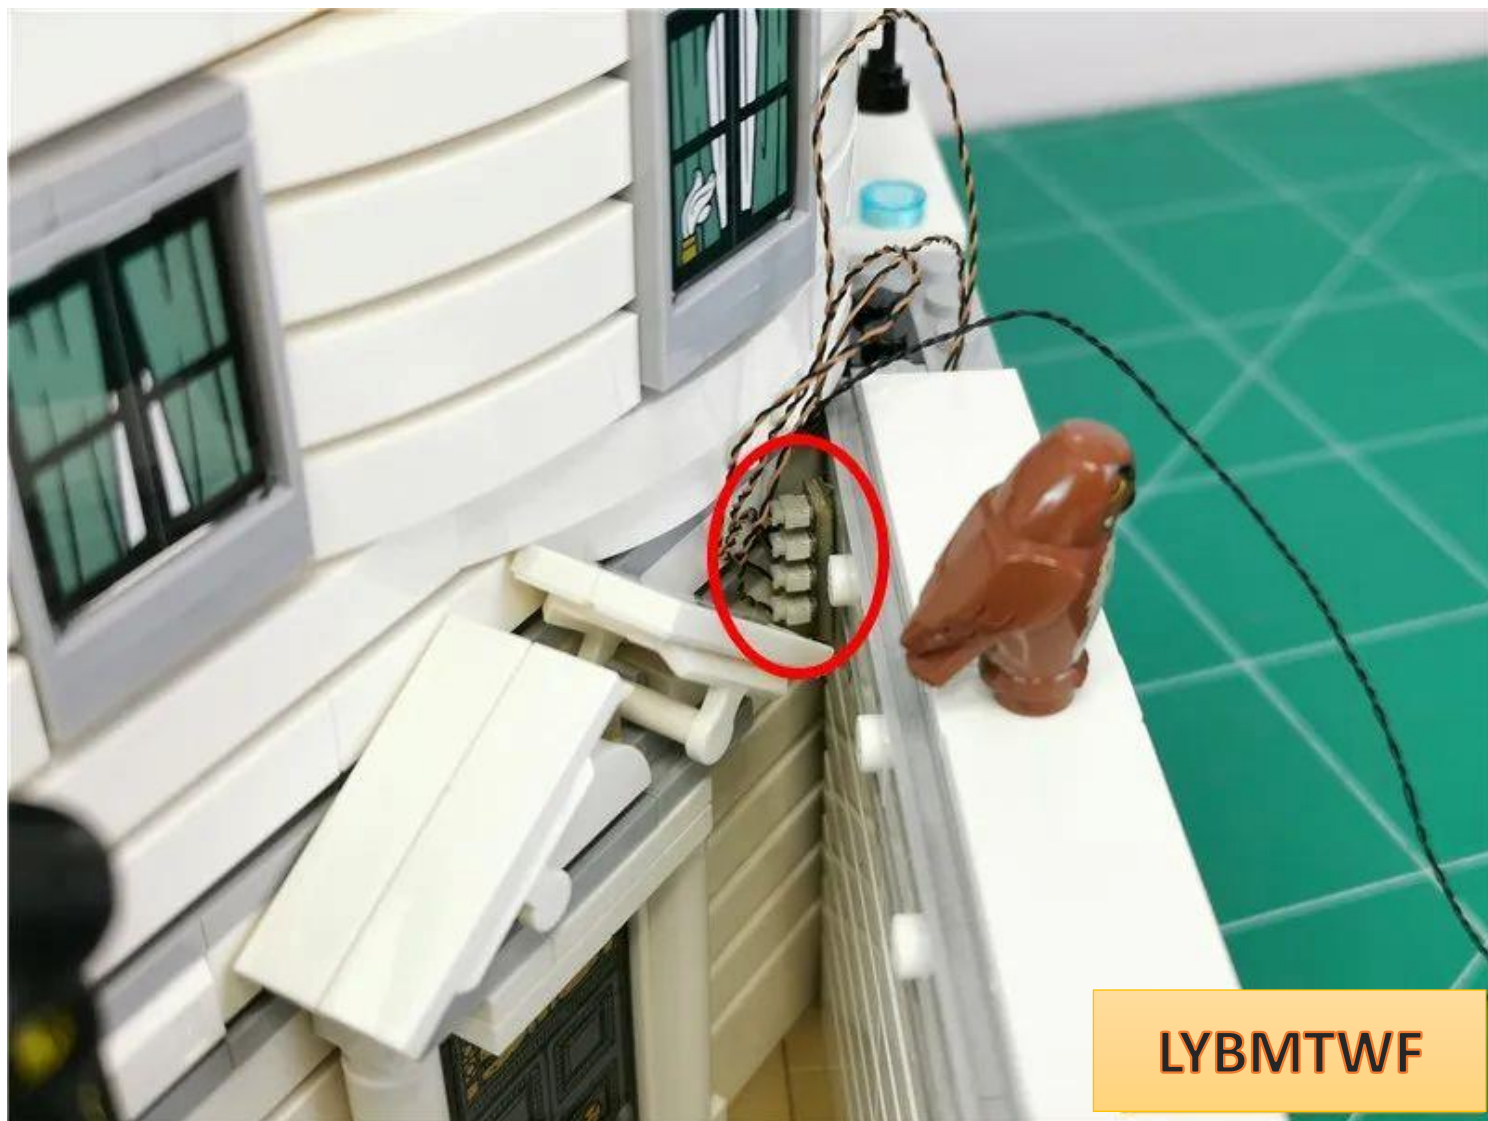

Pull the connecting line upward along the angle

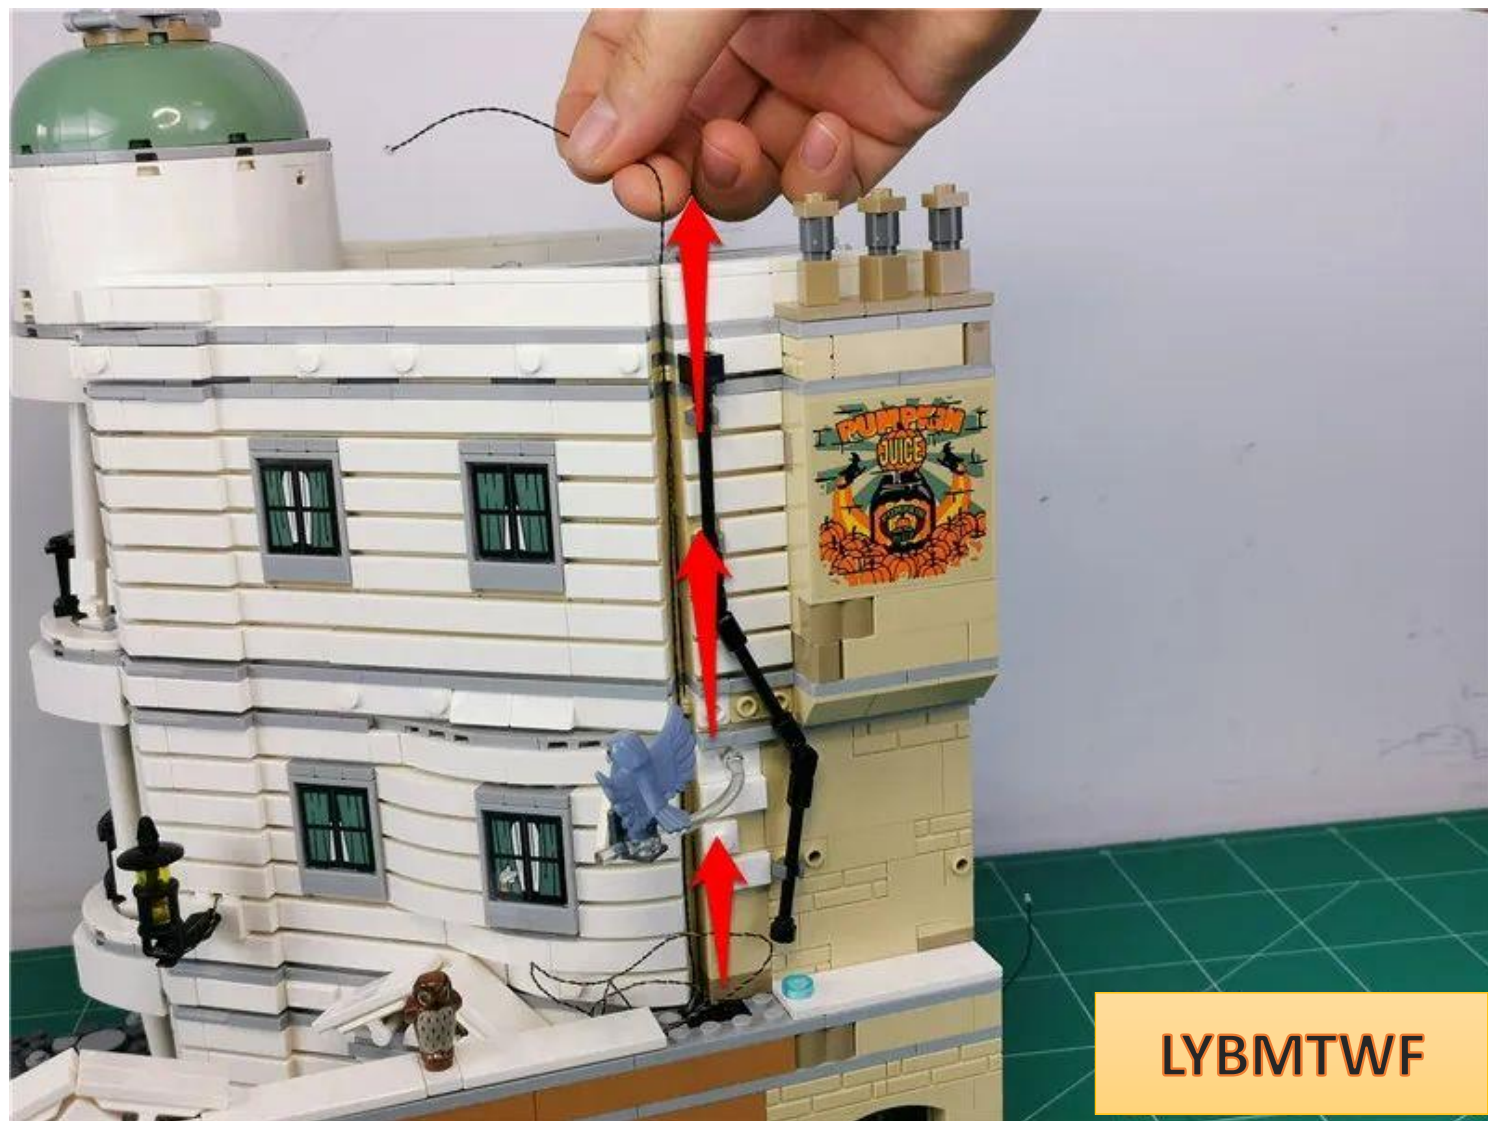


Stuff into the gap

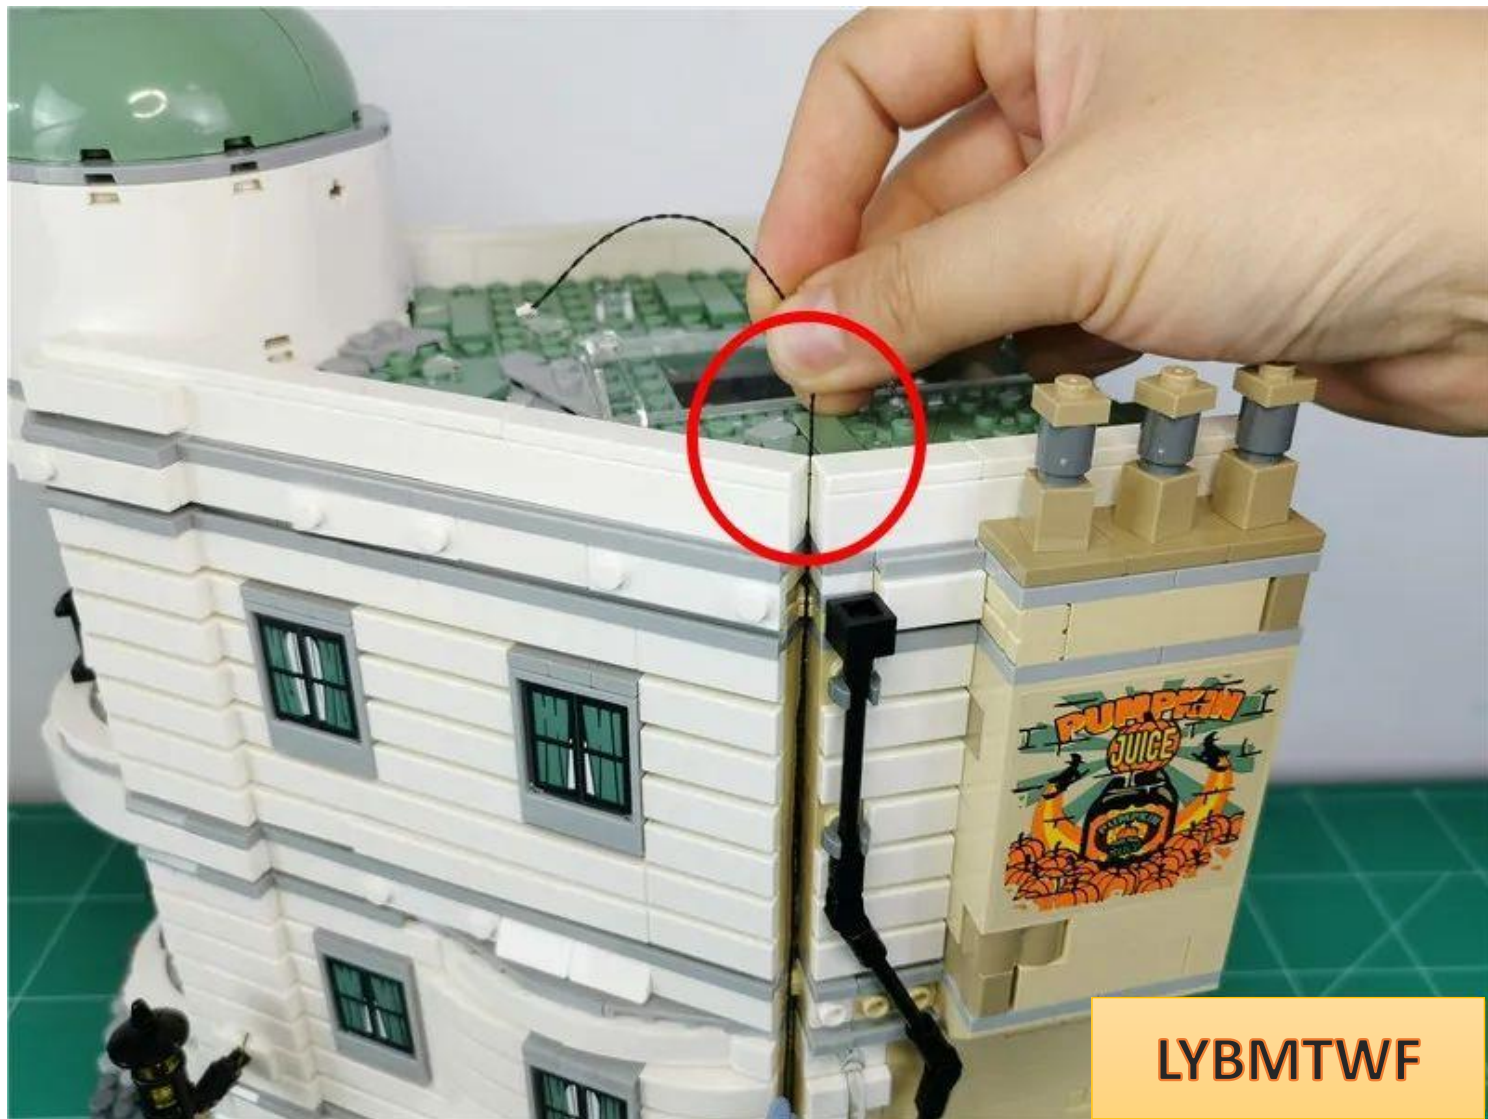


LYBMTWF


Fit the wire to the edge of the part and pull it to the included corner

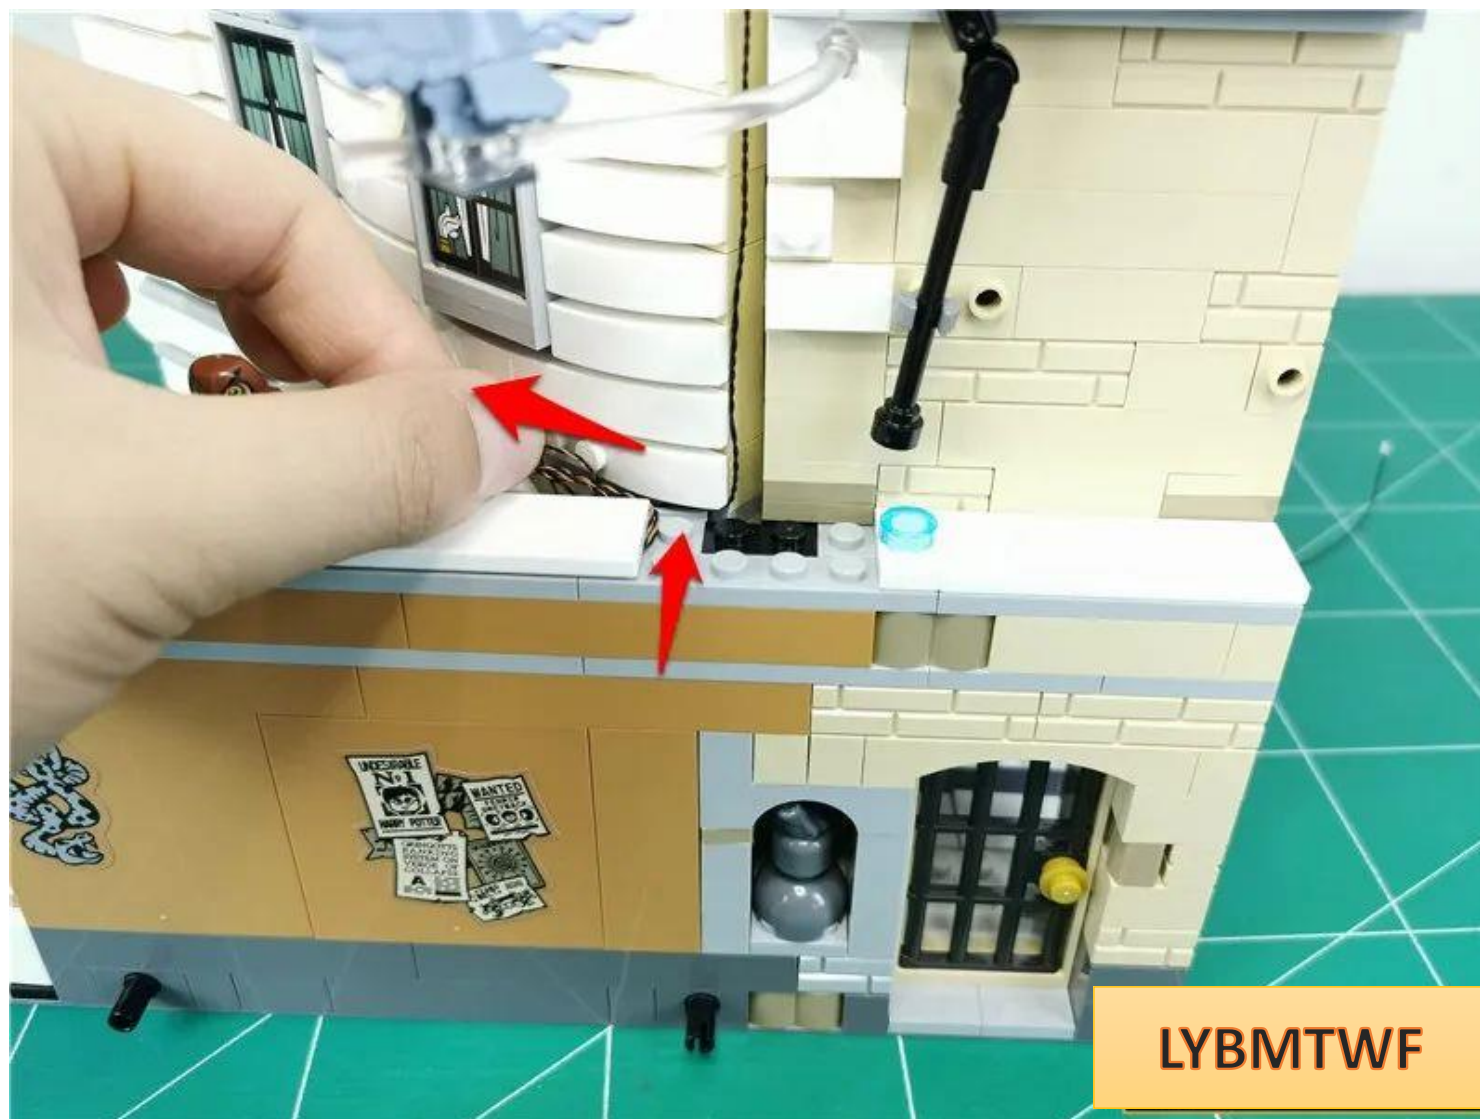

Restore parts and fix wires

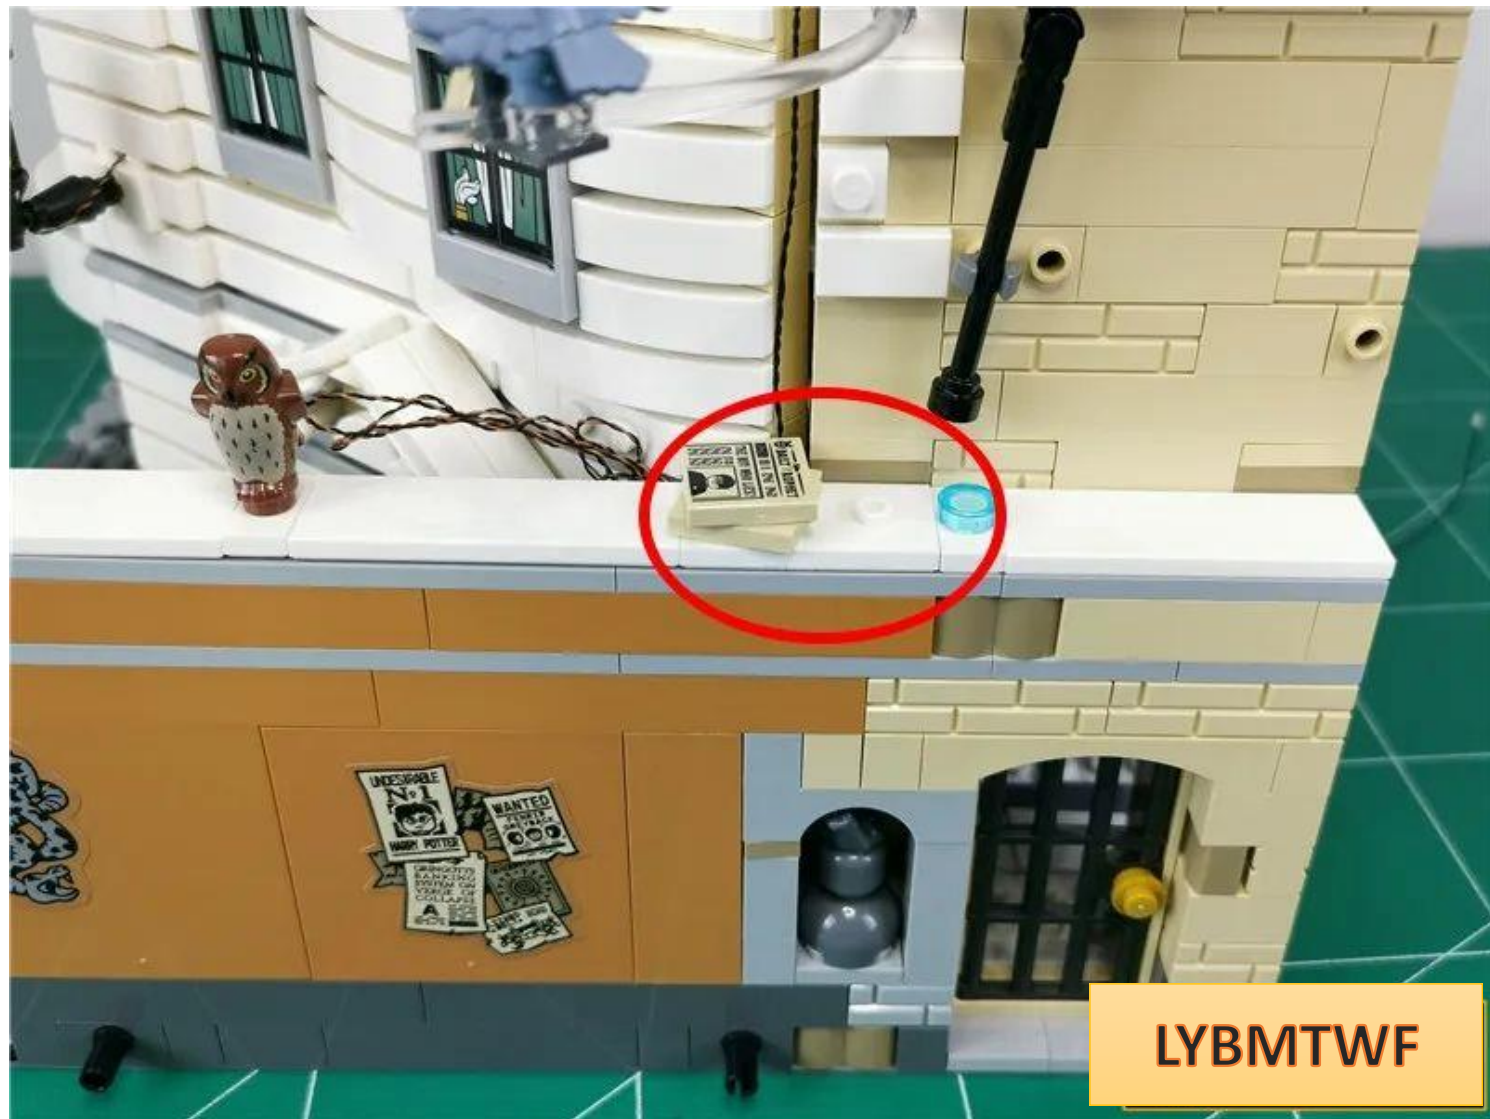

Twist the excess wires together appropriately and tuck them into the corners

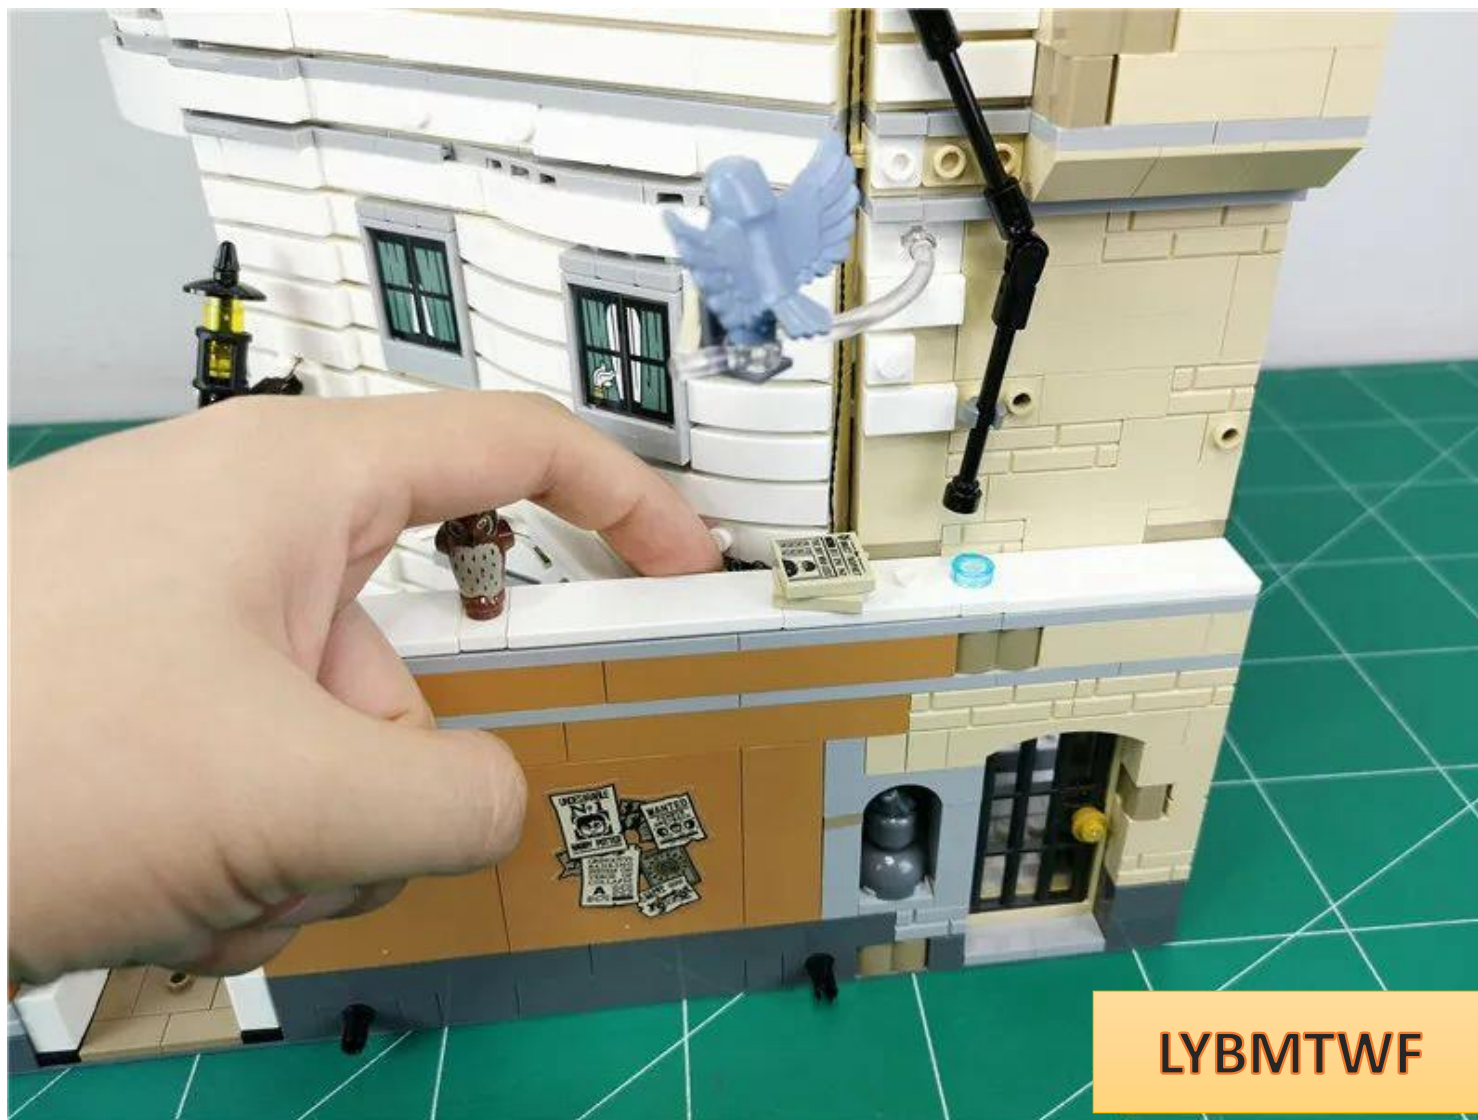

The effect after finishing is as follows



LYBMTWF

Go to front




LYBMTWF

Remove the parts indicated by the arrows in sequence



Pinch the part and spread it outwards

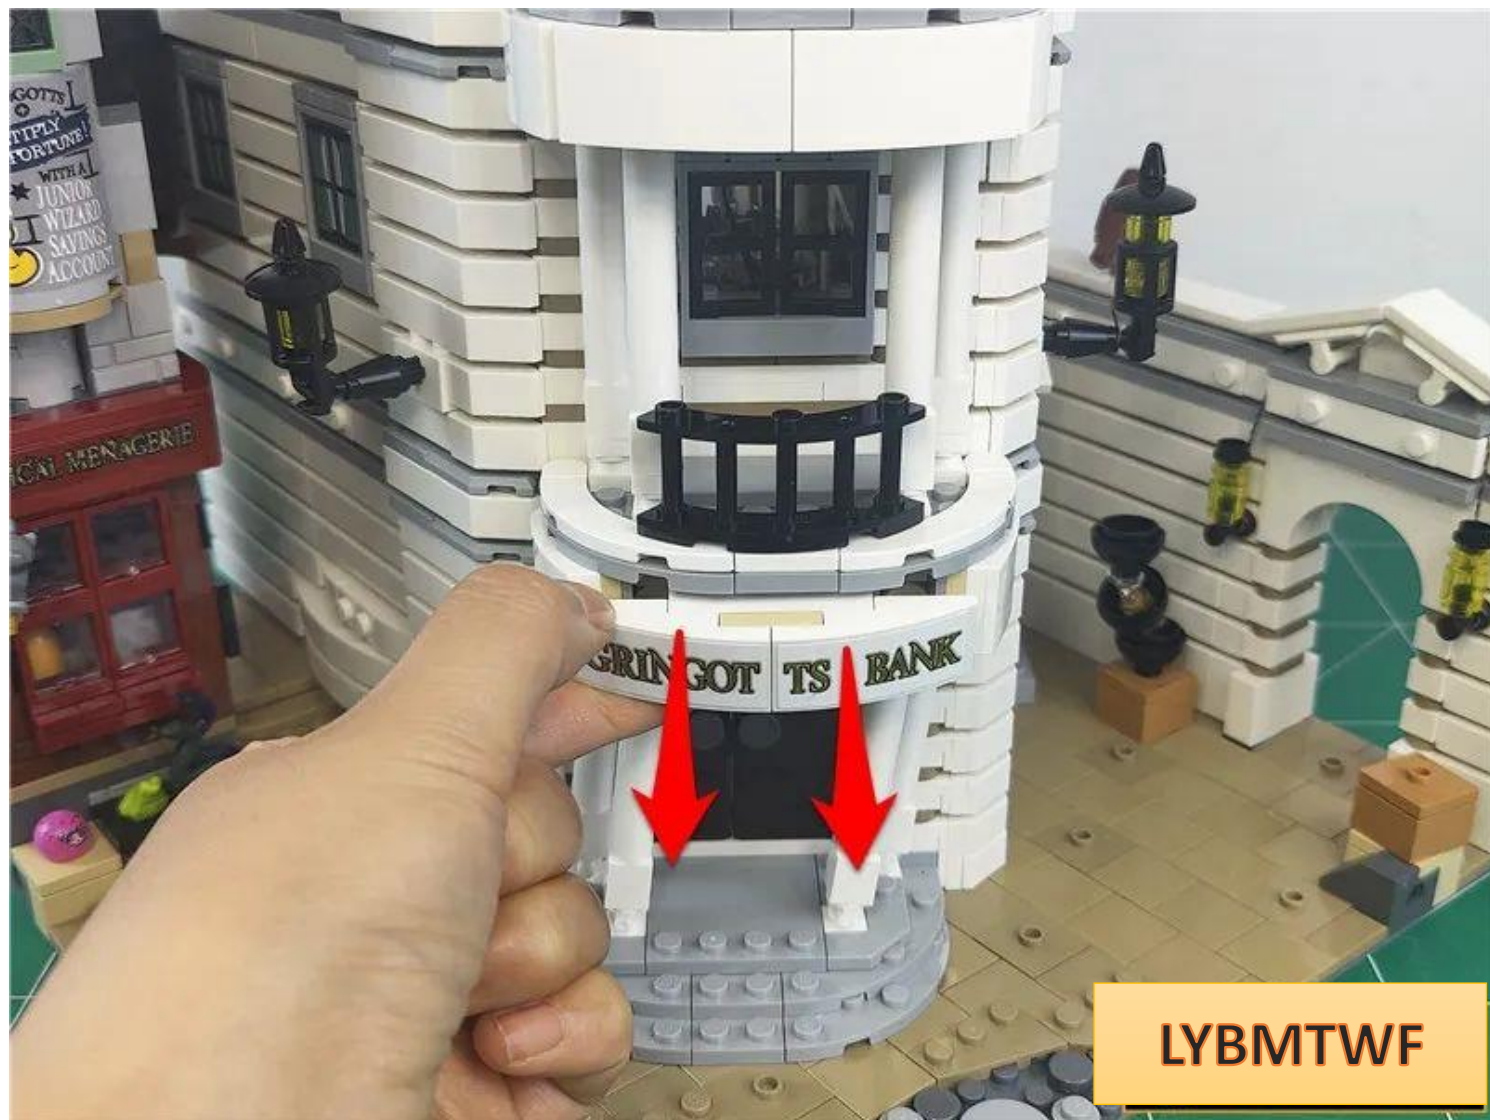


LYBMTWF




GRINGOT TS BANK


LYBMTWF

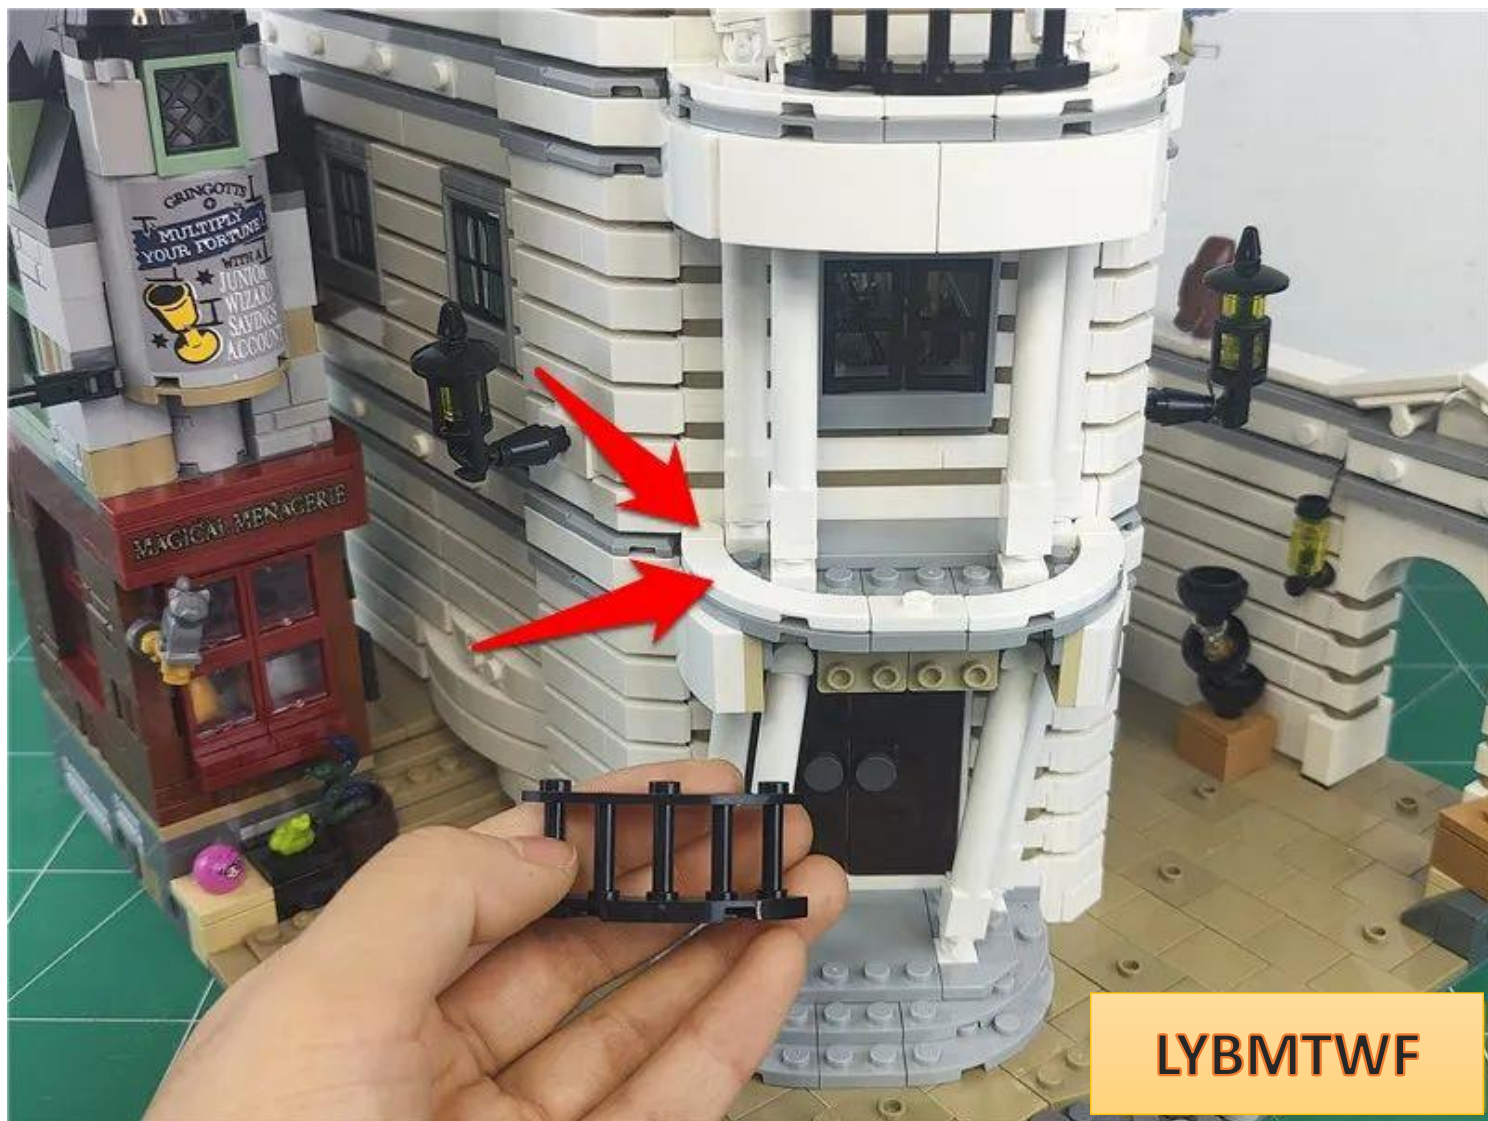

LYBMTWF

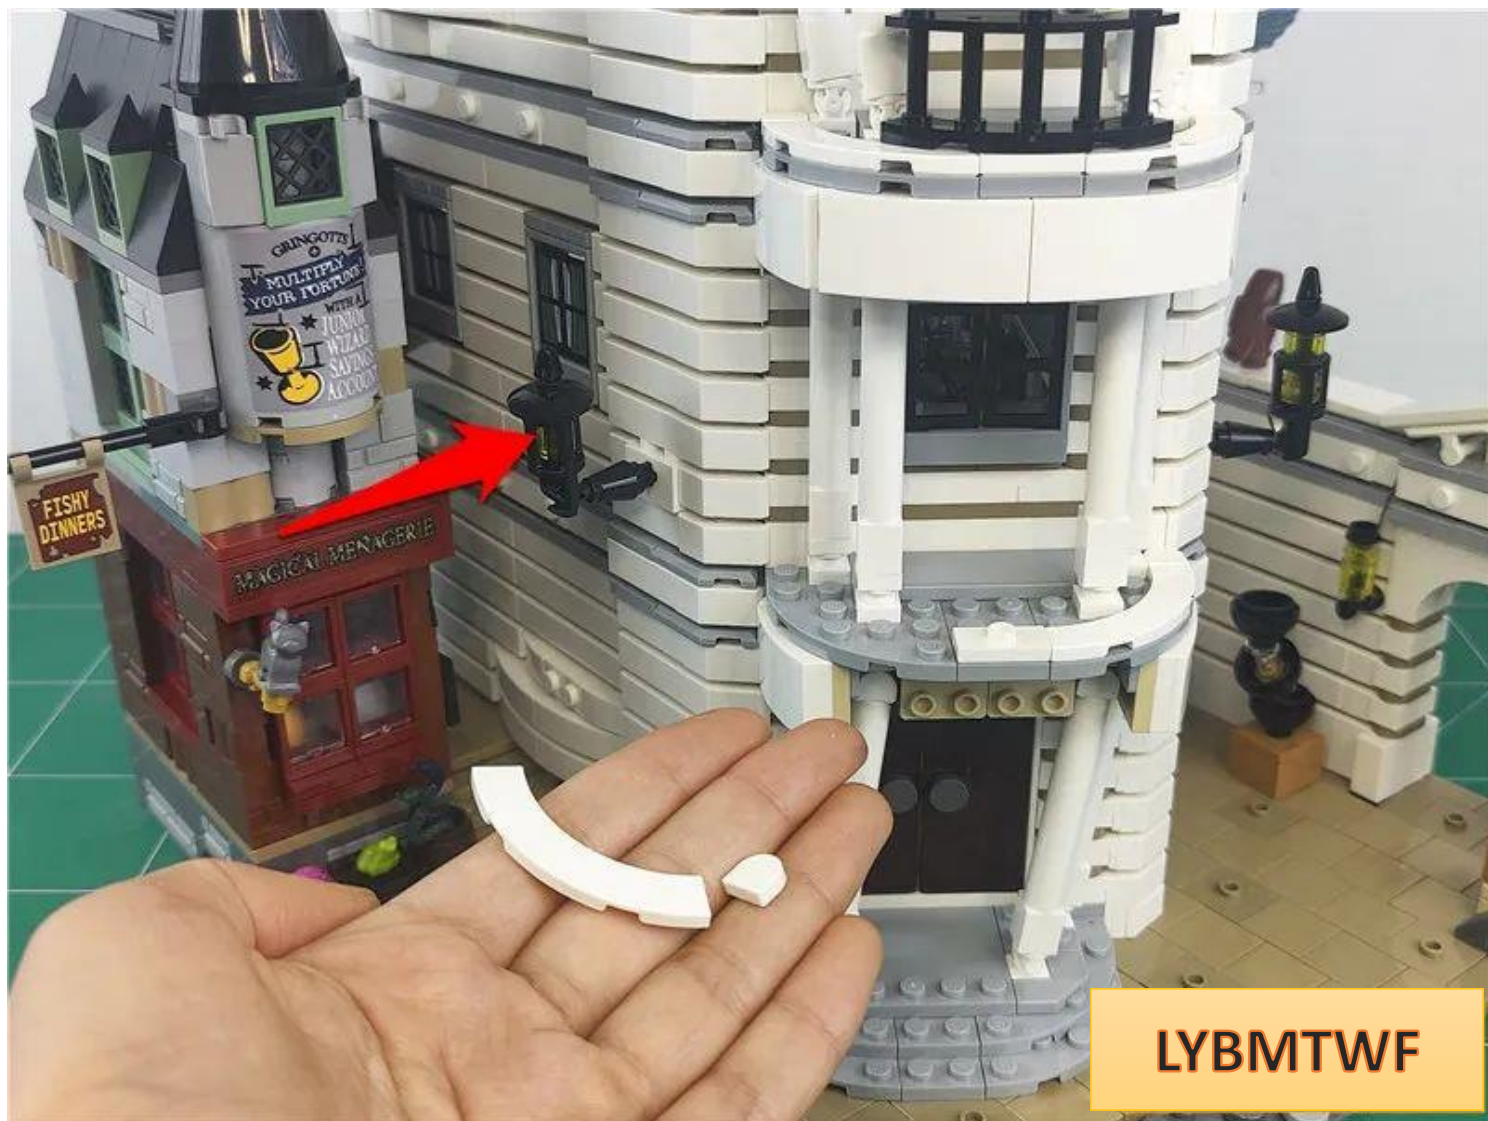


LYBMTWF

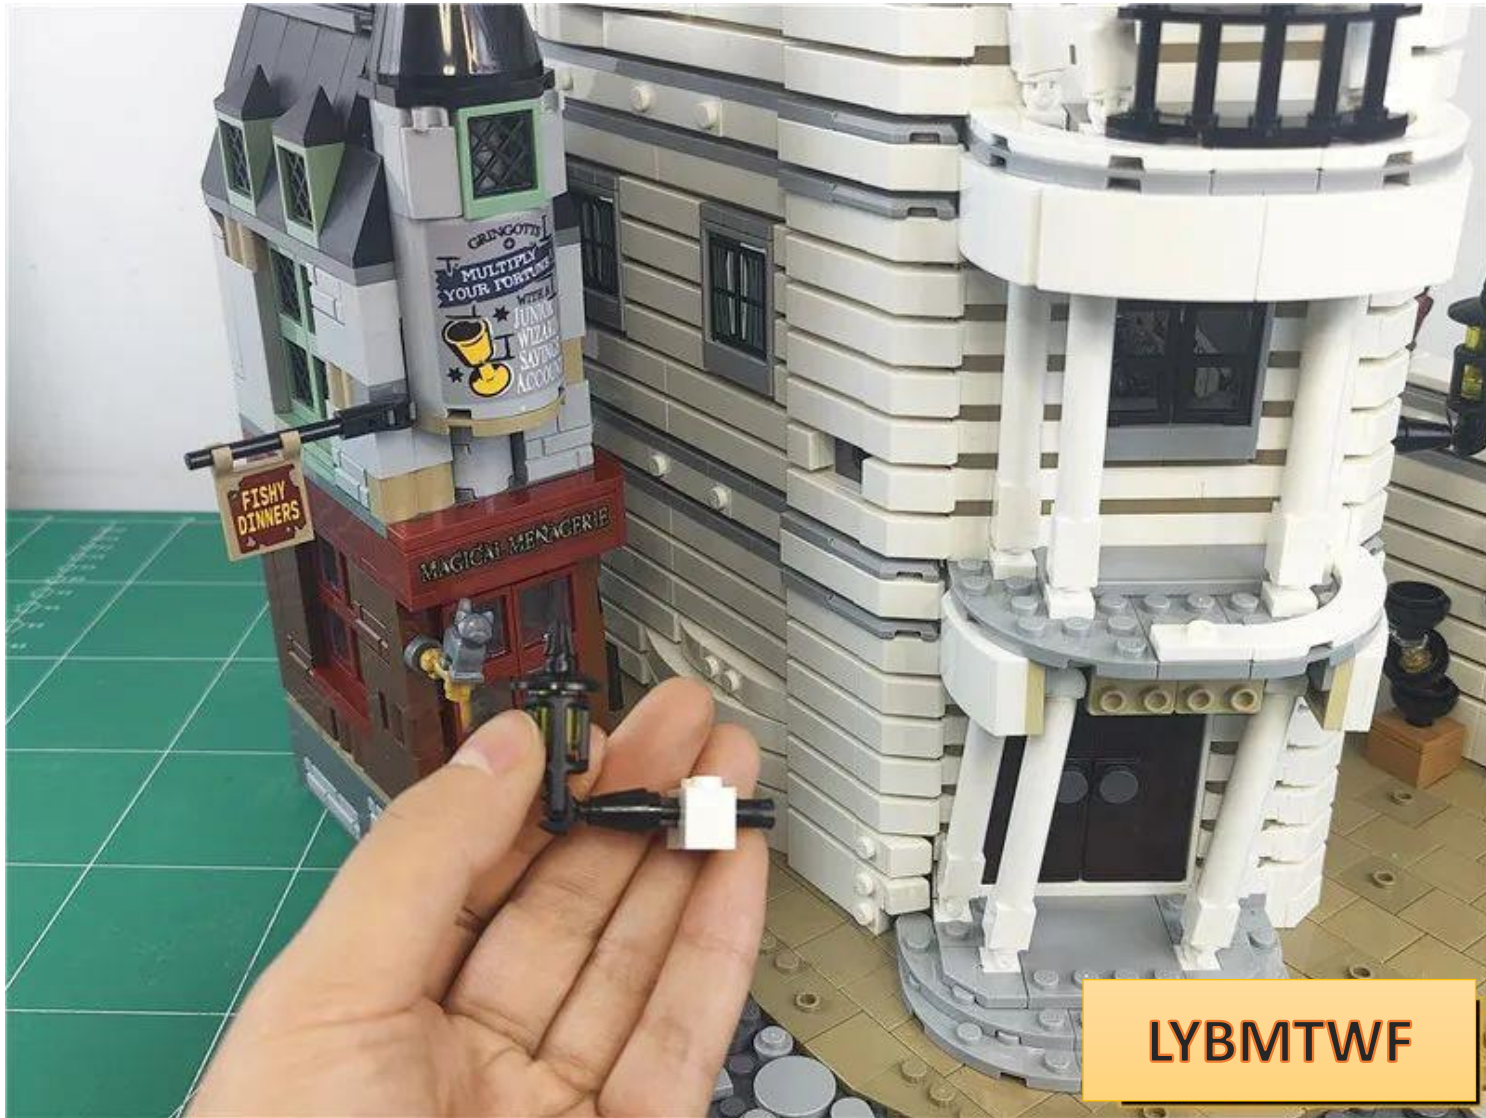


LYBMTWF

Take 1 15cm ordinary warm light bulb and 2 hollow transparent yellow circles

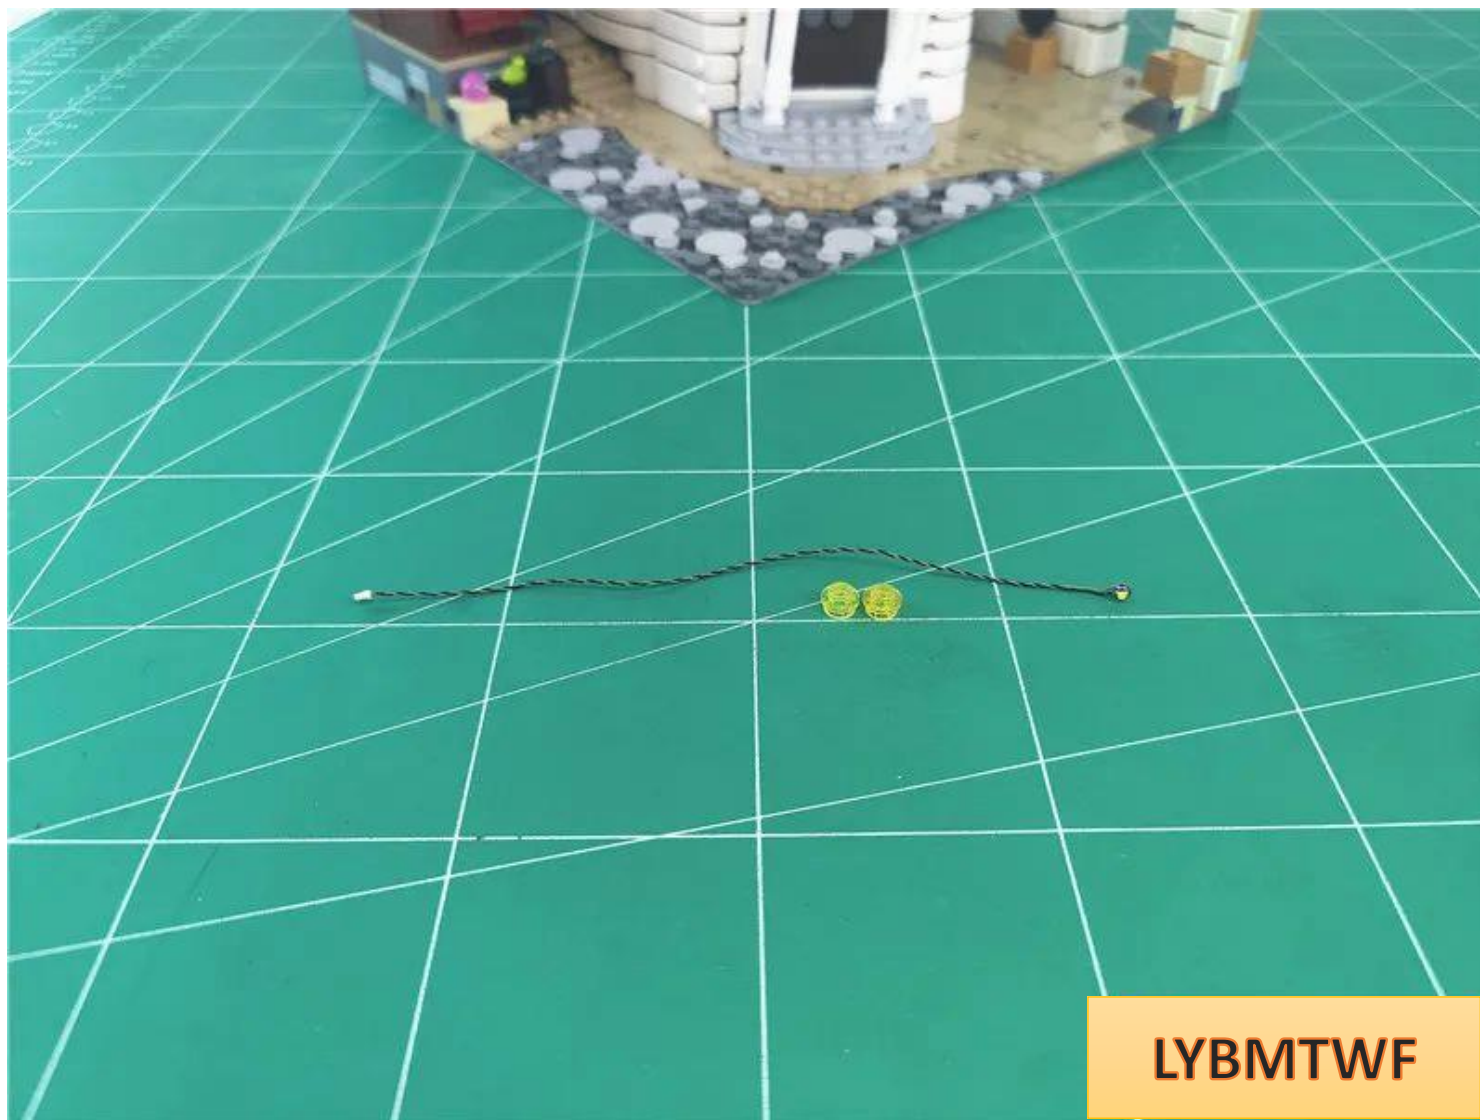


In the same way as before, install the lamp particles and organize the wires

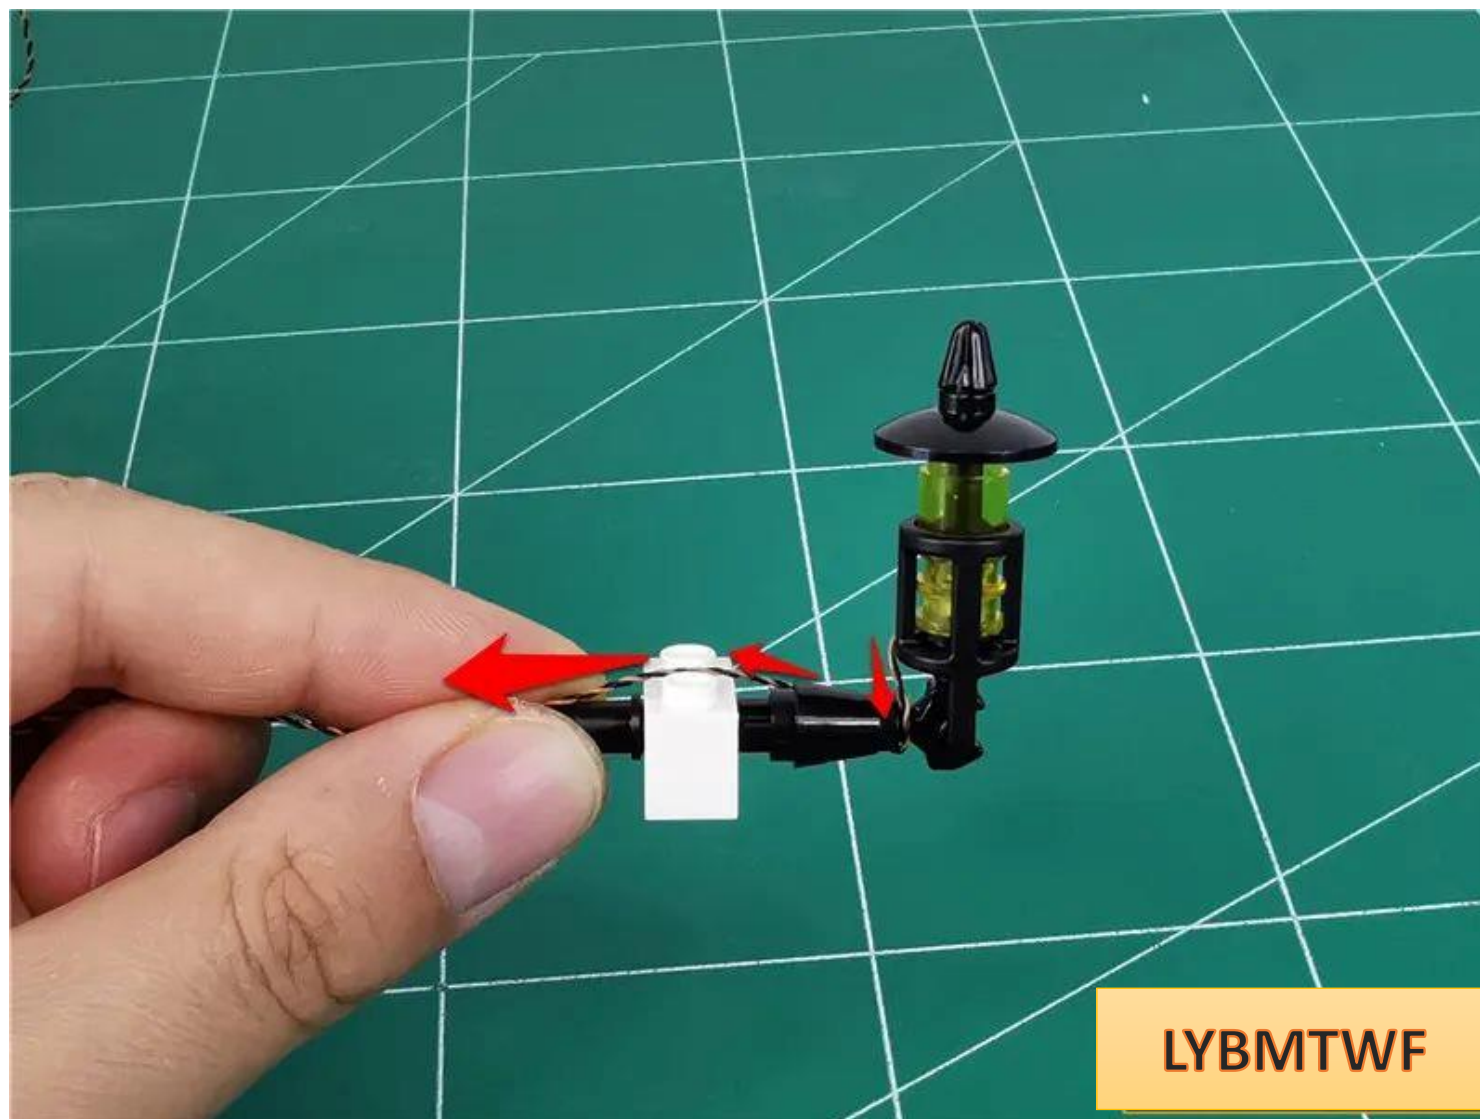

LYBMTWF

Before restoring the wall light, route the wires around the black connecting bolts

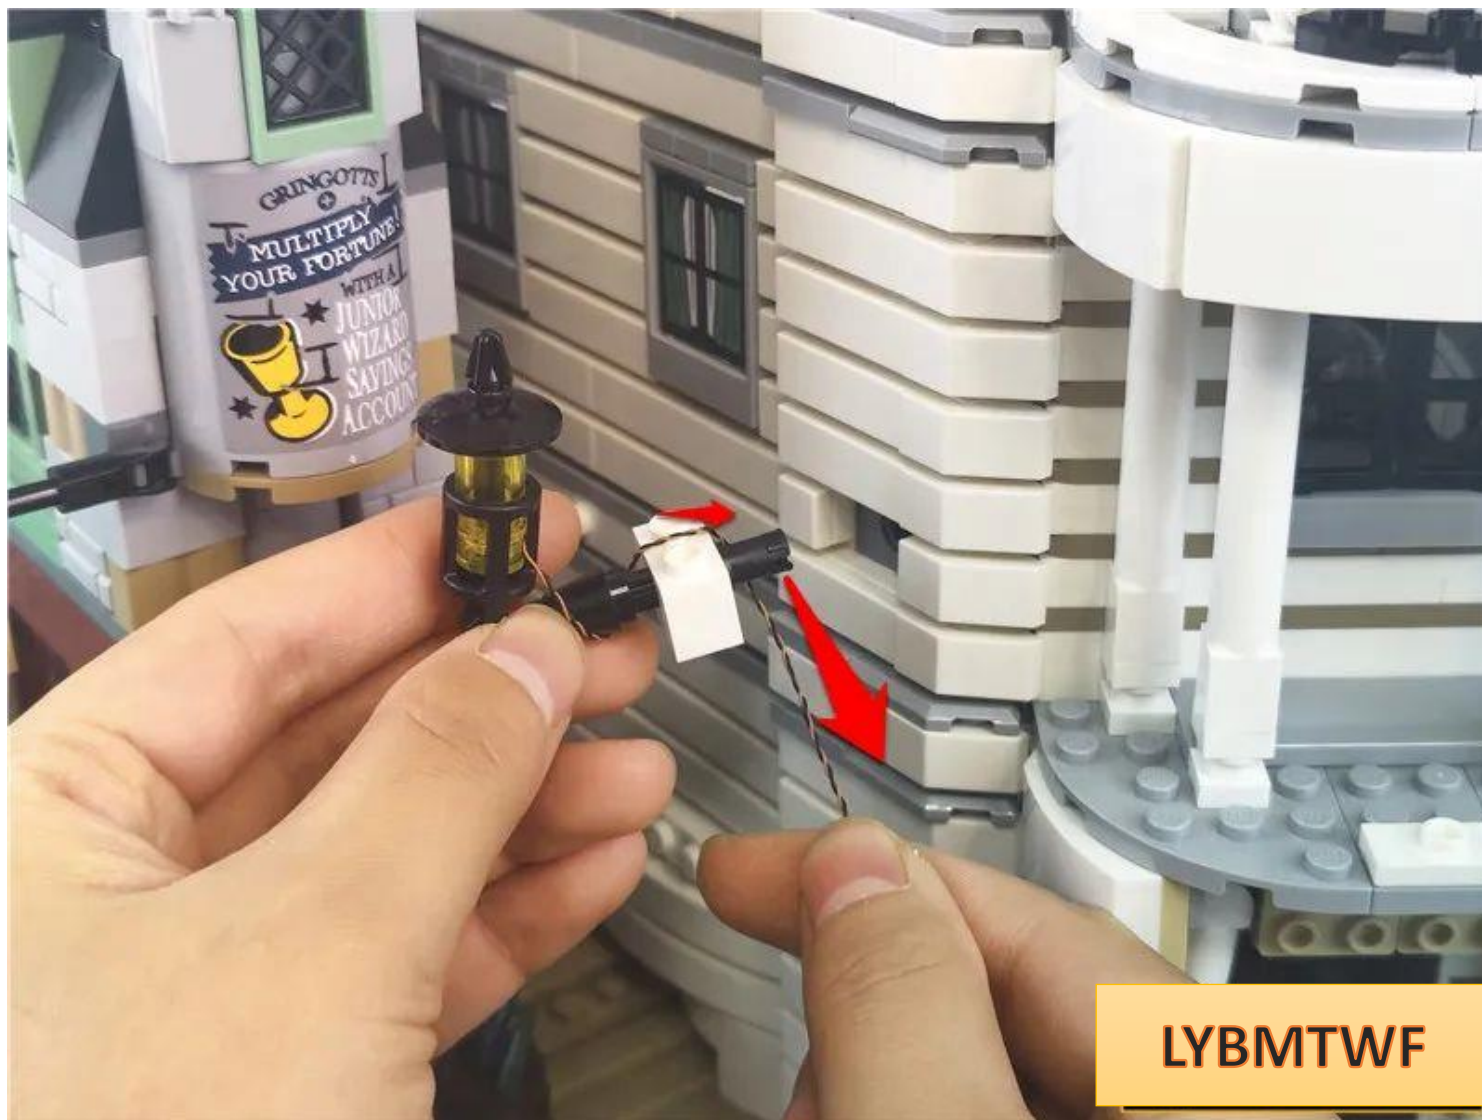


Restoration wall lamp




LYBMTWF

Pull the wire along the gap to the right

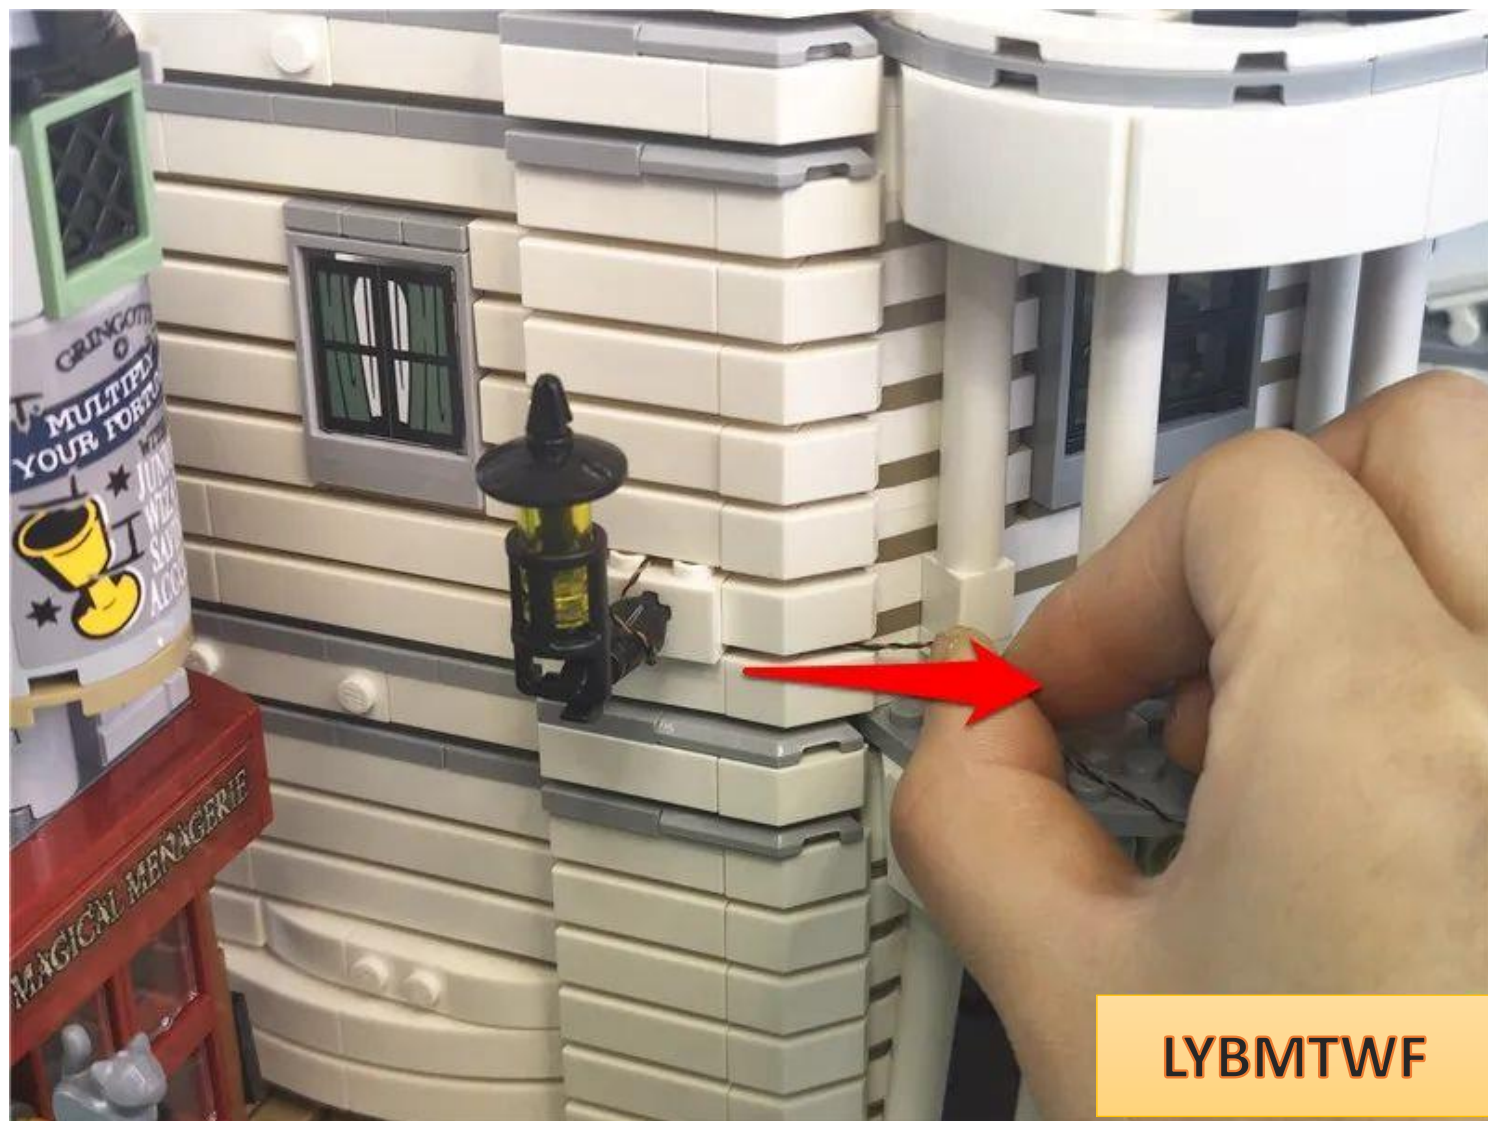

The included angle of the fitting parts passes

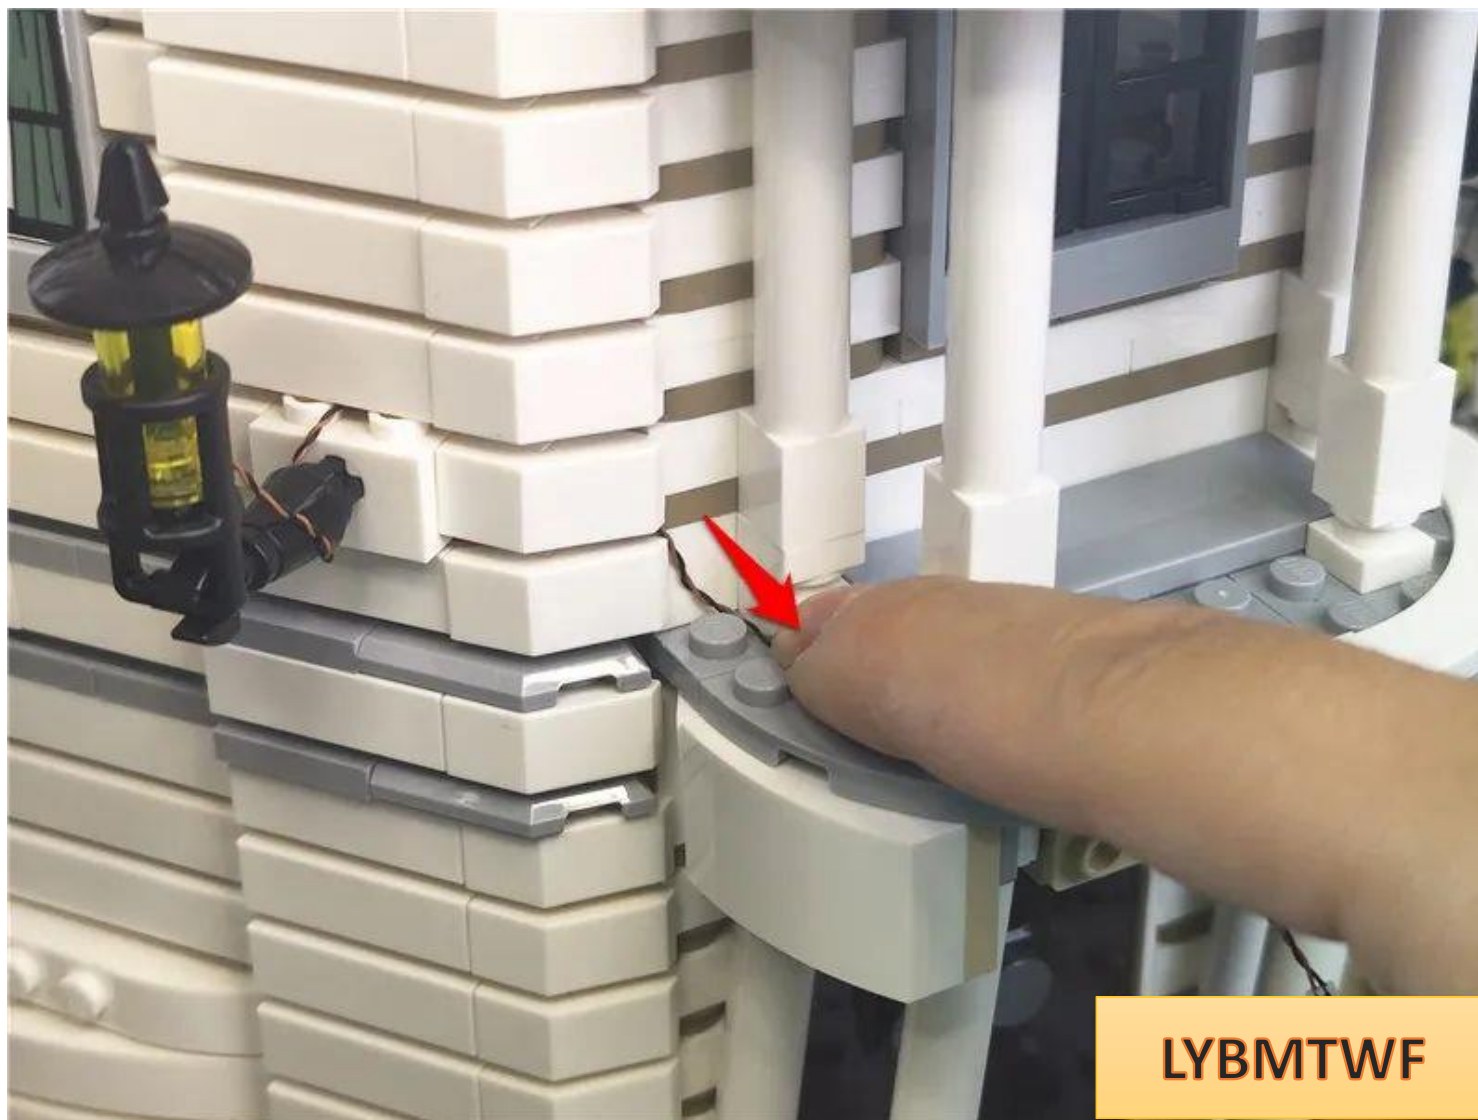

LYBMTWF

Restore the white semicircle and fix the wires

